

Magnet Buffer

RoHS



New

Stable buffer reaction force during stroke
Adsorbs workpieces with different heights
Reduces the impact applied to a workpiece


The fixed piping type has been added. **p. 4**

A structure that does not experience sliding resistance due to piping resistance.

The buffer reaction force is stable regardless of the stroke position.

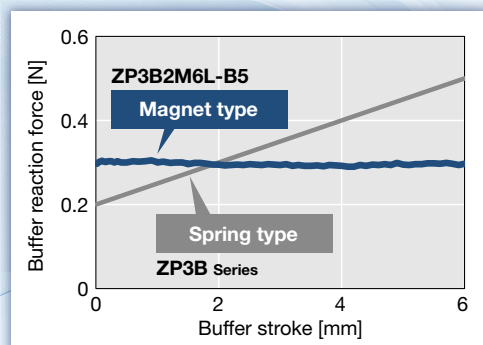

Basic type

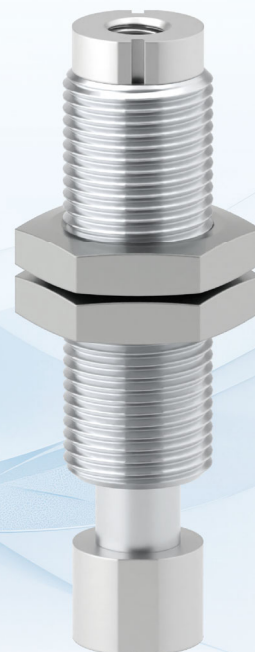

Low particle generation

No particle generation due to the friction of a spring (spring-less structure)

Non-rotating

Reduces rotation by 4-pole magnets (non-rotating mechanism principle **p. 2**)

Copper and zinc-free^{*1}

Compatible with the secondary battery manufacturing process^{*1}


^{*1} Excludes the ZP3B3M(3, 6, 16)H-B5 and the ZP3B(1, 2, 3)MG(3, 6, 16)(L, H)-(B3, B5)

A model with a mesh filter is available (Fixed piping type)



Applicable cup size: $\varnothing 1.5$ to $\varnothing 32$
 Connection thread: M3, M5

Variations

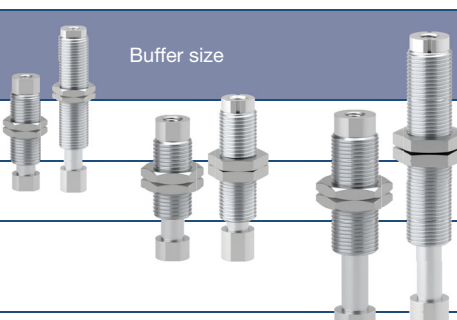	Buffer size	Buffer stroke [mm]	Buffer reaction force [N]			Applicable cup size	
			Basic type		Fixed piping type	Min.	Max.
			L	H			
M8 x 0.75		3	0.15 ±0.05	0.3 ±0.1	0.8 ±0.15	Ø 1.5	Ø 6
		6					
M10 x 1.0		3	0.3 ±0.1	0.5 ±0.1	1.1 ±0.15		Ø 20
		6					
M12 x 1.0		3	0.5 ±0.1	1.0 ±0.1	1.4 ±0.15		Ø 32
		6					
		16					

ZP3B□M(S) Series



CAT.EUS100-176B-UK

Magnet Buffer/Basic Type

ZP3B□M Series

RoHS

How to Order

ZP3B **1** M **3** L - **B3**

①

②

③

④

⑤

⑥

ZP3B1M3

ZP3B2M6

ZP3B3M16

① Buffer size

Symbol	Connection thread
1	M8 x 0.75
2	M10 x 1.0
3	M12 x 1.0

② Rotating

Symbol	Rotating
M	Magnet type, Non-rotating, Basic type

③ Nut material

Symbol	Nut material
—	Stainless steel
G	Steel + Zinc chromated specifications

④ Stroke

Symbol	Stroke	Applicable body size		
		M8 x 0.75	M10 x 1.0	M12 x 1.0
3	3 mm	●	●	●
6	6 mm	●	●	●
16	16 mm	—	—	●

⑤ Buffer reaction force

Symbol	Applicable body size					
	M8 x 0.75		M10 x 1.0		M12 x 1.0	
	Buffer reaction force [N]					
	0.15 ±0.05	0.3 ±0.1	0.3 ±0.1	0.5 ±0.1	0.5 ±0.1	1.0 ±1.0
L	●	—	●	—	●	—
H	—	●	—	●	—	●

⑥ Adapter/Vacuum inlet thread size

Symbol	Type	Thread size	Applicable buffer size		
			M8 x 0.75	M10 x 1.0	M12 x 1.0
B3	Female thread	M3 x 0.5	●	—	—
B5		M5 x 0.8	—	●	●
Applicable cup size	Min.	Ø 1.5	Ø 1.5	Ø 1.5	Ø 1.5
	Max.	Ø 5	Ø 20	Ø 20	Ø 32

For precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

Specifications

At an ambient temperature of 23 °C

Model	ZP3B1M				ZP3B2M				ZP3B3M					
Buffer type	Magnet													
With or without non-rotating	With*1													
With or without bushing	With													
Ambient and fluid temperatures [°C]	5 to 50													
Stroke [mm]	3	6	3	6	3	6	3	6	3	6	16	3	6	16
Buffer reaction force [N]*2	0.15 ±0.05		0.3 ±0.1		0.3 ±0.1		0.5 ±0.1		0.5 ±0.1			1.0 ±0.1		
Accuracy of buffer reaction force [%]*2	Within ±15 F.S.													
Max. holding torque [N·m]*3	0.25 or more		0.5 or more		0.5 or more		0.8 or more		0.8 or more		1.3 or more	1.4 or more		3.4 or more
Connection thread	M8 x 0.75				M10 x 1.0				M12 x 1.0					
Nut tightening torque [N·m]	1.5 to 2.0				2.5 to 3.5				4.5 to 5.5					
Cup adapter/Vacuum inlet	M3 x 0.5				M5 x 0.8									


*1 By the magnetic holding

*2 For the details about the product terminology, refer to the operation manual of this product.

*3 When the force is applied over the maximum holding torque, the rod rotates 180° from its original position.

The holding torque is the force that allows the rod to return to its original position when an external force has been applied and removed.

Construction Principle

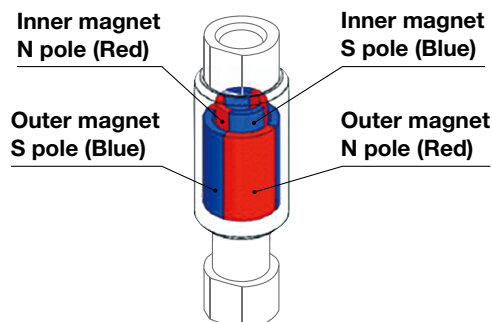

<Buffer principle>


1. The N pole (red) and S pole (blue) balance by attracting each other in the stroke direction.
2. After applying an external force in the direction that pushes into the rod, it returns to its original position when the force is removed.

<Non-rotating mechanism principle>

1. The rod balances at the position that the N pole (red) and S pole (blue) are facing.
2. After applying an external, clockwise force that does not exceed the maximum allowable torque into the rod, the rod returns to its original position when the force is removed.
3. After applying an external, counterclockwise force that does not exceed the maximum allowable torque into the rod, the rod returns to its original position when the force is removed.
4. After applying an external force that exceeds the maximum allowable torque into the rod clockwise, the rod rotates 180° from its original position when the force is removed. And then, it balances at the position that the N pole (red) and S pole (blue) are facing.

Construction

Basic type

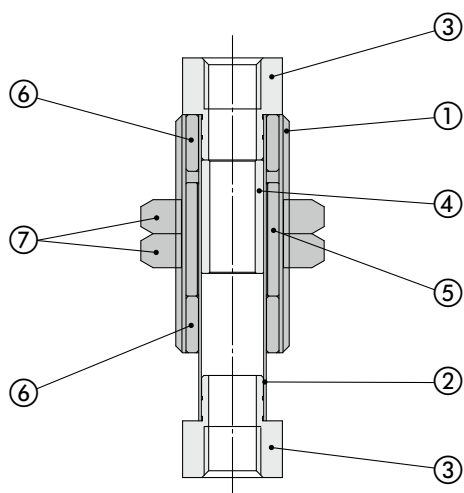


No.	Description	Material (Surface treatment)	Note
1	Buffer body R	Stainless steel	
2	Piston tube	Stainless steel	
3	Cup adapter	Aluminium alloy (Clear anodised)	
4	Inner magnet	Neodymium magnet	
5	Outer magnet	Neodymium magnet	
6	Bushing	POM	
7	Nut	Stainless steel	


ZP3B□M Series

Dimensions/Models


ZP3B □ M □ □ □ - □
 ① ② ③ ④ ⑤ ⑥

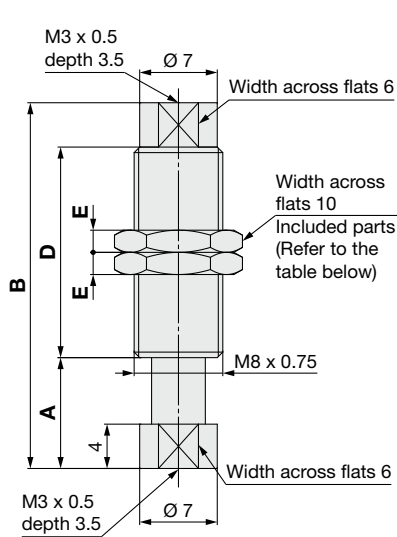


ZP3B1M(3, 6)□-B3

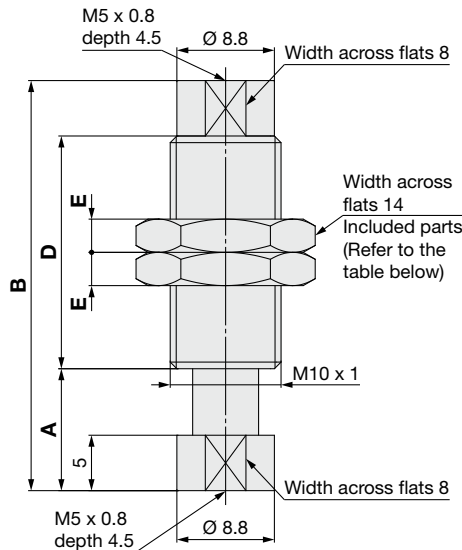

ZP3B2M(3, 6)□-B5

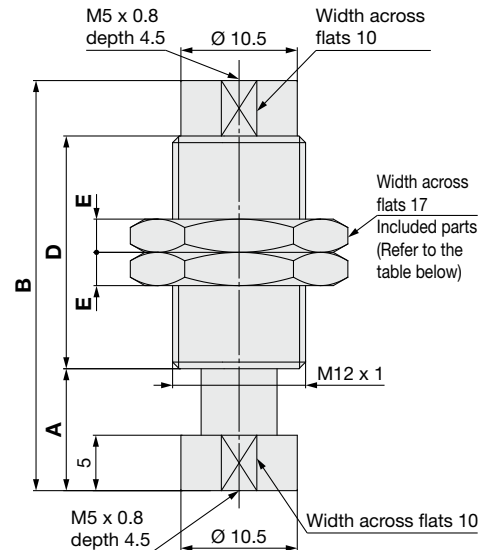

ZP3B3M(3, 6, 16)□-B5

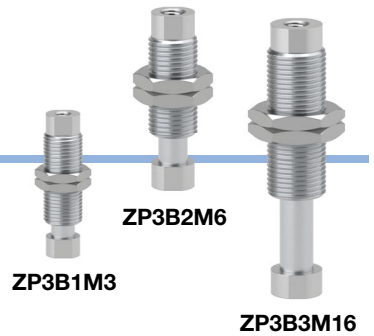

	Model						A	B	D	E	Minimum hole size	Weight [g]	Parts included with nut		
	① Buffer size	② Specifications	③ Nut material	④ Buffer stroke	⑤ Buffer reaction force	⑥ Adapter mounting thread size/ Vacuum inlet									
ZP3B	1	M	—	3	L H	B3	7	30	19	2	Ø 2	5.6	ZPSNA-M8A		
				6			10	33				5.7			
	2			3	L H	B5	8	34	21	3	Ø 4	11.3	ZPSNA-M10		
				6			11	37				11.4			
	3			3	L H L H L H	B5	8	34	4	Ø 4.2	18.1	ZPSNA-M12C			
													19.3		
				6				11			37		18.2		
													19.4		
				16				21			57		31	Ø 4.2	23.8
													Ø 2.8	26.3	
	1			G	3	L H	B3	7	30	19	2	Ø 2	5.6	ZPNA-M8B	
								6	10				33		5.7
	2	3	L H		B5	8	34	21	3	Ø 4	11.3	ZPNA-M10			
		6				11	37				11.4				
	3	3	L H L H L H		B5	8	34	3	Ø 4.2	18.1	IR20P-600S				
												19.2			
		6					11			37		18.2			
												19.4			
		16					21			57		31	Ø 4.2	23.8	
												Ø 2.8	26.2		

Magnet Buffer/Fixed Piping Type ZP3B□MS Series

RoHS

How to Order

Fixed Piping Type

ZP3B **1** MS **3** - B3 - MF

1 2 3 4 5 6



1 Buffer size

Symbol	Connection thread
1	M8 x 0.75
2	M10 x 1.0
3	M12 x 1.0

2 Rotating

Symbol	Rotating
MS	Magnet type, Non-rotating, Fixed piping type

3 Nut material

Symbol	Nut material
—	Stainless steel
G	Steel + Zinc chromated specifications

4 Stroke

Symbol	Stroke	Applicable buffer size		
		M8 x 0.75	M10 x 1.0	M12 x 1.0
3	3 mm	●	●	●
6	6 mm	●	●	●
16	16 mm	—	—	●

5 Adapter/Vacuum inlet thread size

Symbol	Type	Thread size	Applicable buffer size		
			M8 x 0.75	M10 x 1.0	M12 x 1.0
B3	Female thread	M3 x 0.5	●	—	—
B5		M5 x 0.8	—	●	●

6 Mesh filter

Symbol	Mesh filter
—	None
MF	With mesh filter

For precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

Specifications

At an ambient temperature of 23 °C

Model	ZP3B1MS		ZP3B2MS		ZP3B3MS		
Buffer type	Magnet						
With or without non-rotating	With*1						
With or without bushing	With						
Ambient and fluid temperatures [°C]	5 to 50						
Stroke [mm]	3	6	3	6	3	6	16
Buffer reaction force [N]	0.8 ±0.15		1.1 ±0.15		1.4 ±0.15		
Accuracy of buffer reaction force [%]*2	Within ±15 F.S.						
Max. holding torque [N·m]*3	0.9 or more		1.3 or more		1.7 or more		
Allowable moment [N·mm]*4	6.2		16.5		20.8		
Connection thread	M8 x 0.75		M10 x 1.0		M12 x 1.0		
Nut tightening torque [N·m]	1.5 to 2.0		2.5 to 3.5		4.5 to 5.5		
Cup adapter/Vacuum inlet	M3 x 0.5		M5 x 0.8				

*1 By the magnetic holding

*2 For the details about the product terminology, refer to the operation manual of this product.


*3 When the force is applied over the maximum holding torque, the rod rotates 180° from its original position.

The holding torque is the force that allows the rod to return to its original position when an external force has been applied and removed.

*4 If a force exceeding the allowable moment is applied, there is a risk of vacuum leakage.


Operation Principle

Low particle generation and a smooth motion is achieved due to the lack of resistance (lateral load) causing by piping oscillation during the buffer stroke.

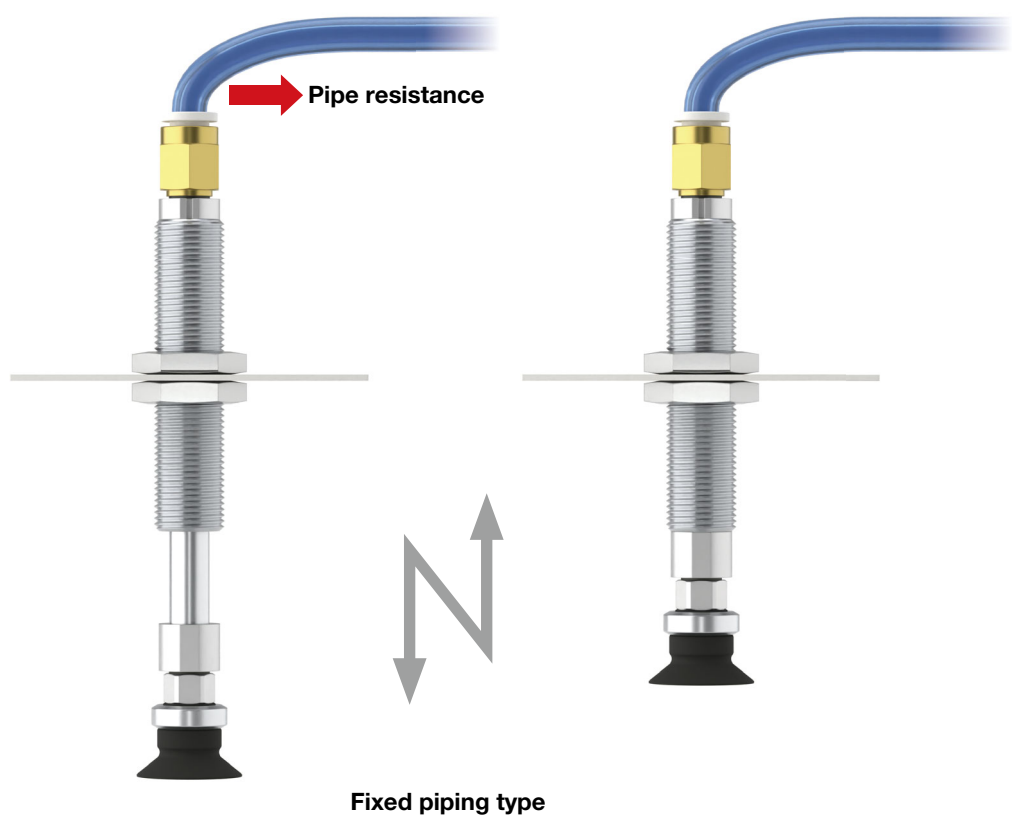

Construction



Fixed piping type

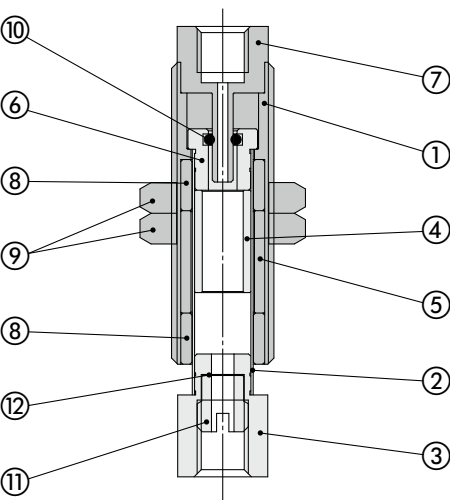


No.	Description	Material (Surface treatment)	Note
1	Buffer body	Stainless steel	
2	Piston tube	Stainless steel	
3	Cup adapter	Aluminium alloy (Clear anodised)	
4	Inner magnet	Neodymium magnet	
5	Outer magnet	Neodymium magnet	
6	Buffer piston	Aluminium alloy (Hard anodised)	
7	Piping adapter	Aluminium alloy (Clear anodised)	
8	Bushing	POM with added oil	
9	Nut	Stainless steel	
10	Seal	NBR	
11	Set screw	Stainless steel	With mesh filter
12	Mesh	Stainless steel	With mesh filter

Dimensions/Models


ZP3B **1** **MS** **G** **3** - **B3** - **MF**
① ② ③ ④ ⑤ ⑥

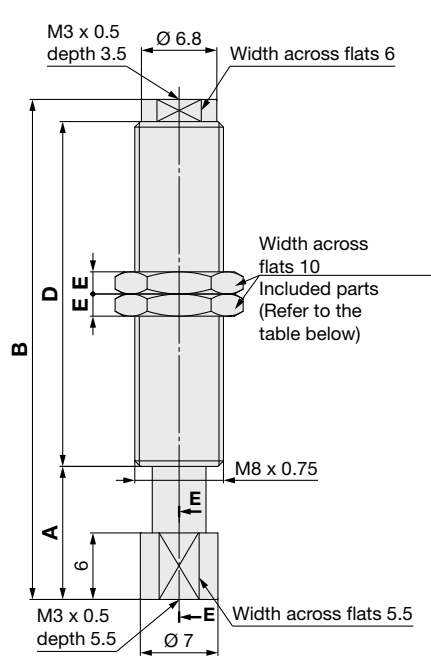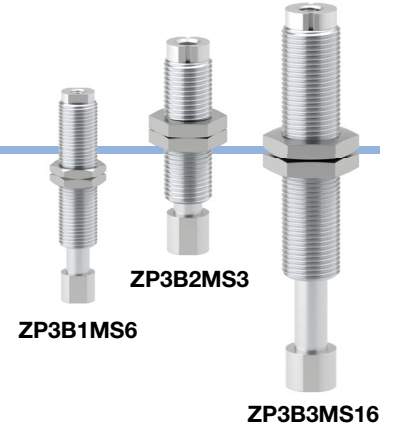

ZP3B1MS□(3, 6)-B3-□

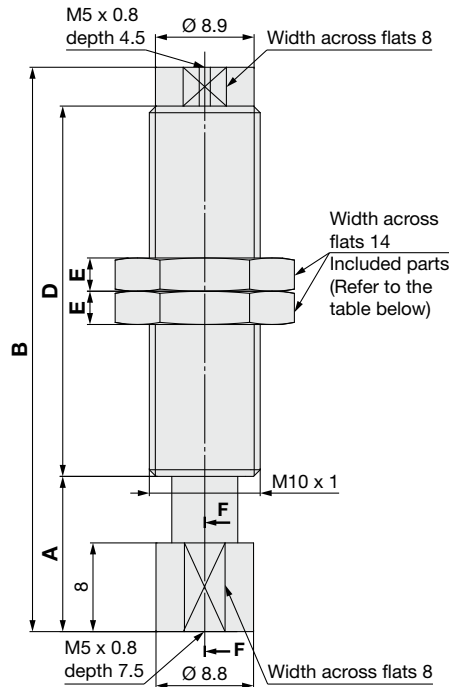


ZP3B2MS□(3, 6)-B5-□

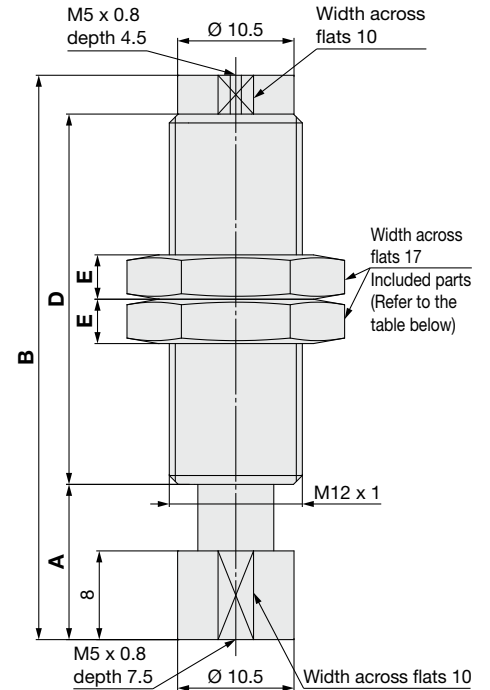


ZP3B3MS□(3, 6, 16)-B5-□

With mesh filter



ZP3B1MS□□-□-MF

With mesh filter



ZP3B(2, 3)MS□□-□-MF

Model							A	B	D	E	Minimum hole size	Weight [g]		Parts no. included with nut			
① Buffer size	② Specifications	③ Nut material	④ Buffer stroke	⑤ Adapter mounting thread size/ Vacuum inlet	⑥ Mesh filter	⑥ Without mesh filter						⑥ With mesh filter					
ZP3B	1	MS	—	3	B3	— MF	9	39.1	28.1	2	Ø 0.6	7.94	8.07	ZPSNA-M8A			
			G									7.78	7.91	ZPNA-M8B			
			—	6								12	45.1	31.1	8.37	8.50	ZPSNA-M8A
			G												8.21	8.34	ZPNA-M8B
	2		—	3	11		44.9	30.4	3	Ø 0.9	16.5				17.0	ZPSNA-M10	
			G								16.0				16.5	ZPNA-M10	
			—	6							14	50.9	33.4	17.4	17.9	ZPSNA-M10	
			G											16.8	17.3	ZPNA-M10	
	3		—	3	11		44.9	30.4	4	Ø 1.2				27.0	27.5	ZPSNA-M12C	
			G											24.7	25.2	IR20P-600S	
			—	6							14	50.9	33.4	28.2	28.7	ZPSNA-M12C	
			G											25.9	26.4	IR20P-600S	
		—	16	24	80.9		53.4	38.6						39.1	ZPSNA-M12C		
		G						36.3						36.8	IR20P-600S		

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “Caution,” “Warning” or “Danger.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)¹⁾, and other safety regulations.

-  **Danger:** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.
-  **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.
-  **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

- 1) ISO 4414: Pneumatic fluid power – General rules and safety requirements for systems and their components.
ISO 4413: Hydraulic fluid power – General rules and safety requirements for systems and their components.
IEC 60204-1: Safety of machinery – Electrical equipment of machines. (Part 1: General requirements)
ISO 10218-1: Robots and robotic devices - Safety requirements for industrial robots - Part 1: Robots.
etc.

Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalogue information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

4. SMC products cannot be used beyond their specifications. They are not developed, designed, and manufactured to be used under the following conditions or environments.

Use under such conditions or environments is not allowed.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Use for nuclear power, railways, aviation, space equipment, ships, vehicles, military application, equipment affecting human life, body, and property, combustion equipment, entertainment equipment, emergency shut-off circuits, press clutches, brake circuits, safety equipment, etc., and use for applications that do not conform to standard specifications such as catalogues and operation manuals.
3. Use for interlock circuits, except for use with double interlock such as installing a mechanical protection function in case of failure. Please periodically inspect the product to confirm that the product is operating properly.

Caution

SMC develops, designs, and manufactures products to be used for automatic control equipment, and provides them for peaceful use in manufacturing industries.

Use in non-manufacturing industries is not allowed.

Products SMC manufactures and sells cannot be used for the purpose of transactions or certification specified in the Measurement Act of each country.

The new Measurement Act prohibits use of any unit other than SI units in Japan.

Limited warranty and Disclaimer/Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”. Read and accept them before using the product.

Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.²⁾ Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalogue for the particular products.

2) Suction cups (Vacuum pads) are excluded from this 1 year warranty.

A suction cup (vacuum pad) is a consumable part, so it is warranted for a year after it is delivered. Also, even within the warranty period, the wear of a product due to the use of the suction cup (vacuum pad) or failure due to the deterioration of rubber material are not allowed by the limited warranty.

Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Safety Instructions

Be sure to read the “Handling Precautions for SMC Products” (M-E03-3) and “Operation Manual” before use.

Revision History		
Edition B	- The fixed piping type has been added. - The number of pages has been increased from 4 to 8.	EW



SMC Corporation (Europe)

Austria	+43 (0)2262622800	www.smc.at	office.at@smc.com
Belgium	+32 (0)33551464	www.smc.be	info@smc.be
Bulgaria	+359 (0)2807670	www.smc.bg	sales.bg@smc.com
Croatia	+385 (0)13707288	www.smc.hr	sales.hr@smc.com
Czech Republic	+420 541424611	www.smc.cz	office.at@smc.com
Denmark	+45 70252900	www.smc.dk	smc.dk@smc.com
Estonia	+372 651 0370	www.smcee.ee	info.ee@smc.com
Finland	+358 207513513	www.smc.fi	smc.fi@smc.com
France	+33 (0)164761000	www.smc-france.fr	supportclient.fr@smc.com
Germany	+49 (0)61034020	www.smc.de	info.de@smc.com
Greece	+30 210 2717265	www.smchellas.gr	sales@smchellas.gr
Hungary	+36 23513000	www.smc.hu	office.hu@smc.com
Ireland	+353 (0)14039000	www.smcautomation.ie	technical.ie@smc.com
Italy	+39 03990691	www.smcitalia.it	mailbox.it@smc.com
Latvia	+371 67817700	www.smc.lv	info.lv@smc.com

Lithuania	+370 5 2308118	www.smclt.lt	info.lt@smc.com
Netherlands	+31 (0)205318888	www.smc.nl	info@smc.nl
Norway	+47 67129020	www.smc-norge.no	post.no@smc.com
Poland	+48 22 344 40 00	www.smc.pl	office.pl@smc.com
Portugal	+351 214724500	www.smc.eu	apoiocliente.pt@smc.com
Romania	+40 213205111	www.smcromania.ro	office.ro@smc.com
Russia	+7 (812)3036600	www.smc.eu	sales@smcru.com
Slovakia	+421 (0)413213212	www.smc.sk	sales.sk@smc.com
Slovenia	+386 (0)73885412	www.smc.si	office.si@smc.com
Spain	+34 945184100	www.smc.eu	post.es@smc.com
Sweden	+46 (0)86031240	www.smc.nu	order.se@smc.com
Switzerland	+41 (0)523963131	www.smc.ch	helpcenter.ch@smc.com
Turkey	+90 212 489 0 440	www.smcturkey.com.tr	satis.tr@smc.com
UK	+44 (0)845 121 5122	www.smc.uk	sales.gb@smc.com
South Africa	+27 10 900 1233	www.smcza.co.za	Sales.za@smc.com