


SY7400-X312

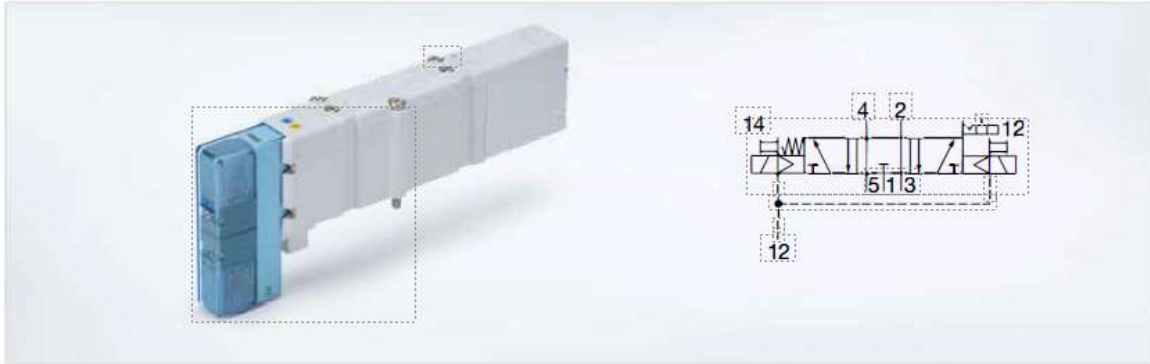

SY7400-X312

► Middle position exhausted:

Application

- The intended use of this valve is to control an actuator
- Complies with basic and proven safety principles according to EN ISO 13849-2
- A side with detent and B side with spring return