

Vacuum Ejector

Supply valve: N.O. specification

Can hold vacuum*¹ even when the power goes out or is turned off

Prevents the sudden dropping of workpieces*¹


*¹ Supposing the supply pressure is being maintained

Vacuum ejector with energy-saving function

90% reduction Air consumption *²

*² Based on SMC's measuring conditions

The digital pressure switch for vacuum with energy-saving function cuts supply air when the pressure reaches the desired vacuum.

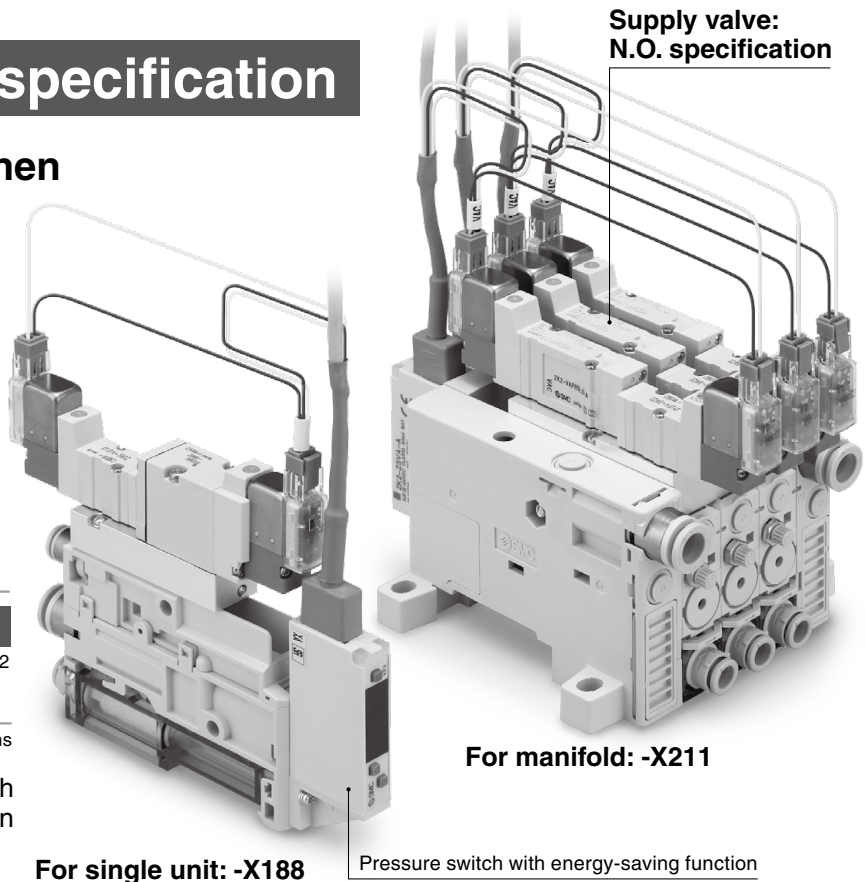


For single unit: -X188

For manifold: -X211

Pressure switch with energy-saving function

● Typical Operation Pattern

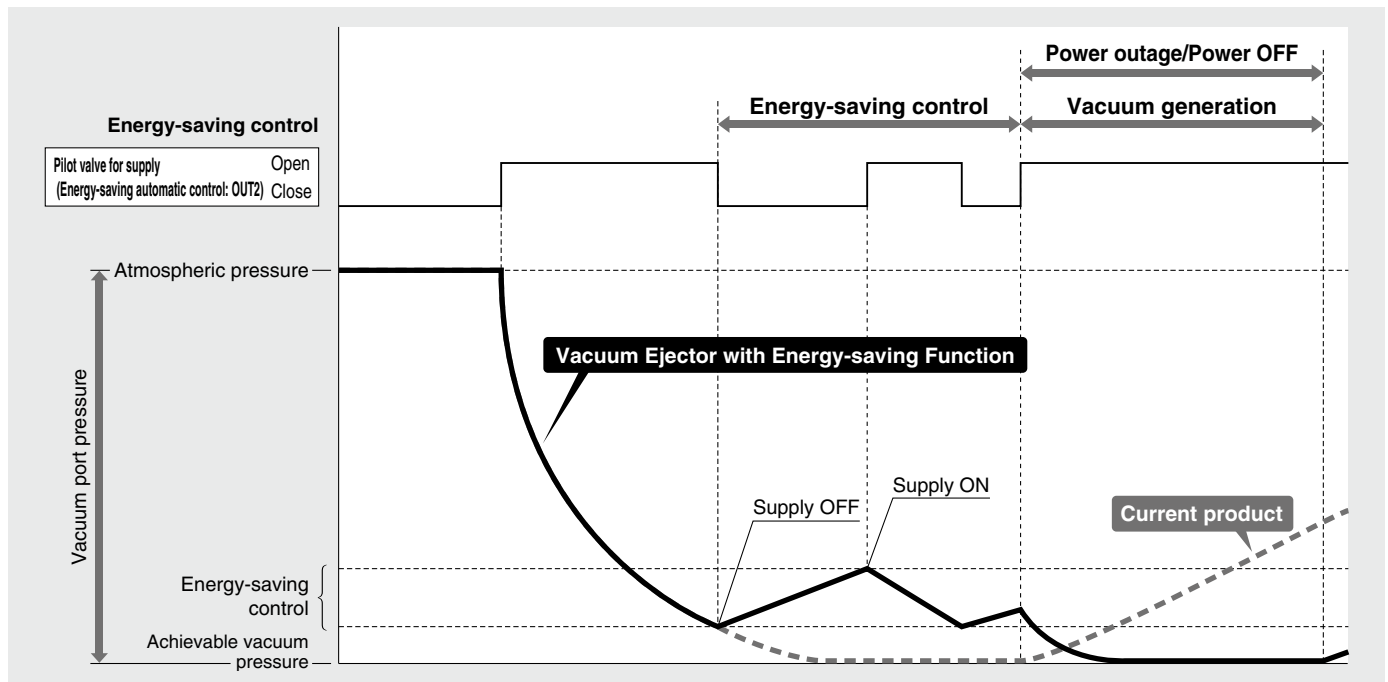

ZK2□-X188: For Single Unit
ZK2□-X211: For Manifold

Vacuum Ejector with Energy-saving Function

ZK2□-X188

ZK2□-X211

How to Order Single Unit

Single unit

ZK2 **A** **12** **A** **5** **MO** **Z** **K** **W** - **06** - **□** - X188

For manifold

ZK2 **C** **12** **A** **5** **MO** **Z** **K** **W** - **06** - **□** - X211

①

②

③

④

⑤

⑥

(Refer to page 2 for How to Order Manifold.)

Supply valve: N.O./Release valve: N.C.

• With light/surge voltage suppressor

Rated voltage*4: 24 VDC

• M plug connector, Without connector

*4 Rated voltage for the supply and release valve

① System/Body type

Symbol	System	Body type	Exhaust type	Built-in silencer
A	Ejector system	Single unit	Silencer exhaust	
B			Port exhaust*1	
G			High-noise reduction silencer exhaust	
C		For manifold	Complex exhaust*2	
F			Individual port exhaust*1	
H			High-noise reduction silencer exhaust	

*1 Port size: ø8 (mm), ø5/16" (inch)

*2 The complex exhaust method combines the common exhaust from the end plate and the direct exhaust from each station.

④ Digital pressure switch for vacuum connector specifications

Symbol	Lead wire with connector for pressure switch	
L3	None	
W	With lead wire for switch with energy-saving function	

⑤ Vacuum (V) port*7

Symbol	Type	Port size
06	Metric size	ø6 One-touch fitting
08		ø8 One-touch fitting
07	Inch size	ø1/4" One-touch fitting
09		ø5/16" One-touch fitting

*7 Supply port (PV) size of single unit: ø6 (mm), ø1/4" (inch)

② Nominal nozzle size

Symbol	System	Nominal size
07	Ejector system*3	ø0.7
10		ø1.0
12		ø1.2
15		ø1.5

*3 Standard supply pressure for nozzle size
07 to 12: 0.35 MPa
15: 0.4 MPa (ZK2□-X188)
0.45 MPa (ZK2□-X211)

③ Digital pressure switch for vacuum specifications

Symbol	Type	Pressure range [kPa]	Specifications
K	Digital pressure switch for vacuum with energy-saving function	-100 to 100	NPN 1 output Unit selection function*5
Q			SI unit only*6
R			PNP 1 output Unit selection function*5
S			SI unit only*6

*5 The unit selection function is not available in Japan due to the New Measurement Act.

*6 Fixed unit: kPa

⑥ Optional specifications (Single unit)*8

Symbol	Type
Nil	Without option
B	With one bracket for mounting a single unit (Mounting screws are attached.)
D	With individual release pressure supply (PD) port*9
E	Long lock nut specification: Screwdriver operation type*10
J	Vacuum break flow-adjusting needle: Round lock nut type
K	Vacuum break flow-adjusting needle: Screwdriver operation type

*8 When more than one option is selected, list the option symbols in alphabetical order. Example) -BJ

Refer to the **Web Catalog** for Function/Application.

*9 Only M3 is available for the PD port size. Use a One-touch fitting or barb fitting (M-3AU-4) for piping. (O.D.: Within ø6.2)

*10 Combinations of "EJ," "EK," and "EJK" are not available.

⑥ Optional specifications (For manifold)*11, *12

Symbol	Type
Nil	Without option
E	Long lock nut specification: Screwdriver operation type
J	Vacuum break flow-adjusting needle: Round lock nut type
K	Vacuum break flow-adjusting needle: Screwdriver operation type
L	Manifold individual supply specification*13
P	With common release pressure supply (PD) port*14

*11 When more than one option is selected, list the option symbols in alphabetical order. Example) -JK

*12 For ① System/Body type "F" or "H," when "L" is selected for ⑥ Optional specifications, the vacuum break flow-adjusting needle option "E," "K," or "JK" can be additionally selected for increased workability.

*13 Select the body for the manifold. Select "L" for the manifold type. When the common supply and individual supply are mixed, please contact SMC.

*14 When "-D" is selected as a manifold option, select option "-P" for the single unit model number.

* Combinations of "EJ," "EK," and "EJK" are not available.

Vacuum Ejector with Energy-saving Function **ZK2□-X188/ZK2□-X211**

How to Order Manifold

ZZK2 **04** - **A** **1** **L** - **□** - **X211**

① ② ③ ④

• Individual wiring specification

① Stations

Symbol	Stations
01	1 station
⋮	⋮
10	10 stations

② System (Port combination)

Symbol	System	Port	Standard
A	Ejector	Common PV: ø8	Metric size
AN	system	Common PV: ø5/16"	Inch size

③ Exhaust

Symbol	Type
1	Ejector system: Complex exhaust*1, *3
2	Ejector system: Individual exhaust*2 (Individual port exhaust, High-noise reduction silencer exhaust)

- *1 Select "C" for ① System/Body type for the single unit model number. Air is exhausted not only from the end plate but also from the exhaust of each station.
- *2 Select "F" or "H" for ① System/Body type for the single unit model number.
- *3 The complex exhaust method combines the common exhaust from the end plate and the direct exhaust from each station.

④ Option *4

Symbol	Type
Nil	Without option
B	With DIN rail mounting bracket*5
D	With common release pressure supply (PD) port*6
L	Manifold individual supply specification*7

- *4 When more than one option is selected, list the option symbols in alphabetical order.
- *5 Select "B" for DIN rail mounting.
- *6 When "D" is selected for the manifold model number, select option "-P" for the ejector system single unit model number.
- *7 When "L (individual supply)" is selected for ③ Optional specifications for the single unit model number, specify "L" for the manifold, too.
- * A combination of "DL" is not available.


How to Order Valve Manifold Assembly

Example

ZK2C12A5MOZQW-08-X211

ZK2C10A5MOZQW-08-X211

ZZK204-A1L-B-X211



ZZK204-A1L-B-X211 1 set (Manifold part number)
 * **ZK2C10A5MOZQW-08-X211** 3 sets (Nominal nozzle size: ø1.0)
 * **ZK2C12A5MOZQW-08-X211** 1 set (Nominal nozzle size: ø1.2)
 ↳ The asterisk denotes the symbol for the assembly.
 Prefix to the single unit part number.

- When the manifold is viewed from the V port, the first station starts from the left (D side).
- After the manifold part number, specify the installed single unit from the first station.
- Complex exhaust and individual port exhaust cannot be mixed.
- The DIN rail should be ordered separately. (Refer to the ZK2 series in the **Web Catalog**.)
- * Some of the units can be replaced by single units for the standard manifold. (Note that single units for manifold ZK2□-X211 cannot be used for the standard manifold.)

Valve Specifications

	Supply valve		Release valve
	ZK2□-X188	ZK2□-X211	
Solenoid valve model	SYJ524-5MOZ-Q	SYJ325-5MOZ-Q	SYJ314-5MOZ-Q
Type of actuation	N.O.		N.C.
Operating pressure range	0.15 MPa to 0.6 MPa		
Rated voltage	24 VDC		
Power consumption	0.4 W		

Ejector Specifications

Item			Model		ZK2□07-X188	ZK2□10-X188	ZK2□12-X188	ZK2□15-X188
					ZK2□07-X211	ZK2□10-X211	ZK2□12-X211	ZK2□15-X211
Nozzle diameter		[mm]			0.7	1.0	1.2	1.5
Max. suction flow*1	Port exhaust	[L/min (ANR)]			34	56	74	89
	Silencer exhaust/Complex exhaust	[L/min (ANR)]			29	44	61	67
	High-noise reduction silencer exhaust	[L/min (ANR)]			34	56	72	83
Air consumption*1		[L/min (ANR)]			24	40	58	90
Maximum vacuum pressure*1		[kPa]			-91			
Supply pressure range		[MPa]			0.15 to 0.6			
Standard supply pressure		[MPa]			0.35			0.4 (For X188)
								0.45 (For X211)

*1 Values are based on SMC's measurement standards. They depend on atmospheric pressure (weather, altitude, etc.) and the measurement method.

Manifold Weight

	1 station	2 stations	3 stations	4 stations	5 stations	6 stations	7 stations	8 stations	9 stations	10 stations
Weight [g]	345	560	780	1000	1215	1435	1650	1875	2100	2320

Single unit weight: 200 g (With vacuum pressure switch)



Specifications not listed are the same as those of the standard product. For details, refer to the **Web Catalog**.

ZK2□-X188/ZK2□-X211


Wiring Examples

For digital pressure switch for vacuum specifications: K, Q

For digital pressure switch for vacuum specifications: R, S

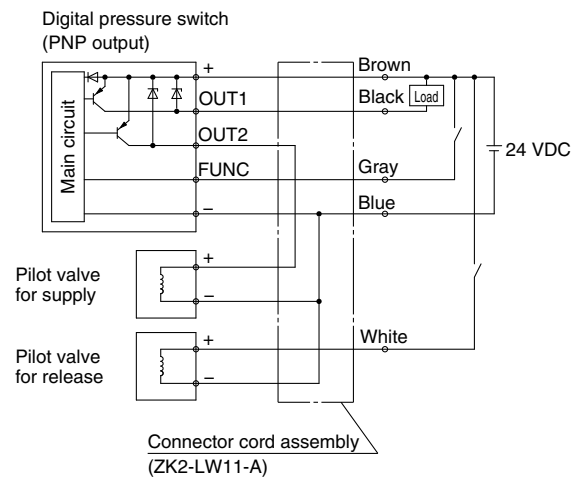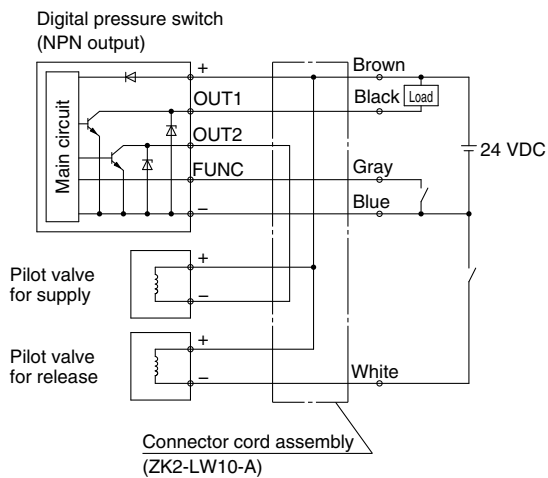

Timing Chart (Typical operation pattern)

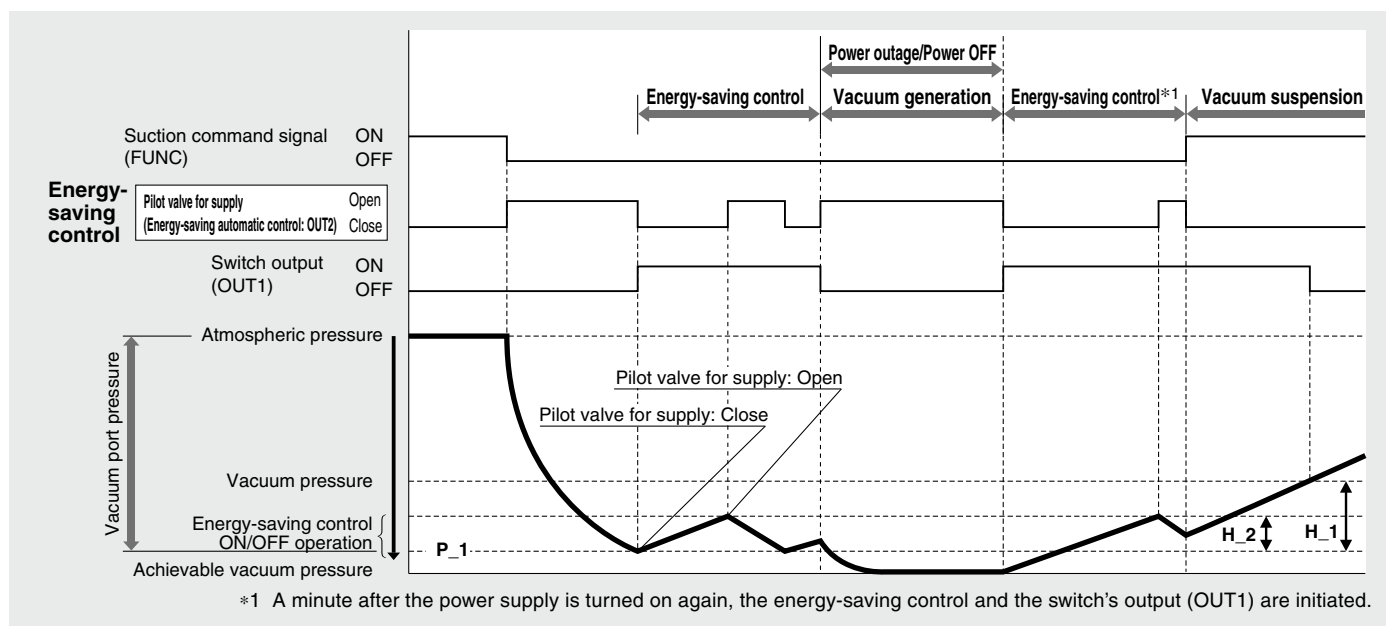


Port Layout

-X188

Port layout no. **1**


Single unit: ZK2A□A5MOZ□□-□-□-X188



System	Ejector
Body type	Single unit
Exhaust type	Silencer exhaust
Application and purpose	Vacuum pressure —
Exhaust	Released within the operating environment
Release pressure	Same pressure as PV

Port combination: PV = PD


Circuit example

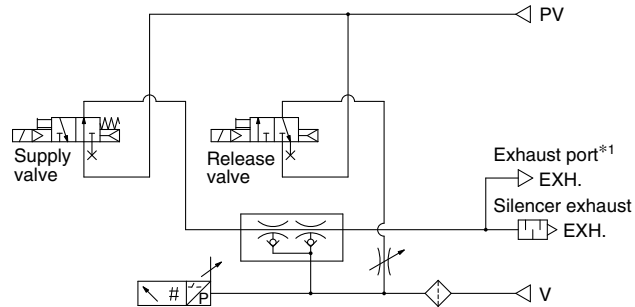

*1 Nozzle size: 12, 15

Port layout no. **2**


Single unit: ZK2B□A5MOZ□□-□-□-X188



System	Ejector
Body type	Single unit
Exhaust type	Port exhaust
Application and purpose	Vacuum pressure —
Exhaust	Released within the operating environment
Release pressure	Same pressure as PV


Port combination: PV = PD

Circuit example

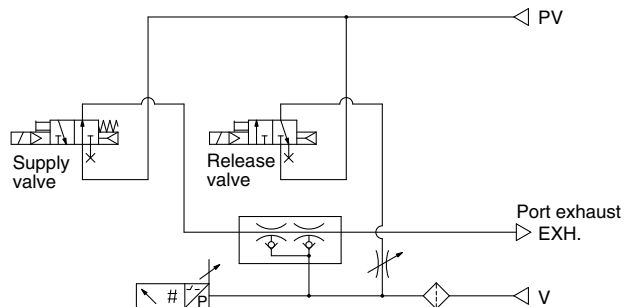

Port layout no. **3**


Single unit: ZK2G□A5MOZ□□-□-□-X188



System	Ejector
Body type	Single unit
Exhaust type	High-noise reduction silencer exhaust
Application and purpose	Vacuum pressure —
Exhaust	Released within the operating environment
Release pressure	Same pressure as PV

Port combination: PV = PD

Circuit example

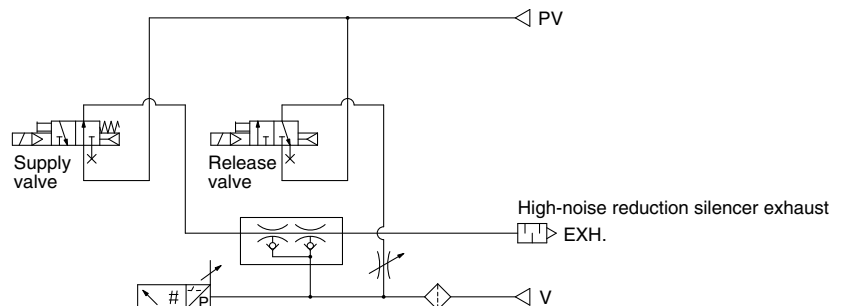


ZK2-X188/ZK2-X211

Port Layout

-X211

Port layout no. 4

Single unit: ZK2C-A5MOZ-X211
Manifold: ZZK2-A1L-X211

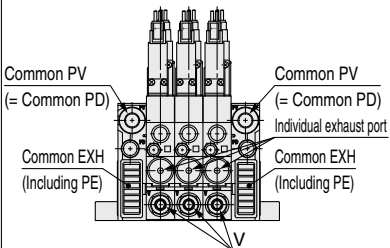


*1 The complex exhaust method combines the common exhaust from the end plate and the direct exhaust from each station.

System	Ejector
Body type	Manifold
Exhaust type	Complex exhaust*1
Application and purpose	Vacuum pressure: Common for each station Exhaust: Released within the operating environment Release pressure: Same pressure as common PV

Port combination: Common PV = Common PD


Circuit example

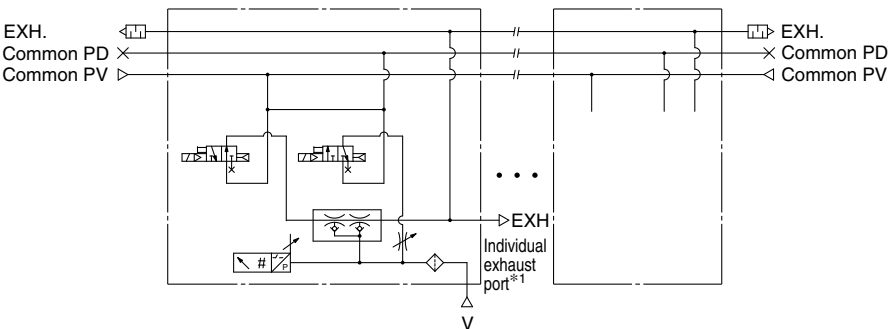

*1 For the complex exhaust type, an individual exhaust port is provided to each station.

Port layout no. 5


Single unit: ZK2F-A5MOZ-X211
Manifold: ZZK2-A2L-X211

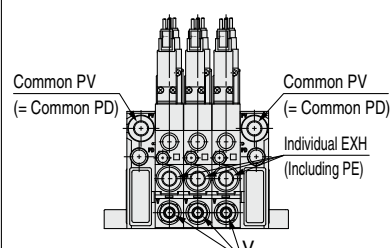

System	Ejector
Body type	Manifold
Exhaust type	Individual port exhaust
Application and purpose	Vacuum pressure: Common for each station Exhaust: After piping, individual exhaust is necessary. Release pressure: Same pressure as common PV


Port combination: Common PV = Common PD

Circuit example

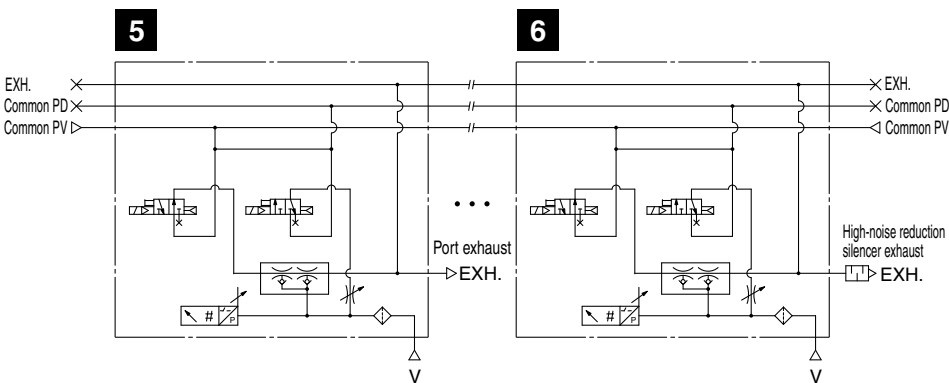

Port layout no. 6

Single unit: ZK2H-A5MOZ-X211
Manifold: ZZK2-A2L-X211

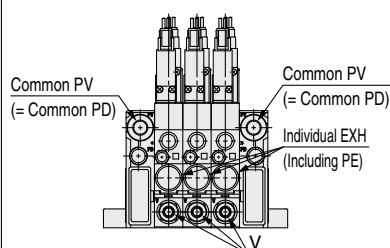


System	Ejector
Body type	Manifold
Exhaust type	High-noise reduction silencer exhaust
Application and purpose	Vacuum pressure: Common for each station Exhaust: Released within the operating environment Release pressure: Same pressure as common PV

Port Layout

Option -D

Port layout no.	7
1	2
3	4
5	6
8	9
10	11
12	13
14	15
16	17
18	19
20	21
22	23
24	25
26	27
28	29
30	31
32	33
34	35
36	37
38	39
40	41
42	43
44	45
46	47
48	49
50	51
52	53
54	55
56	57
58	59
60	61
62	63
64	65
66	67
68	69
70	71
72	73
74	75
76	77
78	79
80	81
82	83
84	85
86	87
88	89
90	91
92	93
94	95
96	97
98	99
100	101
102	103
104	105
106	107
108	109
110	111
112	113
114	115
116	117
118	119
120	121
122	123
124	125
126	127
128	129
130	131
132	133
134	135
136	137
138	139
140	141
142	143
144	145
146	147
148	149
150	151
152	153
154	155
156	157
158	159
160	161
162	163
164	165
166	167
168	169
170	171
172	173
174	175
176	177
178	179
180	181
182	183
184	185
186	187
188	189
190	191
192	193
194	195
196	197
198	199
200	201
202	203
204	205
206	207
208	209
210	211
212	213
214	215
216	217
218	219
220	221
222	223
224	225
226	227
228	229
230	231
232	233
234	235
236	237
238	239
240	241
242	243
244	245
246	247
248	249
250	251
252	253
254	255
256	257
258	259
260	261
262	263
264	265
266	267
268	269
270	271
272	273
274	275
276	277
278	279
280	281
282	283
284	285
286	287
288	289
290	291
292	293
294	295
296	297
298	299
300	301
302	303
304	305
306	307
308	309
310	311
312	313
314	315
316	317
318	319
320	321
322	323
324	325
326	327
328	329
330	331
332	333
334	


Single unit: ZK2A□A5MOZ□□-□-□D-X188



System		Ejector
Body type		Single unit
Exhaust type		Silencer exhaust
Application and purpose	Vacuum pressure	—
	Exhaust	Released within the operating environment
	Release pressure	PD pressure has to be supplied with PV pressure.

Port combination: $PV \neq PD$


Circuit example

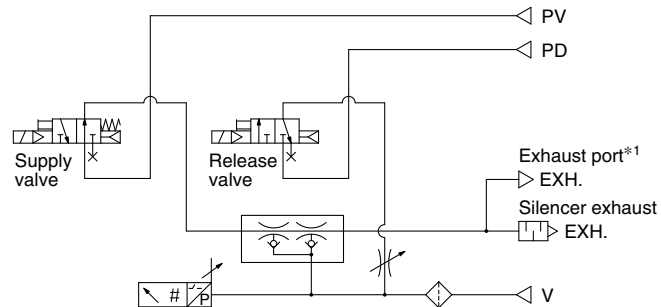

*1 Nozzle size: 12, 15

Port layout no.	8
-----------------	---


Single unit: ZK2B□A5MOZ□□-□-□D-X188



System		Ejector
Body type		Single unit
Exhaust type		Port exhaust
Application and purpose	Vacuum pressure	—
	Exhaust	After piping, individual exhaust is necessary.
	Release pressure	PD pressure has to be supplied with PV pressure.


Port combination: PV \neq PD

Circuit example

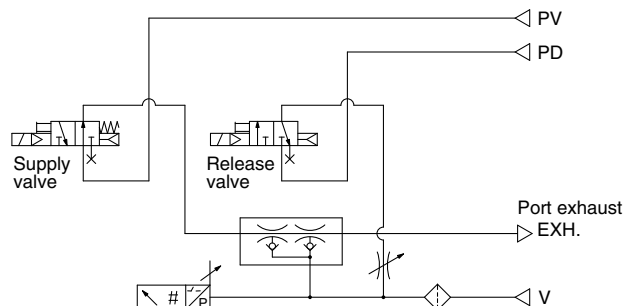

Port layout no.	9
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100


Single unit: ZK2G□A5MOZ□□-□-□D-X188



System		Ejector
Body type		Single unit
Exhaust type		High-noise reduction silencer exhaust
Application and purpose	Vacuum pressure	—
	Exhaust	Released within the operating environment
	Release pressure	PD pressure has to be supplied with PV pressure.

Port combination: $PV \neq PD$

Circuit example

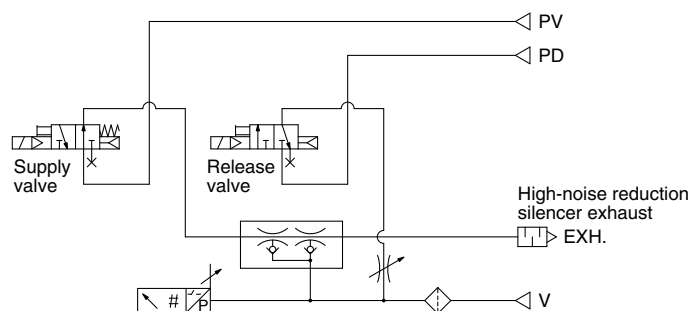

ZK2□-X188/ZK2□-X211

Port Layout


Option -D

Port layout no.

10

Single unit: ZK2C□A5MOZ□□-□□P-X211

Manifold: ZZK2□□-A□1L-□D-X211

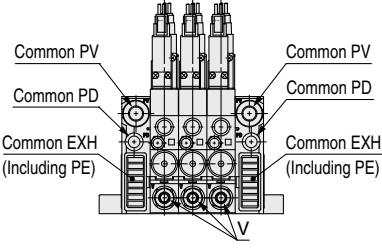


*1 The complex exhaust method combines the common exhaust from the end plate and the direct exhaust from each station.

System	Ejector
Body type	Manifold
Exhaust type	Complex exhaust*1
Application and purpose	Vacuum pressure: Common for each station
	Exhaust: Released within the operating environment
	Release pressure: Common PD pressure has to be supplied with common PV.

Port combination: Common PV ≠ Common PD

Circuit example

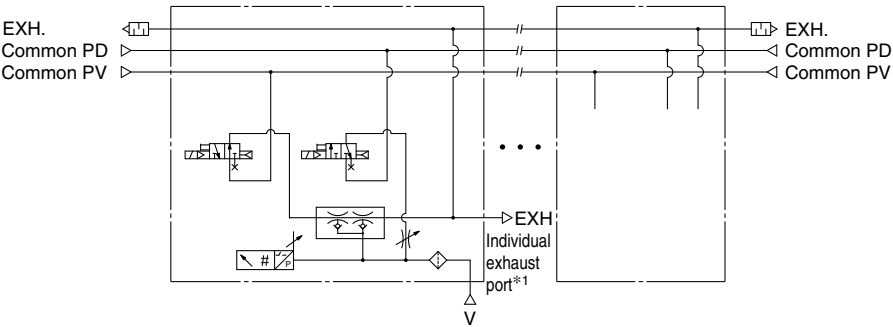


*1 For the complex exhaust type, an individual exhaust port is provided to each station.

Port layout no.

11

Single unit: ZK2F□A5MOZ□□-□□P-X211


Manifold: ZZK2□□-A□2L-□D-X211

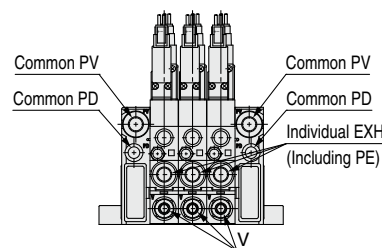

System	Ejector
Body type	Manifold
Exhaust type	Individual port exhaust
Application and purpose	Vacuum pressure: Common for each station
	Exhaust: After piping, individual exhaust is necessary.
	Release pressure: Common PD pressure has to be supplied with common PV.

Port combination: Common PV ≠ Common PD

Circuit example

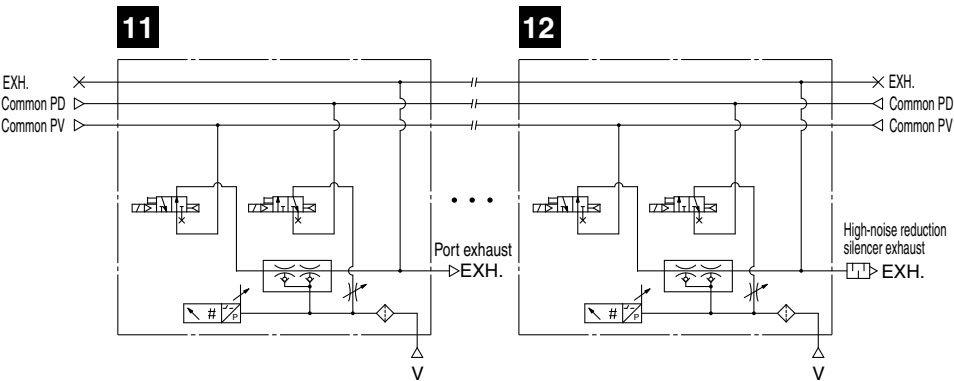


Port layout no.

12

Single unit: ZK2H□A5MOZ□□-□□P-X211

Manifold: ZZK2□□-A□2L-□D-X211

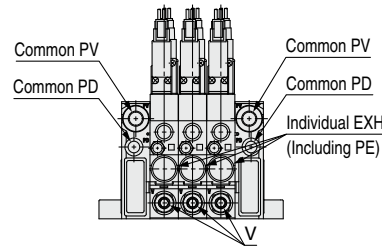


System	Ejector
Body type	Manifold
Exhaust type	High-noise reduction silencer exhaust
Application and purpose	Vacuum pressure: Common for each station
	Exhaust: Released within the operating environment
	Release pressure: Common PD pressure has to be supplied with common PV.

Port Layout

Option -L

Port layout no. **13**

Single unit: ZK2C□A5MOZ□□-□-□L-X211
Manifold: ZZK2□□-A□1L-□L-X211

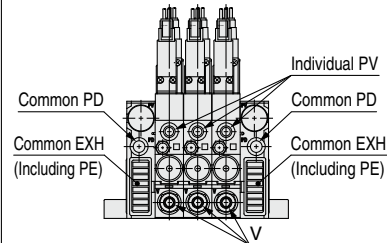


*1 The complex exhaust method combines the common exhaust from the end plate and the direct exhaust from each station.

System		Ejector
Body type		Manifold
Exhaust type		Complex exhaust*1
Application and purpose	Vacuum pressure	PV pressure can be changed per station.
	Exhaust	Released within the operating environment
	Release pressure	Common PD pressure has to be supplied with individual PV

Port combination: Individual PV ≠ Common PD


Circuit example

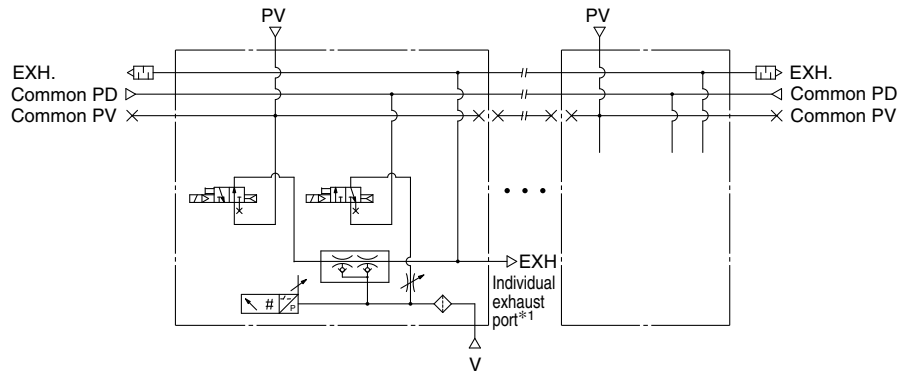

*1 For the complex exhaust type, an individual exhaust port is provided to each station.

Port layout no. **14**


Single unit: ZK2F□A5MOZ□□-□-□L-X211
Manifold: ZZK2□□-A□2L-□L-X211

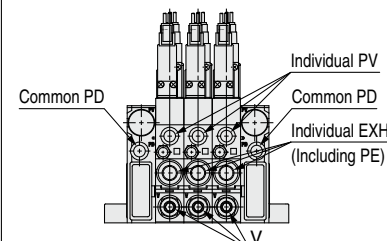

System		Ejector
Body type		Manifold
Exhaust type		Individual port exhaust
Application and purpose	Vacuum pressure	PV pressure can be changed per station.
	Exhaust	After piping, individual exhaust is necessary.
	Release pressure	Common PD pressure has to be supplied with individual PV.


Port combination: Individual PV ≠ Common PD

Circuit example

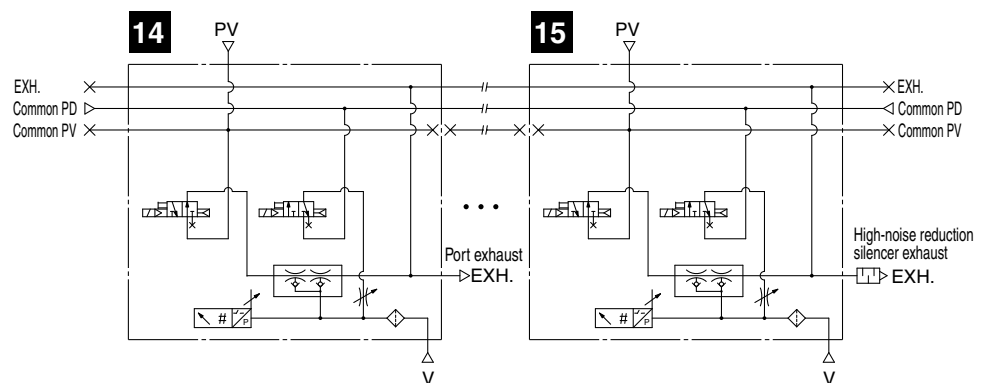

Port layout no. **15**


Single unit: ZK2H□A5MOZ□□-□-□L-X211
Manifold: ZZK2□□-A□2L-□L-X211

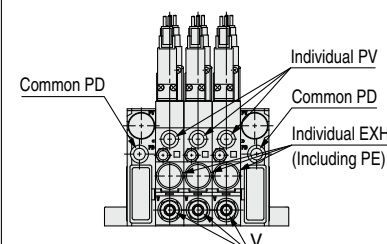

System		Ejector
Body type		Manifold
Exhaust type		High-noise reduction silencer exhaust
Application and purpose	Vacuum pressure	PV pressure can be changed per station.
	Exhaust	Released within the operating environment
	Release pressure	Common PD pressure has to be supplied with individual PV

ZK2□-X188/ZK2□-X211

Dimensions: Single Unit

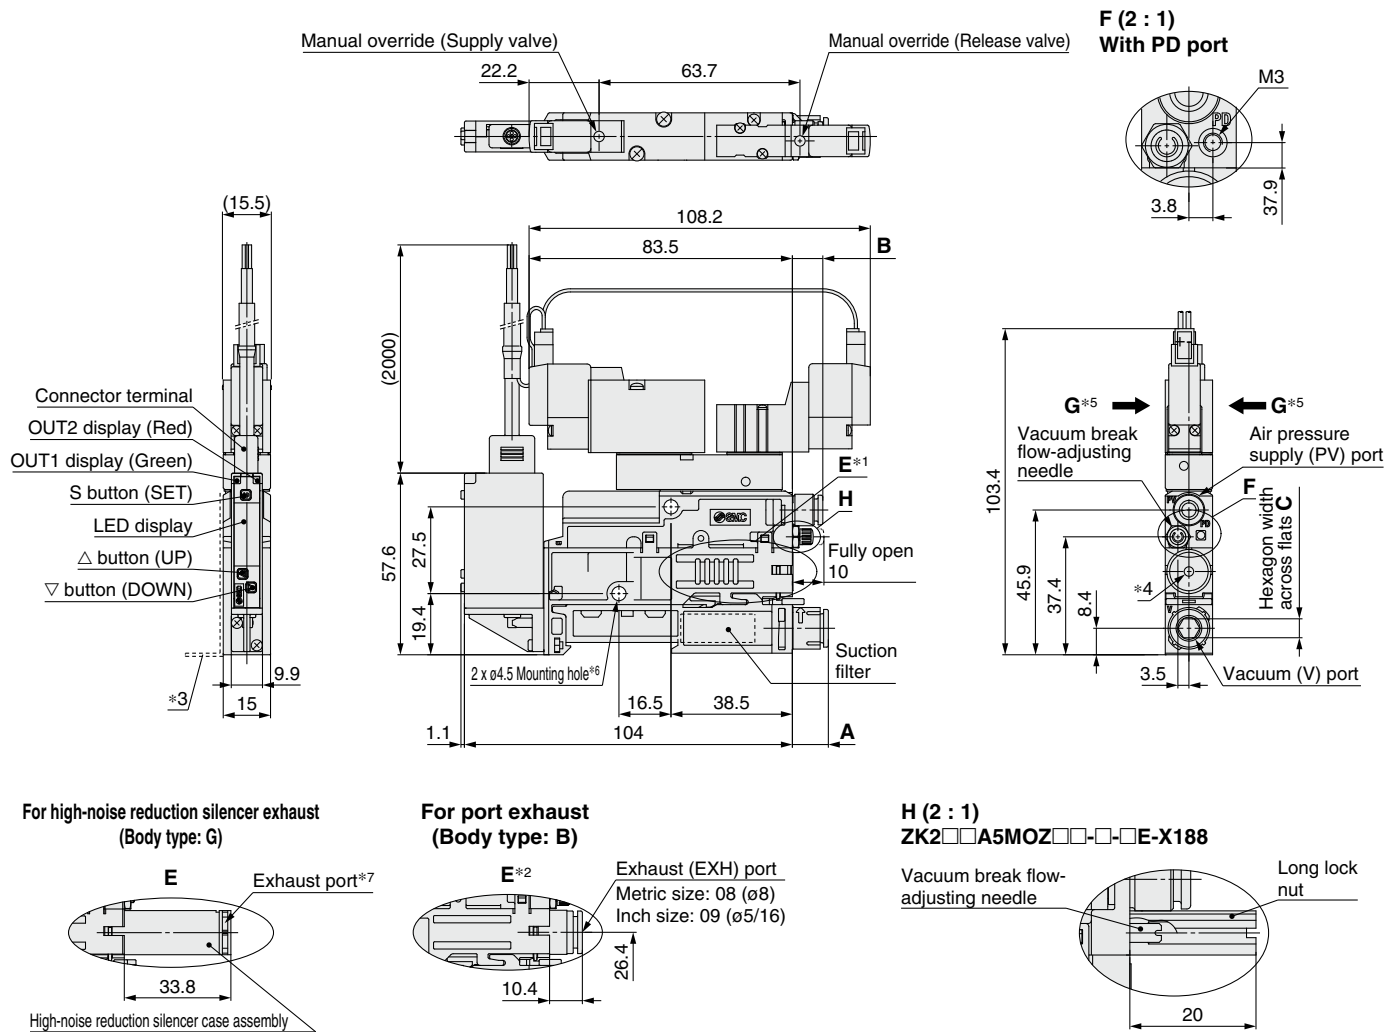

V Port Dimensions

V port type			A	B	C
Metric size	06	ø6	8.25	9.7	4
	08	ø8	11.4		6
Inch size	07	ø1/4"	10.8	12.3	4.76
	09	ø5/16"	11.4		6

*1 For the silencer exhaust type, air is exhausted from the slit on both sides. (Do not cover both sides. Allow release from at least one side.)

*2 For the port exhaust type, air is exhausted from the One-touch fitting.

*3 Refer to the **Web Catalog** for dimensions with a mounting bracket.

*4 Nozzle sizes 12 and 15 have an exhaust port.

*5 Do not apply any external force in the directions of the arrows shown beside G.


*6 When the product is mounted by using a 2 x ø4.5 mounting hole, it is recommended that the M4 screw be tightened with a tightening torque of 0.73 to 0.75 N·m.

*7 Do not block the exhaust port. Otherwise, backflow of exhausted air, which can cause the failure of the product, may occur.

* These figures show the ZK2A□A5MOZ□W-□□E-X188.

Vacuum Ejector with Energy-saving Function **ZK2□-X188/ZK2□-X211**

Dimensions: Manifold

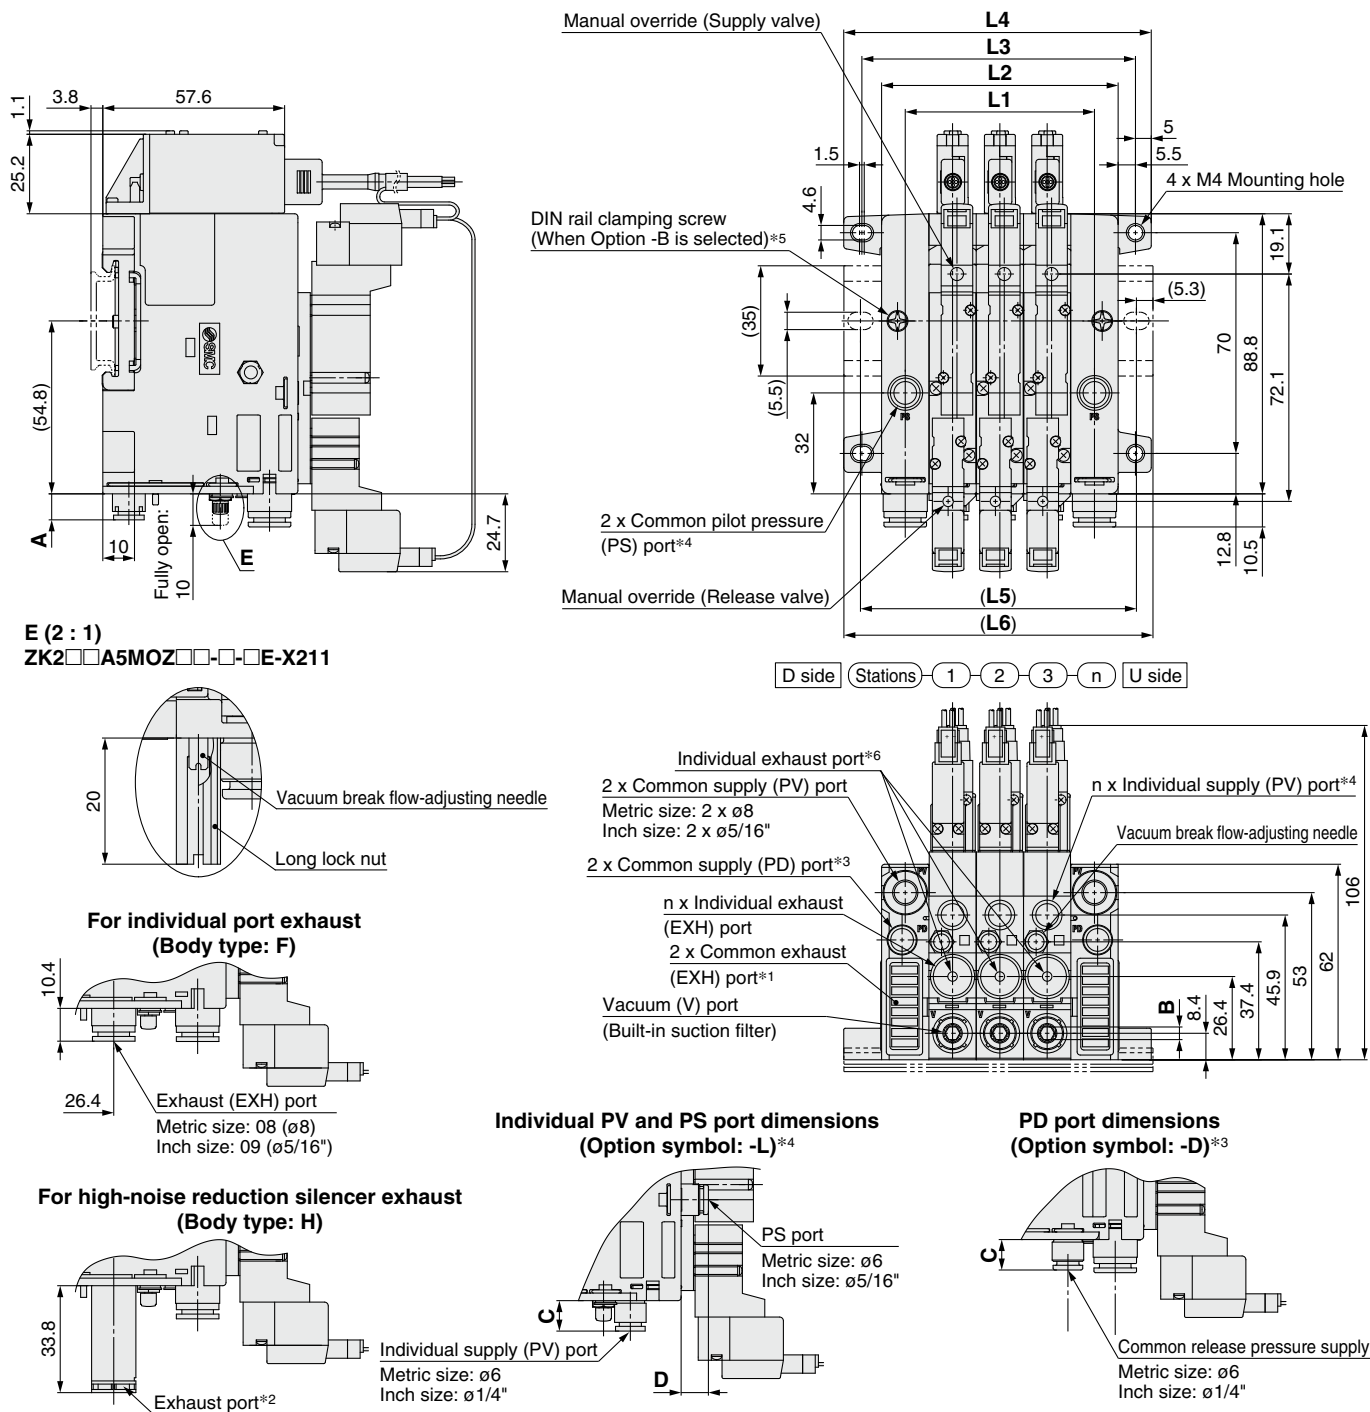

Port Dimensions

[mm]

V port type	A	B (Hexagon width across flats)	C	D
Metric size	06	ø6	8.3	4
	08	ø8	11.4	6
Inch size	07	ø1/4"	10.8	4.76
	09	ø5/16"	11.4	6
			12.3	11.3

Manifold Dimensions

[mm]

Stations	1	2	3	4	5	6	7	8	9	10
L1	30	45	60	75	90	105	120	135	150	165
L2	45	60	75	90	105	120	135	150	165	180
L3	56.8	71.8	86.8	101.8	116.8	131.8	146.8	161.8	176.8	191.8
L4	67.5	82.5	97.5	112.5	127.5	142.5	157.5	172.5	187.5	202.5
L5	62.5	75	87.5	112.5	125	137.5	150	162.5	187.5	200
L6	73	85.5	98	123	135.5	148	160.5	173	198	210.5

- *1 The individual port exhaust type and high-noise reduction silencer exhaust type do not have exhaust ports.
- *2 Do not block the exhaust port. Otherwise, backflow of exhausted air, which can cause the failure of the product, may occur.
- *3 Only when common PD port type option (Symbol: -D) is selected (mm: ø6 inch: ø1/4")

- *4 Only when the individual supply specification (Symbol: -L) is selected (mm: ø6 inch: ø1/4")
- *5 To secure the manifold to the DIN rail, select an option for the manifold model number.
- *6 For the complex exhaust type, air is also exhausted from the individual exhaust port of each station in addition to the common exhaust.

