


# Check Valve with One-Touch Fitting

## Series *AKH/AKB*


3 configurations provide design solutions based on the operating conditions

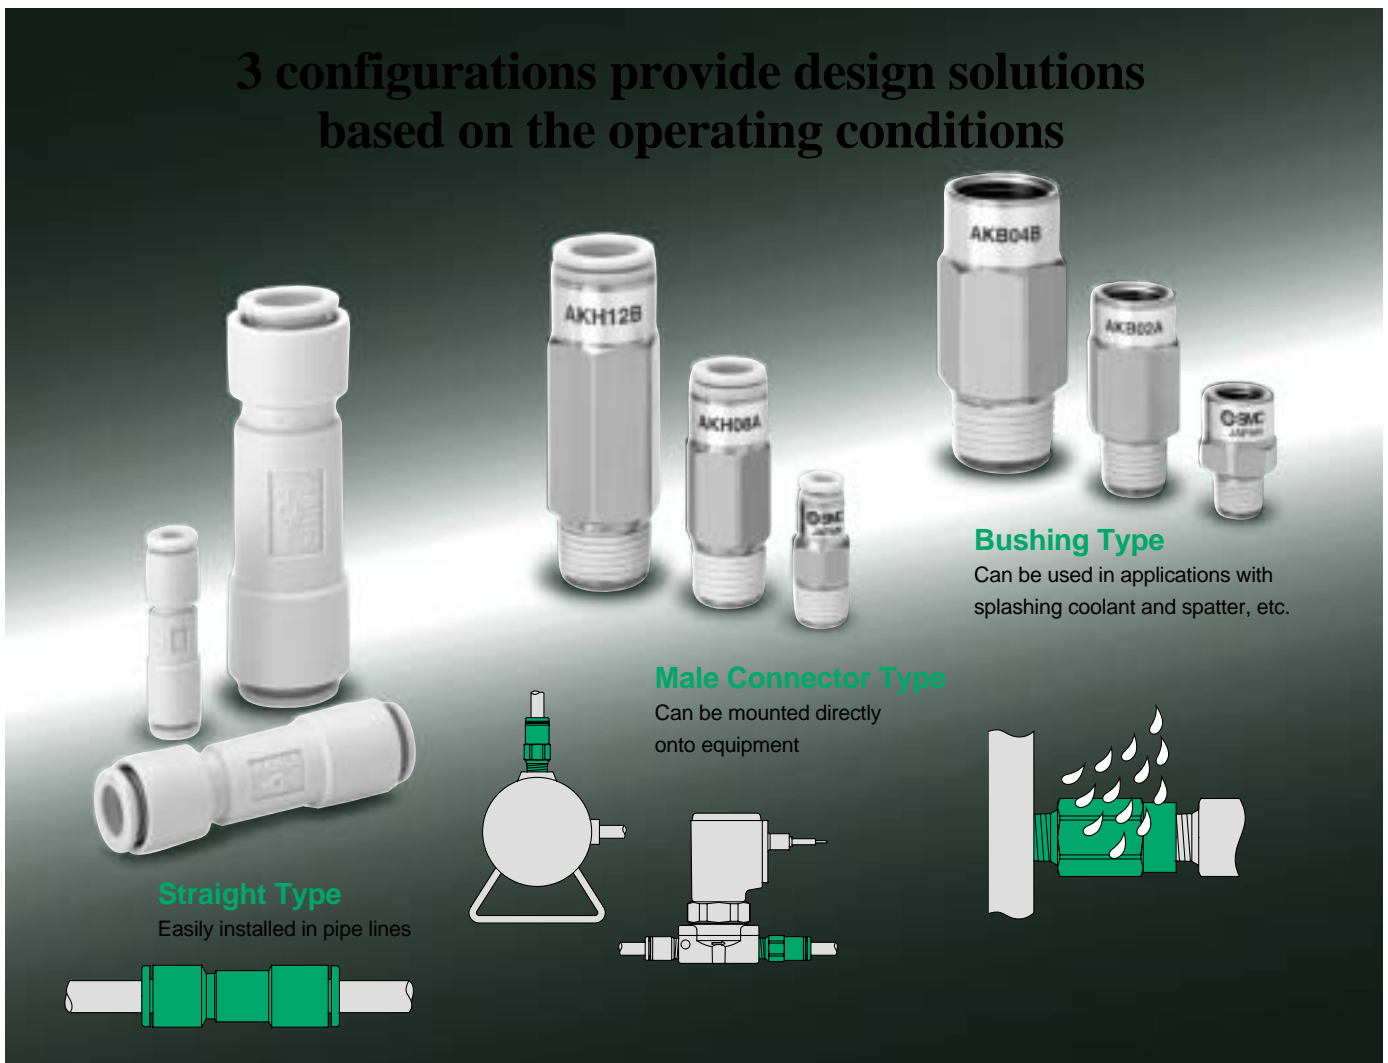


**Bushing Type**  
Can be used in applications with splashing coolant and spatter, etc.

**Male Connector Type**  
Can be mounted directly onto equipment

**Straight Type**  
Easily installed in pipe lines



Can be used for vacuum (-100kPa)

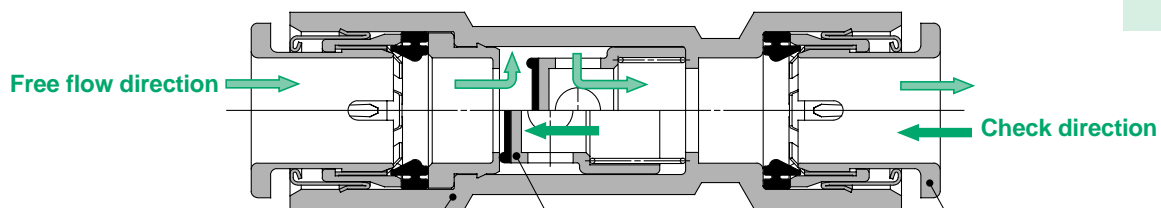

**Compact & Light weight**

Outside diameter:  $\varnothing 11.6\text{mm}$   
Overall length: 37.1mm  
Weight: 5g  
(for AKH06-00)

**Valve**

Low cracking pressure: 0.005MPa  
Large effective area: 3 to 34mm<sup>2</sup>

**With One-touch fitting**

Reduces piping labour  
Release bushing colour  
Millimeter size: White  
Inch size: Orange

# Check Valve with One-Touch Fitting Series **AKH/AKB**



## How to Order

**Straight Type** AKH 04 - 00  
**Male Connector Type** AKH 04 A - 01 S

### Applicable tube O.D.

Millimeter size		Inch size	
04	ø4	03	ø5/32
06	ø6	07	ø1/4
08	ø8	09	ø5/16
10	ø10	11	ø3/8
12	ø12	13	ø1/2

### Check valve free flow direction

<b>A</b>	From male thread to One-touch fitting	
<b>B</b>	From One-touch fitting to male thread	

• With sealant (standard)

\* Not applicable to types M5 & 10-32UNF are not required.

### Thread type

Nil	Metric system thread (M5)
	Unified thread (10-32UNF)
	R(PT)
N	NPT

### Port size

M5	M5 x 0.8
U10/32	10-32UNF
01	1/8
02	1/4
03	3/8
04	1/2

### Applicable Tube O.D. /Port Size Combinations

#### Millimeter size

Model	Applicable tube O.D.	Port size R(PT)				
		M5	1/8	1/4	3/8	1/2
AKH04□	ø4	●	●			
AKH06□	ø6	●	●	●		
AKH08□	ø8		●	●	●	
AKH10□	ø10			●	●	●
AKH12□	ø12				●	●

#### Inch size



Model	Applicable tube O.D.	Port size NPT				
		10-32 UNF	1/8	1/4	3/8	1/2
AKH03□	ø5/32	●	●			
AKH07□	ø1/4	●	●	●		
AKH09□	ø5/16		●	●	●	
AKH11□	ø3/8			●	●	●
AKH13□	ø1/2				●	●

**Bushing Type** AKB 01 A - 01 S

### Body size

01	1/8
02	1/4
03	3/8
04	1/2

### Check valve free flow direction

<b>A</b>	From male thread to female thread	
<b>B</b>	From female thread to male thread	

• With sealant (standard)

### Thread type

Nil	R(PT)
N	NPT

### Port size

01	1/8
02	1/4
03	3/8
04	1/2

### Female Thread/Male Thread Combinations

#### R(PT) thread

Model	Female thread Rc(PT)	Male thread R(PT)			
		1/8	1/4	3/8	1/2
AKB01□	1/8	●			
AKB02□	1/4		●		
AKB03□	3/8			●	
AKB04□	1/2				●

#### NPT thread

Model	Female thread NPT	Male thread NPT			
		1/8	1/4	3/8	1/2
AKB01□	1/8	●			
AKB02□	1/4		●		
AKB03□	3/8			●	
AKB04□	1/2				●

# Check Valve with One-Touch Fitting *Series AKH/AKB*




## Specifications

Fluid	Air
Proof pressure	1.5MPa
Operating pressure range	- 100kPa to 1MPa
Cracking pressure	0.005MPa
Ambient and fluid temperature	- 5 to 60°C (with no freezing)
Applicable tube material <sup>Note 1)</sup>	Nylon, Soft nylon, Polyurethane


Note 1) Use caution at the maximum operating pressure with soft nylon and polyurethane.  
(Refer to CAT.E501-③ "Air Fittings and Tubing" for details.)

## Application Examples for Check Valve with One-Touch Fitting


### Prevention of reverse flow to vacuum source\* (simple vacuum holding)

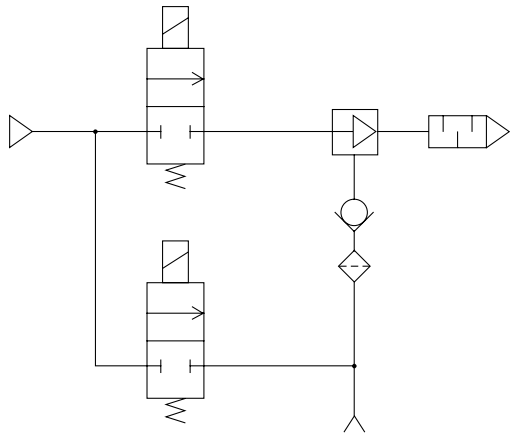

### Tank pressure reverse flow prevention

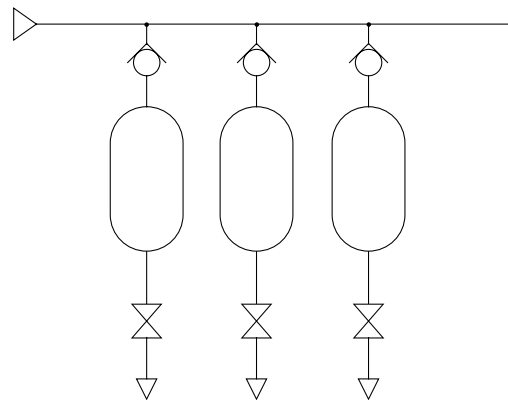

### Drop prevention\*

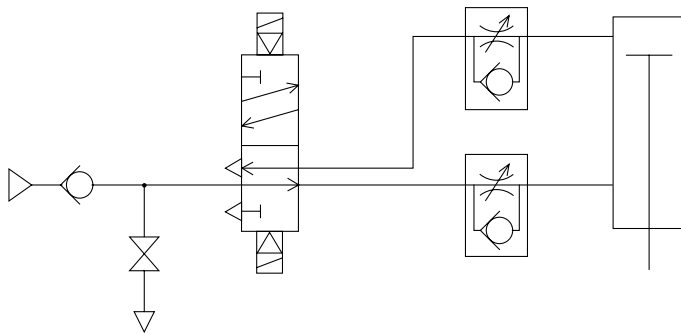


\* A certain amount of leakage is allowed in the specifications of this product. Please note that it is not suitable for holding over an extended period of time.

# Series AKH/AKB

## Dimensions

### Straight Type: AKH

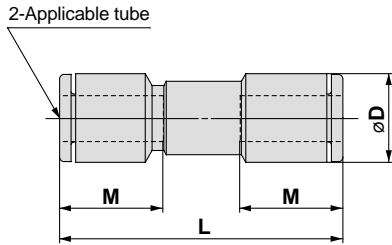

#### Millimeter Size


Applicable tube O.D.	Model	øD	L	M	Effective area (mm <sup>2</sup> )	Weight g
4	AKH04-00	9.3	33.5	12.7	2.8	3
6	AKH06-00	11.6	37.1	13.5	6.5	5
8	AKH08-00	15.2	53.3	18.5	14	10
10	AKH10-00	18.5	63.6	21	24	17
12	AKH12-00	21.7	70.2	22	34	25

#### Inch Size

Applicable tube O.D.	Model	øD	L	M	Effective area (mm <sup>2</sup> )	Weight g
5/32	AKH03-00	9.3	33.5	12.7	2.8	3
1/4	AKH07-00	12	39	13.6	6.5	6
5/16	AKH09-00	15.2	53.3	18.5	14	10
3/8	AKH11-00	18.5	63.6	21	24	17
1/2	AKH13-00	21.7	70.2	22	34	24

### Male Connector Type: AKH

<For M5, UNF10-32>

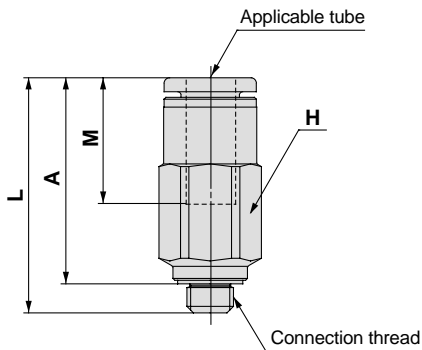

#### Millimeter Size

Applicable tube O.D.	Connection thread R(PT)	Model	H (Width across flats)	L	A *	M	Effective area (mm <sup>2</sup> )	Weight g
4	M5 x 0.8	AKH04□-M5	8	24.3	21.2	12.7	2.8	5
	1/8	AKH04□-01S	10	24.6	20.6		10	
6	M5 x 0.8	AKH06□-M5	10	25.8	22.2	13.5	2.8	8
		AKH06□-01S		26.9	22.9		6.5	
	1/4	AKH06□-02S	14	30	24	17	6.5	22
8	1/8	AKH08□-01S	14	31.7	27.7	18.5	6.5	16
		AKH08□-02S		42	36		14	24
	3/8	AKH08□-03S	17	42	35.5	18.5	14	43
10	1/4	AKH10□-02S	17	54.3	48.3	21	24	45
	3/8	AKH10□-03S		47.3	40.8			39
	1/2	AKH10□-04S	22	49.3	41.3	21	24	80
12	3/8	AKH12□-03S	19	60.5	54	22	34	62
	1/2	AKH12□-04S	22	54.5	46.5			80

\* Reference dimension after screwing into R(PT) threads.

#### Inch Size


Applicable tube O.D.	Connection thread NPT	Model	H (Width across flats)	L	A *	M	Effective area (mm <sup>2</sup> )	Weight g
5/32	10-32 UNF	AKH03□-U10/32	8	24.3	21.2	12.7	2.8	5
	1/8	AKH03□-N01S	11.11	24.6	20.6			10
1/4	10-32 UNF	AKH07□-U10/32	11.11	25.8	22.7	13.6	6.5	10
		AKH07□-N01S		26.9	22.9			11
	1/4	AKH07□-N02S	14.29	31	25	17	6.5	18
5/16	1/8	AKH09□-N01S	14.29	31.7	27.7	18.5	6.5	16
		AKH09□-N02S		42	36			14
	3/8	AKH09□-N03S	17.46	42	35.5	18.5	14	43
3/8	1/4	AKH11□-N02S	17.46	54.2	48.3	21	24	47
	3/8	AKH11□-N03S		47.2	40.7			40
	1/2	AKH11□-N04S	22.23	49.2	41.2	21	24	79
1/2	3/8	AKH13□-N03S	22.23	60.5	54	22	34	87
		AKH13□-N04S		54.5	46.5			85

\* Reference dimension after screwing into NPT threads.

# Check Valve with One-Touch Fitting *Series AKH/AKB*

## Dimensions

### Bushing Type: AKB

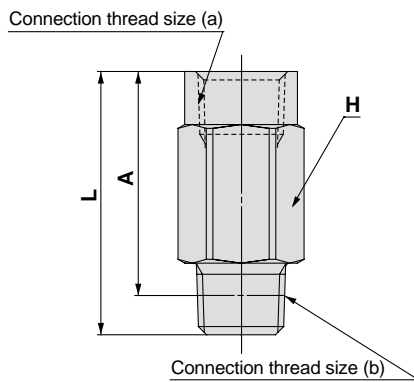

### Millimeter Size

Connection thread size R(PT)		Model	H	L	A *	Effective area (mm <sup>2</sup> )	Weight g
(a)	(b)						
1/8	1/8	AKB01□-01S	14	23.7	19.7	6.5	18
1/4	1/4	AKB02□-02S	17	39.8	33.8	14	44
3/8	3/8	AKB03□-03S	22	45.2	38.7	24	86
1/2	1/2	AKB04□-04S	24	56.2	48.2	34	113

\* Reference dimension after screwing into R(PT) threads.

### Inch Size

Connection thread size NPT		Model	H	L	A *	Effective area (mm <sup>2</sup> )	Weight g
(a)	(b)						
1/8	1/8	AKB01□-N01S	14.29	24.2	20.2	6.5	18
1/4	1/4	AKB02□-N02S	17.46	40	34	14	44
3/8	3/8	AKB03□-N03S	22.23	44.9	38.4	24	86
1/2	1/2	AKB04□-N04S	23.81	55.5	47.5	34	113


\* Reference dimension after screwing into NPT threads.

# Series AKH/AKB


## Construction

### Straight type: AKH

ø4, ø6  
ø5/32, ø1/4



ø8, ø10, ø12  
ø5/16, ø3/8, ø1/2

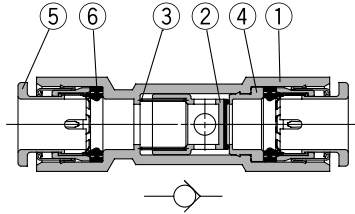

#### Parts list

No.	Description	Material	Note
1	Body	PBT	
2	Valve	NBR, Aluminum alloy	
3	Spring	Stainless steel	
4	Spacer	Brass	Electroless nickel plated
5	Cassette	-	
6	Seal	NBR	

### Male Connector Type: AKH

	M5 type U10/32	ø4, ø6 ø8 x R(PT) 1/8 ø5/32, ø1/4 ø5/16 x NPT 1/8	ø8, ø10, ø12 ø5/16, ø3/8, ø1/2
Free flow Fitting ↑ Male thread			
Free flow Fitting ↓ Male thread			

#### Parts list

No.	Description	Material	Note
1	Body	Brass	Electroless nickel plated
2	Valve	NBR, Aluminum alloy	
3	Spring	Stainless steel	
4	Spacer	Brass	Electroless nickel plated
5	Stopper	Stainless steel	
6	O-ring	NBR	
7	Cassette	-	
8	Seal	NBR	
9	Gasket	Stainless steel + NBR	

### Bushing Type: AKB

	R (PT) 1/8 NPT 1/8	R(PT) 1/4, 3/8, 1/2 NPT1/4, 3/8, 1/2
Free flow Female thread ↑ Male thread		
Free flow Female thread ↓ Male thread		


#### Parts list


No.	Description	Material	Note
1	Body	Brass	Electroless nickel plated
2	Valve	NBR, Aluminum alloy	
3	Spring	Stainless steel	
4	Spacer	Brass	Electroless nickel plated
5	Stopper	Stainless steel	
6	O-ring	NBR	




# Series *AKH/AKB* Safety Instructions

These safety instructions are intended to prevent a hazardous situation and/or equipment damage. These instructions indicate the level of potential hazard by labels of "Caution", "Warning" or "Danger". To ensure safety, be sure to observe ISO 4414 <sup>Note 1)</sup>, JIS B 8370 <sup>Note 2)</sup> and other safety practices.

 **Caution** : Operator error could result in injury or equipment damage.

 **Warning** : Operator error could result in serious injury or loss of life.

 **Danger** : In extreme conditions, there is a possible result of serious injury or loss of life.

Note 1) ISO 4414: Pneumatic fluid power – Recommendations for the application of equipment to transmission and control systems.

Note 2) JIS B 8370: Pneumatic system axiom.

## **Warning**

### **1. The compatibility of pneumatic equipment is the responsibility of the person who designs the pneumatic system or decides its specifications.**

Since the products specified here are used in various operating conditions, their compatibility for the specific pneumatic system must be based on specifications or after analysis and/or tests to meet your specific requirements.

### **2. Only trained personnel should operate pneumatically operated machinery and equipment.**

Compressed air can be dangerous if an operator is unfamiliar with it. Assembly, handling or repair of pneumatic systems should be performed by trained and experienced operators.

### **3. Do not service machinery/equipment or attempt to remove components until safety is confirmed.**

1. Inspection and maintenance of machinery/equipment should only be performed after confirmation of safe locked-out control positions.

2. When equipment is to be removed, confirm the safety process as mentioned above. Cut the supply pressure for this equipment and exhaust all residual compressed air in the system.

3. Before machinery/equipment is re-started, take measures to prevent shooting-out of cylinder piston rod, etc. (Bleed air into the system gradually to create back-pressure.)

### **4. Contact SMC if the product is to be used in any of the following conditions:**

1. Conditions and environments beyond the given specifications, or if product is used outdoors.

2. Installation on equipment in conjunction with atomic energy, railway, air navigation, vehicles, medical equipment, food and beverages, recreation equipment, emergency stop circuits, press applications, or safety equipment.

3. An application which has the possibility of having negative effects on people, property, or animals, requiring special safety analysis.



# Series AKH/AKB Check Valve Precautions 1

Be sure to read before handling.

## Selection

### Warning

#### 1. Confirm the specifications.

The products appearing in this catalog are designed for use only in compressed air systems (including vacuum). Do not use outside the specified ranges of pressure, temperature, etc., as this may cause damage or faulty operation. (Refer to specifications.)

Consult with SMC if fluids other than compressed air (including vacuum) are to be used.

## Mounting

### Warning

#### 1. Read the instruction manual carefully.

The product should be mounted and operated with a good understanding of its contents. Also, keep the manual where it can be easily referred to at any time.

#### 2. Ensure space for maintenance.

Ensure the necessary space for maintenance activities.

#### 3. Strictly observe the fastening of screws and fastening torque.

When mounting, fasten screws with the recommended torque.

## Piping

### Caution

#### 1. Preparation before piping

Before piping is connected, it should be thoroughly blown out with air (flushing) or washed to remove chips, cutting oil and other debris from inside the pipe.

#### 2. Wrapping of sealing tape

When screwing together pipes and fittings, etc., be certain that chips from the pipe threads and sealing material do not get inside the piping.

Further, when sealing tape is used, leave 1.5 to 2 thread ridges exposed at the end of the threads.

## Air Supply

### Warning

#### 1. Types of fluid

This product is designed for use with compressed air. Consult with SMC if a different fluid is to be used.

#### 2. When there is a large amount of drainage

Pressurized air containing a large amount of drainage may cause the malfunction of pneumatic equipment. An air dryer or Drain Catch should be installed upstream from filters.

#### 3. Drainage removal

If the air filter drains are not flushed regularly, the drainage will flow downstream and this may lead to the malfunction of pneumatic equipment.

In cases where the management of drain flushing will be difficult, the use of filters with automatic drains is recommended.

For details on the qualities of compressed air mentioned above, refer to SMC's "Compressed Air Cleaning Systems" catalog.

#### 4. Types of air

Do not use compressed air containing chemicals, synthetic oil which includes organic solvents, salt, corrosive gases, etc., as this may cause damage or faulty malfunction.





# Series AKH/AKB Check Valve Precautions 2

Be sure to read before handling.

## Operating Environment

### Warning

1. Do not operate in locations having an atmosphere of corrosive gases, chemicals, sea water, fresh water or water vapor, or where there will be contact with the same.
2. In locations which receive direct sunlight, the sunlight should be blocked .
3. Do not operate in locations where vibration or impact occurs.
4. Do not operate in a location near a heat source where radiated heat will be received.

## Maintenance

### Warning

1. Maintenance should be performed in accordance with procedures in the instruction manual.

Improper handling may cause damage or malfunction of equipment or machinery.

#### 2. Maintenance operations

Improper handling of compressed air is dangerous. Therefore, in addition to observing the product specifications, replacement of elements and other maintenance activities should be performed by personnel having sufficient knowledge and experience pertaining to pneumatic equipment.

#### 3. Drain flushing

Drainage should be flushed from air filter and other drains on a regular basis. (Refer to specifications.)

#### 4. Pre-maintenance inspection

When removing this product, turn off the electric power, and be certain to shut off the supply pressure and exhaust the compressed air in the system. Proceed only after confirming that all pressure has been released to the atmosphere.

#### 5. Post maintenance inspection

After installation, repair or reconstruction, reconnect compressed air and electric power, and then perform inspections for proper operation and air leakage. If the sound of air leakage can be heard, or if the equipment does not operate properly, stop operation and confirm that it is mounted correctly.

#### 6. Disassembly and alteration prohibited

Do not disassemble the unit or make any alterations to it.



# Series AKH/AKB Specific Product Precautions 1

Be sure to read before handling. Refer to pages 6 through 8 for safety instructions and precautions.

## Selection

### Warning

1. Cannot be used as a check valve when zero leakage is required.

A certain amount of leakage is allowed in the product's specifications.

### Caution

1. Do not use in a location where connection threads or tube connecting sections will slide or turn.
2. Use tubing within its minimum bend radius.  
Using at less than the minimum bend radius can cause breaking or flattening of the tubing.
3. Do not use for gas, gas fuels and refrigerants, etc., which are combustible, explosive or poisonous.
4. Confirm whether PTFE can be used.

PTFE (tetrafluoroethylene resin) powder is contained in the sealing materials. Confirm that this will not cause operating problems.

## Operating Environment

### Warning

1. Do not use in locations where static electric charges will be a problem.  
This can cause malfunction or failure of the system.
2. Except for the bushing type: AKB, do not use in locations where spatter is generated.  
There is a danger of fire occurring if spatter sticks to synthetic resin parts.
3. Except for the bushing type: AKB, do not use in environments where there will be direct contact with liquids such as cutting oil, lubricating oil or coolant oil.

Contact SMC regarding operation in this kind of environment.

## Maintenance


### Caution

1. Check for the following during regular maintenance, and replace components as necessary.
  - a) Scratches, gouges, abrasion, corrosion
  - b) Air leakage
  - c) Twisting, flattening or distortion of tubing
  - d) Hardening, deterioration or softness of tubing
2. Do not repair or patch the replaced tubing or fittings for reuse.


## Mounting

### Caution

1. Confirm the model and size, etc. before mounting.  
Also, confirm that the product has no scratches, gouges or cracks, etc.
2. Confirm the flow direction of a check valve when mounting.  
Confirm the free flow direction with the JIS symbol which is displayed on the body.



3. When connecting tubing, make allowances for changes in the length of the tubing, etc. due to pressure.
4. Do not allow tubing and fittings to be subjected to distortion, twisting, pulling or moment loads, etc. This can cause damage to fittings, and crushing, bursting or disconnection of tubing, etc.
5. Do not allow tubing to be worn, twisted or scratched. This can cause crushing, bursting or disconnection of the tubing, etc.
6. When connecting piping and fittings, etc., be careful that chips from the pipe threads and sealing material do not get inside. Also, when sealing tape is used, leave about 2 thread ridges uncovered at the end of the pipe.



7. When connecting taper pipe threads, tighten the wrench flats on the body with a suitable wrench.

Damage can be caused if any other area is used.



# Series AKH/AKB Specific Product Precautions 2

Be sure to read before handling. Refer to pages 6 through 8 for safety instructions and precautions.

## Precautions on Other Tube Brands

### ⚠ Caution

1. When using other than SMC brand tubes, confirm that the following specifications are satisfied with respect to the outside diameter tolerance of the tube.

- 1) Nylon tube                within  $\pm 0.1$ mm
- 2) Soft nylon tube        within  $\pm 0.1$ mm
- 3) Polyurethane tube    within  $+0.15$ mm  
                                      within  $-0.2$ mm

Do not use tubes which do not meet these outside diameter tolerances. It may not be possible to connect them, or they may cause other trouble, such as air leakage or the tube pulling out after connection.

## Precautions for One-Touch Fittings

### ⚠ Caution

#### Attaching and Detaching Tubes to One-Touch Fittings

##### 1. Attaching of tube

- ① Take a tube having no flaws on its periphery and cut it off at a right angle. When cutting the tube, use tube cutters TK-1, 2 or 3. Do not use pinchers, nippers or scissors, etc. The tube might be cut diagonally or flattened, making installation impossible or causing problems such as disconnection of the tube after installation or air leakage. Allow some extra length in the tube.
- ② Grasp the tube and push it in slowly, inserting it securely all the way into the fitting.
- ③ After inserting the tube, pull on it lightly to confirm that it will not come out. If it is not installed securely all the way into the fitting, this can cause problems such as air leakage or the tube pulling out.

##### 2. Detaching of tube

- ① Push in the release bushing sufficiently, and push the collar equally at the same time.
- ② Pull out the tube while holding down the release bushing so that it does not come out. If the release bushing is not pressed down sufficiently, there will be increased bite on the tube and it will become more difficult to pull it out.
- ③ When the removed tube is to be used again, using the chewed portion of the tube as it is can cause problems such as air leakage or difficulty in removing the tube.

## Tightening Torque

### ⚠ Caution

1. The proper torque for connecting pipe fittings is shown in the table below. As a rule, this is equivalent to 2 or 3 turns with a tool after tightening by hand.

Be careful of damage due to over tightening. When using miniature pipe fittings, tighten by an additional 1/4 turn after hand tightening. Further, in cases such as a universal elbow or universal tee which have gaskets in 2 locations, the additional tightening is doubled to 1/2 turn.

Male thread	Proper tightening torque (N·m)
M5 10/32-UNF	1/6 turn after hand tightening
1/8	7 to 9
1/4	12 to 14
3/8	22 to 24
1/2	28 to 30

**Austria**

SMC Pneumatik GmbH (Austria).  
Girakstrasse 8, A-2100 Körneuburg  
Phone: 02262-62280, Fax: 02262-62285

**Belgium**

SMC Pneumatics N.V./S.A.  
Nijverheidsstraat 20, B-2160 Wommelgem  
Phone: 03-355-1464, Fax: 03-355-1466

**Czech**

SMC Czech.s.r.o.  
Kodanska 46, CZ-100 10 Prague 10  
Phone: 02-67154 790, Fax: 02-67154 793

**Denmark**

SMC Pneumatik A/S  
Jens Juuls vej 32, DK-8260 Viby J  
Phone: 45-70252900, Fax: 45-70252901

**Estonia**

Teknomaa Eesti AS  
Mustamäe tee 5, EE-0006 Tallinn, Estonia  
Phone: 259530, Fax: 259531

**Finland**

SMC Pneumatikka OY  
Veneentekijäntie 7, SF-00210 Helsinki  
Phone: 09-681021, Fax: 09-6810233

**France**

SMC Pneumatique, S.A.  
1, Boulevard de Strasbourg, Parc Gustave Eiffel  
Bussy Saint Georges  
F-77607 Marne La Vallée Cedex 3  
Phone: 01-6476 1000, Fax: 01-6476 1010

**Germany**

SMC Pneumatik GmbH  
Boschring 13-15, D-63329 Egelsbach  
Phone: 06103-4020, Fax: 06103-402139

**Greece**

S. Parianopoulos S.A.  
9, Konstantinoupoleos Street,  
GR-11855 Athens  
Phone: 01-3426076, Fax: 01-3455578

**Hungary**

SMC Hungary Kft.  
Budafoki ut 107-113, 1117 Budapest  
Phone: 01-204 4366, Fax: 01-204 4371

**Ireland**

SMC Pneumatics (Ireland) Ltd.  
2002 Citywest Business Campus,  
Naas Road, Saggart, Co. Dublin  
Phone: 01-403 9000, Fax: 01-464 0500

**Italy**

SMC Italia S.p.A  
Via Garibaldi 62, I-20061 Carugate, (Milano)  
Phone: 02-92711, Fax: 02-92150394

**Latvia**

Ottensten Latvia SIA  
Ciekurkalna Prima Gara Linija 11,  
LV-1026 Riga, Latvia  
Phone: 371-23-68625, Fax: 371-75-56748

**Lithuania**

UAB Ottensten Lietuva  
Savanoriu pr.180, LT-2600 Vilnius, Lithuania  
Phone/Fax: 370-2651602

**Netherlands**

SMC Controls BV  
De Ruyterkade 120, NL-1011 AB Amsterdam  
Phone: 020-5318888, Fax: 020-5318880

**Norway**

SMC Pneumatics (Norway) A/S  
Wollsvveien 13 C, granfoss Noeringspark  
N-134 Lysaker, Norway  
Phone: 22 99 6036, Fax: 22 99 6103

**Poland**

Semac Co., Ltd.  
PL-05-075 Wesola k/Warszaway, ul. Wspolna 1A  
Phone: 022-6131847, Fax: 022-613-3028

**Portugal**

SMC España (Sucursal Portugal), S.A.  
Rua de Engº Ferreira Dias 452, 4100 Porto  
Phone: 02-610-89-22, Fax: 02-610-89-36

**Romania**

SMC Romania srl  
Vasile Stroescu 19, Sector 2, Bucharest  
Phone: 01-210-1354, Fax: 01-210-1680

**Russia**

SMC Pneumatik LLC  
Centrako Business Centre 103,  
Bolshoy Prospect V.O., 199106 St. Petersburg  
Phone: 812-1195131, Fax: 812-1195129

**Slovakia**

SMC Slovakia s.r.o.  
Pribinova ul. C. 25, 819 02 Bratislava  
Phone: 0-563 3548, Fax: 07-563 3551

**Slovenia**

SMC Slovenia d.o.o.  
Grajski trg 15, 8360 Zuzemberk  
Phone: 068-88 044 Fax: 068-88 041

**Spain**

SMC España, S.A.  
Zuazobidea 14, Pol. Ind. Jundiz,  
E-01015 Vitoria  
Phone: 945-184 100, Fax: 945-184 124

**Sweden**

SMC Pneumatics Sweden A.B.  
Ekhagsvägen 29-31, S-14105 Huddinge  
Phone: 08-603 07 00, Fax: 08-603 07 10

**Switzerland**

SMC Pneumatik AG  
Dorfstrasse 7, CH-8484 Weisslingen  
Phone: 052-396-3131, Fax: 052-396-3191

**Turkey**

Entek Pnömatik San. ve Tic Ltd. Sti.  
Perpa Tic. Merkezi Kat: 11 No: 1625,  
TR-80270 Okmeydani Istanbul  
Phone: 0212-221-1512, Fax: 0212-220-2381

**UK**

SMC Pneumatics (UK) Ltd  
Vincent Avenue, Crownhill,  
Milton Keynes, MK8 0AN  
Phone: 01908-563888 Fax: 01908-561185

**OTHER SUBSIDIARIES WORLDWIDE:**

ARGENTINA, AUSTRALIA, BOLIVIA, BRASIL, CANADA, CHILE, CHINA, HONG KONG, INDIA, MALAYSIA, MEXICO, NEW ZEALAND, PHILIPPINES, SINGAPORE, SOUTH KOREA, TAIWAN, THAILANDIA, USA, VENEZUELA

*For more information, please contact your local SMC Regional Centre*

**SMC UK Regional Centres****BELFAST**

Tel:01232 778414 Fax:01232 778422  
SMC Pneumatics (UK) Ltd  
Northern Ireland Regional Centre  
Suite 3, Shaftesbury House, Edgewater Road  
Belfast  
BT3 9JQ

**BIRMINGHAM**

Tel:01675 467177 Fax:01675 465073  
SMC Pneumatics (UK) Ltd  
Birmingham Regional Centre  
24 The Courtyard, Gorsey Lane, Coleshill  
Warwickshire  
B46 1JA

**BRISTOL**

Tel:01179 522155 Fax:01179 522186  
SMC Pneumatics (UK) Ltd  
Bristol Regional Centre  
5 East Gate Office Centre  
East Gate Road, Eastville, Bristol  
BS5 6XX

**SMC UK Distributors**

**Birmingham**  
JAMES LISTER  
Tel: 0121 5803800  
Fax: 0121 5535951

**Blackburn**  
BLACKBURN PNEUMATIC SYSTEMS LTD  
Tel: 01254 682232  
Fax: 01254 682224

**Bristol**  
APPLIED AUTOMATION  
Tel: 0117 9827769  
Fax: 0117 9235522

**CRAWLEY**

Tel:01293 614094 Fax:01293 614135  
SMC Pneumatics (UK) Ltd  
Crawley Regional Centre  
9 Pelham Court, Pelham Place, Broadfield  
Crawley  
RH11 9AZ

**CUMBERNAULD**

Tel:01236 781133 Fax:01236 780611  
SMC Pneumatics (UK) Ltd  
Scottish Regional Centre  
1 Carradale Crescent,  
Broadwood Business Park, Cumbernauld  
Glasgow  
G69 9LE

**DROITWICH**

Tel: 01905 774544 Fax: 01905 797343  
SMC Pneumatics (UK) Ltd  
Droitwich Regional Centre  
Hampton Park, Hampton Lovett  
Droitwich, Worcestershire  
WR9 0NX

**Bury St Edmunds**

PNEUMATIC LINES  
Tel: 01284 706239  
Fax: 01284 761218

**Cardiff**

WALES FLUID POWER  
Tel: 01222 494551  
Fax: 01222 481955

**IPSWICH**

Tel:01473 240040 Fax:01473 747707  
SMC Pneumatics (UK) Ltd  
Ipswich Regional Centre  
Unit 6 & 7, Alpha Business Park  
16-18 Whitehouse Road, Ipswich, Suffolk  
IP1 5LT

**MANCHESTER**

Tel:0161 876 7371 Fax:0161 876 7372  
SMC Pneumatics (UK) Ltd  
Manchester Regional Centre  
3 Modwen Road, Waters Edge Business Park  
Ordsall Lane, Salford, Manchester  
M5 3EZ

**MILTON KEYNES**

Tel: 01908 265247 Fax: 01908 262705  
SMC Pneumatics (UK) Ltd  
Vincent Avenue, Crownhill, Milton Keynes  
MK8 0AN

**East Grinstead**

AUTARKY AUTOMATION  
Tel: 01342 311388  
Fax: 01342 323733

**Newton Aycliffe**

ONCAD AUTOMATION  
Tel: 01325 311599  
Fax: 01325 307562

**NEWCASTLE**

Tel:0191 487 2040 Fax:0191 487 2041  
SMC Pneumatics (UK) Ltd  
Newcastle Regional Centre  
Unit B6, Marquis Court, Marquis Way  
Team Valley Trading Estate, Gateshead  
Tyne & Wear  
NE11 0RU

**POOLE**

Tel:01202 732233 Fax:01202 737743  
SMC Pneumatics (UK) Ltd  
Poole Regional Centre  
Unit 4, Acorn Business Centre, Ling Road  
Poole, Dorset  
BH12 4NZ

**SHEFFIELD**

Tel: 01909 565504 Fax: 01909 569717  
SMC Pneumatics (UK) Ltd  
Sheffield Regional Centre  
Unit 4, North Anston Business Park  
Houghton Road, North Anston, Sheffield  
S31 7JJ

**Plymouth**

APPLIED AUTOMATION  
Tel: 01752 343300  
Fax: 01752 341161

**Redditch**

MULTI-PNEUMATICS  
Tel: 01527 544544  
Fax: 01527 544296