

Flow Controller for Air

Applicable fluid Dry air, N₂, Ar, CO₂

New



RoHS



For the automatic adjustment of the flow rate


Flow ratio 100:1

* Maximum rating control flow rate value: minimum rating control flow rate value.

Series	Port size	Flow range [L/min]								Set-up setting control flow rate minimum unit [L/min]
		0.1	0.2	0.5	1	2	10	25	50	100
PFCA710	C4, C6, (Rc, NPT, G) 1/8	0.1					10			0.01
PFCA725	C6, C8, N7, (Rc, NPT, G) 1/8	0.2						25		0.1
PFCA750			0.5						50	
PFCA711	C6, C8, N7, (Rc, NPT, G) 1/4				1					100

Color display/2-screen display supported

For the confirmation of the instantaneous flow rate, flow rate command value, and accumulated flow rate at a glance

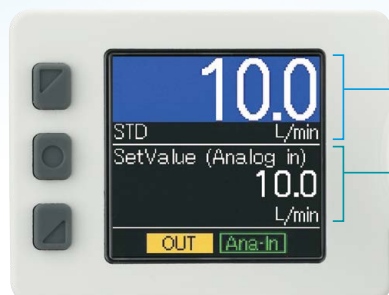

Main screen

Instantaneous flow

Sub screen

Flow rate command value, accumulated flow rate, etc.

Size


1.44 inch

Resolution/Color

128 x 128/RGB

IO-Link Compatible

With the process data, the flow rate value and equipment status can be easily grasped, and flow rate control is also possible.

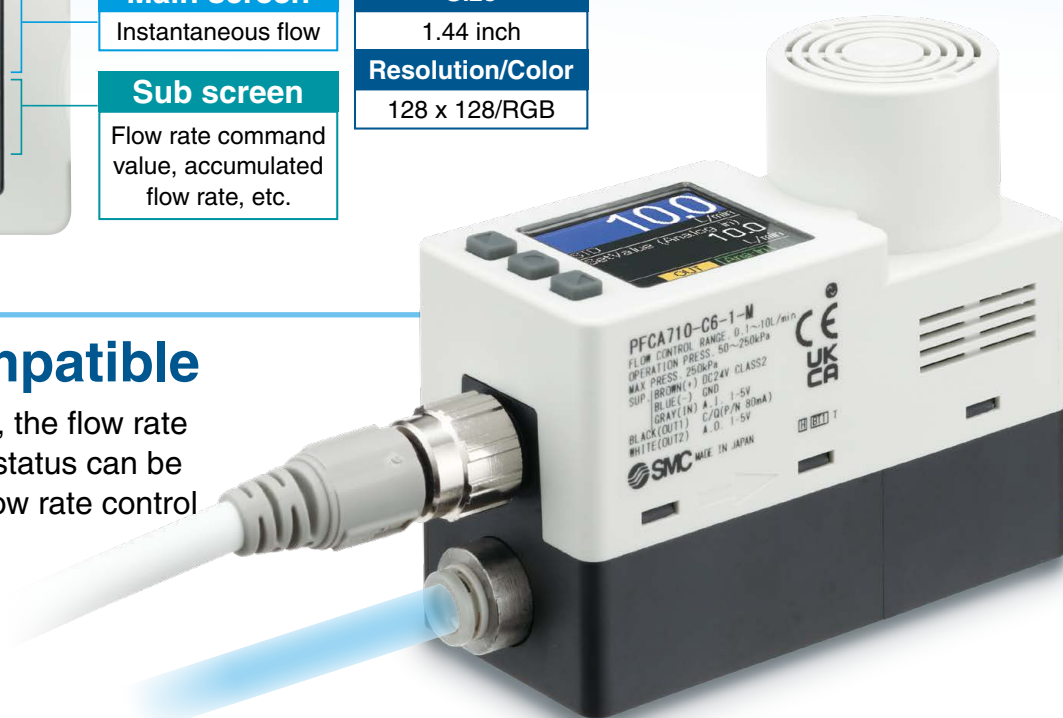

PFCA7 Series




CAT.ES100-162A

Space saving/Reduced piping, wiring, and installation labor

Automatic control to set flow rate


Flow controller for air/PFCA7

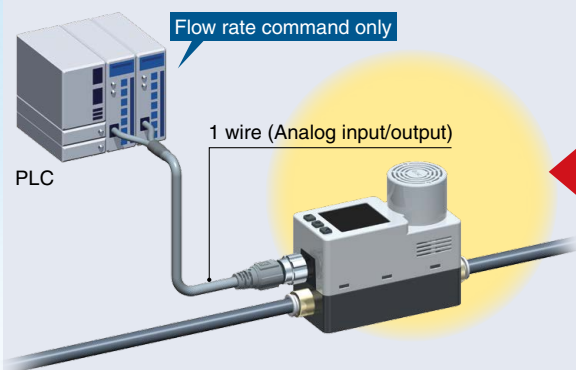

Reduced installation labor

At equipment start up*1

*1 No program change is required when the connected load conditions change as it is not affected by load fluctuations.

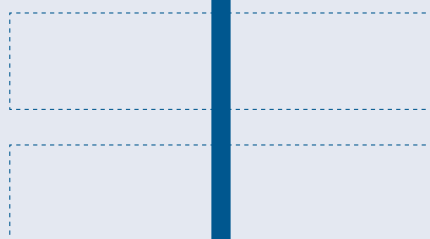


Creation of a flow rate command program

Equipment operation

Reduced installation labor

Flow rate control program required

Flow sensor/PF2M7 Series + Proportion solenoid valve/PVQ Series

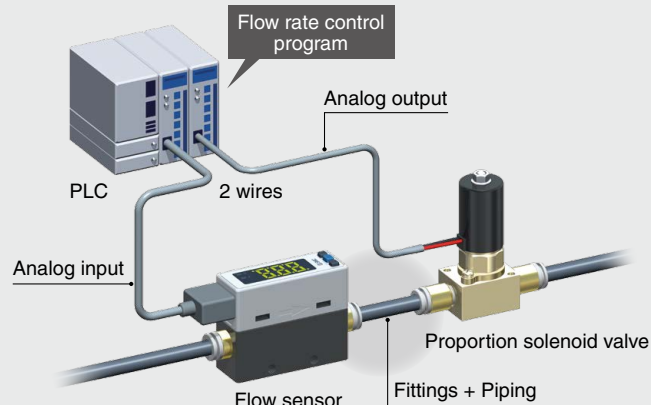

At equipment start up
When there are connected
load condition changes

Confirmation of the relationship
between the control valve (pressure, valve
opening, etc.) and the flow rate


Creation of a control program

Creation/correction of a flow rate control
program for control valve analog output
based on the flow sensor analog input


Equipment operation

Color display/2-screen display supported

The color display allows for improved visibility. And the 2-screen display allows you to check the status at a glance.

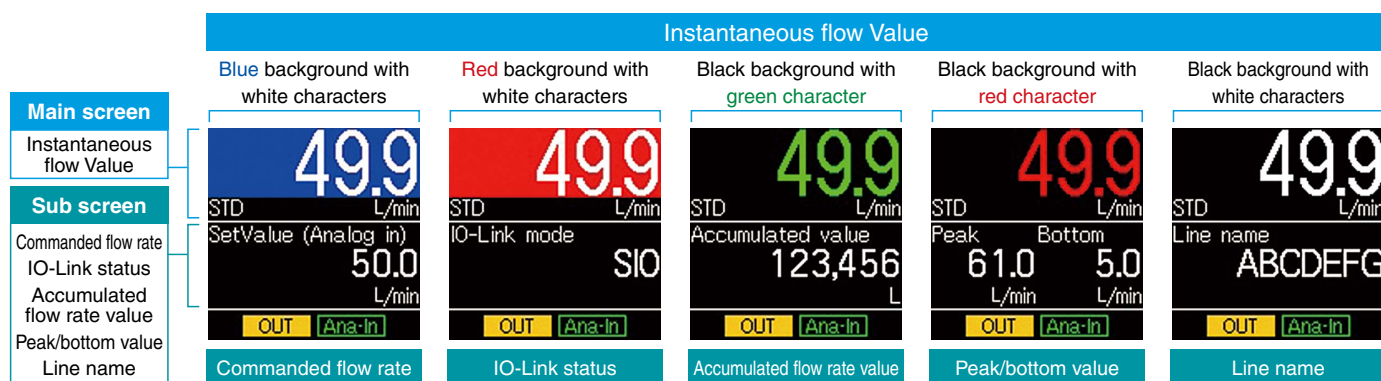

Improved visibility and operability

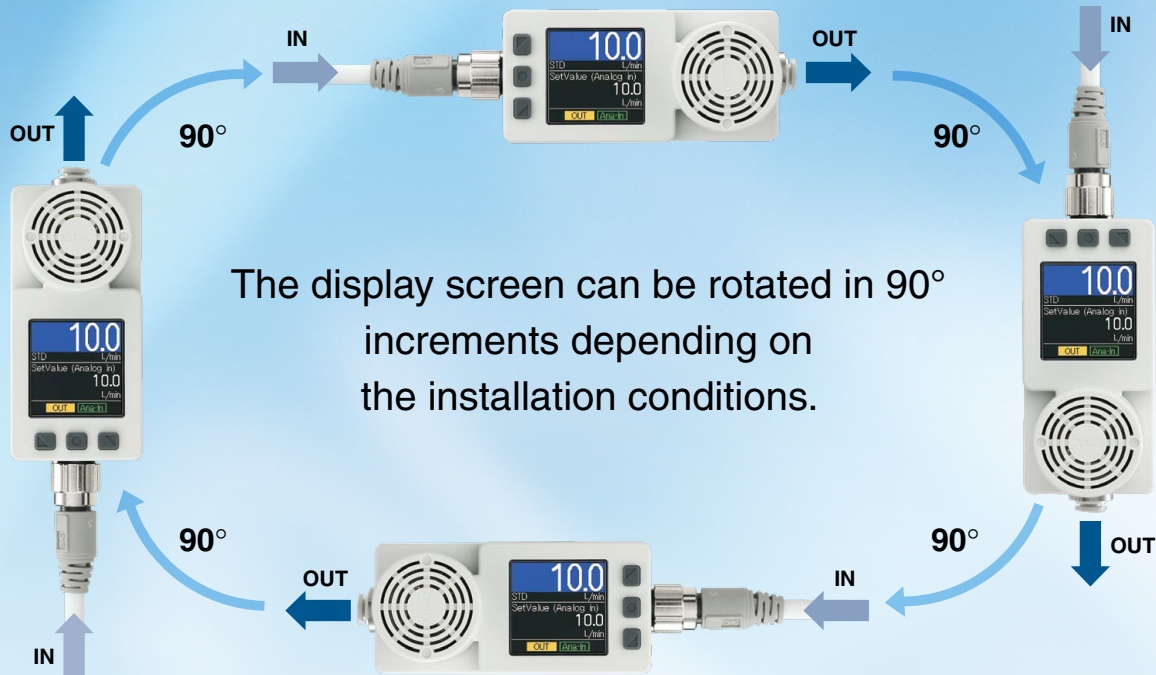

- The fluid can be switched.



- Control accuracy $\pm 3\%$ F.S.

* For dry air


- Repeatability $\pm 1\%$ F.S.

- Responsiveness (settling time) 0.5 s or less

* For the 10/25 L range

- Grease-free


- Improved water and foreign matter resistance due to diversion structure

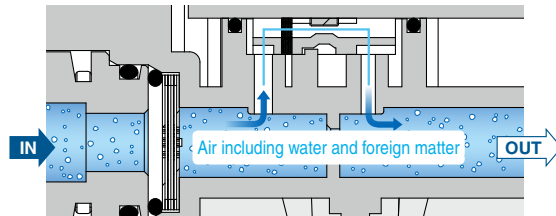

- Piping variations



Recommended Pneumatic Circuit

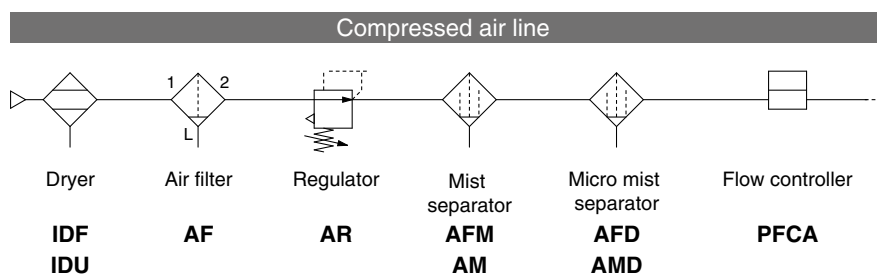


* Recommended air quality class: JIS B 8392-1:2012 [1:6:2], ISO 8573-1:2010 [1:6:2]


Functions

- | | | | |
|-------------------------------------|-------------------------------------|---------------------------------|--|
| • Output operation | • Forced output function | • Setting of a security code | • Zero-clear |
| • Display colour | • Accumulation value. hold function | • Key-lock function | • Selection of the display on the sub screen |
| • Reference condition | • Accumulation automatic shut off | • Reset to the default settings | • Analog output free range |
| • Selectable analog output function | • Peak/Bottom value display | • Indication rotation function | • Error indication function |
| | | • Delay time setting | |

Select a flow controller to increase energy savings!

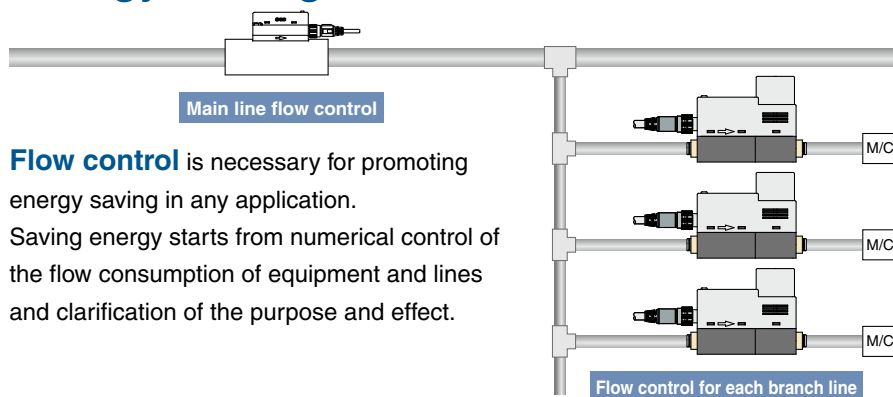


Flow control is necessary for promoting energy saving in any application. Saving energy starts from numerical control of the flow consumption of equipment and lines and clarification of the purpose and effect.

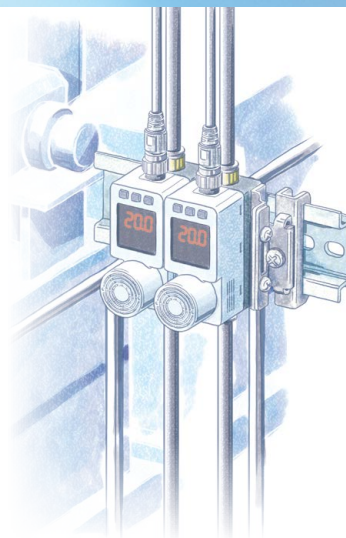


Applications

For the control of metal wire tension

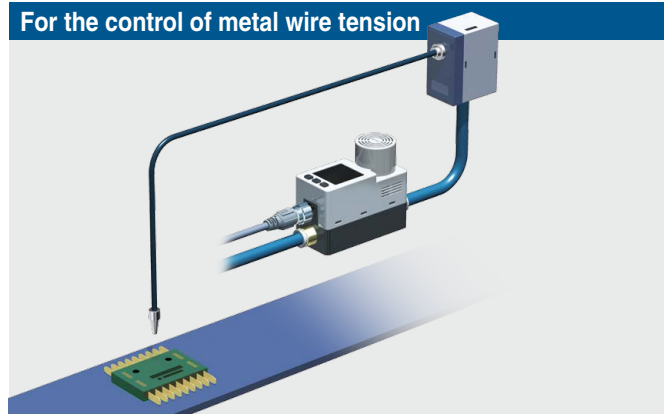


For air blow


- For flow control of N_2 gas to prevent lead frame oxidation
- N_2 blow prevents the distortion of camera images due to air turbulence.

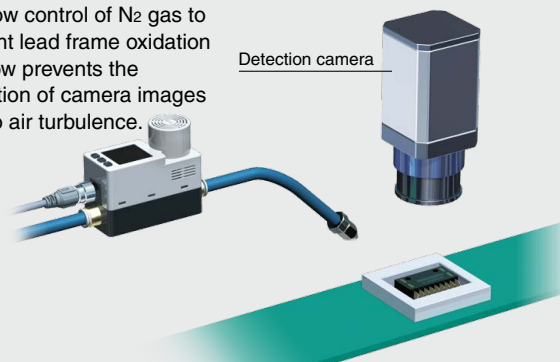


For welding machines

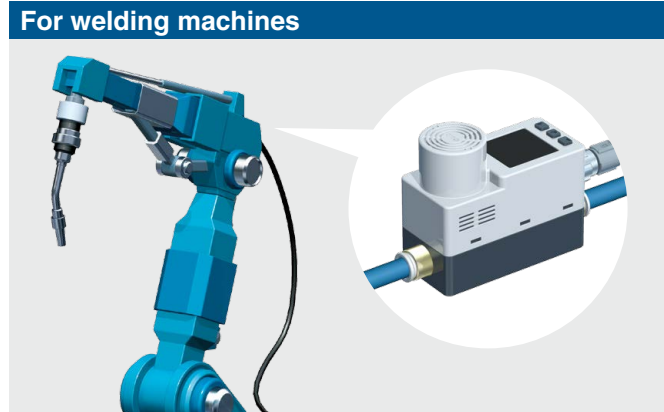

For N_2 gas cylinder peripheral equipment

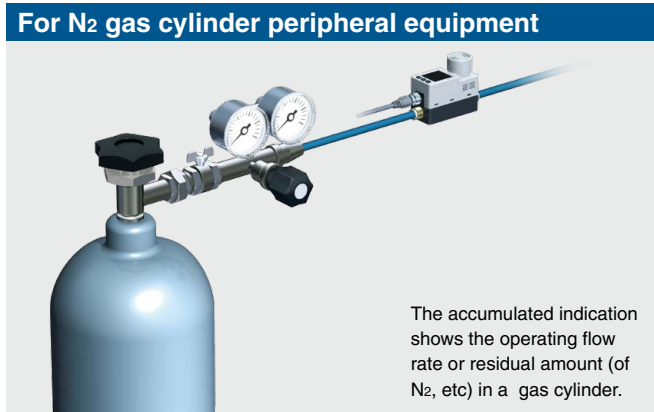

Nitrogen replenishment

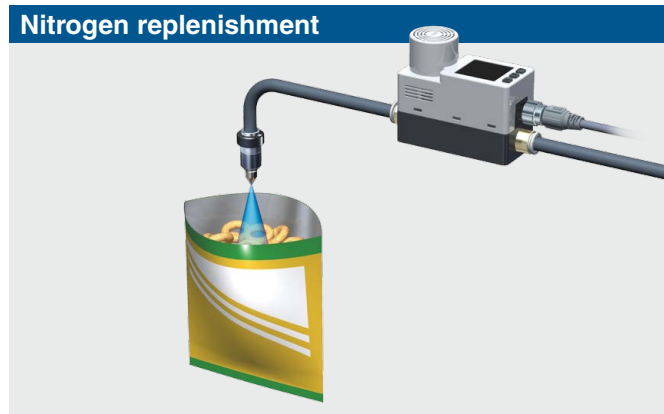


IO-Link Compatible PFCA7□-□-□□-□□□

p. 7

Supports the IO-Link communication protocol



IO-Link is an open communication interface technology between the sensor/actuator and the I/O terminal that is an international standard, IEC61131-9

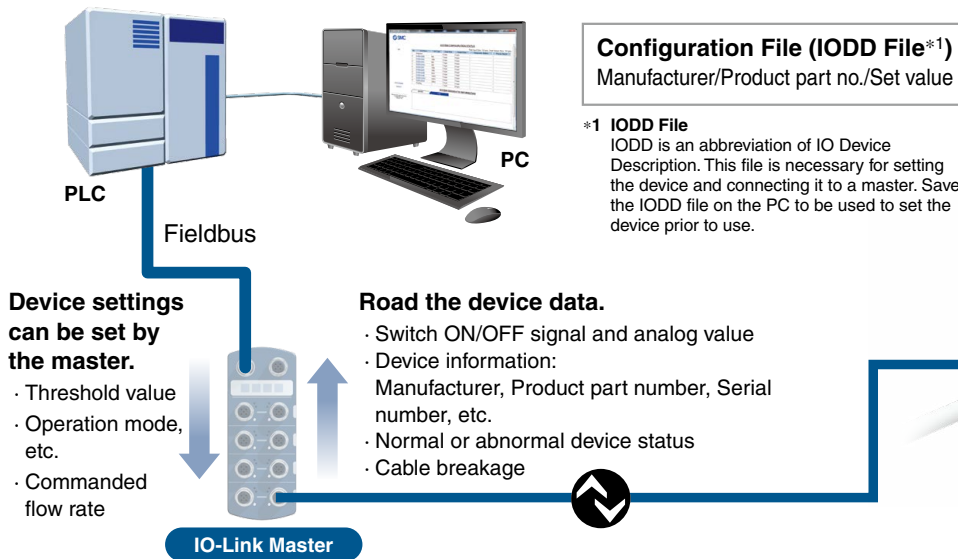

For the confirmation of the status via the input process data
For the input of the flow rate command value via the output process data

Input process data

Bit offset	63	62	61	60	59	58	57	56	55	54	53	52	51	50	49	48
Item	Accumulated measurement value [upper byte] (PD)															

Bit offset	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32
Item	Accumulated measurement value [lower byte] (PD)															

Bit offset	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Item	Flow rate measurement (PD)/Measured value of the flow meter															

Bit offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Item	System error	Error	Fixed output	Local input	Accumulation shut-off	Output PD diagnosis	Flow rate diagnostics	Accumulation diagnosis	Reference condition	Flow rate units	Reservation				Limit deviation tolerance SW	Accumulated flow SW

Bit offset	Item	Remarks
0	Accumulated flow SW	0: OFF 1: ON
1	Limit deviation tolerance SW	0: OFF 1: ON
6	Flow rate units	0: L 1: ft ³
7	Reference condition	0: STD 1: NOR
8	Accumulation diagnosis	0: Within the range 1: Outside the range
9	Flow rate diagnostics	0: Within the range 1: Outside the range
10	Outside the output PD range	0: Within the range 1: Outside the range
11	Accumulation shut-off	0: Automatic accumulation shut-off has not occurred 1: Automatic accumulation shut-off has occurred
12	Local input	0: Remote 1: Local
13	Fixed output	0: Normal output 1: Fixed output
14	Error	0: Error not generated 1: Error generated
15	System error	0: Error not generated 1: Error generated
16 to 31	Flow rate measurement (PD)/Measured value of the flow meter	With code symbol: 16 bit
32 to 47	Accumulated measurement value [upper byte]	Without code symbol: 32 bit
48 to 63	Accumulated measurement value [lower byte]	

Output process data

Bit offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Item	Commanded flow rate (PD)															

Bit offset	Item	Remarks
0 to 15	Commanded flow rate	With code symbol: 16 bit

Communication with master	IO-Link communication status	Status	Display indication	Content
Yes		Normal	Operate	Normal communication status (Output PD disabled)
			Operate valid	Normal communication status (Output PD enabled)
		Start up	StartUp	At the start of communication
		Preoperate	PreOperate	
No		IO-Link mode	Version does not match	IO-Link version does not match with master
			Err 15	
		Error	Communication shut-off	Normal communication was not received for 1 s or longer.
			StartUp	
Light is OFF		SIO mode	PreOperate	General switch output
			SIO	

* If the version of the connected IO-Link master is something other than "V1.1," the display will show an error.

Flow Controller Flow Rate Variations

Series	Applicable fluid	Control accuracy	Repeatability	Enclosure	IO-Link Compatible	Port size	Rated flow range [L/min]										
							0.1	1	10	25	50	100	200	300	500	1000	2000
PFCA7  p. 7	Dry air N ₂ Ar CO ₂	±3% F.S. * For dry air	±1% F.S.	IP40		ø4, ø6, ø8, ø1/4" (Rc, NPT, G) 1/8, 1/4											
																	
																	
																	
IN502-44/45  	Dry air N ₂	±5% F.S.	±2% F.S. * Includes a control dead band (F.S. ±1%)	IP65		Rc1/2											
																	
PFCQ  	Dry air N ₂	±3% F.S.*1	±1% F.S.	IP40	—	Rc1/2											

*1 Operating differential pressure: 0.3 MPa, Temperature: 25°C



CONTENTS

Flow Controller for Air *PFCA7 Series*



How to Order	p. 7
Specifications	p. 8
Flow Rate/Analog Input/Analog Output	p. 9
Internal Circuits and Wiring Examples	p. 10
Construction: Parts in Contact with Fluid	p. 11
Dimensions	p. 12
Function Details	p. 15
Safety Instructions	Back cover

How to Order

PFCA7 **10** - **C6** - **1** **□** - **M** **□** **□**

1
2
3
4
5
6
7



1 Rated control flow range

Model	Rated control flow range
10	0.1 to 10 L/min
25	0.2 to 25 L/min
50	0.5 to 50 L/min
11	1 to 100 L/min

2 Port size

Model	Port size	Rated control flow range			
		10	25	50	11
01	Rc1/8	●	●	●	—
N1	NPT1/8	●	●	●	—
F1	G1/8	●	●	●	—
02	Rc1/4	—	—	—	●
N2	NPT1/4	—	—	—	●
F2	G1/4	—	—	—	●
C4	ø4	●	—	—	—
C6	ø6	●	●	●	●
C8	ø8	—	●	●	●
N7	ø1/4"	—	●	●	●

3 Input/output specifications

Model	IN	OUT1	OUT2
1	Analogue input (1 to 5 V)	IO-Link/NPN/PNP	Analogue output (1 to 5 V ⇔ 0 to 10 V)*1
2	Analogue input (4 to 20 mA)	IO-Link/NPN/PNP	Analogue output (4 to 20 mA)

*1 1 to 5 V or 0 to 10 V can be selected by pressing the button. The default setting is 1 to 5 V.

4 Option 1

Symbol	Content
Nil	With lead wire with connector (3 m/5 core) ZS-53-A
N	Without lead wire with function
Q	M12-M12 lead wire with connector (3 m/5 core)*2 ZS-53-D

*2 One side has an M12 (socket), and the other side has an M12 (plug) lead wire with a connector.

5 Unit specification

Model	Content
Nil	Unit specification*3
M	SI unit only*4

*3 This product is for overseas use only. (The SI unit type is provided for use in Japan in accordance with the New Measurement Act.)

The unit can be changed. Instantaneous flow: L/min ⇔ cfm
Accumulated flow: L ⇔ ft³

*4 Fix unit Instantaneous flow: L/min
Accumulated flow: L

6 Option 2

Model	Content
Nil	None
R	Bracket (mounting position: Side) ZS-40-L
S	Bracket (mounting position: Stream side) ZS-53-G

7 Operation manual/Calibration certificate*5

Model	Content	
	Operation manual	Calibration certificate
Nil	●	—
Y	—	—
K	●	●
T	—	●

*5 The certificate is in both English and Japanese.

For flow switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

Specifications

Model			PFCA710	PFCA725	PFCA750	PFCA711	
Fluid	Applicable fluid*1		Dry air, N ₂ , Ar, CO ₂ (JIS B 8392-1:2012 [1:6:2], ISO 8573-1:2010 [1:6:2])				
	Fluid temperature range		0 to 50°C				
Flow	Detection method		Heating type sensor				
	Rated control flow range*2	Dry air, N ₂ , Ar	0.1 to 10 L/min	0.2 to 25 L/min	0.5 to 50 L/min	1 to 100 L/min	
		CO ₂	0.1 to 5 L/min	0.2 to 12.5 L/min	0.5 to 25 L/min	1 to 50 L/min	
	Set controlled flow rate range*2	Dry air, N ₂ , Ar	0.04 to 10.3 L/min	0.1 to 25.8 L/min	0.2 to 51.5 L/min	0.4 to 103 L/min	
		CO ₂	0.04 to 5.15 L/min	0.1 to 12.9 L/min	0.2 to 25.8 L/min	0.4 to 51.5 L/min	
	Set-up setting control flow rate minimum unit		0.01 L/min				
	Set accumulated flow range		0.0 to 99999999.9 L				
	Minimum unit of accumulated flow rate		0.1 L				
	Accumulated volume per pulse		0.1 L/pulse				
	Accumulated-value hold function*3		Select from every 2 or 5 minutes				
Control specifications*4	Control accuracy		±3% F.S.				
	Analog output accuracy*5		±3% F.S.				
	Repeatability		±1% F.S.				
	Temperature characteristics		±5% F.S. (0 to 50°C, Reference: 25°C)				
	Pressure characteristics		±2% F.S. (reference operating pressure)				
	Settling time*6		Reaches within ±3% F.S. of the commanded flow rate in 0.5 seconds or less (Under the reference conditions)		Reaches within ±3% F.S. of the commanded flow rate in 1 second or less (Under the reference conditions)		
	Control specification method		IO-Link, analogue input, local setting				
	State when power supply is shut off		Fully closed (Normally closed (N.C.))				
	Analogue input	Voltage	Input type	1 to 5 V			
			Input impedance	1 MΩ approx.			
Current		Input type	4 to 20 mA				
		Input impedance	250 Ω or less				
Analogue output	Voltage	Output type	Select from 1 to 5 V or 0 to 10 V				
		Output impedance	1 MΩ approx.				
	Current	Output type	4 to 20 mA				
		Load impedance	50 to 600 Ω				
Switch output	Output type		Select from NPN or PNP open collector output				
	Output mode		Limit deviation tolerance mode, accumulated output, accumulated pulse output, error output, switch output off				
	Switch operation		Select from normal output or reversed output				
	Maximum load current		80 mA				
	Maximum applied voltage (Only NPN)		30 VDC				
	Internal voltage drop		1.5 V or less (at 80 mA load current)				
	Delay time		5 ms or less, variable from 0 to 60 s/0.01 s increments				
	Enclosure rating		Switch output power supply polarity protection, over current protection				
Pressure	Operating pressure range*7		50 to 250 kPa	100 to 300 kPa	150 to 300 kPa	250 to 350 kPa	
	Minimum operational differential pressure*8		50 kPa	100 kPa	150 kPa	250 kPa	
	Reference operating pressure*9		100 kPa	150 kPa	200 kPa	300 kPa	
	Withstand pressure		1 MPa				
Electrical	Power supply voltage		24 VDC ±10%				
	Current consumption*10		200 mA or less				
	Protection		Power supply polarity protection				
Display	Reference condition*11		Select from standard condition (STD) and normal condition (NOR)				
	Display mode		Main display: Instantaneous flow rate value Sub display: Select from the set control flow rate value, IO-Link status, accumulated flow rate value, peak/bottom value, and line name.				
	Unit*12	Instantaneous flow	L/min, cfm				
		Accumulated flow	L, ft ³				
	Displayable range	Instantaneous flow	-0.5 to 10.5 L/min	-1.3 to 26.3 L/min	-2.5 to 52.5 L/min	-5 to 105 L/min	
		Accumulated flow	0.0 to 99999999.9 L	0 to 999999999 L			
	Minimum display units	Instantaneous flow	0.01 L/min	0.1 L/min			
		Accumulated flow	0.1 L	1 L			
	Display		LCD (Can be rotated 90, 180, and 270 degrees)				
Mounting orientation		The display cannot be mounted with the screen facing down					
Environmental resistance	Enclosure rating		IP40				
	Withstand voltage		1000 VAC for 1 min between terminals and housing				
	Insulation resistance		50 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing				
	Operating temperature range		Operating: 0 to 50°C, Stored: 0 to 60°C (No freezing or condensation)				
	Operating humidity range		Operation, storage: 35 to 85% R.H. (No condensation)				
Standard		CE/UKCA marking					
Piping	One-touch fitting		C4 (ø4)/C6 (ø6)	C6 (ø6)/N7 (ø1/4")/C8 (ø8)			
	Screw fitting		01 (Rc1/8)/F1 (NPT1/8)/N1 (G1/8)			02 (Rc1/4)/F2 (NPT1/4)/N2 (G1/4)	
Materials in contact with fluid			PPS, FKM, Stainless steel, Brass, PTFE, Si, Au, GE4F				
Weight	Product	One-touch fitting	Approx. 255 g				
		Screw fitting	Approx. 305 g				
	Lead wire (ZS-53-A)		Approx. 180 g				
	Bracket (ZS-40-L)		+25 g				

- *1 Refer to the "Recommended Pneumatic Circuit Examples" on page 2.
- *2 The operation may be unstable outside the rated control flow range.
- *3 When using the accumulated value hold function, calculate the product life from the operating conditions, and use the product within its life. The maximum access limit of the memory device is approximately 1 million cycles. The product life is as follows when energized for 24 hours a day.
 - Data stored every 5 minutes ---
5 minutes x 1 million times = 5 million minutes
= approx. 9.5 years
 - Data stored every 2 minutes ---
2 minutes x 1 million times = 2 million minutes
= approx. 3.8 years
- *4 Applicable fluid: The specification value when dry air is shown. For gas types other than air, the value is for reference.
- *5 For the analogue voltage, option 1, lead wire with M12 connector (3-m long), is used. If the lead wire is different, the accuracy may fluctuate depending on the wiring resistance.
- *6 The reference conditions are as follows: pressure: reference operating pressure; temperature: 25°C; commanded flow rate: step change from 1% to 100%. In other conditions, the setting time may be delayed.
- *7 The operating pressure range refers to the pressure that can be applied to the primary side of the product. This product cannot be used for negative pressure.
- *8 This is the min. differential pressure (inlet and outlet pressure differential) required for the normal operation of the product. Do not install a restrictor in the vicinity of this product's outlet side, as this may result in unstable control operation.
- *9 The pressure on the secondary side of the product is open to atmosphere (0 kPa).
- *10 Analogue output and switch output are not included. If there is no supply pressure, a consumption current beyond the product specifications may flow in the event of an error in control operation.
- *11 Standard condition (STD): 20°C, 101.3 kPa, 65% R.H. (The flow rate given in the specification is the value at the standard condition)
Normal condition (NOR): 0°C, 101.3 kPa, 0% R.H.
- *12 This setting is only available for models with the units selection function. For models without the units selection function, the instantaneous flow is L/min and the accumulated flow (rate) is fixed to L.
- *13 SMC are working to improve quality. However, any products with tiny scratches, smear, dead-pixel, or variation in the display colour or brightness which does not affect the performance of the product, are verified as conforming products.

PFCA7 Series

Flow Rate Range

Control the flow rate within the rated control flow rate range.


The rated control flow rate range is the flow rate range that satisfies the specifications of the product (accuracy, etc.).
The set control flow rate range is the flow rate range in which the flow rate command value can be set.
Even if the rated control flow rate range is exceeded, the flow rate command value can be set within the set control flow rate range.
However, it cannot be guaranteed that the specifications will be satisfied in such cases.
The flow rate for CO₂ is shown in parentheses.

Model	Flow range [L/min]					
	-5	0	10	25	50	100
PFCA710	0.1 L/min	10 L/min (5 L/min)				
	0.04 L/min	10.3 L/min (5.15 L/min)				
	-0.5 L/min	10.5 L/min (5.25 L/min)				
PFCA725	0.2 L/min	25 L/min (12.5 L/min)				
	0.1 L/min	25.8 L/min (12.9 L/min)				
	-1.3 L/min	26.3 L/min (13.1 L/min)				
PFCA750	0.5 L/min	50 L/min (25 L/min)				
	0.3 L/min	51.5 L/min (25.8 L/min)				
	-2.5 L/min	52.5 L/min (26.3 L/min)				
PFCA711	1 L/min	100 L/min (50 L/min)				
	0.4 L/min	103 L/min (51.5 L/min)				
	-5.0 L/min	105 L/min (52.5 L/min)				

Rated control flow rate range Set control flow rate range Displayable range

Flow Rate Command Value/Analog Input

	A	B	C		D	E
			PFCA710/750/711	PFCA725		
Voltage input (1 to 5 V)	1 V	1.016 V	1.04 V	1.032 V	5 V	5.12 V
Current input (4 to 20 mA)	4 mA	4.064 mA	4.16 mA	4.128 mA	20 mA	20.48 mA


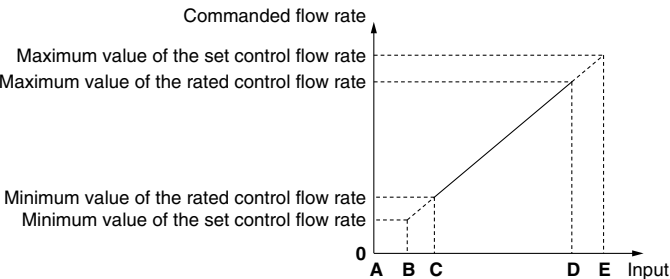


Flow Rate/Analogue Output

	A	B		C
		PFCA710/750/711	PFCA725	
Voltage output (1 to 5 V)	1 V	1.04 V	1.032 V	5 V
Current output (4 to 20 mA)	4 mA	4.16 mA	4.128 mA	20 mA


	D	E		F
		PFCA710/750/711	PFCA725	
Voltage output (0 to 10 V) *1	0 V	0.1 V	0.08 V	10 V

*1 Set the current that flows from the connected equipment to the analogue output to 20 μ A or less when selecting 0 to 10 V.
When more than 20 μ A current flows, it is possible that the accuracy will not be satisfied below 0.5 V.



Internal Circuits and Wiring Examples

NPN type

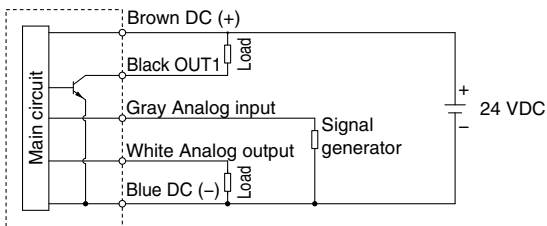

Maximum applied voltage: 30 V
Maximum load current: 80 mA
Internal voltage drop: 1.5 V or less


PFCA7□-□-1□-□□□

Analogue output: 1 to 5 V or 0 to 10 V
Output impedance: Approx. 1 k Ω
Analogue input: 1 to 5 V
Input impedance: Approx. 1 M Ω

PFCA7□-□-2□-□□□

Analogue output: 4 to 20 mA
Load impedance: 50 to 600 Ω
Analogue input: 4 to 20 mA
Input impedance: 250 Ω or less

PNP type

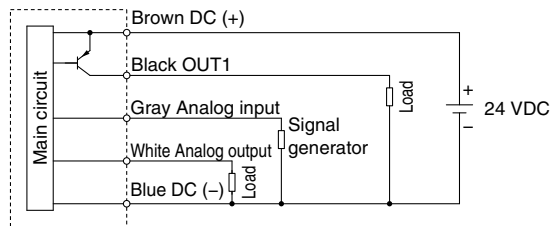

Maximum load current: 80 mA
Internal voltage drop: 1.5 V or less


PFCA7□-□-1□-□□□

Analogue output: 1 to 5 V or 0 to 10 V
Output impedance: Approx. 1 k Ω
Analogue input: 1 to 5 V
Input impedance: Approx. 1 M Ω

PFCA7□-□-2□-□□□


Analogue output: 4 to 20 mA
Load impedance: 50 to 600 Ω
Analogue input: 4 to 20 mA
Input impedance: 250 Ω or less

When used as an IO-Link device

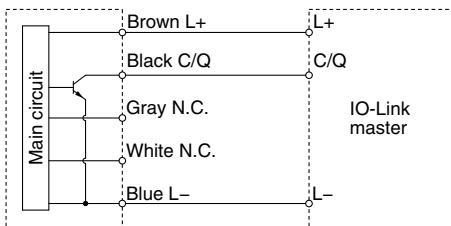

PFCA7 Series

Construction: Parts in Contact with Fluid

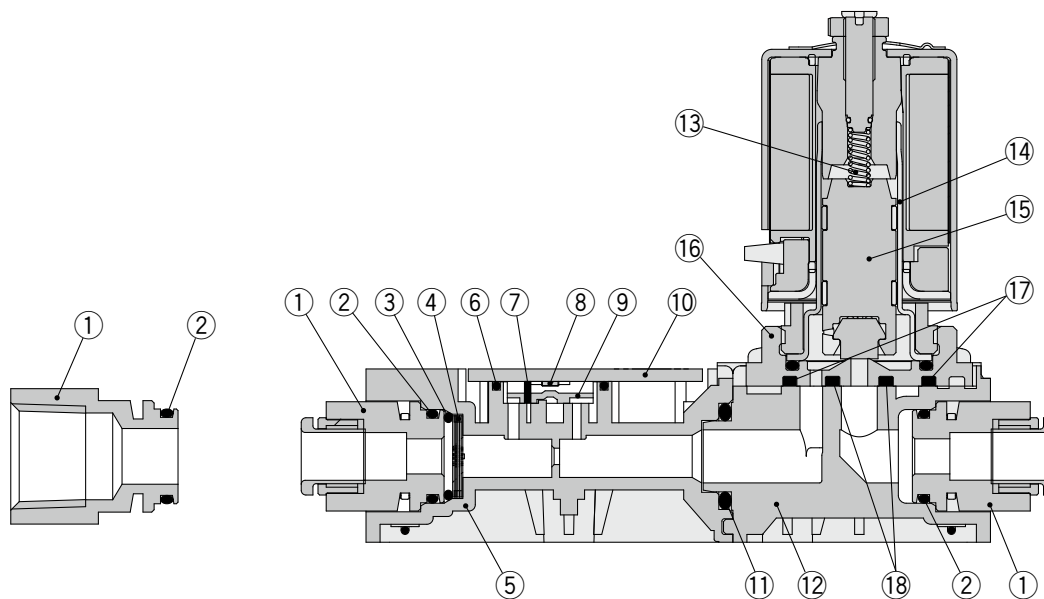


Component Parts

No.	Description	Material	Remarks
1	Piping fitting	Brass	Electroless nickel plating
2	O-ring	FKM	Fluorine coated
3	O-ring	FKM	Fluorine coated
4	Rectification meshing	Stainless steel 304	
5	Body	PPS	
6	Gasket	FKM	
7	Rectification meshing	Stainless steel 304	
8	Sensor chip	Silicon	
9	Body B	PPS	
10	Board	GR4F	
11	O-ring	FKM	Fluorine coated
12	Body	PPS	
13	Spring	Stainless steel	
14	Tube assembly	Stainless steel	
15	Armature assembly	Stainless steel	
		PTFE	
		FKM	Fluorine coated
16	Valve body	Brass	
17	Gasket	FKM	
18	Gasket	FKM	


Dimensions

PFCA7□-C4/C6/C8/N7

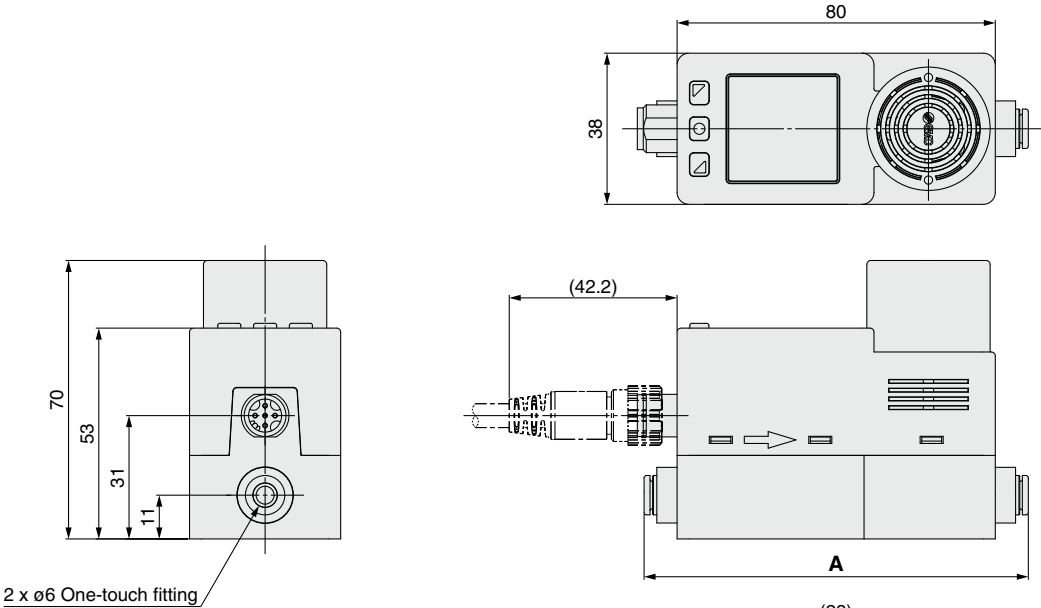

Model	A [mm]
PFCA7□-C4	96.2
PFCA7□-C6	96.6
PFCA7□-C8	100
PFCA7□-N7	96.6

PFCA7□-01/N1/F1/02/N2/F2

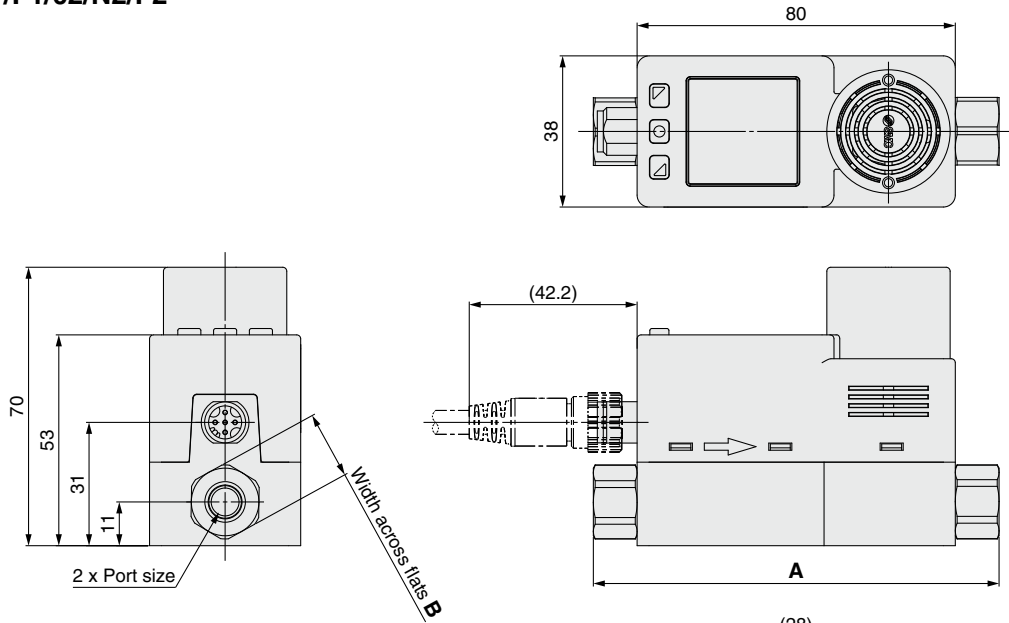


Model	A [mm]	B [mm]
PFCA7□-01	102	17
PFCA7□-N1	102	17
PFCA7□-F1	102	17
PFCA7□-02	102	17
PFCA7□-N2	102	17
PFCA7□-F2	110	21


PFCA7 Series

Dimensions


Bracket (ZS-40-L)

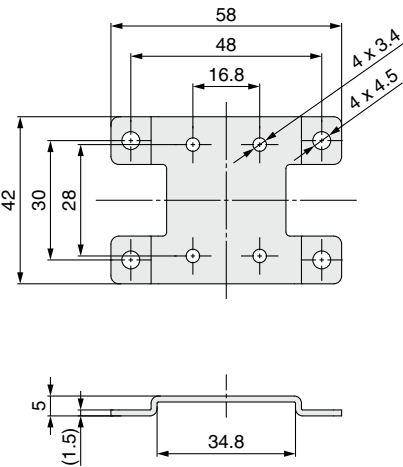


Bracket (ZS-53-G)

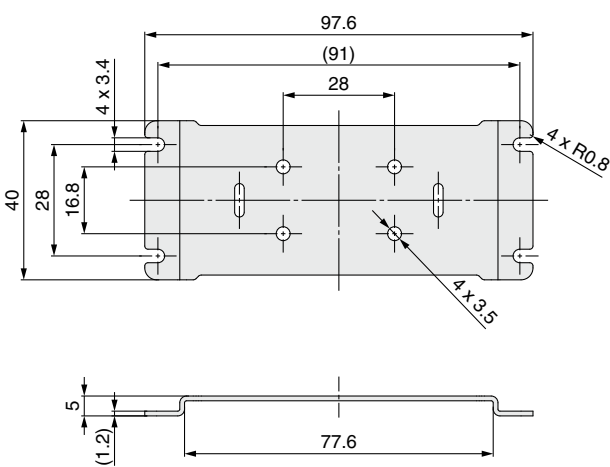

Lead wire with connector (ZS-53-A)

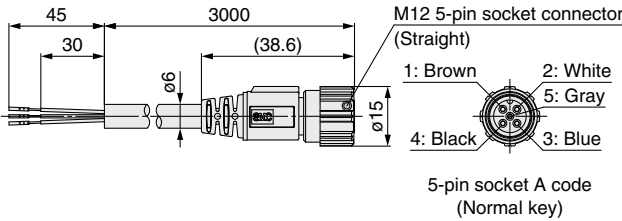

Lead wire with connector (ZS-53-D)

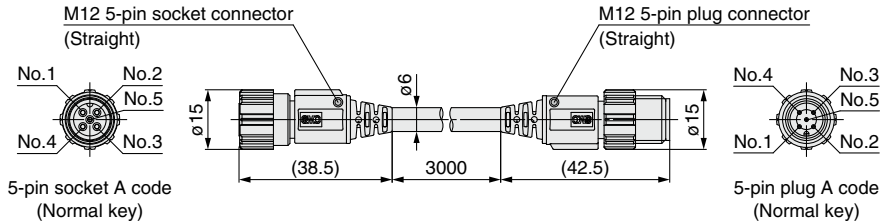

Cable material specifications

Conductor	Nominal cross section	AWG21
Insulator	O.D.	Approx. 1.60 mm
	Colors	Brown, Gray, White, Black, Blue
Sheath	Material	Oil-resistant PVC
Outer diameter		ø6

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)*1), and other safety regulations.

 **Danger :** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

 **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

 **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

*1) ISO 4414: Pneumatic fluid power - General rules and safety requirements for systems and their components
ISO 4413: Hydraulic fluid power - General rules and safety requirements for systems and their components
IEC 60204-1: Safety of machinery - Electrical equipment of machines - Part 1: General requirements
ISO 10218-1: Robots and robotic devices - Safety requirements for industrial robots - Part 1: Robots etc.

Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

4. Our products cannot be used beyond their specifications. Our products are not developed, designed, and manufactured to be used under the following conditions or environments. Use under such conditions or environments is not covered.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Use for nuclear power, railways, aviation, space equipment, ships, vehicles, military application, equipment affecting human life, body, and property, fuel equipment, entertainment equipment, emergency shut-off circuits, press clutches, brake circuits, safety equipment, etc., and use for applications that do not conform to standard specifications such as catalogs and operation manuals.
3. Use for interlock circuits, except for use with double interlock such as installing a mechanical protection function in case of failure. Please periodically inspect the product to confirm that the product is operating properly.

Caution

We develop, design, and manufacture our products to be used for automatic control equipment, and provide them for peaceful use in manufacturing industries.

Use in non-manufacturing industries is not covered.

Products we manufacture and sell cannot be used for the purpose of transactions or certification specified in the Measurement Act.

The new Measurement Act prohibits use of any unit other than SI units in Japan.

Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.

Read and accept them before using the product.

Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.*2)
Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.
This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.

*2) **Vacuum pads are excluded from this 1 year warranty.**

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.

Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Safety Instructions

Be sure to read the “Handling Precautions for SMC Products” (M-E03-3) and “Operation Manual” before use.

SMC Corporation

Akihabara UDX 15F,
4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN
Phone: 03-5207-8249 Fax: 03-5298-5362
<https://www.smcworld.com>
© 2023 SMC Corporation All Rights Reserved

Specifications are subject to change without prior notice
and any obligation on the part of the manufacturer.

D-G