DWG NO

VALVE No.
VQC5*01-51-X503
TYPE OF ACTUATION
1 :SINGLE SOLENOID
2 :DOUBLE SOLENOID
3 :CLOSED CENTER
4 :EXHAUST CENTER
5 :PRESSURE CENTER

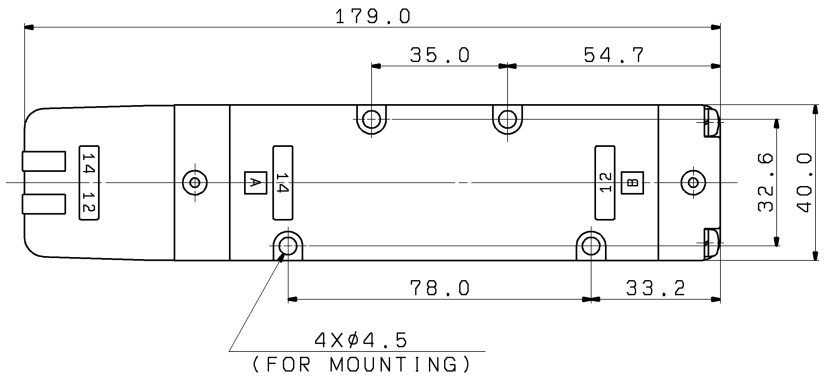


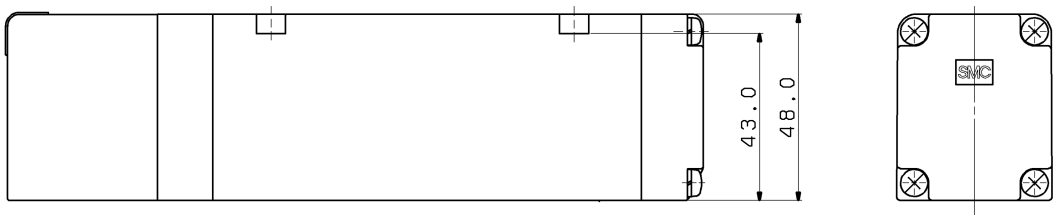


RATED VOLTAGE:24VDC

SPECIAL REQUIREMENT
WITH SPECIAL LABEL

NOTES
1. FOR DETAILS OF THE PRODUCT SPECIFICATIONS, PLEASE REFER TO THE STANDARD CATALOG.
2. THIS DRAWING SHOWS THE CASE OF "VQC5201-51-X503".
3. UNLESS OTHERWISE NOTED ALONG WITH A SEPARATE CONTRACT OR AGREEMENT WITHIN THE PRODUCT SPECIFICATIONS, THE SAFETY INSTRUCTIONS SPECIFIED IN THE PRODUCT CATALOG ARE APPLIED. PLEASE CONTACT YOUR LOCAL SMC SALES OFFICE FOR FURTHER DETAILS.
4. DIMENSIONS ARE IN MILLIMETERS

SYMBOL




| REV | QTY | DESCRIPTION | DATE PREPARED | REV NO |
|---|---|---|---|---|

| TOLERANCES JIS B 0405 | | | |
|---|---|---|---|
| RANGE(mm) | GRADE f ± | m ± | c ± |
| 0.5≤D≤3 | 0.05 | 0.1 | 0.2 |
| 3<D≤6 | 0.05 | 0.1 | 0.3 |
| 6<D≤30 | 0.1 | 0.2 | 0.5 |
| 30<D≤120 | 0.15 | 0.3 | 0.8 |
| 120<D≤400 | 0.2 | 0.5 | 1.2 |
| 400<D≤1000 | 0.3 | 0.8 | 2 |
| 1000<D≤2000 | 0.5 | 1.2 | 3 |

| | | | |
|---|---|---|---|
| DRAWN | M.USHIJIMA | SCALE | FREE |
| DATE | 2017-10-10 | | |
| DESIGNED | M.SUGIYAMA | DWG NAME | 5 PORT SOL.VALVE |
| DATE | 2017-10-10 | | |
| CHECKED | R.KANEKO | DWG NO | A VQC5*01-51-X503 |
| DATE | 2017-10-11 | REVISION | |
| APPROVED | S.SUMIYOSHI | | |
| DATE | 2017-10-11 | | |

| | | | |
|---|---|---|---|
| FINISH | | MODEL | QTY |
| PAINT | | THIRD ANGLE | |
| MASS | | | |
| PACKING | | | |
| MATERIAL | | | |
| MATERIAL SIZE | | | |

FINISH:表面処理 / PAINT:塗装 / MASS:質量
PACKING:包装区分 / MATERIAL:材質
MATERIAL SIZE:材料寸法

VQC5000V-PMV5004

DWG NAME PILOT VALVE:V100 SERIES
DWG REC
DWG ID BA50803600

SMC Corporation