

Electric Actuator Slider Type



* For details, refer to ww.smc.eu.

RoHS

Battery-less Absolute (Step Motor 24 VDC)


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Ball Screw Drive *LEFS Series*

Size: 16, 25, 32, 40

Max. work load: **65** kg Max. speed: **1200** mm/s
 Positioning repeatability: **±0.015** mm (High-precision type)
 Clean room specification also available*¹
 *1 For the incremental type

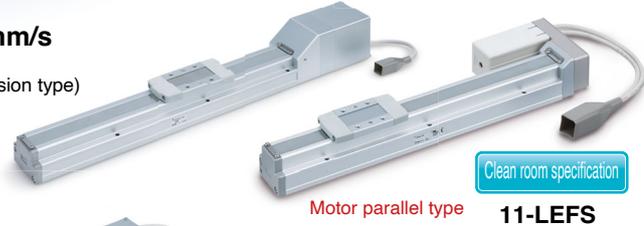

Motor parallel type 11-LEFS

Belt Drive *LEFB Series*

Size: 16, 25, 32

Max. stroke: **2000** mm
 Max. speed: **2000***¹ mm/s
 *1 For the incremental type




AC Servo Motor

Ball Screw Drive *LEFS Series*

Size: 25, 32, 40

Positioning repeatability: **±0.01** mm (High-precision type)
 Improved high-speed transfer ability Max. speed: **1500** mm/s
 High acceleration/deceleration: 20000 mm/s²
 Pulse input type
 With internal absolute encoder (For the LECSB/C/S)
 Clean room specification also available

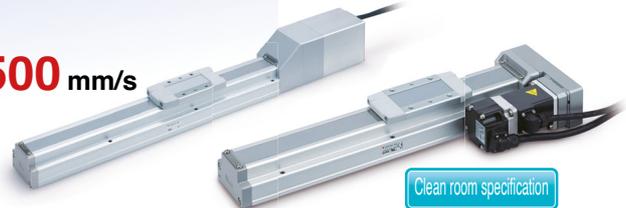


Motor parallel type 11-LEFS

Belt Drive *LEFB Series*

Size: 25, 32, 40

Max. speed: **2000** mm/s
 Max. stroke: **3000** mm
 Max. acceleration/deceleration: **20000** mm/s²
 Motor bottom mounting type also available

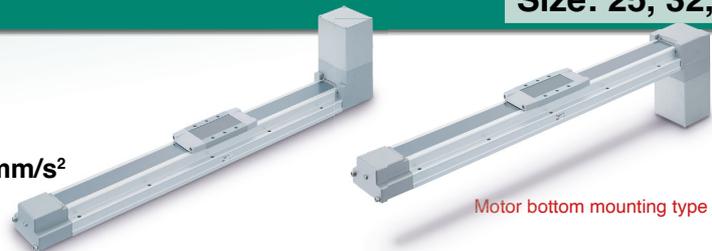

Motor bottom mounting type

Incremental (Step Motor 24 VDC)

Controller/Driver

Incremental (Servo Motor 24 VDC)

- ▶ Step data input type
JXC51/61/LECA6 Series (64 positioning points)
- ▶ EtherCAT/EtherNet/IP™/PROFINET/DeviceNet®/IO-Link/CC-Link direct input type
JXCE□1/9□/P□/D1/L□/M1 Series
- ▶ Pulse input type
LECPA Series



AC Servo Motor Driver

- ▶ For absolute encoders
 - Pulse input type/Positioning type
LECSB-T Series
 - CC-Link direct input type
LECS-C Series
 - SSCNET III/H type
LECSS-T Series
 - Network card type
LECSN□-T Series
 - MECHATROLINK type
LECY□ Series



- ▶ For incremental encoders
 - Pulse input type/Positioning type
LECSA Series



LEF Series



CAT.EUS100-87F-UK

Slider Type *LEF Series*

Battery-less Absolute (Step Motor 24 VDC)


Ball Screw Drive/LEFS□E Series Size: 16, 25, 32, 40



Restart from the last stop position is possible.

Easy operation restart after recovery of the power supply

The position information is held by the encoder even when the power supply is turned off. A return to origin operation is not necessary when the power supply is recovered.

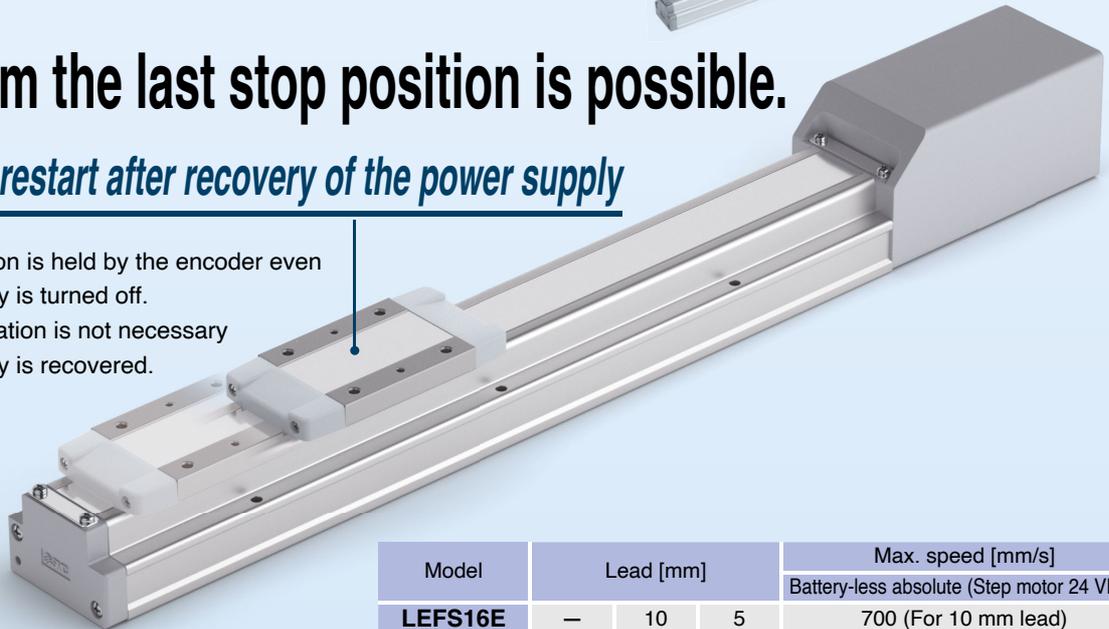

Model	Lead [mm]			Max. speed [mm/s]
				Battery-less absolute (Step motor 24 VDC)
LEFS16E	—	10	5	700 (For 10 mm lead)
LEFS25E	20	12	6	1100 (For 20 mm lead)
LEFS32E	24	16	8	1200 (For 24 mm lead)
LEFS40E	30	20	10	1200 (For 30 mm lead)

Does not require the use of batteries.
Reduced maintenance

Batteries are not used to store the position information. Therefore, there is no need to store spare batteries or replace dead batteries.


Max. work load: **65 kg**
Positioning repeatability: **±0.02 mm**
(±0.015 mm for the LEFSH□E)

Belt Drive/LEFB□E Series Size: 16, 25, 32

Max. stroke: **2000 mm**

Max. speed: **1500 mm/s**

Model	Equivalent lead [mm]	Max. speed [mm/s]
		Battery-less absolute (Step motor 24 VDC)
LEFB16E	48	1100
LEFB25E		1400
LEFB32E		1500

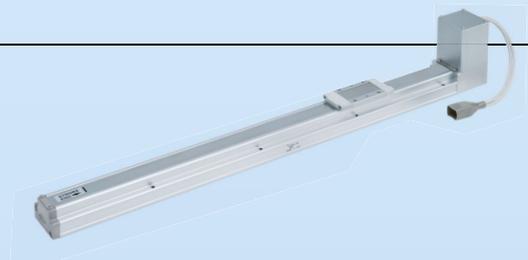


Battery-less Absolute (Step Motor 24 VDC)

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

- Easy mounting of the body/Reduction in installation labour
- The auto switch can be used to detect the position of the table.* Excludes size 16
- Up to 2 auto switches can be mounted on each side of the body.

It is possible to mount the main body without removing the external cover, etc.

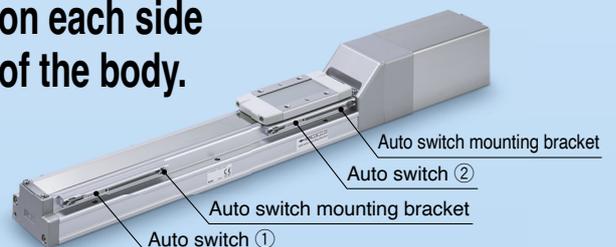


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Ball Screw Drive/LEFS Series Size: 16, 25, 32, 40


Model	Lead [mm]			Max. speed [mm/s]*1
				Incremental (Step motor 24 VDC)
LEFS16	—	10	5	700 (For 10 mm lead)
LEFS25	20	12	6	1100 (For 20 mm lead)
LEFS32	24	16	8	1200 (For 24 mm lead)
LEFS40	30	20	10	1200 (For 30 mm lead)

*1 Excludes the LECPA

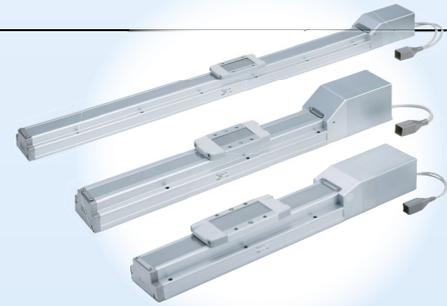


Max. work load: **65 kg**

Positioning repeatability: **±0.02 mm**
(±0.015 mm for the LEFSH)

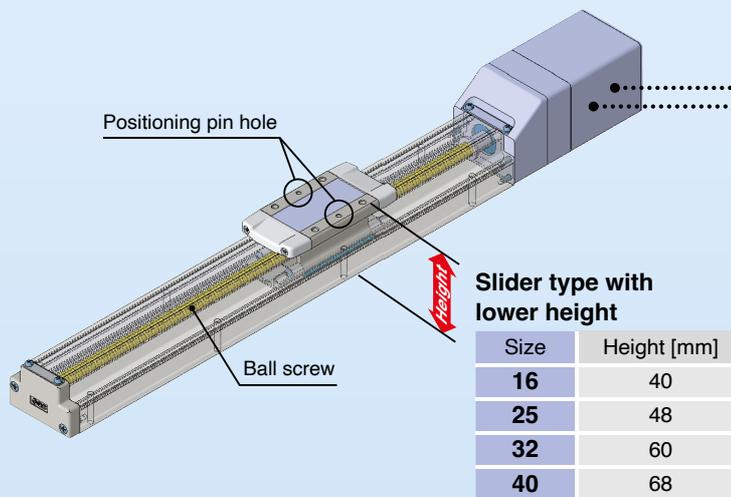


Size	Height [mm]
16	40
25	48
32	60
40	68

Motor parallel type available!

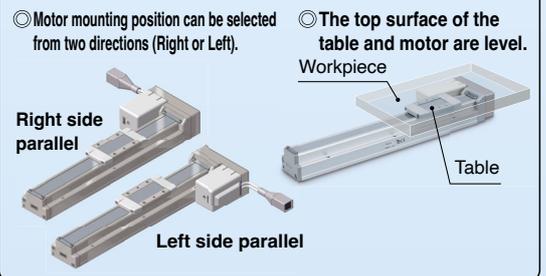

Compatible motors


- **Step motor (Servo/24 VDC)**
Ideal for the low-speed transfer of heavy loads
- **Servo motor (24 VDC)**
Stable at high speeds Silent operation

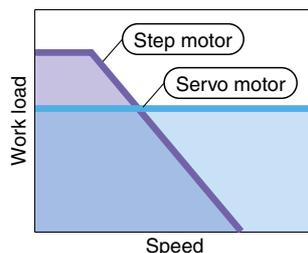

Non-magnetising lock mechanism (Option)

For drop prevention in the case of a power failure (Maintained)*1



*1 The LEFB belt drive actuator cannot be used for vertical applications.

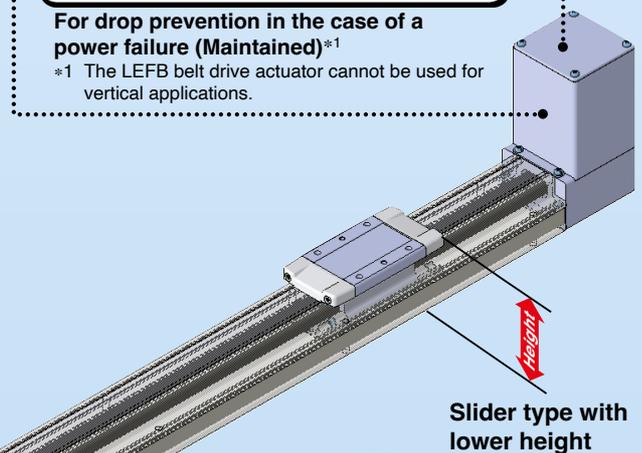

Belt Drive/LEFB Series Size: 16, 25, 32

Max. stroke: **2000 mm**

Max. speed: **2000 mm/s**

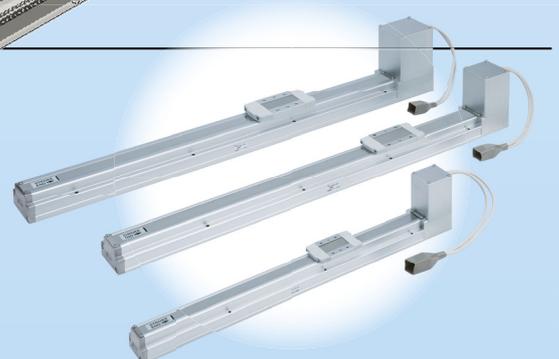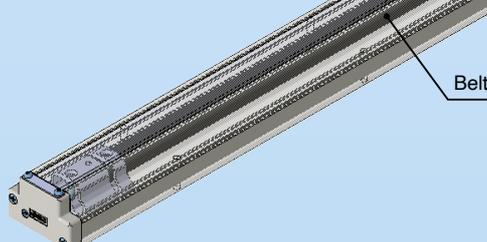

Slider Type *LEF Series*

AC Servo Motor

Ball Screw Drive/*LEFS Series* Size: 25, 32, 40

Model	Lead [mm]			Max. speed [mm/s]
				AC servo motor
LEFS25	20	12	6	1500
LEFS32	24	16	8	1500
LEFS40	30	20	10	1500



High-output motor (100/200/400 W)

Improved high-speed transfer ability

High acceleration/deceleration compatible: **20000** mm/s²

Pulse input type

With internal absolute encoder (For the LECSB-T/C-T/S-T and LECY)

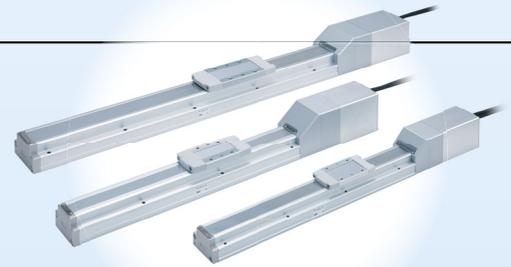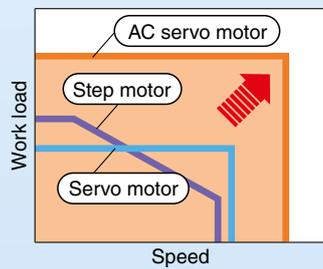

Motor parallel type available!

◎ Motor mounting position can be selected from two directions (Right or Left).





Belt Drive/*LEFB Series* Size: 25, 32, 40

Max. speed: **2000** mm/s

Max. stroke: **3000** mm

Max. acceleration/deceleration: **20000** mm/s²

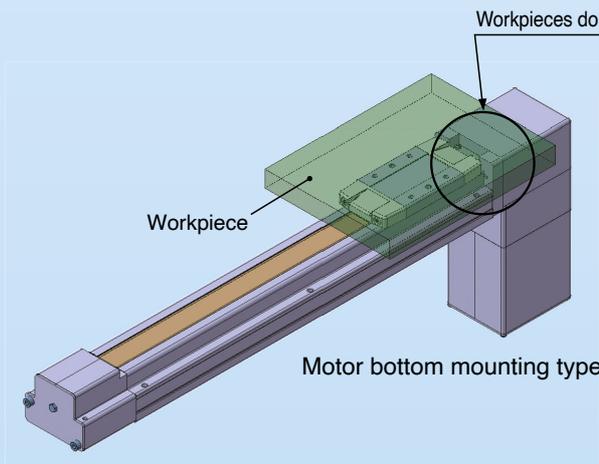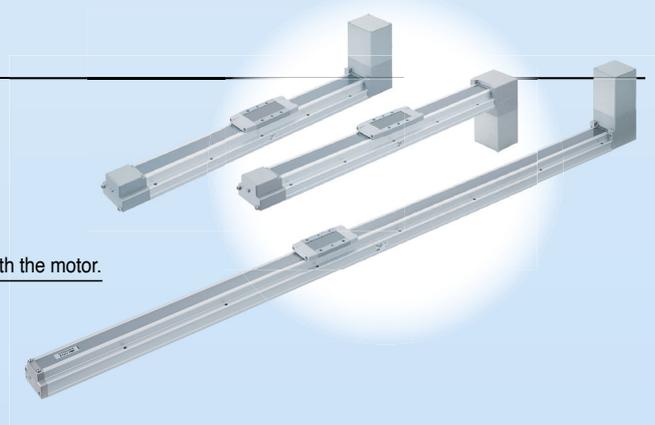

Incremental (Step Motor 24 VDC)


Clean Room Specification

Ball Screw Drive/*11-LEFS* Series

ISO Class 4*1 (ISO 14644-1)

- Built-in vacuum piping
- It is possible to mount the main body without removing the external cover, etc.
- Body-integrated linear guide specification

*1 Changes depending on the suction flow rate

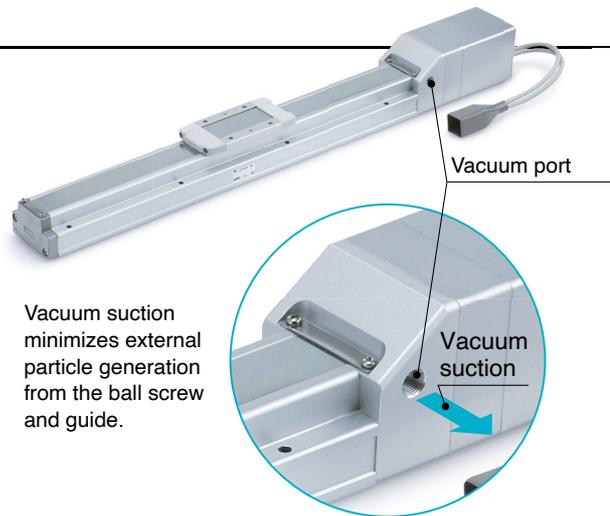


Vacuum suction minimizes external particle generation from the ball screw and guide.

Support Guide/*LEFG* Series

The support guide was designed to support workpieces with significant overhang.

- As the dimensions are the same as the LEF series body, installation is simple and contributes to a reduction in installation and assembly labour.
- The standard-equipped seal bands prevent grease from splashing and external foreign matter from entering.

Application example

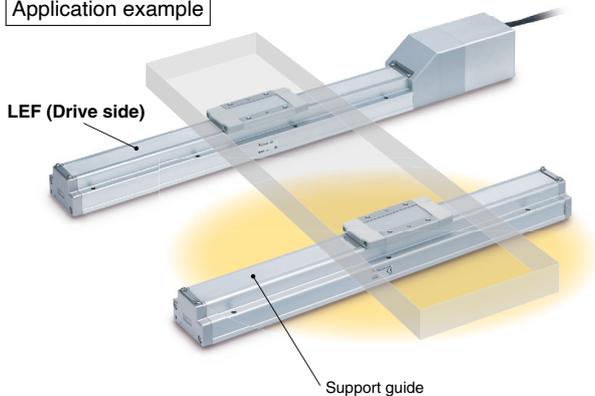

⚠ Caution

After installing the actuator on the drive side, align it with the support guide. If the mounting flatness exceeds 0.1, install a floating mechanism separately on the workpiece installation surface (table).




For details, refer to page 42.


Slider Type *LEF Series*

Application Examples

For precise positioning of workpieces

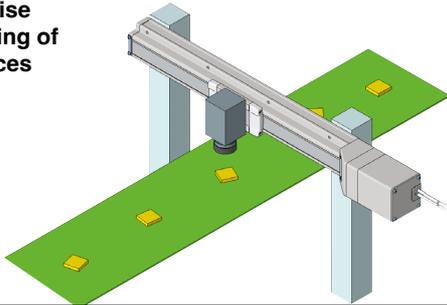

For load and unload transfer of workpieces

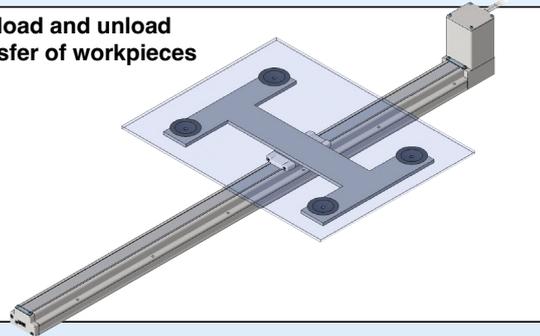

Series Variations

Ball Screw Drive/*LEFS Series*

Type	Size ^{*1}	Lead [mm]	Stroke [mm] ^{*2}
Battery-less absolute (Step motor 24 VDC) Incremental (Step motor 24 VDC) 	16	5	50, 100, 150, 200, 250, 300, 350, 400, 450, 500
		10	
	25	6	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800
		12	
		20	
	32	8	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000
		16	
		24	
	40	10	150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000, 1100, 1200
		20	
		30	
	Incremental (Servo motor 24 VDC) 	16	5
10			
25		6	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800
		12	
		20	
AC servo motor 		25	6
	12		
	20		
	32	8	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000
		16	
		24	
40	10	150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000, 1100, 1200	
	20		
	30		

*1 The size corresponds to the bore of the air cylinder with an equivalent force. (For the ball screw drive) *4 The speed in parentheses is for the battery-less absolute type.


*2 Please contact SMC for non-standard strokes as they are produced as special orders.

*3 For the clean room specification, refer to www.smc.eu. Not applicable depending on the lead and stroke. Excludes the battery-less absolute type


Belt Drive/*LEFB Series*

Type	Size ^{*1}	Equivalent lead [mm]	Stroke [mm] ^{*2}
Battery-less absolute (Step motor 24 VDC) Incremental (Step motor 24 VDC)	16	48	300, 500, 600, 700, 800, 900, 1000
	25		300, 500, 600, 700, 800, 900, 1000, 1200, 1500, 1800, 2000
	32		300, 500, 600, 700, 800, 900, 1000, 1200, 1500, 1800, 2000
Incremental (Servo motor 24 VDC)	16	48	300, 500, 600, 700, 800, 900, 1000
	25		300, 500, 600, 700, 800, 900, 1000, 1200, 1500, 1800, 2000
AC servo motor	25	54	300, 400, 500, 600, 700, 800, 900, 1000, (1100), 1200, (1300), (1400), 1500, (1600), (1700), (1800), (1900), 2000
	32	54	300, 400, 500, 600, 700, 800, 900, 1000, (1100), 1200, (1300), (1400), 1500, (1600), (1700), (1800), (1900), 2000, 2500
	40	54	300, 400, 500, 600, 700, 800, 900, 1000, (1100), 1200, (1300), (1400), 1500, (1600), (1700), (1800), (1900), 2000, 2500, 3000

For pick and place operations

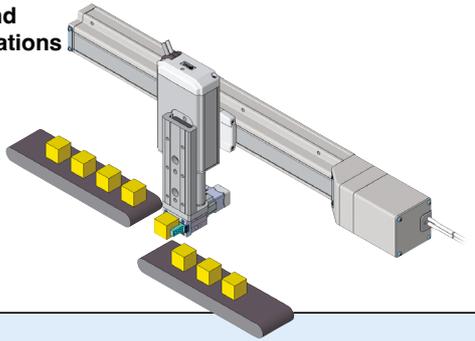

For vertical transfer

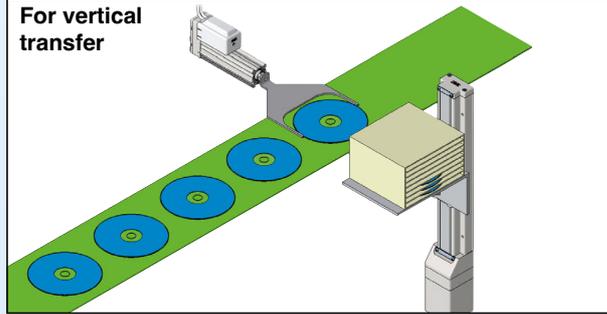


	Work load: Horizontal [kg]						Work load: Vertical [kg]			Speed [mm/s]						Page
	10	20	30	40	50	60	10	20	30	200	400	600	800	1000	1200	
	[Red bars]						[Red bars]			[Red bars]						*3 11, 19
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						*3 27, 35
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						
	[Red bars]						[Red bars]			[Red bars]						

	Work load: Horizontal [kg] ^{*3}					Speed [mm/s]				Page
	5	10	15	20	25	500	1000	1500	2000	
	[Red bars]					[Red bars]				11, 19
	[Red bars]					[Red bars]				
	[Red bars]					[Red bars]				
	[Red bars]					[Red bars]				
	[Red bars]					[Red bars]				37
	[Red bars]					[Red bars]				
	[Red bars]					[Red bars]				
	[Red bars]					[Red bars]				

*1 The nominal size based on force (equivalent to the air cylinder) during operation with ball screws
 *2 Please contact SMC for non-standard strokes as they are produced as special orders.
 *3 The belt drive actuator cannot be used for vertical applications.

CONTENTS


Slider Type Ball Screw Drive *LEFS Series*

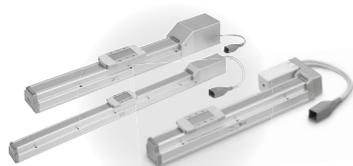

Battery-less Absolute (Step Motor 24 VDC)

◎ Ball Screw Drive *LEFS□E Series*

Model Selection	p. 11
How to Order	p. 45
Specifications	p. 47
Construction	p. 49
Dimensions	p. 51

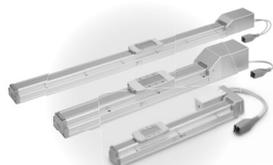

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

◎ Ball Screw Drive *LEFS Series*

Model Selection	p. 19
How to Order	p. 67
Specifications	p. 70
Construction	p. 72
Dimensions	p. 74




◎ Support Guide for Ball Screw Drive Actuator/*LEFG Series*

Model Selection	p. 42
How to Order	p. 119
Dimensions	p. 120

AC Servo Motor

LECS□ Series

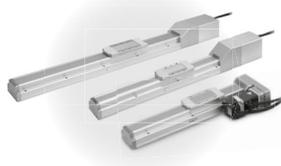

◎ Ball Screw Drive *LEFS Series*

Model Selection	p. 27
How to Order	p. 88
Specifications	p. 89
Construction	p. 90
Dimensions	p. 92

LECY□ Series

◎ Ball Screw Drive *LEFS Series*

Model Selection	p. 35
How to Order	p. 104
Specifications	p. 105
Construction	p. 106
Dimensions	p. 107

Environment



Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

◎ Ball Screw Drive *11-LEFS Series*

Clean Room Specification

Model Selection	p. 19
Particle Generation Characteristics	p. 189
How to Order	p. 193
Specifications	p. 196
Dimensions	p. 198



AC Servo Motor

◎ Ball Screw Drive *11-LEFS Series*

Clean Room Specification


Model Selection	p. 27, 35
Particle Generation Characteristics	p. 189
How to Order	p. 203, 2055
Specifications	p. 204, 206
Dimensions	p. 207



◎ Support Guide for Ball Screw Drive Actuator/*11-LEFG Series*

Clean Room Specification

Model Selection	p. 42
How to Order	p. 211
Dimensions	p. 212

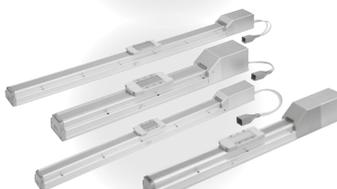

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)


AC Servo Motor

◎ Ball Screw Drive *25A-LEFS Series*

Secondary Battery Compatible

Model Selection	p. 19, 27, 35
How to Order	p. 215, 218, 219

Slider Type Belt Drive *LEFB* Series

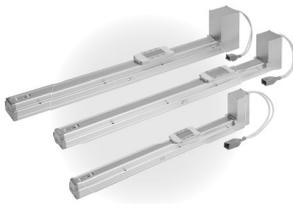

Battery-less Absolute (Step Motor 24 VDC)

◎ Belt Drive *LEFB□E* Series

Model Selection	p. 11
How to Order	p. 123
Specifications	p. 125
Construction	p. 126
Dimensions	p. 128

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

◎ Belt Drive *LEFB* Series

Model Selection	p. 19
How to Order	p. 134
Specifications	p. 137
Construction	p. 139
Dimensions	p. 140

◎ Support Guide for Belt Drive Actuator/*LEFG* Series

Model Selection	p. 42
How to Order	p. 176
Dimensions	p. 177



AC Servo Motor

LECS□ Series


◎ Belt Drive *LEFB* Series

Model Selection	p. 37
How to Order	p. 144
Specifications	p. 145
Construction	p. 146
Dimensions	p. 148

LECY□ Series

◎ Belt Drive *LEFB* Series

Model Selection	p. 37
How to Order	p. 160
Specifications	p. 161
Construction	p. 162
Dimensions	p. 164

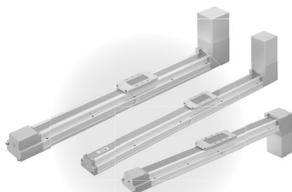

Auto Switch Mounting	p. 181
Specific Product Precautions	p. 185

◎ Incremental (Step Motor 24 VDC)/ Incremental (Servo Motor 24 VDC) Controllers/Drivers

For more information, please visit www.smc.eu



◎ 3-Axis Step Motor Controller

For more information, please visit www.smc.eu



◎ 4-Axis Step Motor (Servo/24 VDC) Controller

For more information, please visit www.smc.eu



◎ AC Servo Motor Drivers

For more information, please visit www.smc.eu




Slider Type

Ball Screw Drive *LEFS Series*

Battery-less Absolute (Step Motor 24 VDC)

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

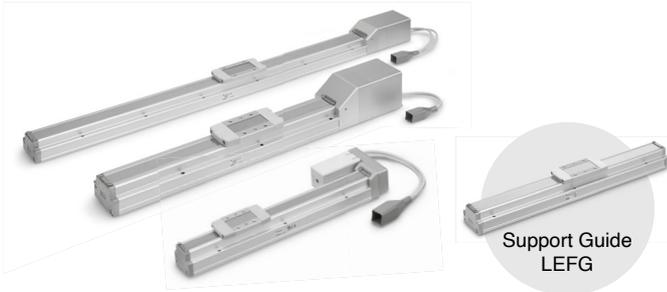

AC Servo Motor




Belt Drive *LEFB Series*


Battery-less Absolute (Step Motor 24 VDC)

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

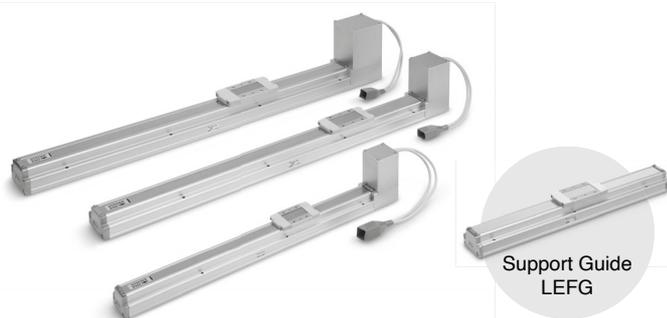

AC Servo Motor

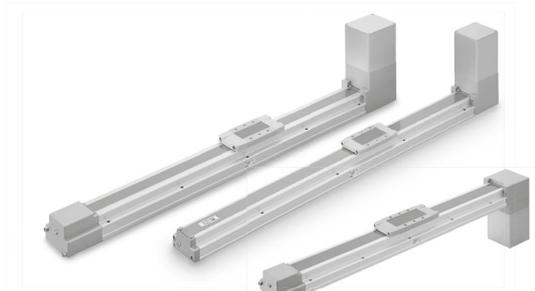


Environment

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Clean Room Specification **11-LEFS Series**

Secondary Battery Compatible **25A-LEFS Series**

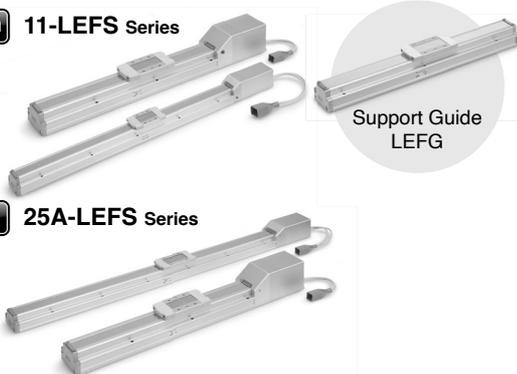

AC Servo Motor


Clean Room Specification **11-LEFS Series**

Secondary Battery Compatible **25A-LEFS Series**



Slider Type
LEF Series

Model Selection

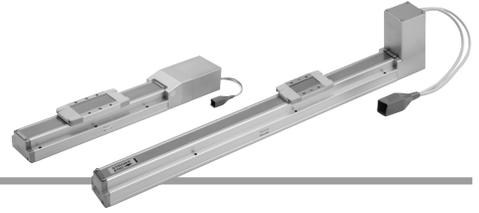



Selection Procedure



Selection Example

Operating conditions

- Workpiece mass: 5 [kg]
- Speed: 300 [mm/s]
- Acceleration/Deceleration: 3000 [mm/s²]
- Stroke: 200 [mm]
- Mounting orientation: Horizontal upward
- Workpiece mounting condition:

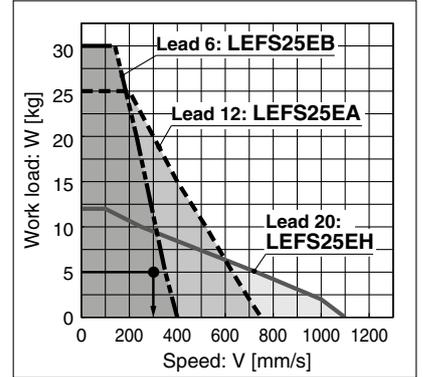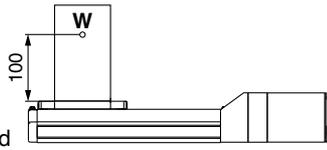

<Speed-Work load graph>
(LEFS25)

Step 1 Check the work load-speed. <Speed-Work load graph>

Select a model based on the workpiece mass and speed while referencing the speed-work load graph.

Selection example) The LEFS25EA-200 can be temporarily selected as a possible candidate based on the graph shown on the right side.

Step 2 Check the cycle time.

Calculate the cycle time using the following calculation method.

Cycle time:

T can be found from the following equation.

$$T = T1 + T2 + T3 + T4 \text{ [s]}$$

- T1: Acceleration time and T3: Deceleration time can be found by the following equation.

$$T1 = V/a1 \text{ [s]} \quad T3 = V/a2 \text{ [s]}$$

- T2: Constant speed time can be found from the following equation.

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \text{ [s]}$$

- T4: Settling time varies depending on the conditions such as motor types, load and in position of the step data. Therefore, calculate the settling time while referencing the following value.

$$T4 = 0.2 \text{ [s]}$$

Calculation example)

T1 to T4 can be calculated as follows.

$$T1 = V/a1 = 300/3000 = 0.1 \text{ [s]}$$


$$T3 = V/a2 = 300/3000 = 0.1 \text{ [s]}$$

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} = \frac{200 - 0.5 \cdot 300 \cdot (0.1 + 0.1)}{300} = 0.57 \text{ [s]}$$

$$T4 = 0.2 \text{ [s]}$$

The cycle time can be found as follows.

$$T = T1 + T2 + T3 + T4 = 0.1 + 0.57 + 0.1 + 0.2 = 0.97 \text{ [s]}$$


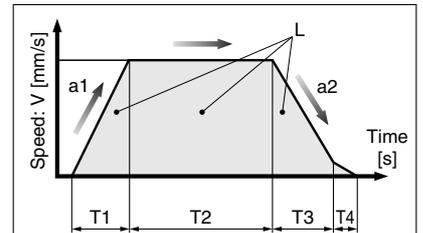


- L : Stroke [mm] ... (Operating condition)
- V : Speed [mm/s] ... (Operating condition)
- a1 : Acceleration [mm/s²] ... (Operating condition)
- a2 : Deceleration [mm/s²] ... (Operating condition)

- T1: Acceleration time [s]
Time until reaching the set speed
- T2: Constant speed time [s]
Time while the actuator is operating at a constant speed
- T3: Deceleration time [s]
Time from the beginning of the constant speed operation to stop
- T4: Settling time [s]
Time until positioning is completed

Step 3 Check the allowable moment. <Static allowable moment> <Dynamic allowable moment>

Confirm the moment that applies to the actuator is within the allowable range for both static and dynamic conditions.

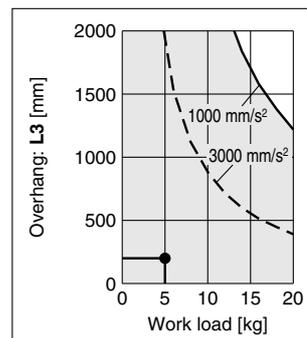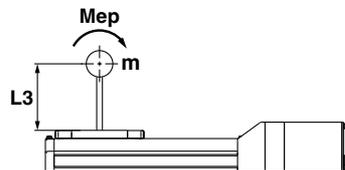


Based on the above calculation result, the LEFS25EA-200 should be selected.

Speed-Work Load Graph (Guide) For Battery-less Absolute (Step Motor 24 VDC), In-line Motor Type


* The following graphs show the values when the moving force is 100 %.

LEFS16/Ball Screw Drive

Horizontal

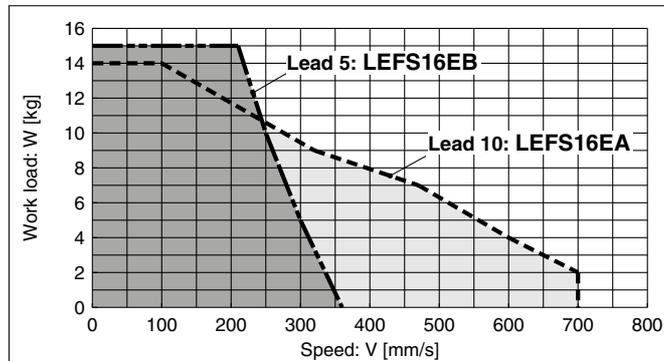


Vertical

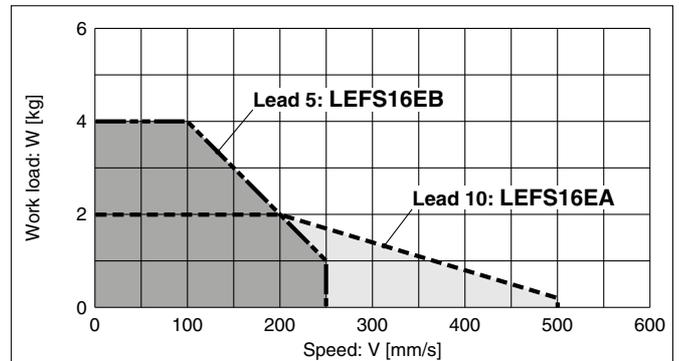


LEFS25/Ball Screw Drive

Horizontal

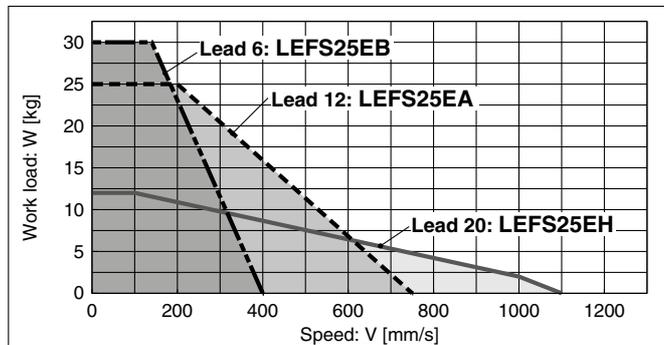


Vertical

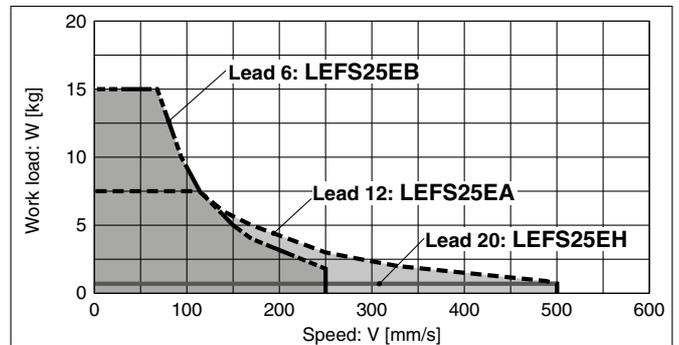


LEFS32/Ball Screw Drive

Horizontal

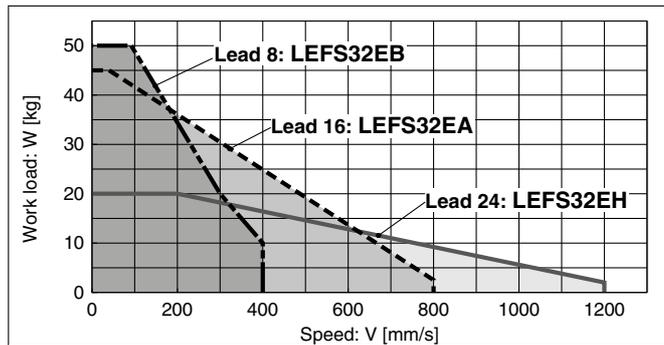


Vertical

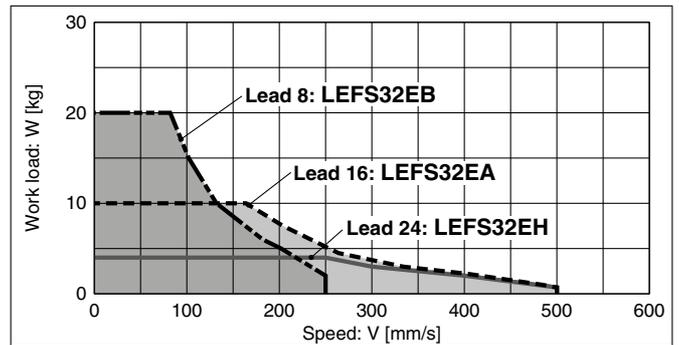


LEFS40/Ball Screw Drive

Horizontal

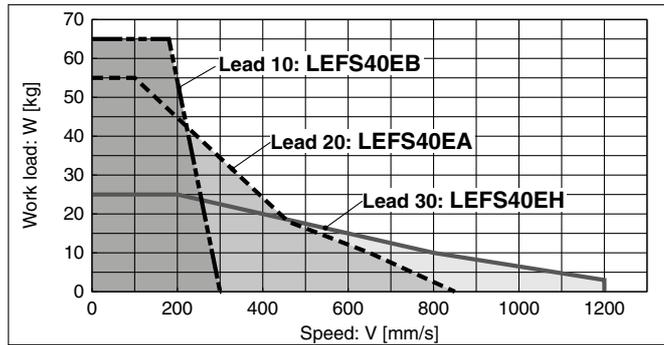

Vertical

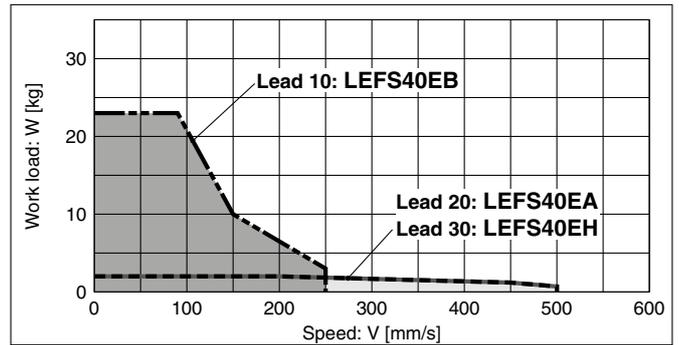

LEF Series


Battery-less Absolute (Step Motor 24 VDC)

Speed-Work Load Graph (Guide) For Battery-less Absolute (Step Motor 24 VDC), Motor Parallel Type


* The following graphs show the values when the moving force is 100 %.

LEFS16(L/R)/Ball Screw Drive

Horizontal

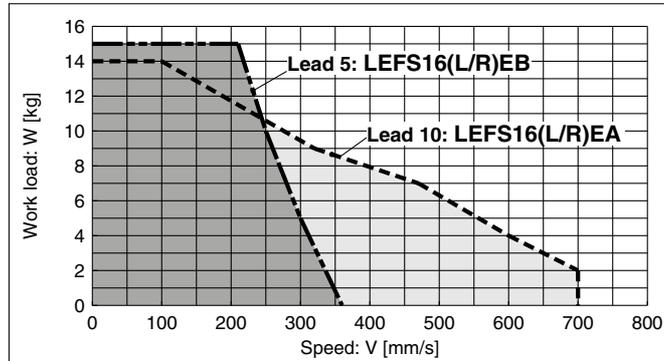


Vertical

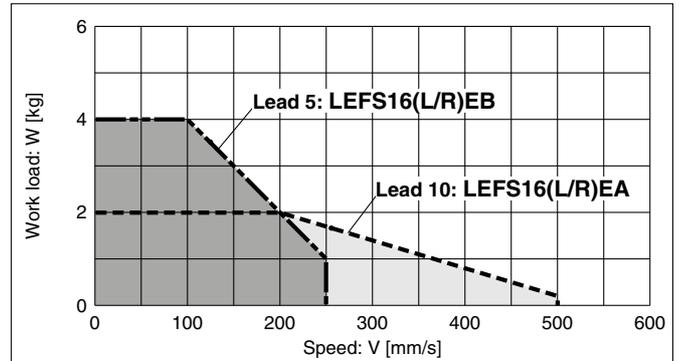


LEFS25(L/R)/Ball Screw Drive

Horizontal

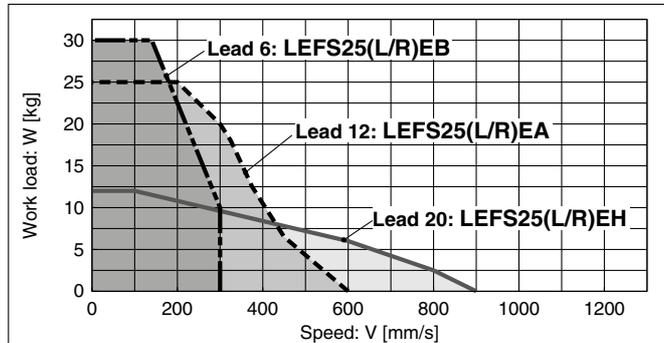


Vertical

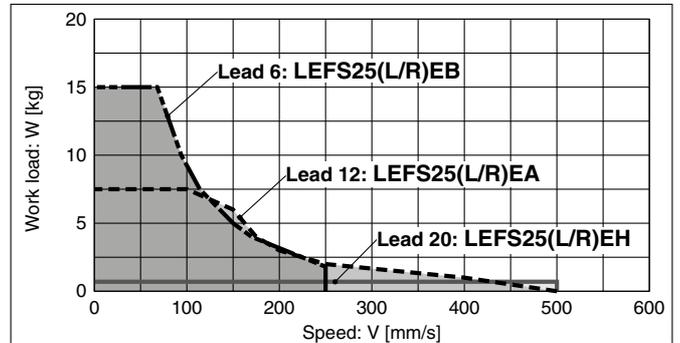


LEFS32(L/R)/Ball Screw Drive

Horizontal

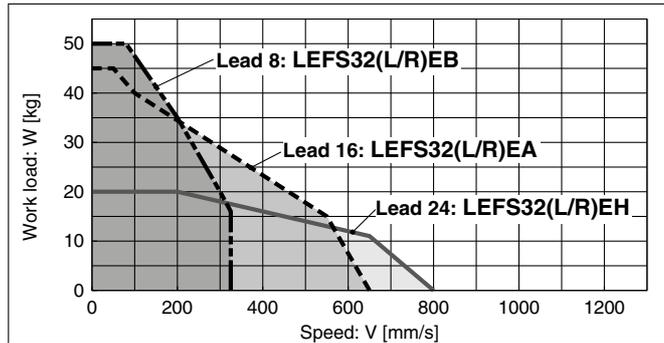


Vertical

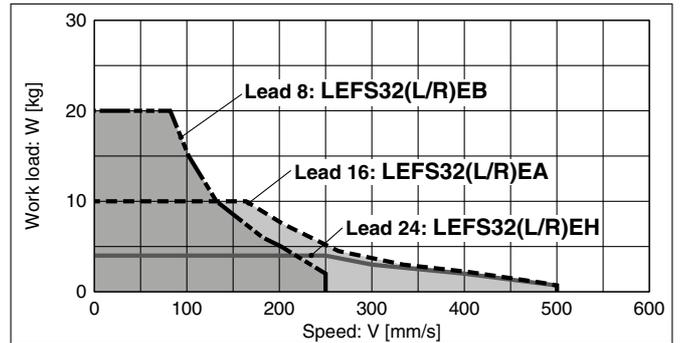


LEFS40(L/R)/Ball Screw Drive

Horizontal

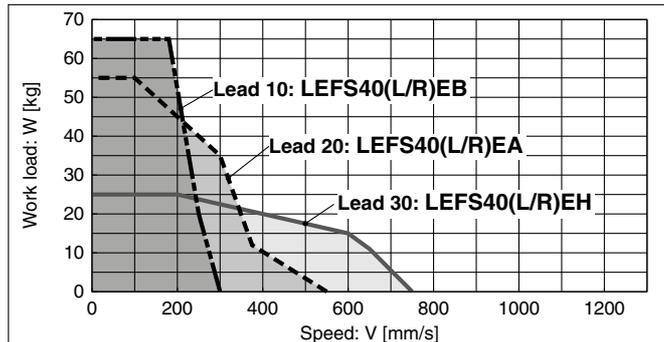

Vertical

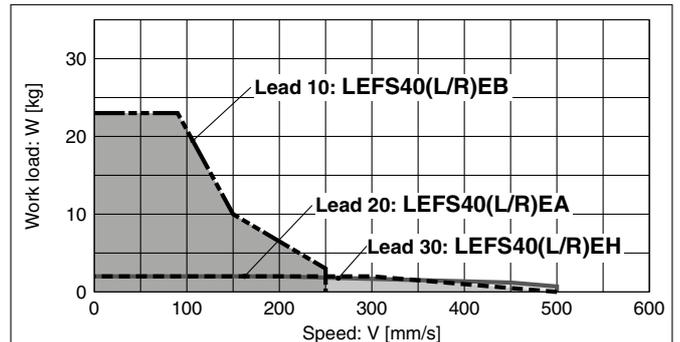


Speed-Work Load Graph (Guide) For Battery-less Absolute (Step Motor 24 VDC)

* The following graph shows the values when the moving force is 100 %.

LEFB/Belt Drive

Horizontal

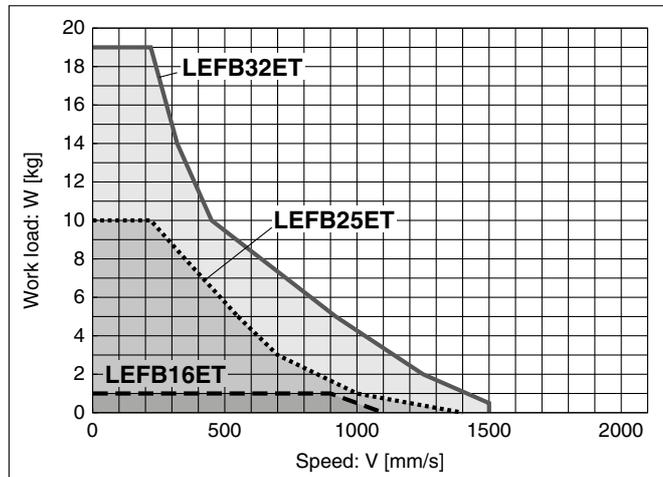

Static Allowable Moment*1

[N·m]

Model	Size	Pitching	Yawing	Rolling
LEF□	16	10.0	10.0	20.0
	25	27.0	27.0	52.0
	32	46.0	46.0	101.0
	40	110.0	110.0	207.0

*1 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.































LEF Series

Battery-less Absolute (Step Motor 24 VDC)

* These graphs show the amount of allowable overhang (guide unit) when the centre of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to the "Calculation of Guide Load Factor" or the Electric Actuator Model Selection Software for confirmation: <https://www.smc.eu>

Dynamic Allowable Moment


Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s²

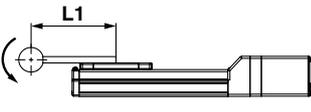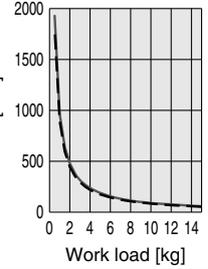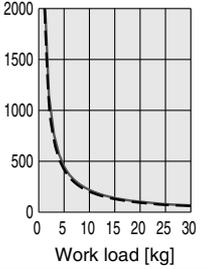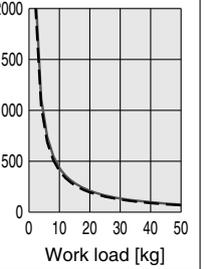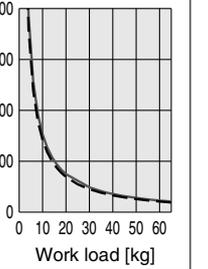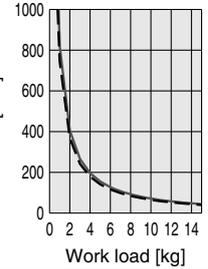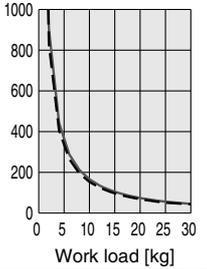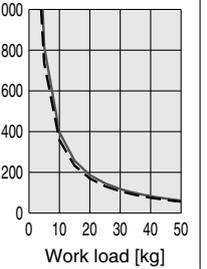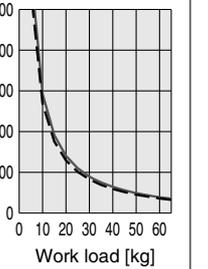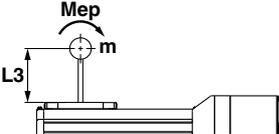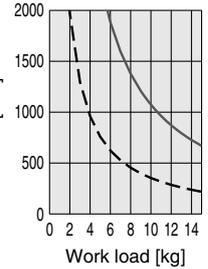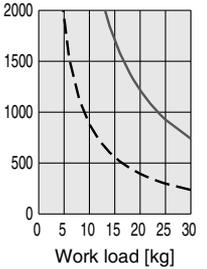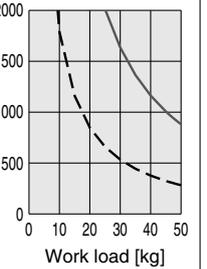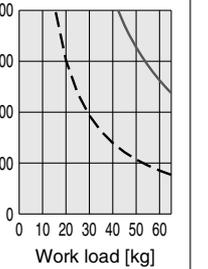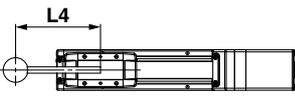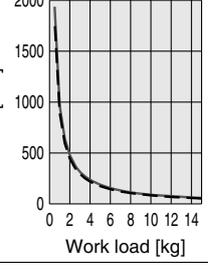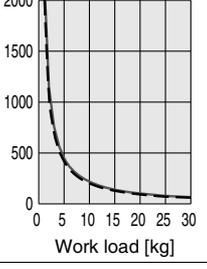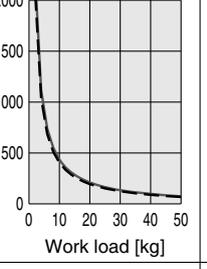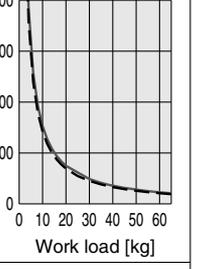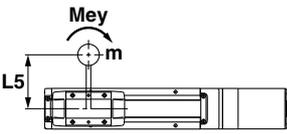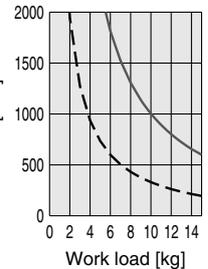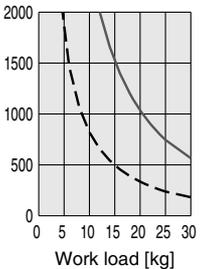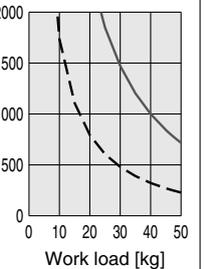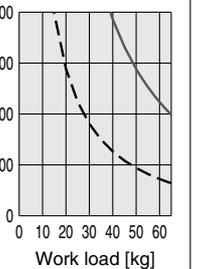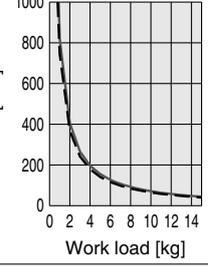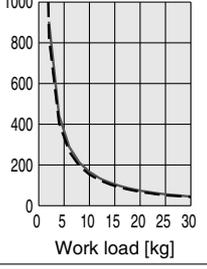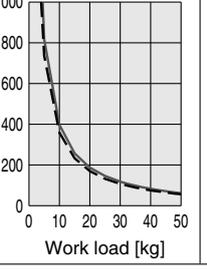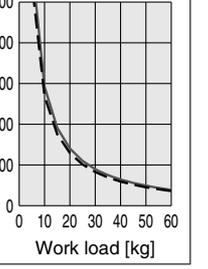Orientation	Load overhanging direction m : Work load [kg] Me : Allowable moment [N·m] L : Overhang to the work load centre of gravity [mm]	Model			
		LEF16	LEF25	LEF32	LEF40
Horizontal/Bottom	X 				
	Y 				
	Z 				
Wall	X 				
	Y 				
	Z 				

* These graphs show the amount of allowable overhang (guide unit) when the centre of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to the "Calculation of Guide Load Factor" or the Electric Actuator Model Selection Software for confirmation: <https://www.smc.eu>

Dynamic Allowable Moment

Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s²

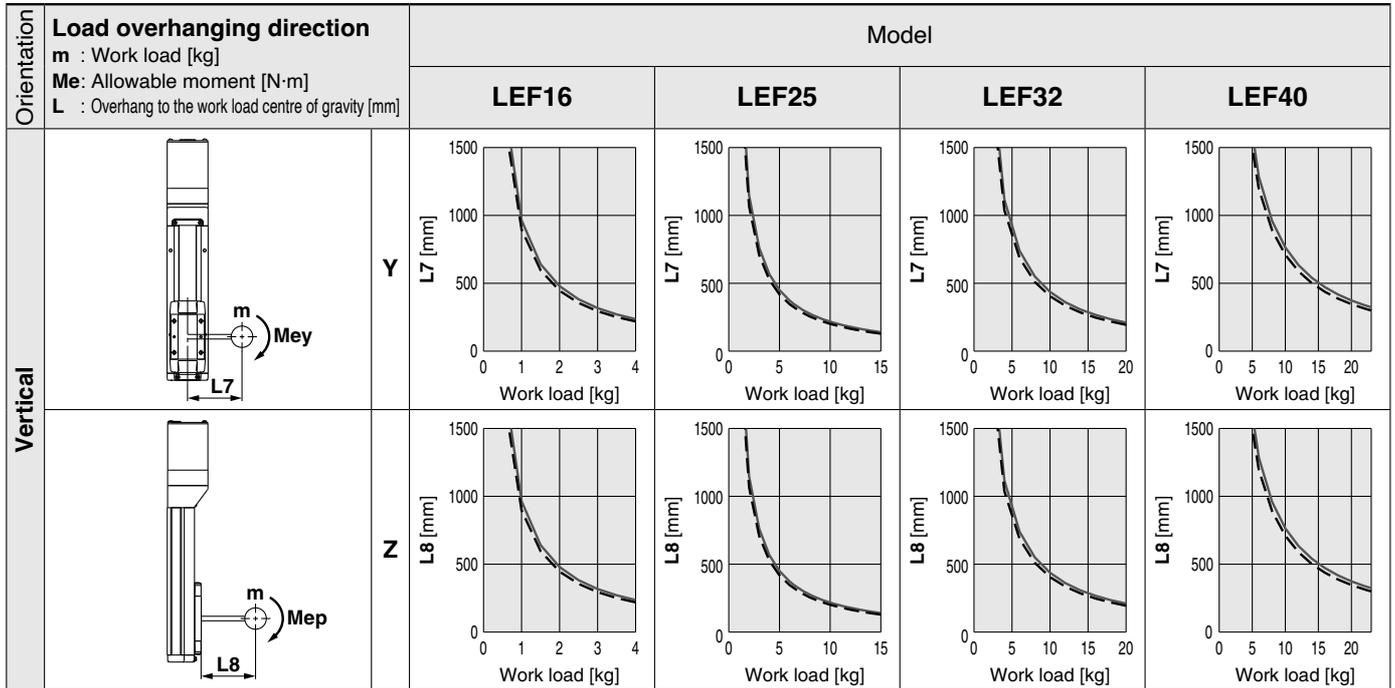

Calculation of Guide Load Factor

- Decide operating conditions.

Model: LEFS/LEFB

Size: 16/25/32/40

Mounting orientation: Horizontal/Bottom/Wall/Vertical

Acceleration [mm/s²]: a

Work load [kg]: m

Work load centre position [mm]: Xc/Yc/Zc

- Select the target graph while referencing the model, size, and mounting orientation.

- Based on the acceleration and work load, find the overhang [mm]: Lx/Ly/Lz from the graph.

- Calculate the load factor for each direction.


$$\alpha_x = X_c/L_x, \alpha_y = Y_c/L_y, \alpha_z = Z_c/L_z$$

- Confirm the total of α_x , α_y , and α_z is 1 or less.

$$\alpha_x + \alpha_y + \alpha_z \leq 1$$

When 1 is exceeded, please consider a reduction of acceleration and work load, or a change of the work load centre position and series.

Mounting orientation

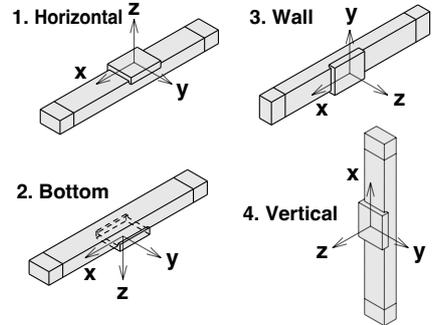

Example

- Operating conditions

Model: LEFS40

Size: 40

Mounting orientation: Horizontal

Acceleration [mm/s²]: 3000

Work load [kg]: 20

Work load centre position [mm]: Xc = 0, Yc = 50, Zc = 200

- Select the graphs for horizontal of the LEF40 on page 15.

- Lx = 400 mm, Ly = 250 mm, Lz = 1500 mm




- The load factor for each direction can be found as follows.

$$\alpha_x = 0/400 = 0$$

$$\alpha_y = 50/250 = 0.2$$

$$\alpha_z = 200/1500 = 0.13$$


- $\alpha_x + \alpha_y + \alpha_z = 0.33 \leq 1$

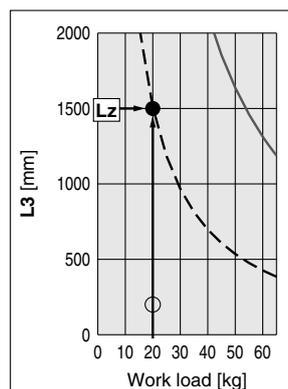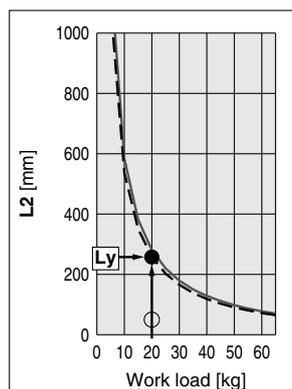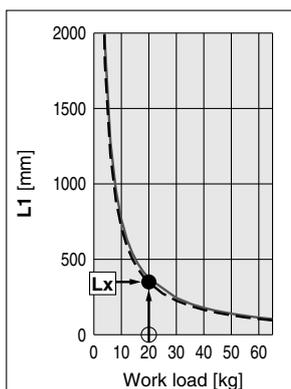

LEF Series

Battery-less Absolute (Step Motor 24 VDC)



Table Accuracy (Reference Value)

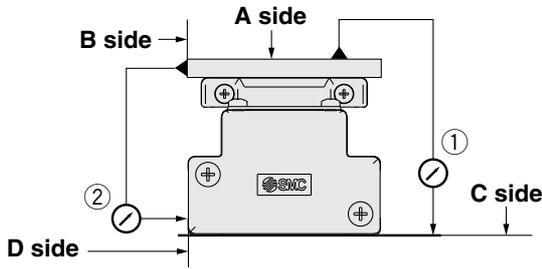

Model	Travelling parallelism [mm] (Every 300 mm)	
	① C side travelling parallelism to A side	② D side travelling parallelism to B side
LEF16	0.05	0.03
LEF25	0.05	0.03
LEF32	0.05	0.03
LEF40	0.05	0.03

* Travelling parallelism does not include the mounting surface accuracy. (Excludes when the stroke exceeds 2000 mm)


Table Displacement (Reference Value)

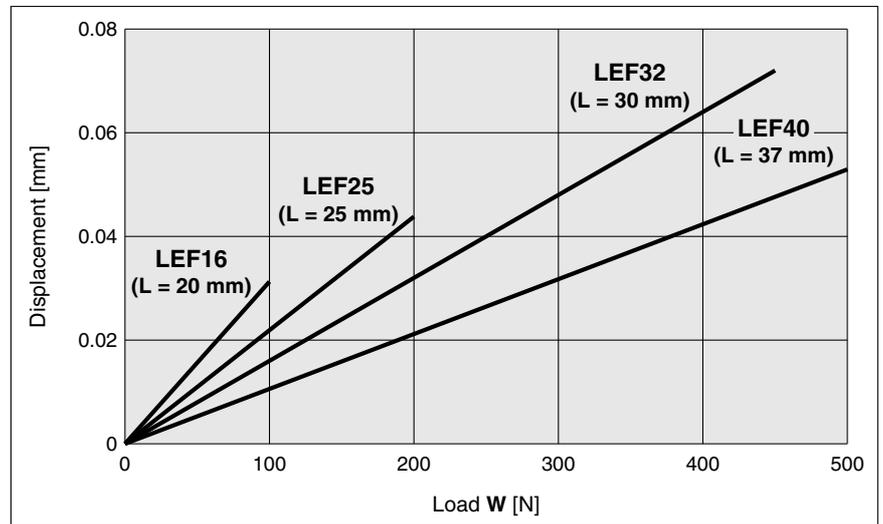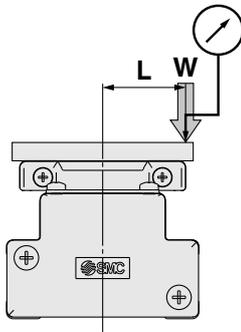


* This displacement is measured when a 15 mm magnetising plate is mounted and fixed on the table.
* Check the clearance and play of the guide separately.

Overhang Displacement Due to Table Clearance (Initial Reference Value)

Basic type

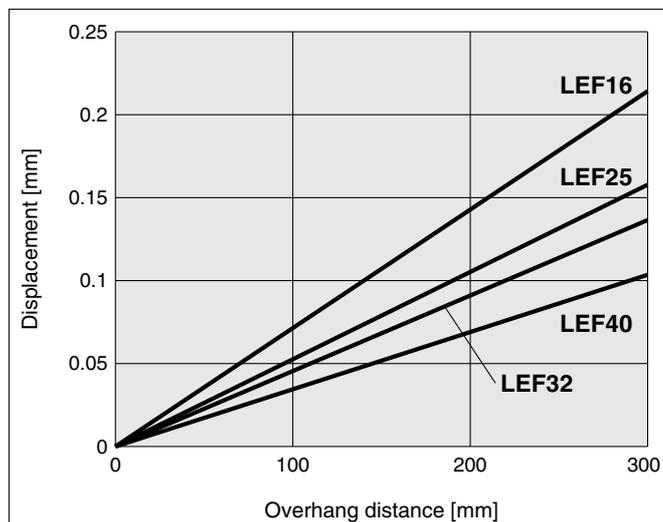

High-precision type

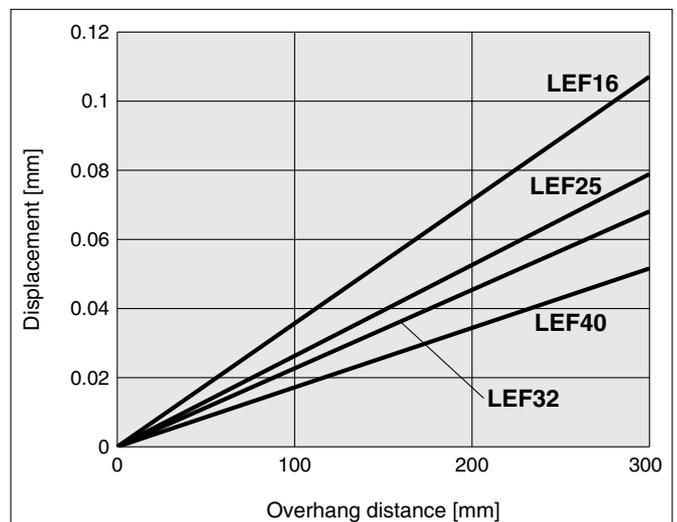

Model Selection





Selection Procedure



Selection Example

Operating conditions

- Workpiece mass: 5 [kg]
- Speed: 300 [mm/s]
- Acceleration/Deceleration: 3000 [mm/s²]
- Stroke: 200 [mm]
- Mounting orientation: Horizontal upward
- Workpiece mounting condition:

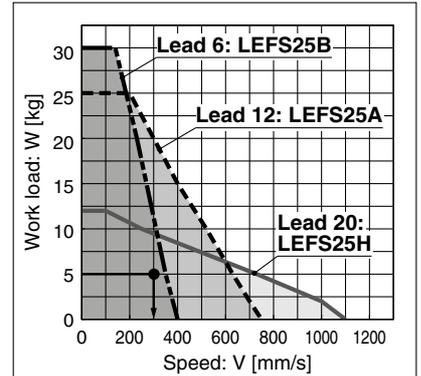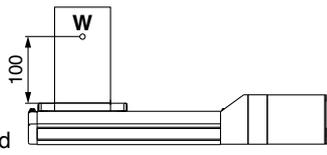

Step 1 Check the work load-speed. <Speed-Work load graph>

Select a model based on the workpiece mass and speed while referencing the speed-work load graph.

Selection example) The **LEFS25A-200** can be temporarily selected as a possible candidate based on the graph shown on the right side.

Step 2 Check the cycle time.

Calculate the **cycle time** using the following calculation method.

Cycle time:

T can be found from the following equation.

$$T = T1 + T2 + T3 + T4 \text{ [s]}$$

- T1: Acceleration time and T3: Deceleration time can be found by the following equation.

$$T1 = V/a1 \text{ [s]} \quad T3 = V/a2 \text{ [s]}$$

- T2: Constant speed time can be found from the following equation.

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \text{ [s]}$$

- T4: Settling time varies depending on the conditions such as motor types, load and in position of the step data. Therefore, calculate the settling time while referencing to the following value.

$$T4 = 0.2 \text{ [s]}$$

Calculation example)

T1 to T4 can be calculated as follows.

$$T1 = V/a1 = 300/3000 = 0.1 \text{ [s]}$$


$$T3 = V/a2 = 300/3000 = 0.1 \text{ [s]}$$

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} = \frac{200 - 0.5 \cdot 300 \cdot (0.1 + 0.1)}{300} = 0.57 \text{ [s]}$$

$$T4 = 0.2 \text{ [s]}$$

The **cycle time** can be found as follows.

$$T = T1 + T2 + T3 + T4 = 0.1 + 0.57 + 0.1 + 0.2 = 0.97 \text{ [s]}$$

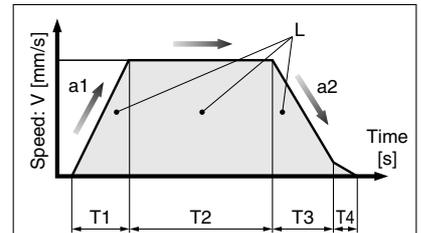


- L : Stroke [mm] ... (Operating condition)
- V : Speed [mm/s] ... (Operating condition)
- a1 : Acceleration [mm/s²] ... (Operating condition)
- a2 : Deceleration [mm/s²] ... (Operating condition)

- T1: Acceleration time [s]
Time until reaching the set speed
- T2: Constant speed time [s]
Time while the actuator is operating at a constant speed
- T3: Deceleration time [s]
Time from the beginning of the constant speed operation to stop
- T4: Settling time [s]
Time until positioning is completed


Step 3 Check the allowable moment. <Static allowable moment>

<Dynamic allowable moment>

Confirm the moment that applies to the actuator is within the allowable range for both static and dynamic conditions.

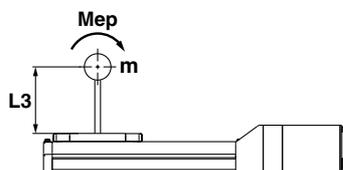

Based on the above calculation result, the **LEFS25A-200** should be selected.

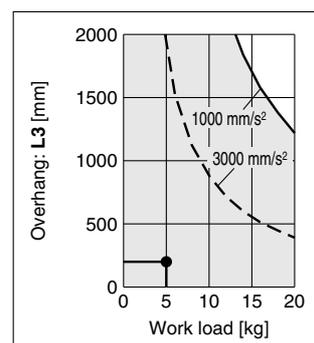

* If the step motor and servo motors do not meet your specifications, also consider the AC servo specification on page 27.

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Clean Room Specification

Secondary Battery Compatible


Speed-Work Load Graph (Guide)

For Step Motor (Servo/24 VDC) JXC□1, JXC□F


* The following graphs show the values when the moving force is 100 %.

LEFS16/Ball Screw Drive

Horizontal

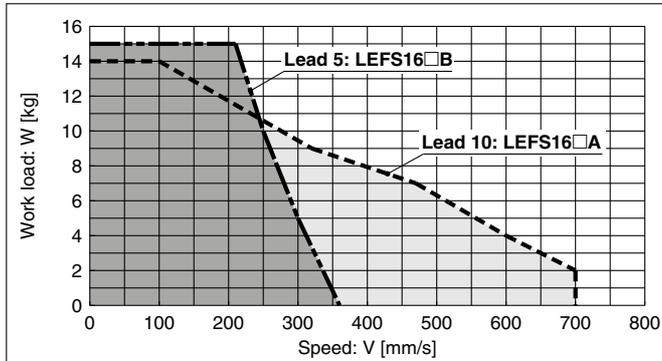


Vertical

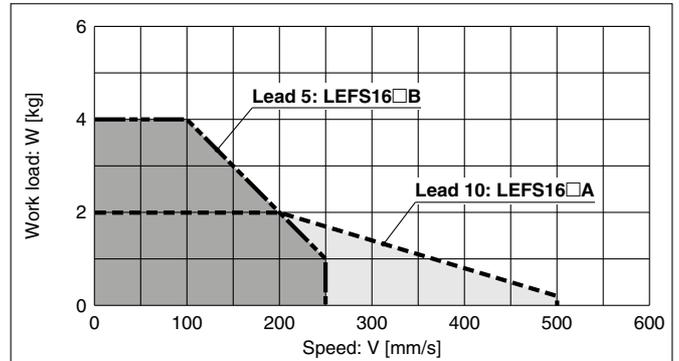


LEFS25/Ball Screw Drive

Horizontal

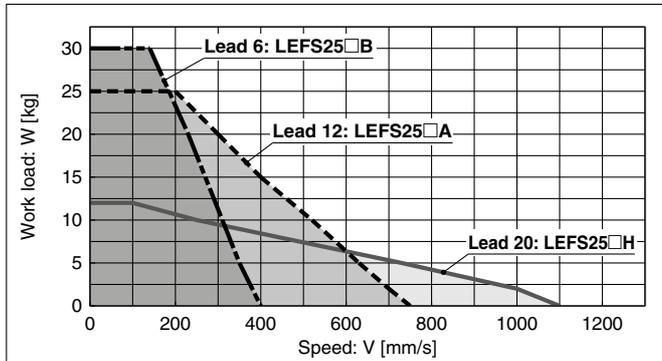


Vertical

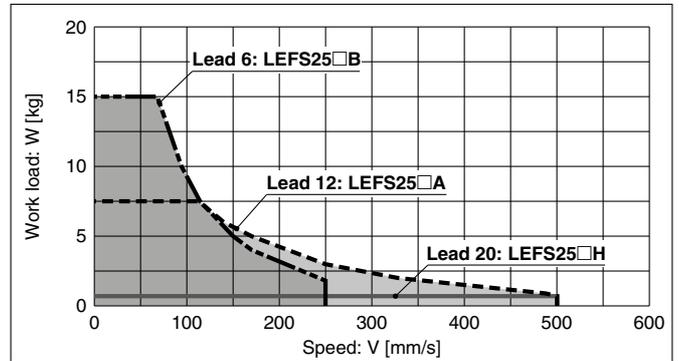


LEFS32/Ball Screw Drive

Horizontal

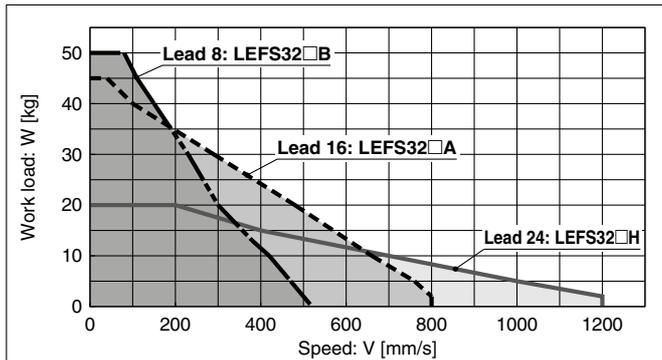


Vertical

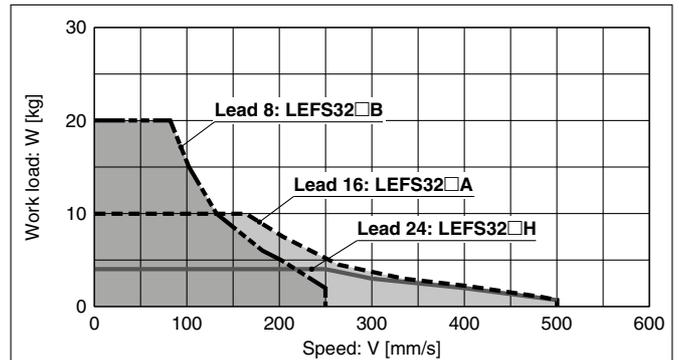


LEFS40/Ball Screw Drive

Horizontal

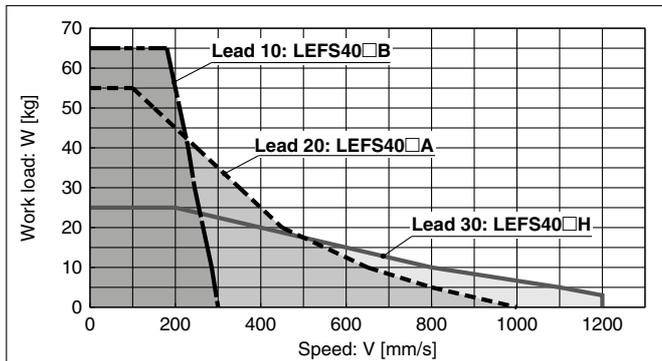

Vertical

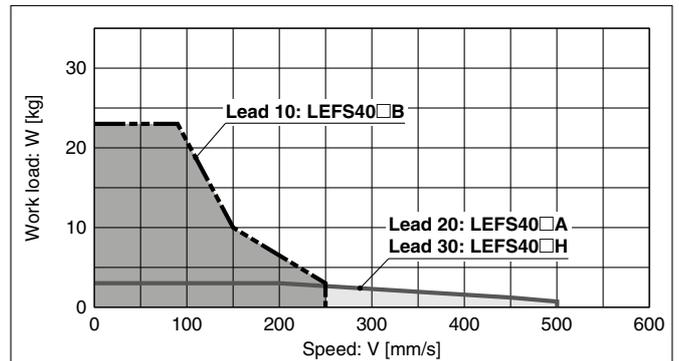

LEF Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Clean Room Specification

Secondary Battery Compatible

For the JXC□1 and JXC□F, refer to page 20.


Speed-Work Load Graph (Guide)

For Step Motor (Servo/24 VDC) LECPA, JXC□²/₃


* The following graphs show the values when the moving force is 100 %.

LEFS16/Ball Screw Drive

Horizontal

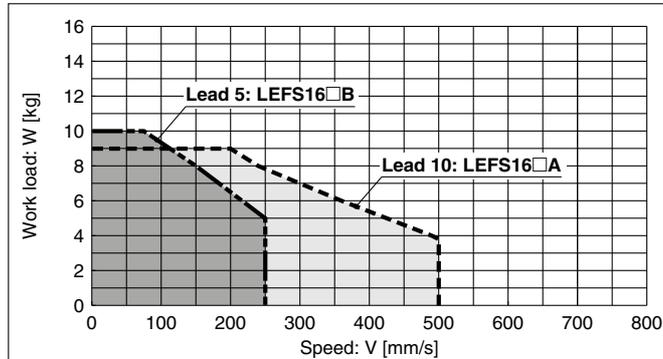


Vertical

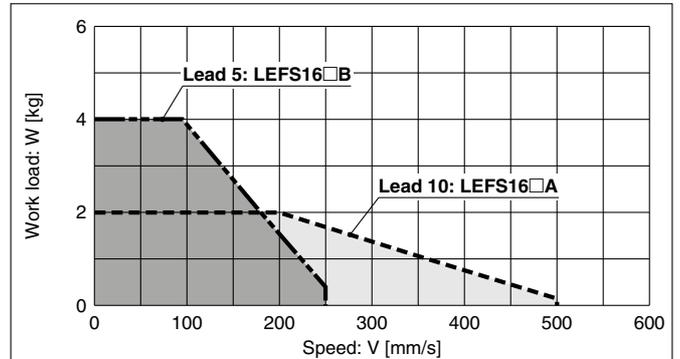


LEFS25/Ball Screw Drive

Horizontal

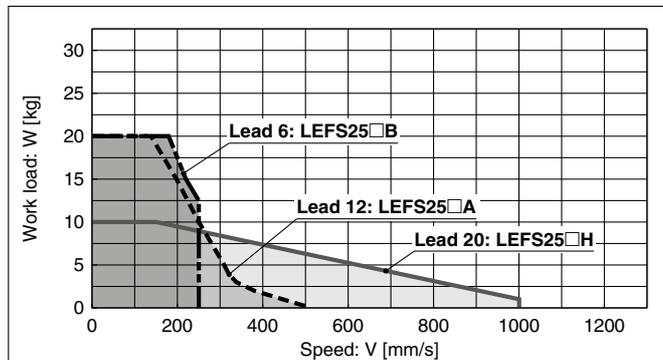


Vertical

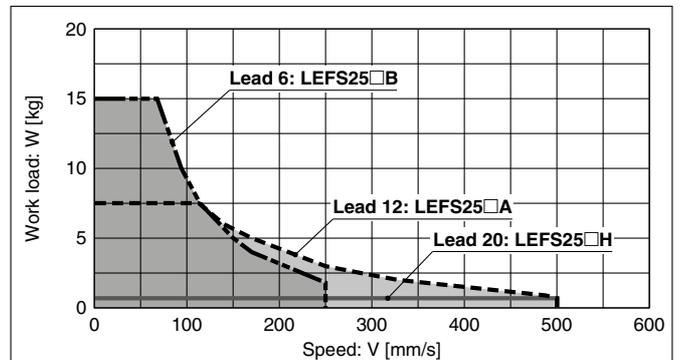


LEFS32/Ball Screw Drive

Horizontal

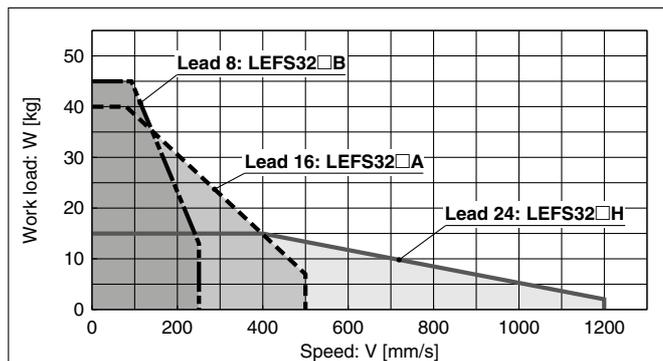


Vertical

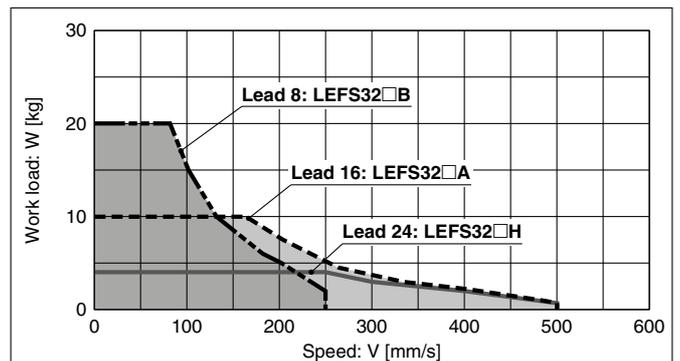


LEFS40/Ball Screw Drive

Horizontal

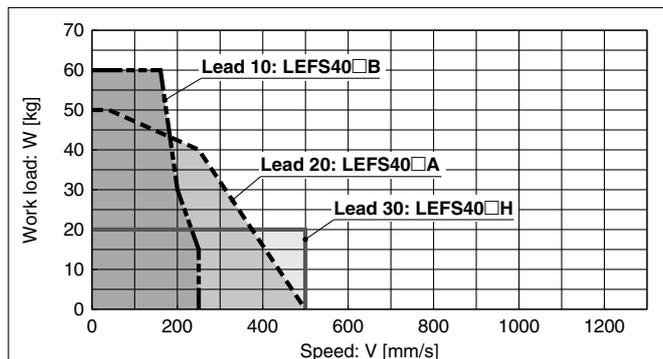

Vertical

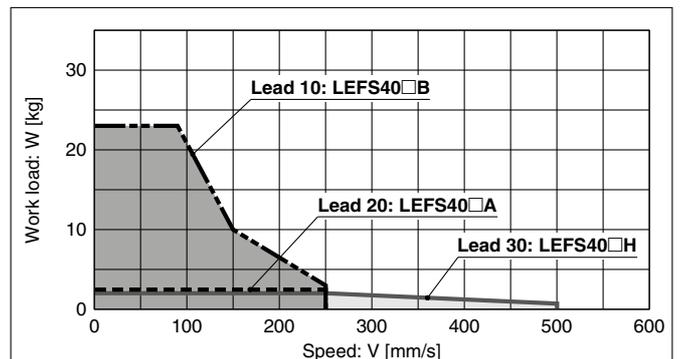


Speed-Work Load Graph (Guide)
For Step Motor (Servo/24 VDC) JXC□1, JXC□F

* The following graph shows the values when the moving force is 100 %.

LEFB/Belt Drive

Horizontal

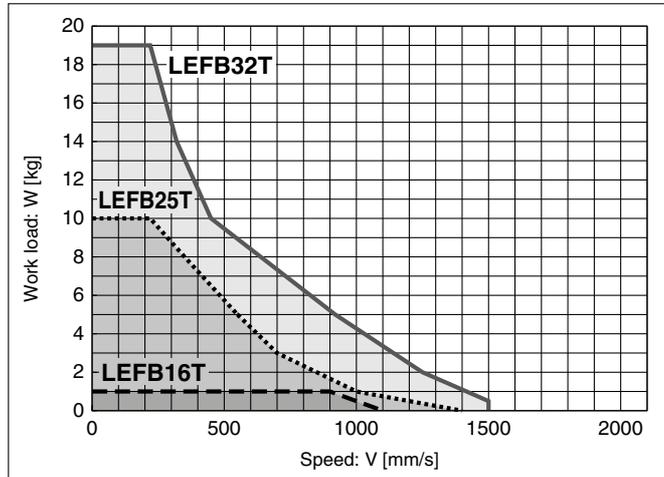


For Step Motor (Servo/24 VDC) LECPA, JXC□²/₃

* The following graph shows the values when the moving force is 100 %.

LEFB/Belt Drive

Horizontal

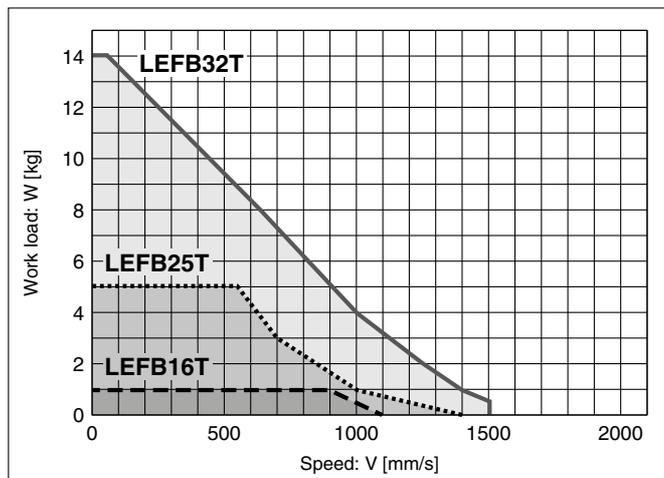

LEF Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Clean Room Specification


Secondary Battery Compatible

Speed-Work Load Graph (Guide) Servo Motor (24 VDC)


* The following graphs show the values when the moving force is 250 %.

LEFS16A/Ball Screw Drive

Horizontal

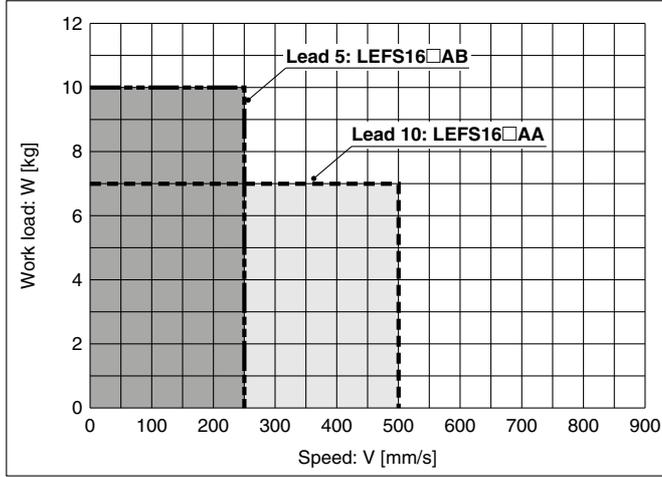


Vertical

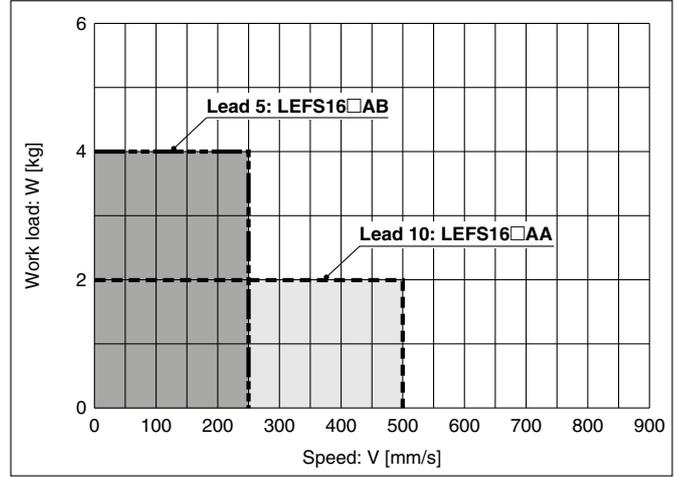


LEFS25A/Ball Screw Drive

Horizontal

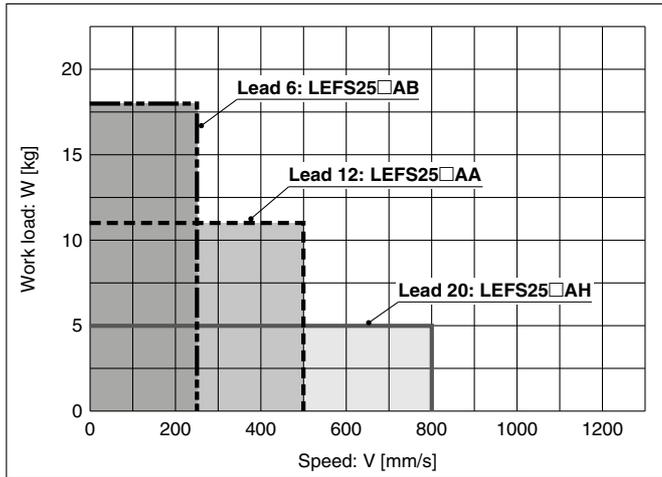

Vertical

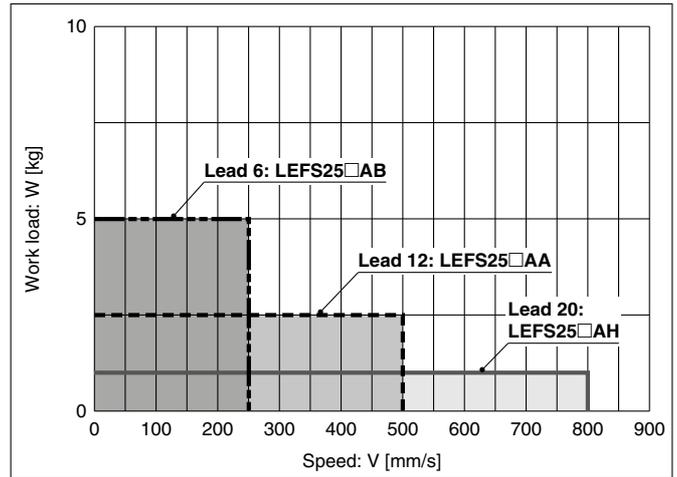


Servo Motor (24 VDC)

LEFB/Belt Drive

* The following graph shows the values when the moving force is 250 %.

Horizontal

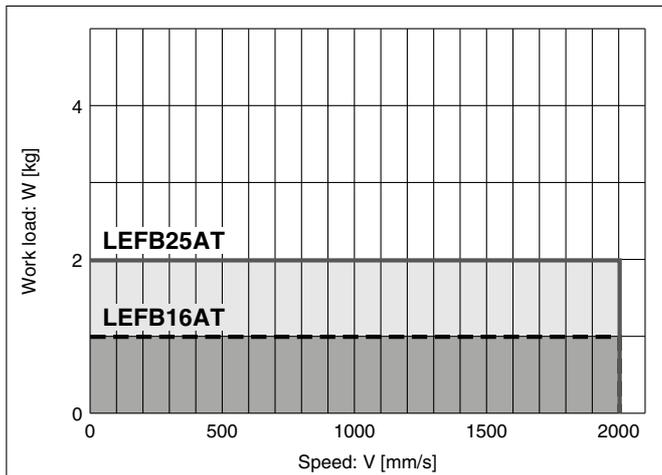

Static Allowable Moment*1

[N·m]

Model	Size	Pitching	Yawing	Rolling
LEF□	16	10	10	20
	25	27	27	52
	32	46	46	101
	40	110	110	207

*1 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)































Clean Room Specification

Secondary Battery Compatible

* These graphs show the amount of allowable overhang (guide unit) when the centre of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to the "Calculation of Guide Load Factor" or the Electric Actuator Model Selection Software for confirmation: <https://www.smc.eu>

Dynamic Allowable Moment


Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s²

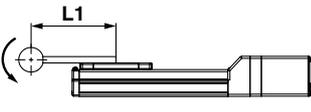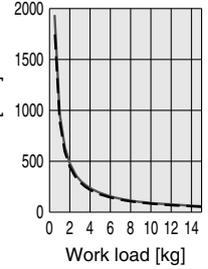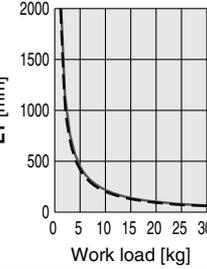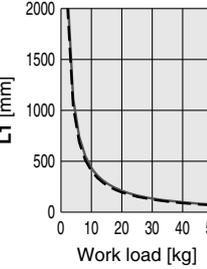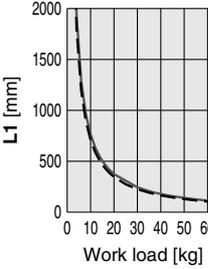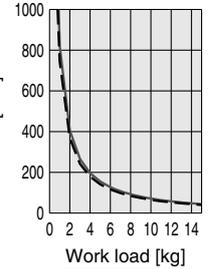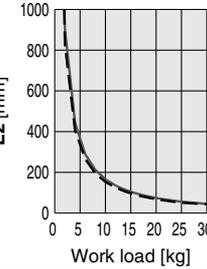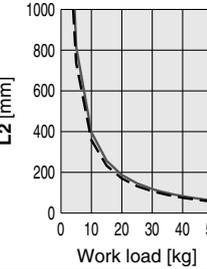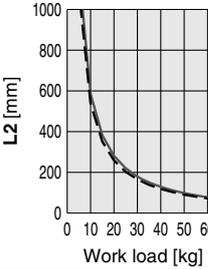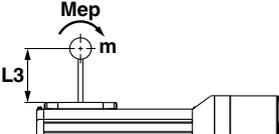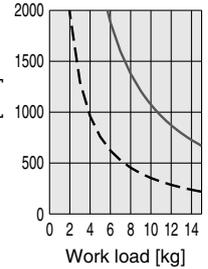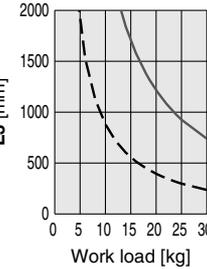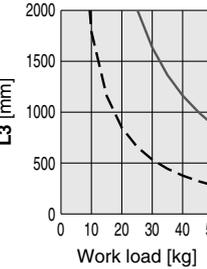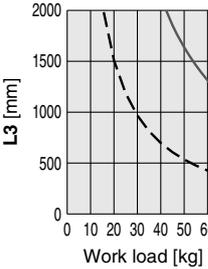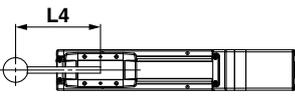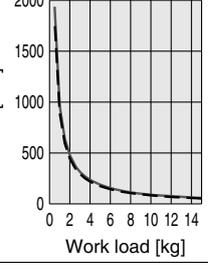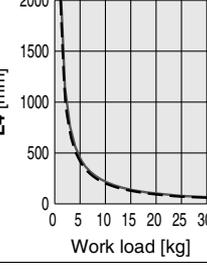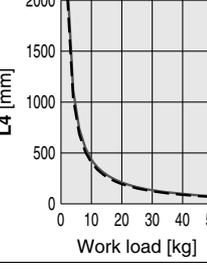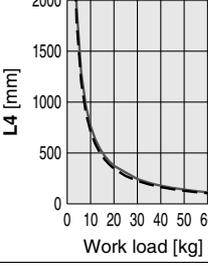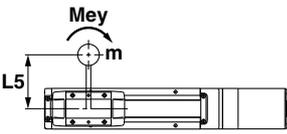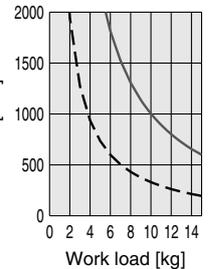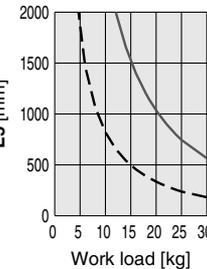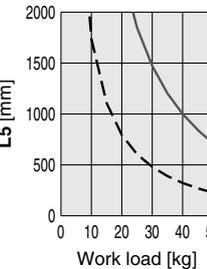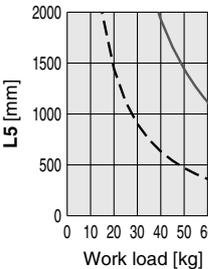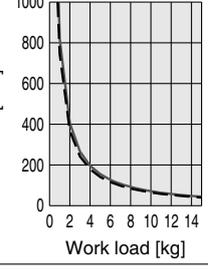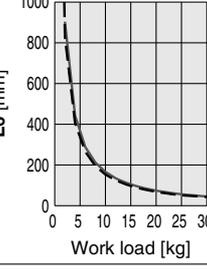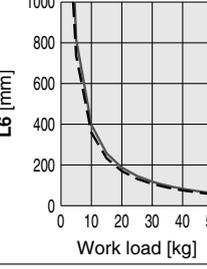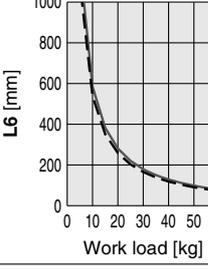Orientation Load overhanging direction m : Work load [kg] Me: Allowable moment [N·m] L : Overhang to the work load centre of gravity [mm]		Model			
		LEF16	LEF25	LEF32	LEF40
Horizontal/Bottom	 X				
	 Y				
	 Z				
Wall	 X				
	 Y				
	 Z				

* These graphs show the amount of allowable overhang (guide unit) when the centre of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to the "Calculation of Guide Load Factor" or the Electric Actuator Model Selection Software for confirmation: <https://www.smc.eu>

Dynamic Allowable Moment

Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s²

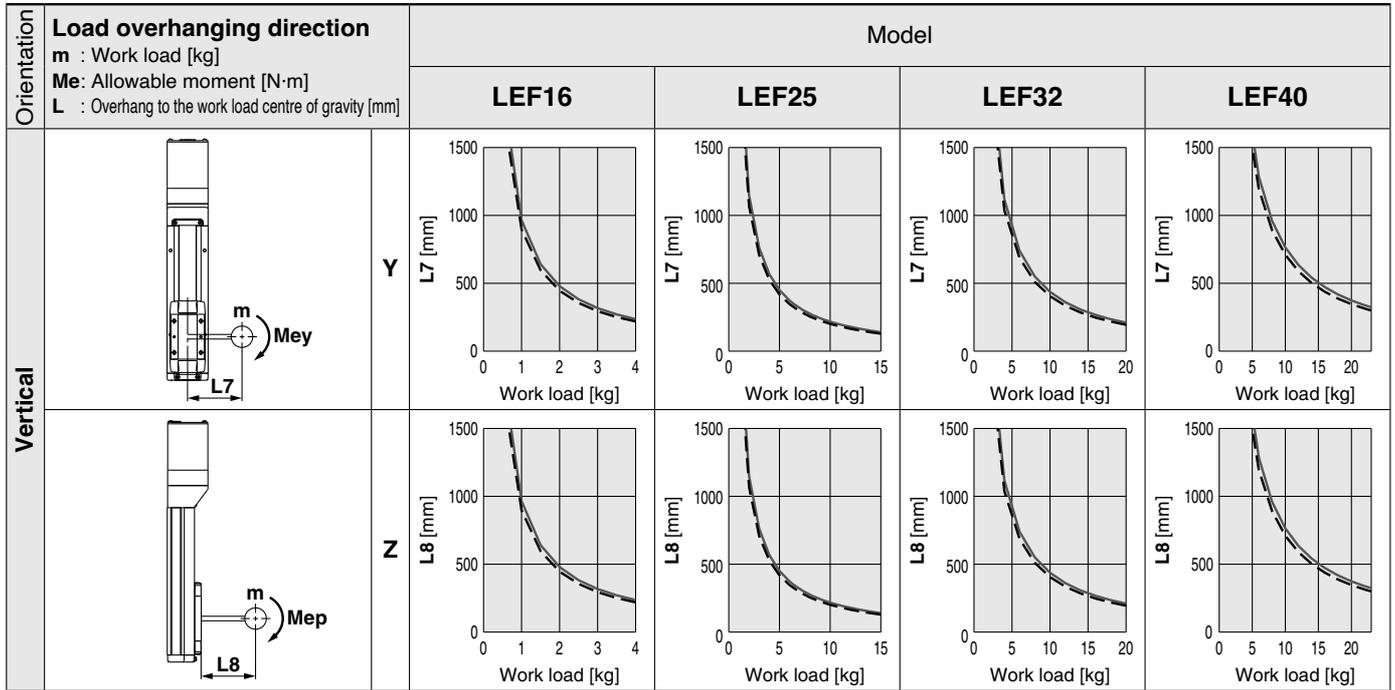

Calculation of Guide Load Factor

- Decide operating conditions.

Model: LEFS/LEFB

Size: 16/25/32/40

Mounting orientation: Horizontal/Bottom/Wall/Vertical

Acceleration [mm/s²]: a

Work load [kg]: m

Work load centre position [mm]: Xc/Yc/Zc

- Select the target graph while referencing the model, size, and mounting orientation.

- Based on the acceleration and work load, find the overhang [mm]: Lx/Ly/Lz from the graph.

- Calculate the load factor for each direction.





$$\alpha_x = X_c/L_x, \alpha_y = Y_c/L_y, \alpha_z = Z_c/L_z$$

- Confirm the total of α_x , α_y , and α_z is 1 or less.

$$\alpha_x + \alpha_y + \alpha_z \leq 1$$

When 1 is exceeded, please consider a reduction of acceleration and work load, or a change of the work load centre position and series.

Mounting orientation



Example

- Operating conditions

Model: LEFS40

Size: 40

Mounting orientation: Horizontal

Acceleration [mm/s²]: 3000

Work load [kg]: 20

Work load centre position [mm]: Xc = 0, Yc = 50, Zc = 200

- Select the graphs for horizontal of the LEF40 on page 24.

- Lx = 400 mm, Ly = 250 mm, Lz = 1500 mm

- The load factor for each direction can be found as follows.

$$\alpha_x = 0/400 = 0$$

$$\alpha_y = 50/250 = 0.2$$

$$\alpha_z = 200/1500 = 0.13$$

- $\alpha_x + \alpha_y + \alpha_z = 0.33 \leq 1$




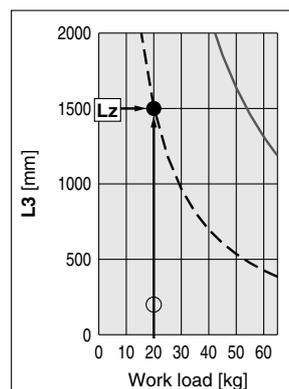




Table Accuracy (Reference Value)

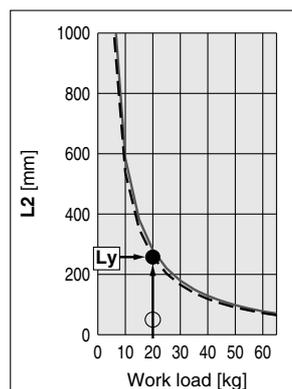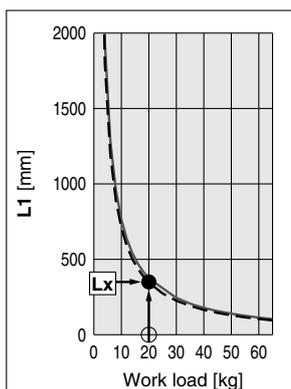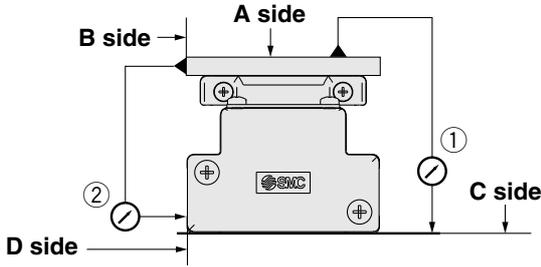

Model	Travelling parallelism [mm] (Every 300 mm)	
	① C side travelling parallelism to A side	② D side travelling parallelism to B side
LEF16	0.05	0.03
LEF25	0.05	0.03
LEF32	0.05	0.03
LEF40	0.05	0.03

* Travelling parallelism does not include the mounting surface accuracy. (Excludes when the stroke exceeds 2000 mm)


Table Displacement (Reference Value)

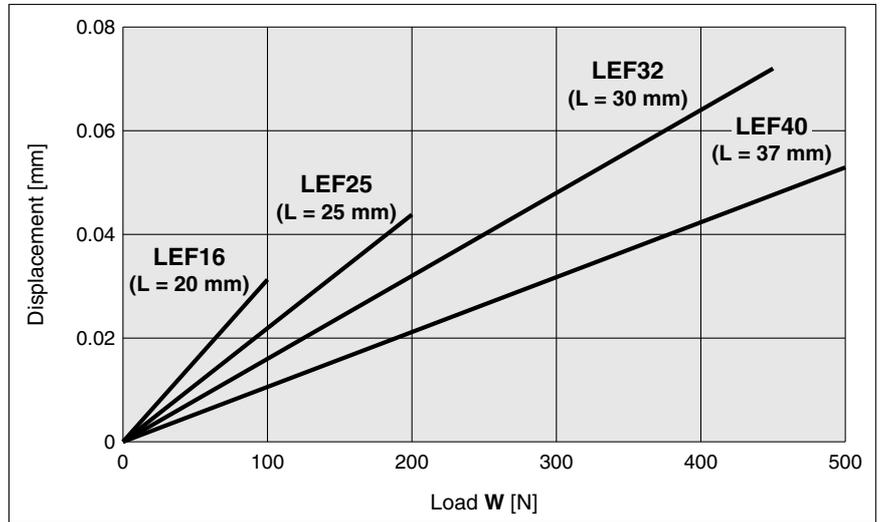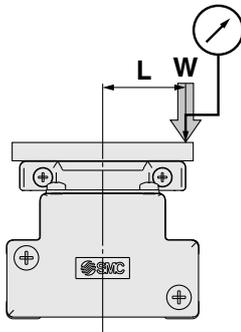


* This displacement is measured when a 15 mm magnetising plate is mounted and fixed on the table.
 * Check the clearance and play of the guide separately.

Overhang Displacement Due to Table Clearance (Initial Reference Value)

Basic type

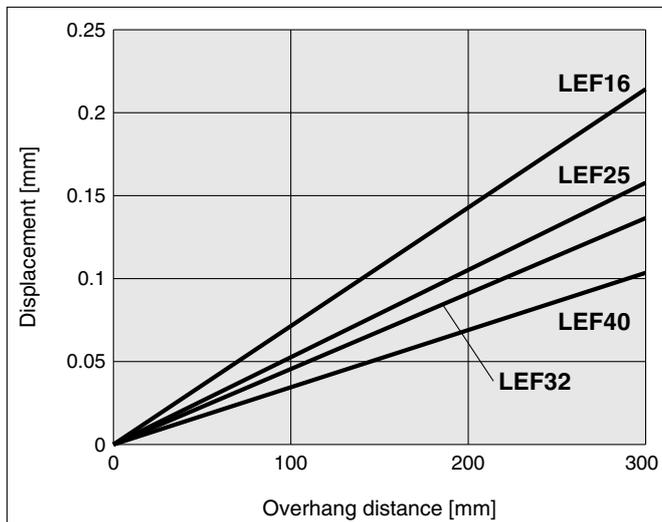

High-precision type

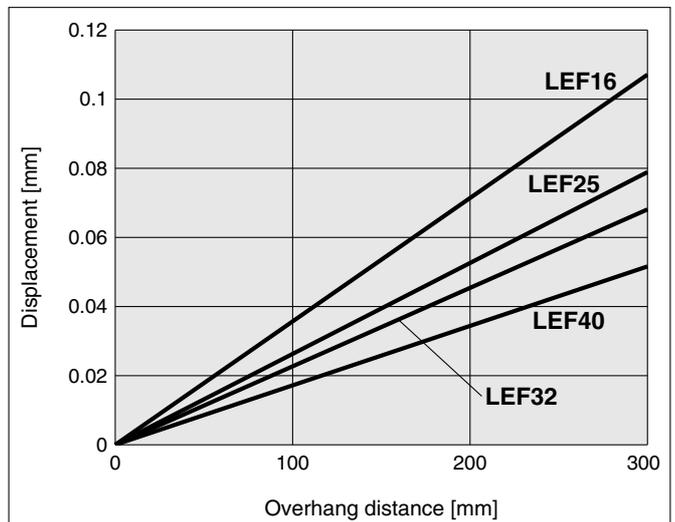

Model Selection





Selection Procedure



Selection Example

Operating conditions

- Workpiece mass: 45 [kg]
- Speed: 300 [mm/s]
- Acceleration/Deceleration: 3000 [mm/s²]
- Stroke: 200 [mm]
- Mounting position: Horizontal upward
- Workpiece mounting condition:

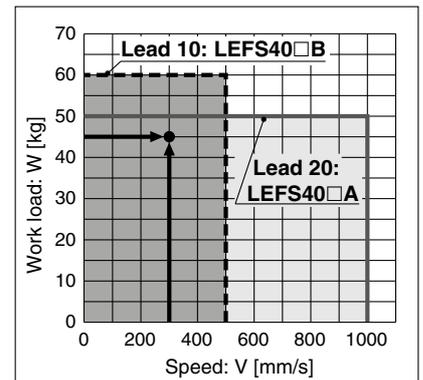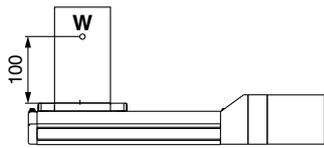

Step 1 Check the work load-speed. <Speed-Work load graph>

Select a model based on the workpiece mass and speed while referencing the speed-work load graph.

Selection example) The **LEFS40S4B-200** can be temporarily selected as a possible candidate based on the graph shown on the right side.

Step 2 Check the cycle time.

Calculate the **cycle time** using the following calculation method.

Cycle time:

T can be found from the following equation.

$$T = T1 + T2 + T3 + T4 \text{ [s]}$$

- T1: Acceleration time and T3: Deceleration time can be found by the following equation.

$$T1 = V/a1 \text{ [s]} \quad T3 = V/a2 \text{ [s]}$$

- T2: Constant speed time can be found from the following equation.

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \text{ [s]}$$

- T4: Settling time varies depending on the motor type and load. The value below is recommended.

$$T4 = 0.05 \text{ [s]}$$

Calculation example)

T1 to T4 can be calculated as follows.

$$T1 = V/a1 = 300/3000 = 0.1 \text{ [s]}$$

$$T3 = V/a2 = 300/3000 = 0.1 \text{ [s]}$$

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} = \frac{200 - 0.5 \cdot 300 \cdot (0.1 + 0.1)}{300} = 0.57 \text{ [s]}$$


$$T4 = 0.05 \text{ [s]}$$

The **cycle time** can be found as follows.

$$T = T1 + T2 + T3 + T4$$

$$= 0.1 + 0.57 + 0.1 + 0.05$$

$$= 0.82 \text{ [s]}$$

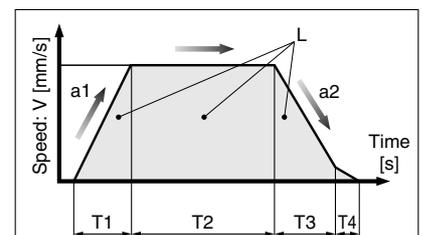


- L : Stroke [mm] ... (Operating condition)
- V : Speed [mm/s] ... (Operating condition)
- a1 : Acceleration [mm/s²] ... (Operating condition)
- a2 : Deceleration [mm/s²] ... (Operating condition)


- T1: Acceleration time [s]
Time until reaching the set speed
- T2: Constant speed time [s]
Time while the actuator is operating at a constant speed
- T3: Deceleration time [s]
Time from the beginning of the constant speed operation to stop
- T4: Settling time [s]
Time until positioning is completed

Step 3 Check the allowable moment. <Static allowable moment> <Dynamic allowable moment>

Confirm the moment that applies to the actuator is within the allowable range for both static and dynamic conditions.

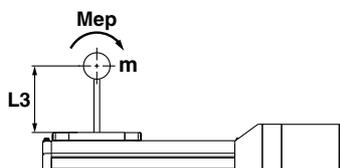

Based on the above calculation result, the **LEFS40S4B-200** should be selected.

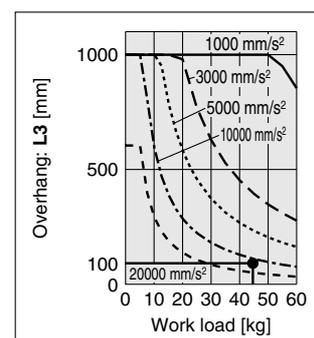


Speed-Work Load Graph/Required Conditions for the Regeneration Option (Guide)


* The allowable speed is restricted depending on the stroke. Select it by referring to the "Allowable Stroke Speed" below.

LEFS25/Ball Screw Drive

Horizontal

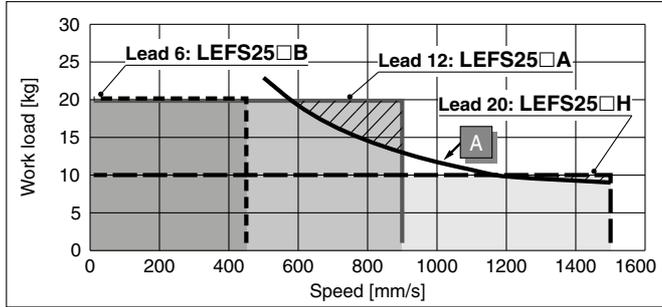


Vertical

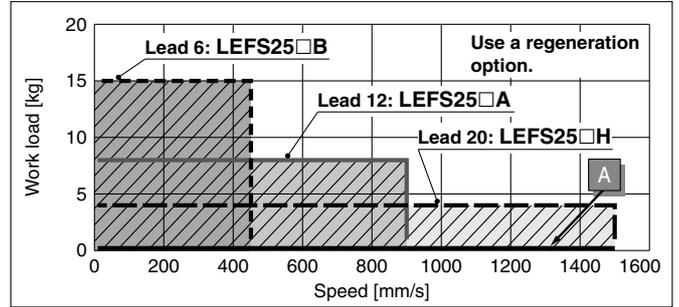


LEFS32/Ball Screw Drive

Horizontal

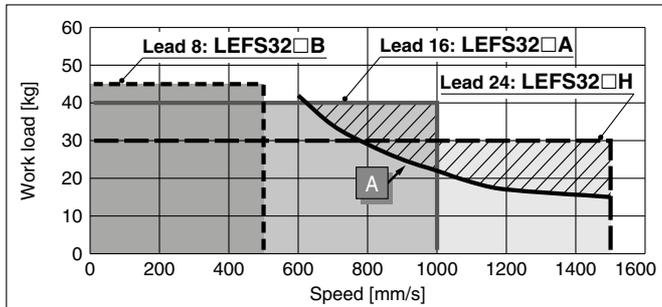


Vertical

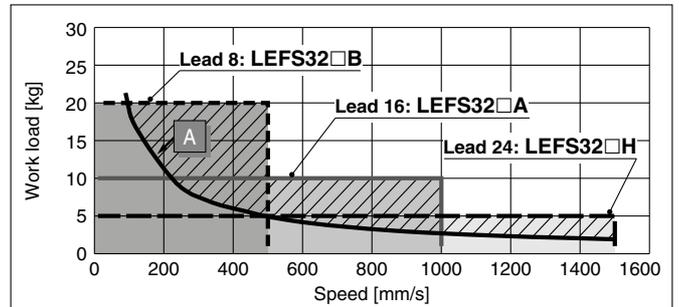


LEFS40/Ball Screw Drive

Horizontal

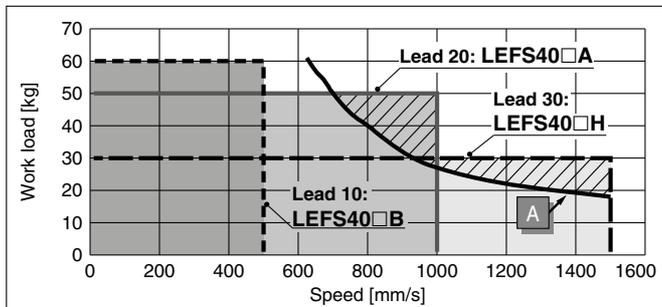

Vertical

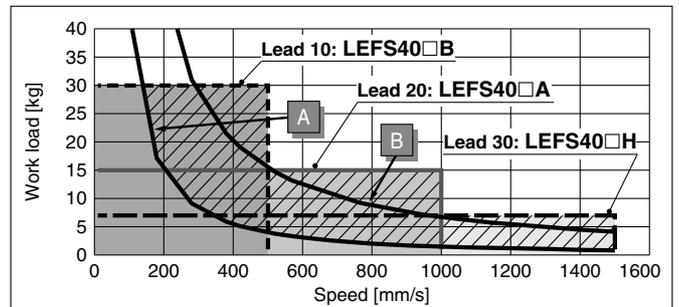

Required conditions for the regeneration option

* The regeneration option is required when using the product above the regeneration line in the graph. (It must be ordered separately.)

Regeneration Option Models

Operating condition	Model
A	LEC-MR-RB-032
B	LEC-MR-RB-12

Allowable Stroke Speed


Model	AC servo motor	Lead		Stroke [mm]											
		Symbol	[mm]	Up to 100	Up to 200	Up to 300	Up to 400	Up to 500	Up to 600	Up to 700	Up to 800	Up to 900	Up to 1000	Up to 1100	Up to 1200
LEFS25	100 W /□40	H	20			1500		1200	900	700	550	—	—	—	—
		A	12			900		720	540	420	330	—	—	—	—
		B	6			450		360	270	210	160	—	—	—	—
		(Motor rotation speed)				(4500 rpm)		(3650 rpm)	(2700 rpm)	(2100 rpm)	(1650 rpm)	—	—	—	—
LEFS32	200 W /□60	H	24			1500		1200	930	750	610	510	—	—	—
		A	16			1000		800	620	500	410	340	—	—	—
		B	8			500		400	310	250	200	170	—	—	—
		(Motor rotation speed)				(3750 rpm)		(3000 rpm)	(2325 rpm)	(1875 rpm)	(1537 rpm)	(1275 rpm)	—	—	—
LEFS40	400 W /□60	H	30	—	—	1500	—	—	1410	1140	930	780	500*1	500*1	—
		A	20	—	—	1000	—	—	940	760	620	520	440	380	—
		B	10	—	—	500	—	—	470	380	310	260	220	190	—
		(Motor rotation speed)		—	—	(3000 rpm)	—	—	(2820 rpm)	(2280 rpm)	(1860 rpm)	(1560 rpm)	(1320 rpm)	(1140 rpm)	—

*1 The motor rotation speed is 1000 rpm.

Work Load–Acceleration/Deceleration Graph (Guide)


LEFS25□□H/Ball Screw Drive

Horizontal

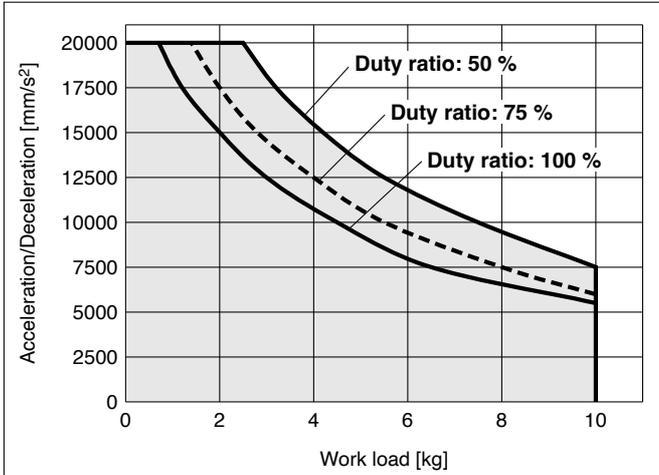


LEFS25□□H/Ball Screw Drive

Vertical

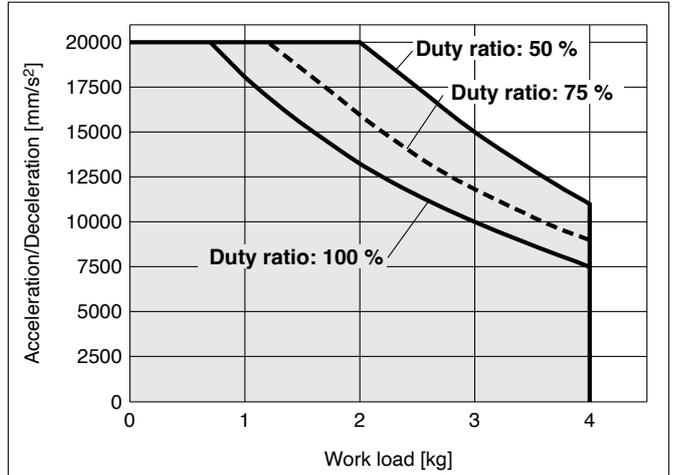


LEFS25□□A/Ball Screw Drive

Horizontal

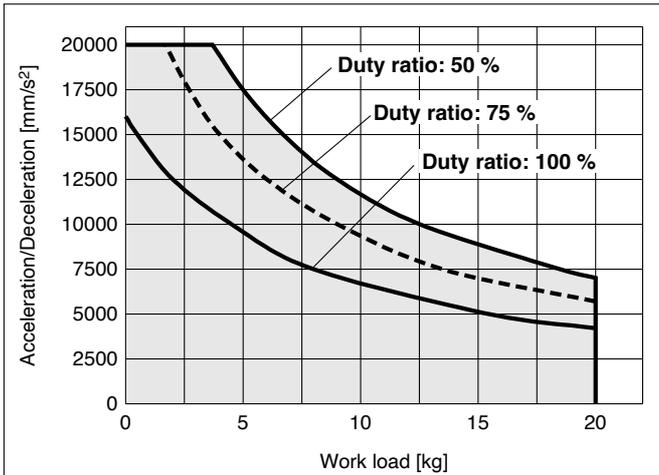


LEFS25□□A/Ball Screw Drive

Vertical

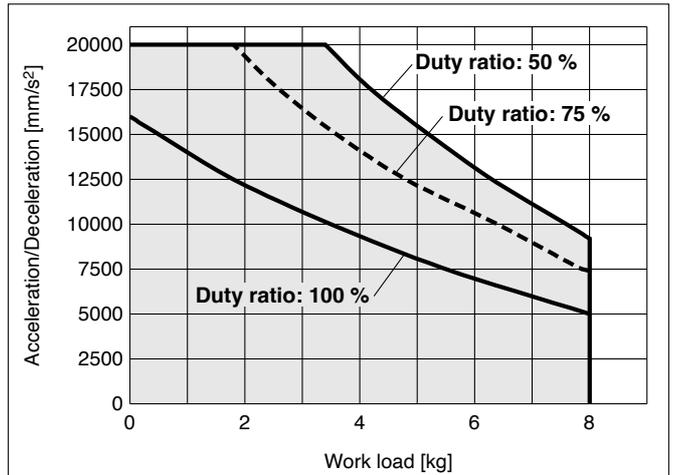


LEFS25□□B/Ball Screw Drive

Horizontal

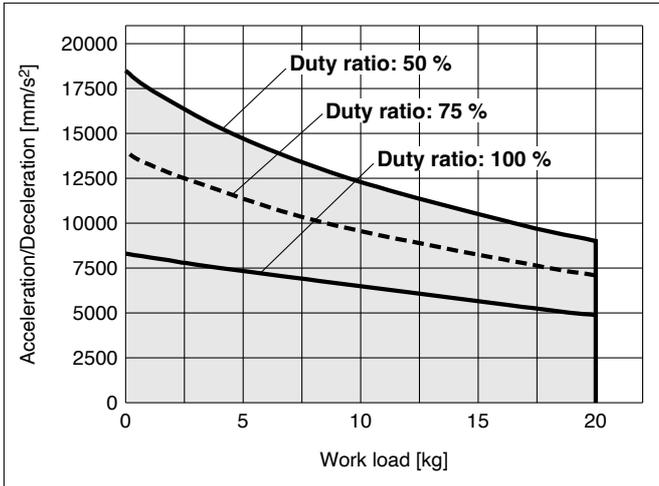

LEFS25□□B/Ball Screw Drive


Vertical

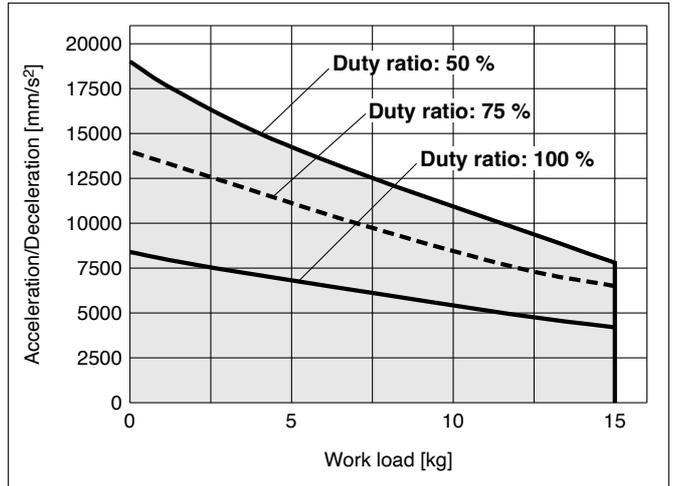

Work Load–Acceleration/Deceleration Graph (Guide)


LEFS32□□H/Ball Screw Drive

Horizontal

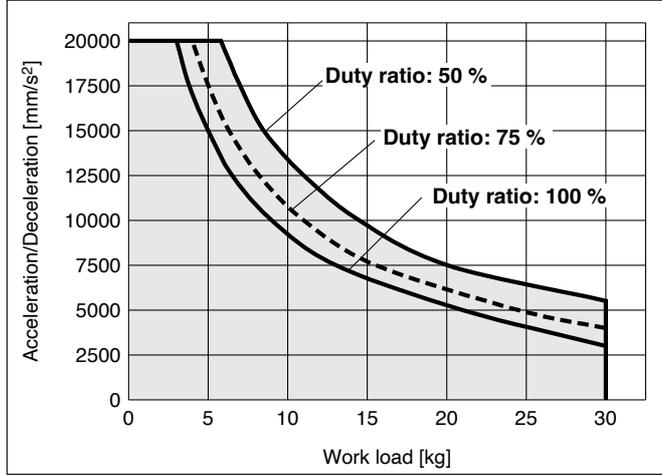


LEFS32□□H/Ball Screw Drive

Vertical

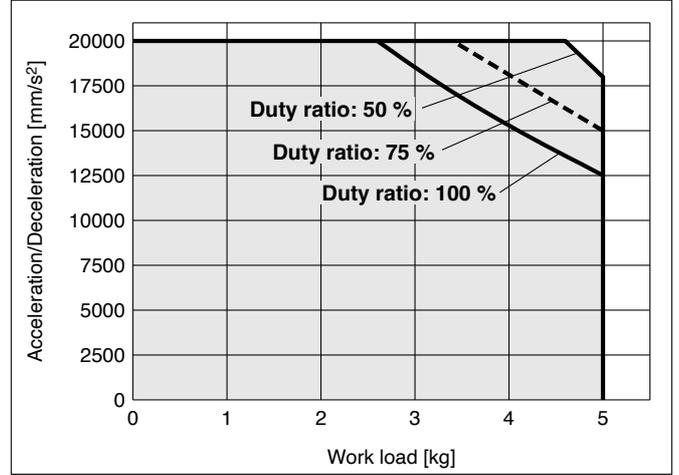


LEFS32□□A/Ball Screw Drive

Horizontal

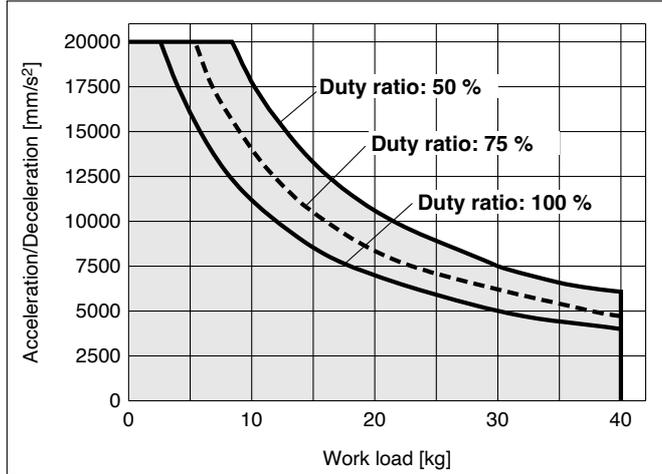


LEFS32□□A/Ball Screw Drive

Vertical

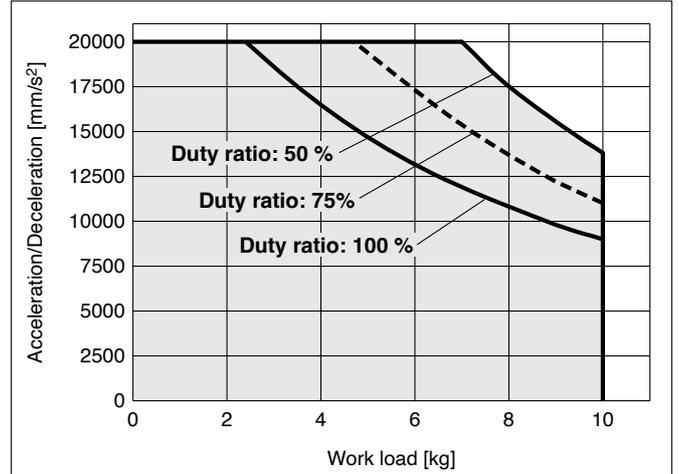


LEFS32□□B/Ball Screw Drive

Horizontal

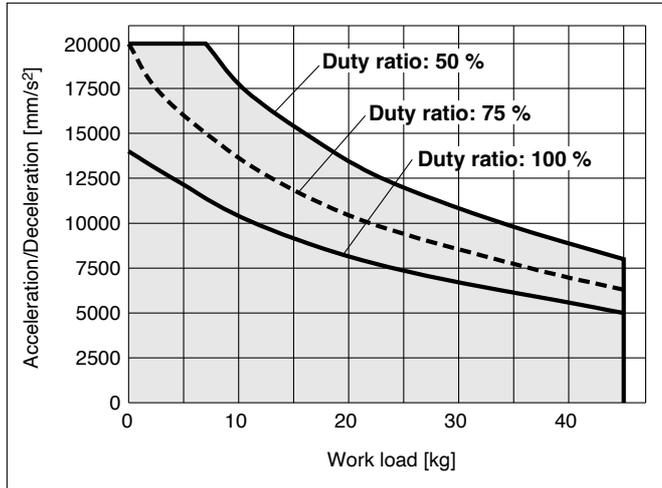

LEFS32□□B/Ball Screw Drive


Vertical

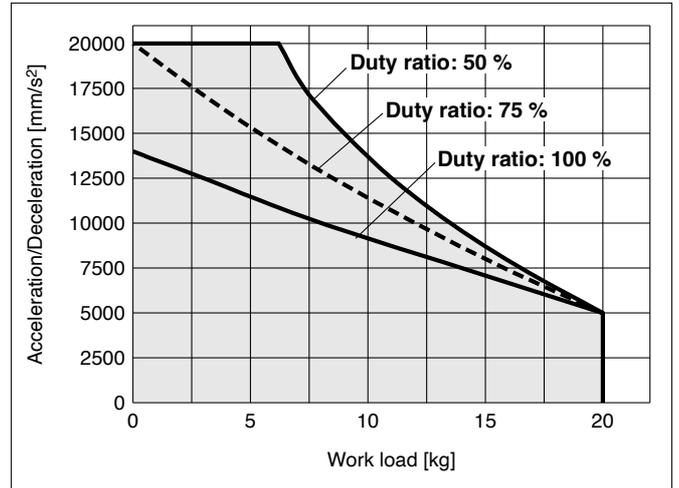

Work Load–Acceleration/Deceleration Graph (Guide)


LEFS40□□H/Ball Screw Drive

Horizontal

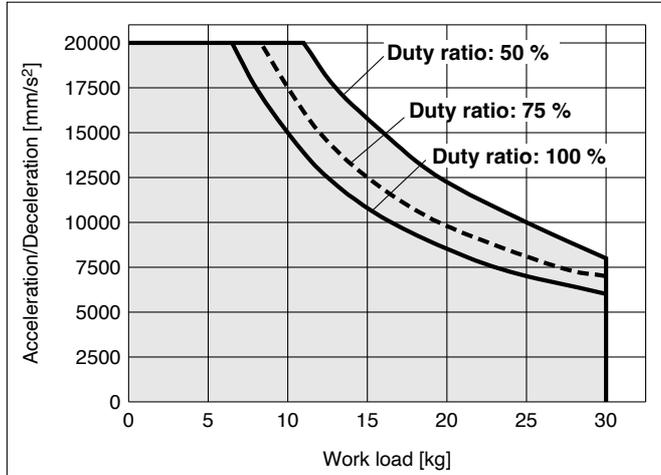


LEFS40□□H/Ball Screw Drive

Vertical

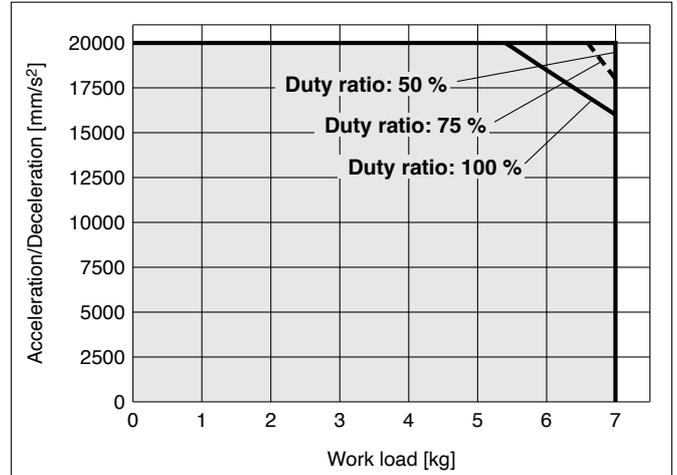


LEFS40□□A/Ball Screw Drive

Horizontal

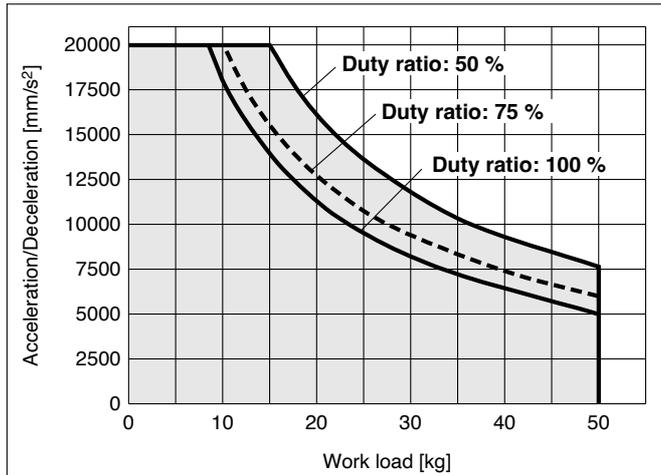


LEFS40□□A/Ball Screw Drive

Vertical

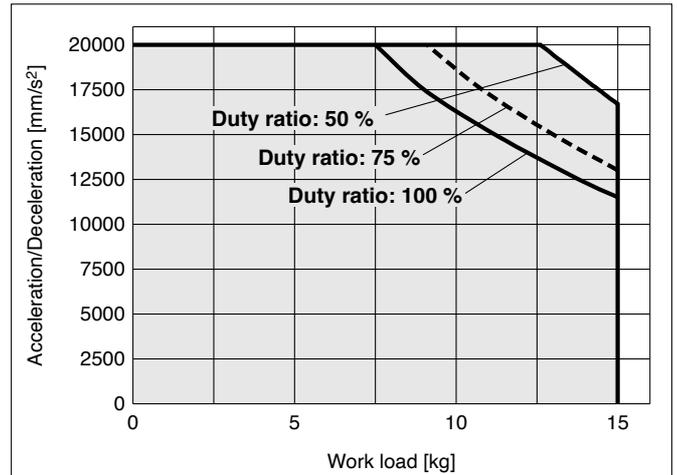


LEFS40□□B/Ball Screw Drive

Horizontal

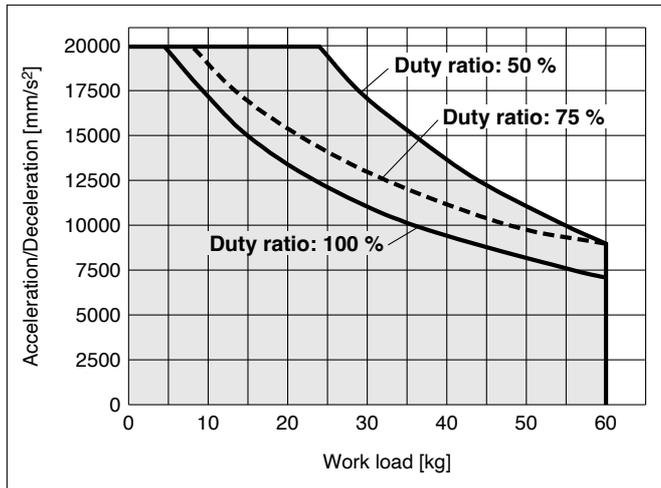

LEFS40□□B/Ball Screw Drive

Vertical

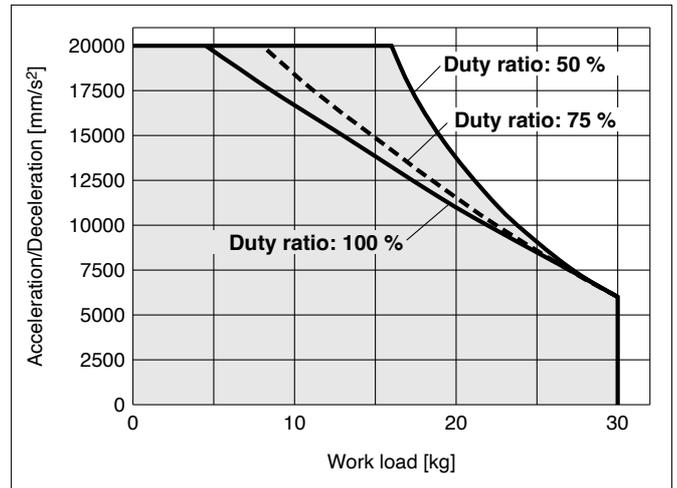

* These graphs show the amount of allowable overhang (guide unit) when the centre of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to the "Calculation of Guide Load Factor" or the Electric Actuator Model Selection Software for confirmation: <https://www.smc.eu>

Dynamic Allowable Moment


Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s² 5000 mm/s² - - - - 10000 mm/s² - - - - - 20000 mm/s²

Orientation		Model		
Load overhanging direction m : Work load [kg] Me: Allowable moment [N·m] L : Overhang to the work load centre of gravity [mm]		LEFS25	LEFS32	LEFS40
Horizontal/Bottom	X 			
	Y 			
	Z 			
Wall	X 			
	Y 			
	Z 			

* These graphs show the amount of allowable overhang (guide unit) when the centre of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to the "Calculation of Guide Load Factor" or the Electric Actuator Model Selection Software for confirmation: <https://www.smc.eu>

Dynamic Allowable Moment

Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s² 5000 mm/s² - - - - 10000 mm/s² - - - - - 20000 mm/s²

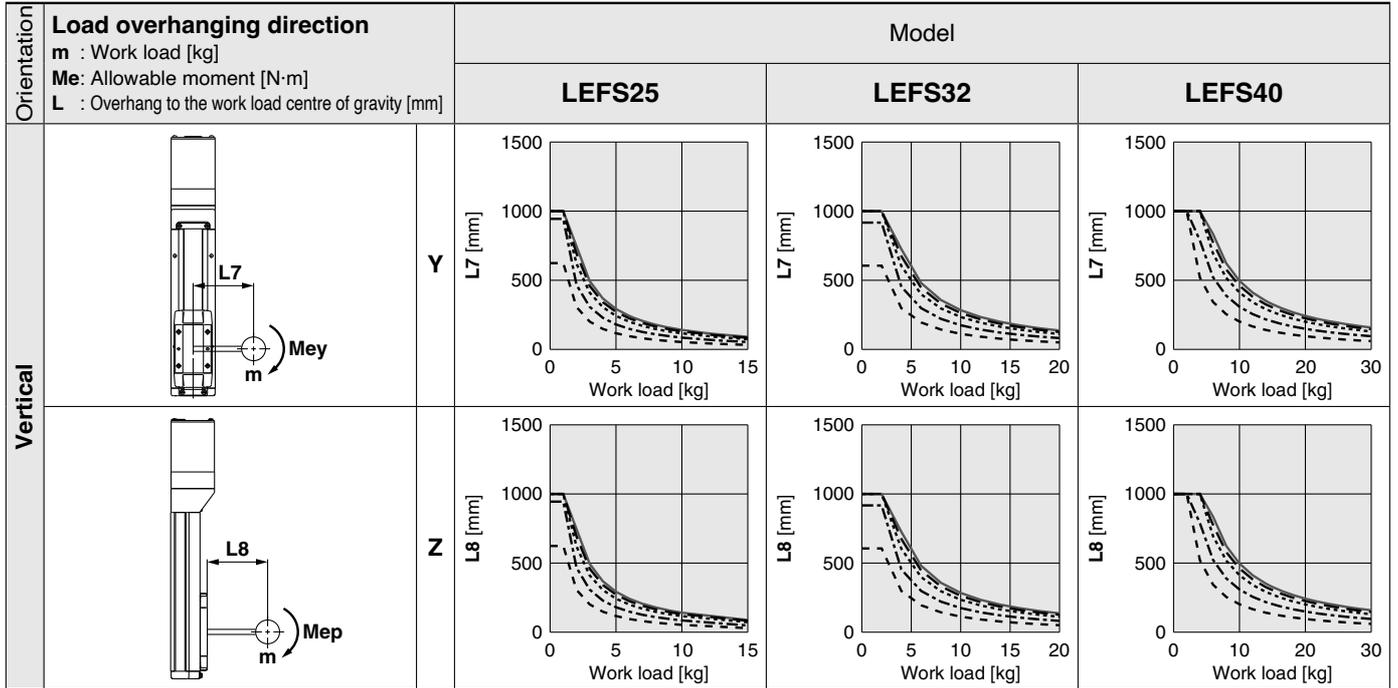

Calculation of Guide Load Factor

- Decide operating conditions.

Model: LEFS

Size: 25/32/40

Mounting orientation: Horizontal/Bottom/Wall/Vertical

Acceleration [mm/s²]: a

Work load [kg]: m

Work load centre position [mm]: Xc/Yc/Zc

- Select the target graph while referencing the model, size, and mounting orientation.

- Based on the acceleration and work load, find the overhang [mm]: Lx/Ly/Lz from the graph.

- Calculate the load factor for each direction.


$$\alpha_x = X_c/L_x, \alpha_y = Y_c/L_y, \alpha_z = Z_c/L_z$$

- Confirm the total of α_x , α_y , and α_z is 1 or less.

$$\alpha_x + \alpha_y + \alpha_z \leq 1$$

When 1 is exceeded, please consider a reduction of acceleration and work load, or a change of the work load centre position and series.

Mounting orientation

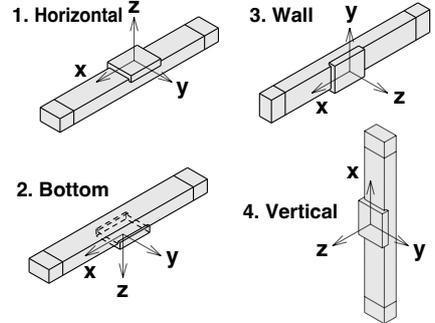

Example

- Operating conditions

Model: LEFS40

Size: 40

Mounting orientation: Horizontal

Acceleration [mm/s²]: 3000

Work load [kg]: 20

Work load centre position [mm]: Xc = 0, Yc = 50, Zc = 200

- Select the graphs for horizontal of the LEFS40 on page 32.

- Lx = 250 mm, Ly = 180 mm, Lz = 1000 mm

- The load factor for each direction can be found as follows.

$$\alpha_x = 0/250 = 0$$

$$\alpha_y = 50/180 = 0.27$$

$$\alpha_z = 200/1000 = 0.2$$

- $\alpha_x + \alpha_y + \alpha_z = 0.47 \leq 1$




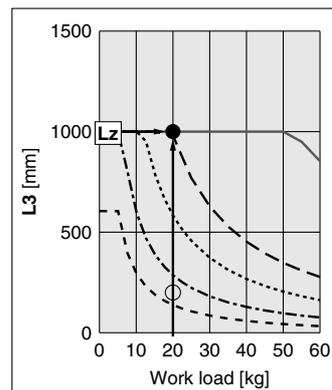




Table Accuracy (Reference Value)

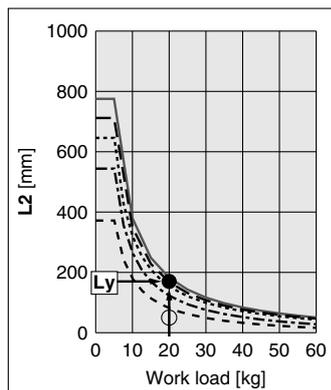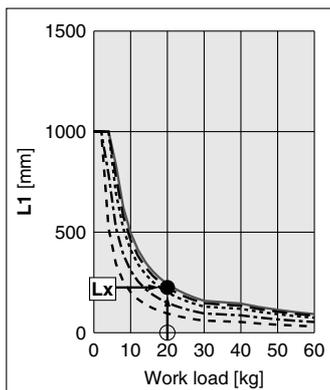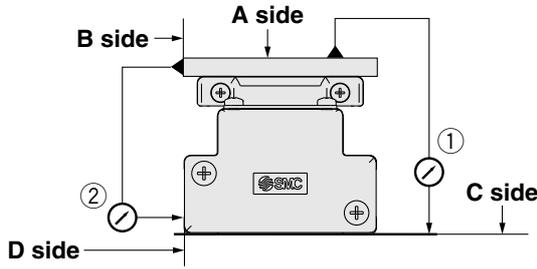

Model	Travelling parallelism [mm] (Every 300 mm)	
	① C side travelling parallelism to A side	② D side travelling parallelism to B side
LEFS25	0.05	0.03
LEFS32	0.05	0.03
LEFS40	0.05	0.03

* Travelling parallelism does not include the mounting surface accuracy.


Table Displacement (Reference Value)

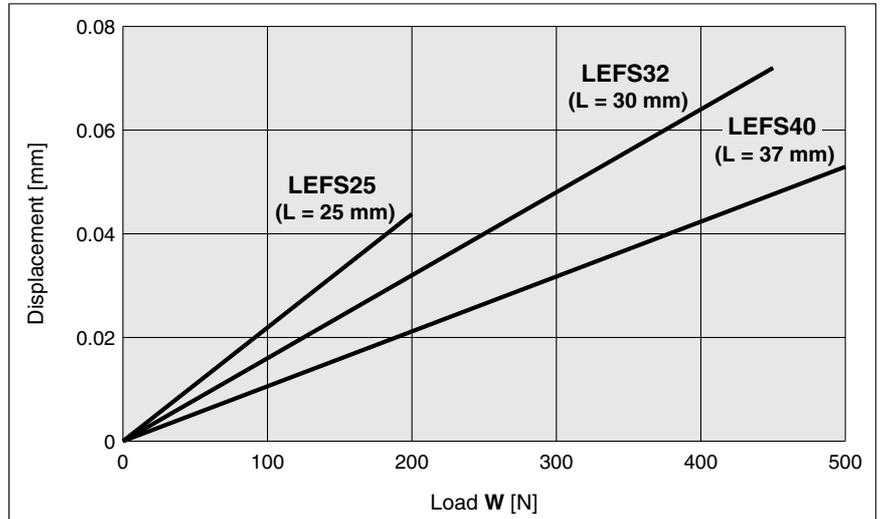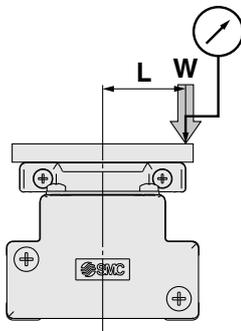


* This displacement is measured when a 15 mm magnetising plate is mounted and fixed on the table.
 * Check the clearance and play of the guide separately.

Overhang Displacement Due to Table Clearance (Initial Reference Value)


Basic type

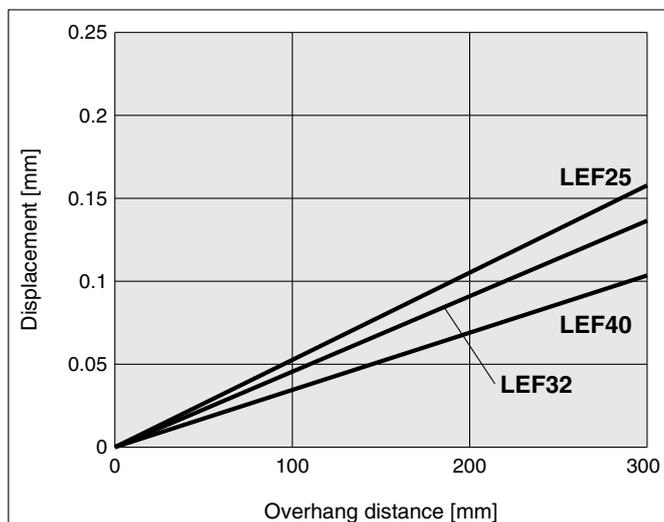

High-precision type

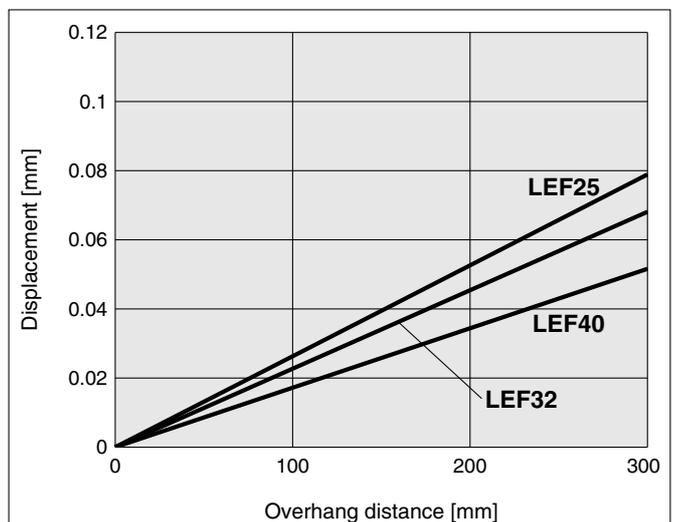

Model Selection

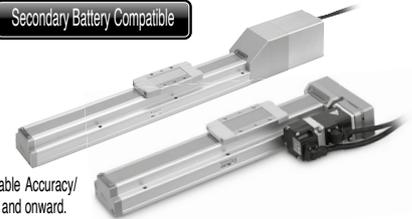

Selection Procedure



* The Work Load-Acceleration/Deceleration Graph, Dynamic Allowable Moment, Calculation of Guide Load Factor, and Table Accuracy/ Displacement/Overhang Displacement are the same as those of the LECS AC servo motor. For details, refer to page 29 and onward.



Selection Example

Operating conditions

- Workpiece mass: 45 [kg]
 - Speed: 300 [mm/s]
 - Acceleration/Deceleration: 3000 [mm/s²]
 - Stroke: 200 [mm]
 - Mounting position: Horizontal upward
- Workpiece mounting condition:

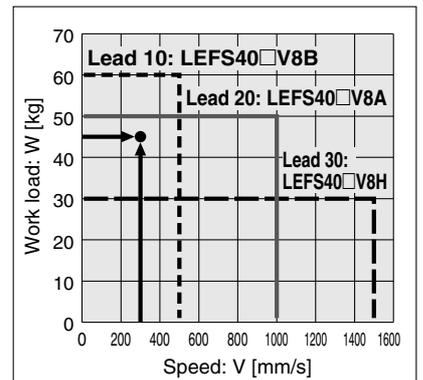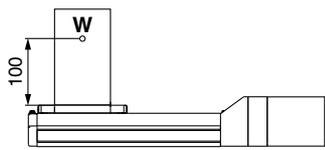

Step 1 Check the work load-speed. <Speed-Work load graph>

Select a model based on the workpiece mass and speed while referencing the speed-work load graph.

Selection example) The **LEFS40V8B-200** can be temporarily selected as a possible candidate based on the graph shown on the right side.

<Speed-Work load graph> (LEFS40)

Step 2 Check the cycle time.

Calculate the **cycle time** using the following calculation method.

Cycle time:

T can be found from the following equation.

$$T = T1 + T2 + T3 + T4 \text{ [s]}$$

- T1: Acceleration time and T3: Deceleration time can be found by the following equation.

$$T1 = V/a1 \text{ [s]} \quad T3 = V/a2 \text{ [s]}$$

- T2: Constant speed time can be found from the following equation.

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \text{ [s]}$$

- T4: Settling time varies depending on the motor type and load. The value below is recommended.

$$T4 = 0.05 \text{ [s]}$$

Calculation example)

T1 to T4 can be calculated as follows.

$$T1 = V/a1 = 300/3000 = 0.1 \text{ [s]}$$


$$T3 = V/a2 = 300/3000 = 0.1 \text{ [s]}$$

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} = \frac{200 - 0.5 \cdot 300 \cdot (0.1 + 0.1)}{300} = 0.57 \text{ [s]}$$

$$T4 = 0.05 \text{ [s]}$$

The **cycle time** can be found as follows.

$$T = T1 + T2 + T3 + T4 = 0.1 + 0.57 + 0.1 + 0.05 = 0.82 \text{ [s]}$$

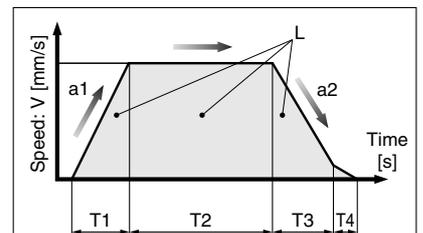


L : Stroke [mm] ... (Operating condition)
 V : Speed [mm/s] ... (Operating condition)
 a1 : Acceleration [mm/s²] ... (Operating condition)
 a2 : Deceleration [mm/s²] ... (Operating condition)


- T1: Acceleration time [s]
Time until reaching the set speed
- T2: Constant speed time [s]
Time while the actuator is operating at a constant speed
- T3: Deceleration time [s]
Time from the beginning of the constant speed operation to stop
- T4: Settling time [s]
Time until positioning is completed

Step 3 Check the allowable moment. <Static allowable moment> <Dynamic allowable moment>

Confirm the moment that applies to the actuator is within the allowable range for both static and dynamic conditions.

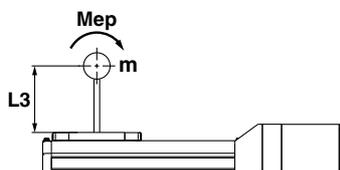

Based on the above calculation result, the **LEFS40V8B-200** should be selected.

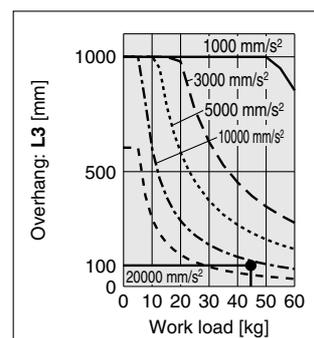


Speed-Work Load Graph/Required Conditions for the Regenerative Resistor (Guide)


* The allowable speed is restricted depending on the stroke.
Select it by referring to the "Allowable Stroke Speed" below.

LEFS25/Ball Screw Drive

Horizontal

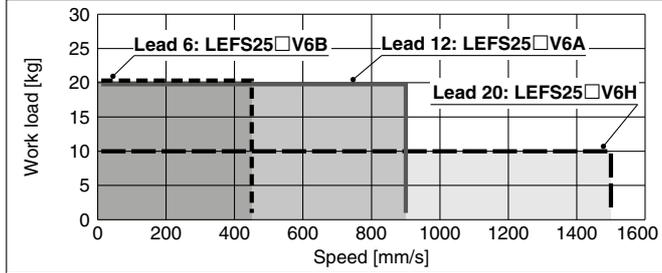


Vertical

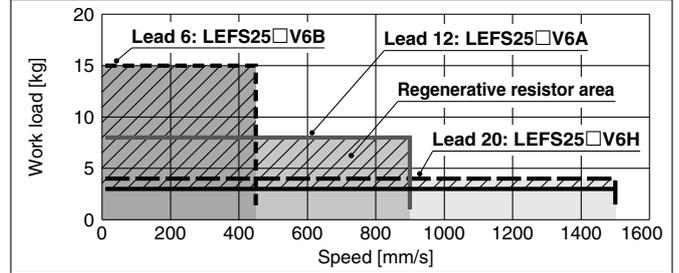


LEFS32/Ball Screw Drive

Horizontal

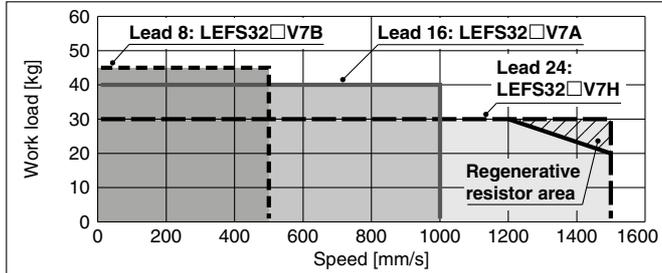


Vertical

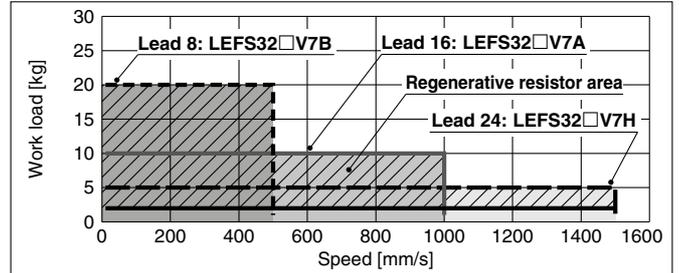


LEFS40/Ball Screw Drive

Horizontal

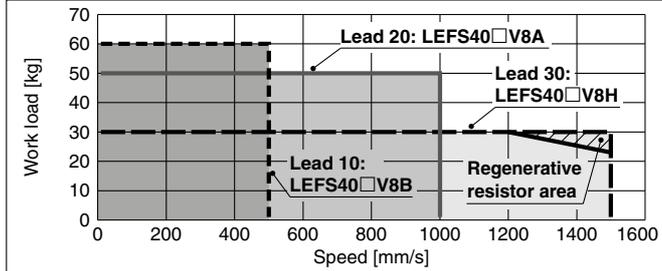

Vertical

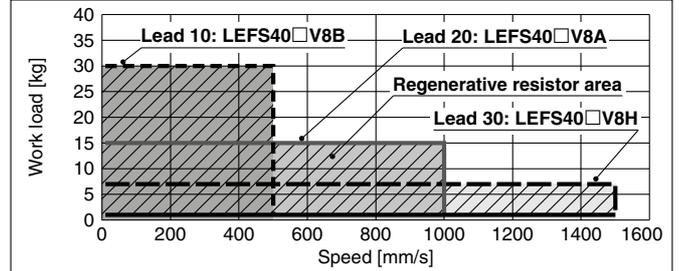

Regenerative resistor area

* When using the actuator in the regenerative resistor area, download the "AC servo drive capacity selection program/SigmaJunmaSize+" from the SMC website. Then, calculate the necessary regenerative resistor capacity to prepare an appropriate external regenerative resistor.

* The regenerative resistor should be provided by the customer.

Applicable Motors/Drivers


Model	Applicable model	
	Motor	Servopack (SMC driver)
LEFS25□	SGMJV-01A3A	SGDV-R90A11□ (LECYM2-V5) SGDV-R90A21□ (LECYU2-V5)
LEFS32□	SGMJV-02A3A	SGDV-1R6A11□ (LECYM2-V7) SGDV-1R6A21□ (LECYU2-V7)
LEFS40□	SGMJV-04A3A	SGDV-2R8A11□ (LECYM2-V8) SGDV-2R8A21□ (LECYU2-V8)

Allowable Stroke Speed

Model	AC servo motor	Lead	Stroke [mm]												
			Symbol	[mm]	Up to 100	Up to 200	Up to 300	Up to 400	Up to 500	Up to 600	Up to 700	Up to 800	Up to 900	Up to 1000	Up to 1100
LEFS25	100 W □40	H	20			1500		1200	900	700	550	—	—	—	—
		A	12			900		720	540	420	330	—	—	—	—
		B	6			450		360	270	210	160	—	—	—	—
		(Motor rotation speed)				(4500 rpm)		(3650 rpm)	(2700 rpm)	(2100 rpm)	(1650 rpm)	—	—	—	—
LEFS32	200 W □60	H	24			1500		1200	930	750	610	510	—	—	
		A	16			1000		800	620	500	410	340	—	—	
		B	8			500		400	310	250	200	170	—	—	
		(Motor rotation speed)				(3750 rpm)		(3000 rpm)	(2325 rpm)	(1875 rpm)	(1537 rpm)	(1275 rpm)	—	—	
LEFS40	400 W □60	H	30	—		1500		1410	1140	930	780	500*1	500*1		
		A	20	—		1000		940	760	620	520	440	380		
		B	10	—		500		470	380	310	260	220	190		
		(Motor rotation speed)				(3000 rpm)		(2820 rpm)	(2280 rpm)	(1860 rpm)	(1560 rpm)	(1320 rpm)	(1140 rpm)		

*1 The motor rotation speed is 1000 rpm.

AC Servo Motor Slider Type Belt Drive/*LEFB* Series Model Selection

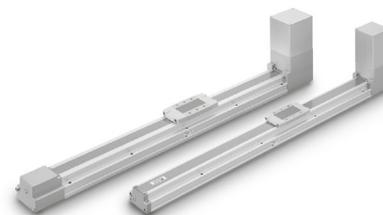



Selection Procedure



Selection Example

Operating conditions

- Workpiece mass: 20 [kg]
- Speed: 1500 [mm/s]
- Acceleration/Deceleration: 3000 [mm/s²]
- Stroke: 2000 [mm]
- Mounting position: Horizontal upward
- Workpiece mounting condition:

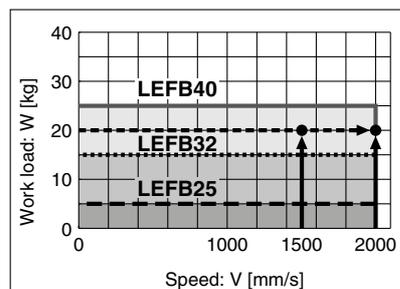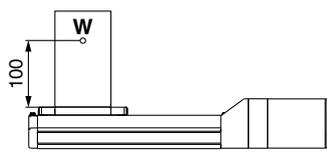

<Speed-Work load graph>
(LEFB□)

Step 1 Check the work load-speed. <Speed-Work load graph>

Select a model based on the workpiece mass and speed while referencing the speed-work load graph.

Selection example) The **LEFB40S4S-2000** can be temporarily selected as a possible candidate based on the graph shown on the right side.

Step 2 Check the cycle time.

Calculate the **cycle time** using the following calculation method.

Cycle time:

T can be found from the following equation.

$$T = T1 + T2 + T3 + T4 \text{ [s]}$$

- T1: Acceleration time and T3: Deceleration time can be found by the following equation.

$$T1 = V/a1 \text{ [s]} \quad T3 = V/a2 \text{ [s]}$$

- T2: Constant speed time can be found from the following equation.

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \text{ [s]}$$

- T4: Settling time varies depending on the motor type and load. The value below is recommended.

$$T4 = 0.05 \text{ [s]}$$

Calculation example)

T1 to T4 can be calculated as follows.

$$T1 = V/a1 = 1500/3000 = 0.5 \text{ [s]}$$


$$T3 = V/a2 = 1500/3000 = 0.5 \text{ [s]}$$

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} = \frac{2000 - 0.5 \cdot 1500 \cdot (0.5 + 0.5)}{1500} = 0.83 \text{ [s]}$$

$$T4 = 0.05 \text{ [s]}$$

The **cycle time** can be found as follows.

$$T = T1 + T2 + T3 + T4 = 0.5 + 0.83 + 0.5 + 0.05 = 1.88 \text{ [s]}$$

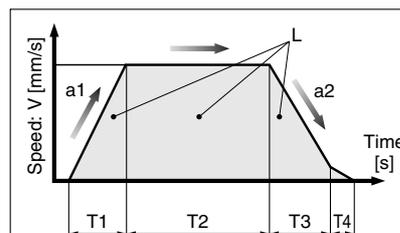


- L : Stroke [mm] ... (Operating condition)
- V : Speed [mm/s] ... (Operating condition)
- a1 : Acceleration [mm/s²] ... (Operating condition)
- a2 : Deceleration [mm/s²] ... (Operating condition)


- T1: Acceleration time [s]
Time until reaching the set speed
- T2: Constant speed time [s]
Time while the actuator is operating at a constant speed
- T3: Deceleration time [s]
Time from the beginning of the constant speed operation to stop
- T4: Settling time [s]
Time until positioning is completed

Step 3 Check the allowable moment. <Static allowable moment> <Dynamic allowable moment>

Confirm the moment that applies to the actuator is within the allowable range for both static and dynamic conditions.

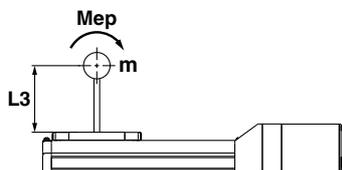


Based on the above calculation result, the **LEFB40S4S-2000** should be selected.

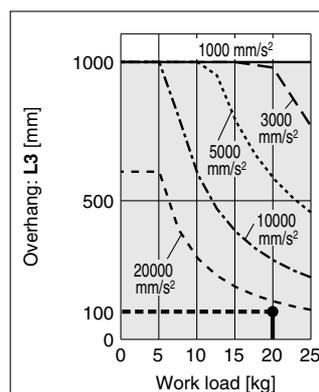

Speed-Work Load Graph/Required Conditions for the Regeneration Option (Guide)

LEFB□/ Belt Drive

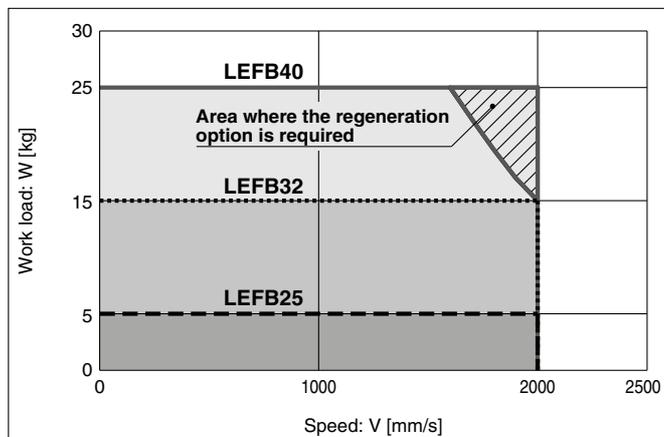


* The shaded area in the graph requires the regeneration option (LEC-MR-RB-032).

Cycle Time Graph (Guide)

LEFB□/ Belt Drive

LEFB25/32/40

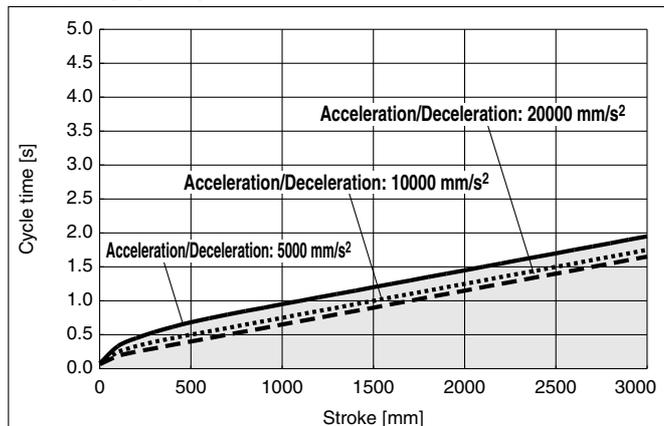

- * Cycle time is for when maximum speed.
- * Maximum stroke: LEFB25: 2000 mm
LEFB32: 2500 mm
LEFB40: 3000 mm


Regenerative resistor area

- * When using the actuator in the regenerative resistor area, download the "AC servo drive capacity selection program/SigmaJunmaSize+" from the SMC website. Then, calculate the necessary regenerative resistor capacity to prepare an appropriate external regenerative resistor.
- * The regenerative resistor should be provided by the customer.


Work Load-Acceleration/Deceleration Graph (Guide)

LEFB□/ Belt Drive


LEFB25 (Duty ratio)

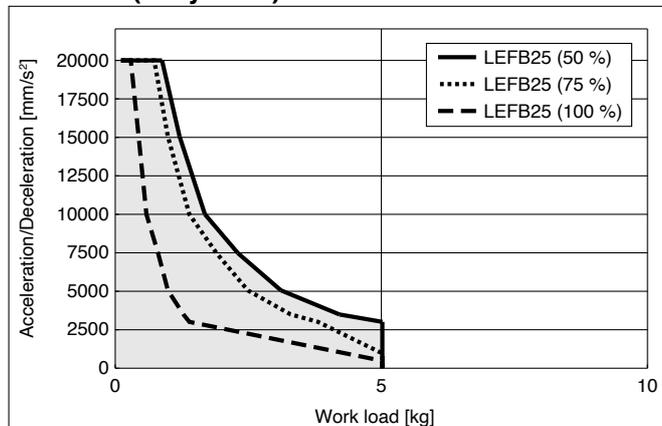

LEFB32 (Duty ratio)

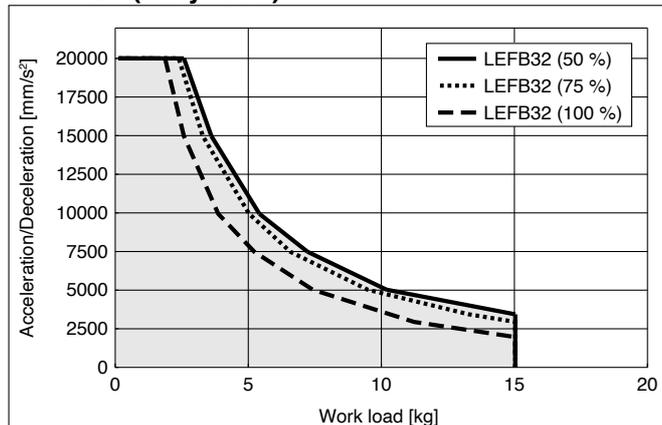


LEFB40 (Duty ratio)

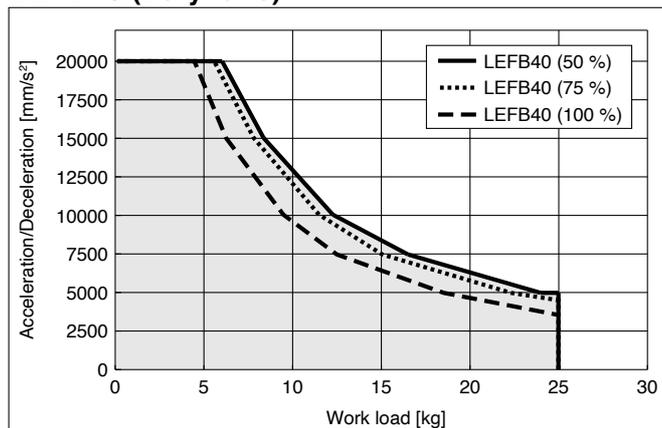

* These graphs show the amount of allowable overhang (guide unit) when the centre of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to the "Calculation of Guide Load Factor" or the Electric Actuator Model Selection Software for confirmation: <https://www.smc.eu>

Dynamic Allowable Moment

Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s² ······ 5000 mm/s² - - - - 10000 mm/s² - - - - 20000 mm/s²

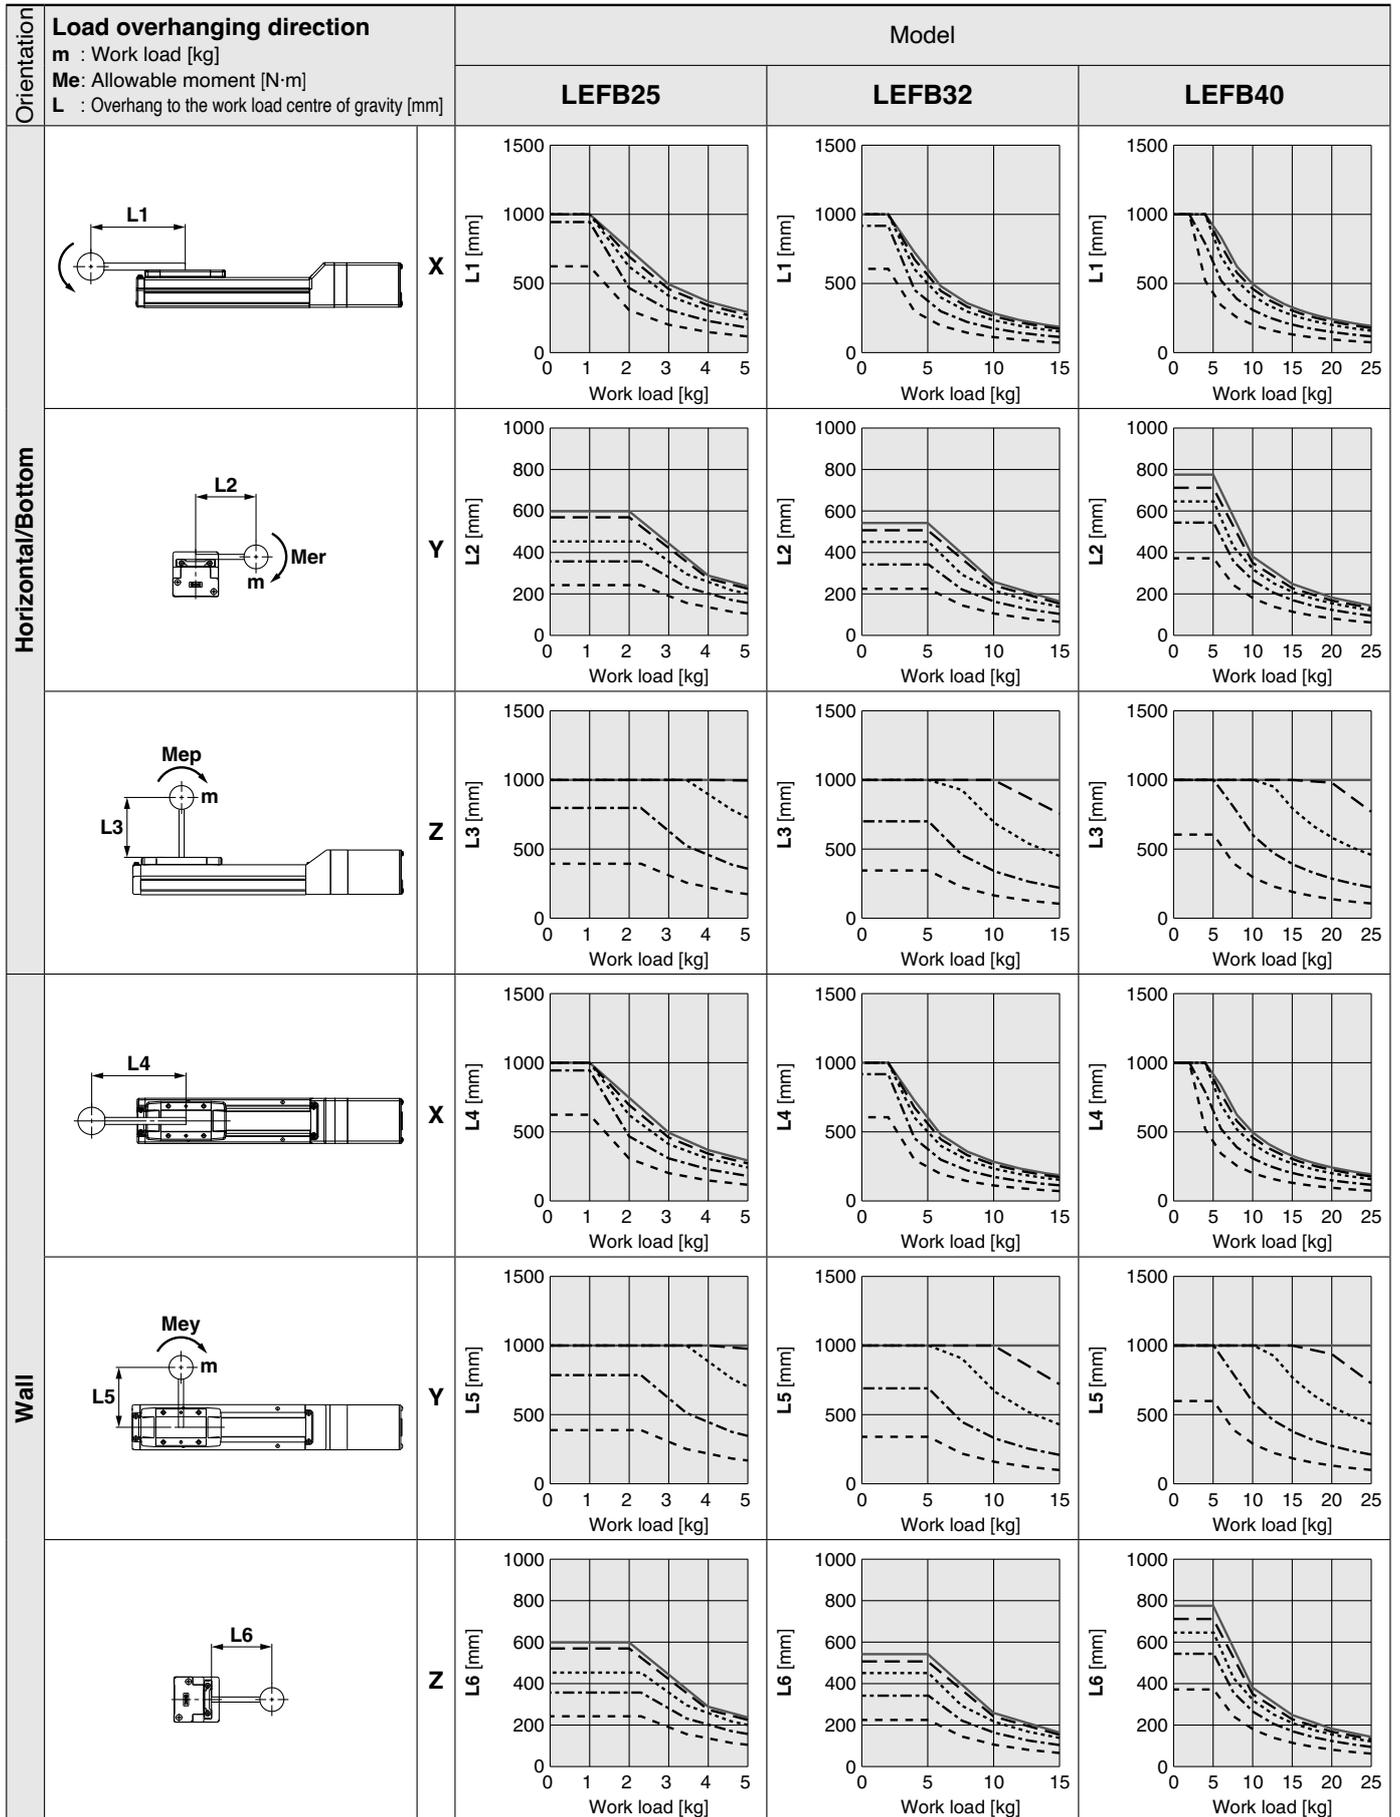

Calculation of Guide Load Factor

1. Decide operating conditions.

Model: LEFB

Size: 25/32/40

Mounting orientation: Horizontal/Bottom/Wall

Acceleration [mm/s^2]: **a**

Work load [kg]: **m**

Work load centre position [mm]: **Xc/Yc/Zc**

2. Select the target graph while referencing the model, size, and mounting orientation.

3. Based on the acceleration and work load, find the overhang [mm]: **Lx/Ly/Lz** from the graph.


4. Calculate the load factor for each direction.

$$\alpha_x = X_c/L_x, \alpha_y = Y_c/L_y, \alpha_z = Z_c/L_z$$

5. Confirm the total of α_x , α_y , and α_z is 1 or less.

$$\alpha_x + \alpha_y + \alpha_z \leq 1$$

When 1 is exceeded, please consider a reduction of acceleration and work load, or a change of the work load centre position and series.

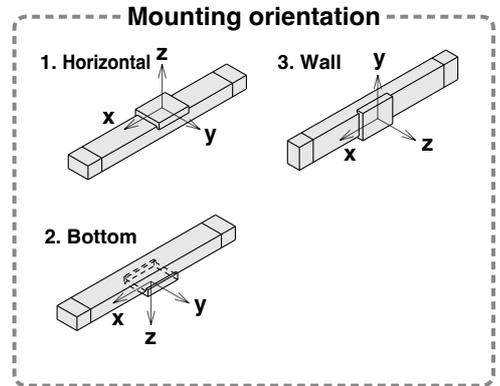

Example

1. Operating conditions

Model: LEFB40

Size: 40

Mounting orientation: Horizontal

Acceleration [mm/s^2]: 3000

Work load [kg]: 20

Work load centre position [mm]: **Xc = 0, Yc = 50, Zc = 200**

2. Select the graphs for horizontal of the LEFB40 on page 39.

3. **Lx = 250 mm, Ly = 180 mm, Lz = 1000 mm**




4. The load factor for each direction can be found as follows.

$$\alpha_x = 0/250 = 0$$

$$\alpha_y = 50/180 = 0.27$$

$$\alpha_z = 200/1000 = 0.2$$


5. $\alpha_x + \alpha_y + \alpha_z = 0.47 \leq 1$

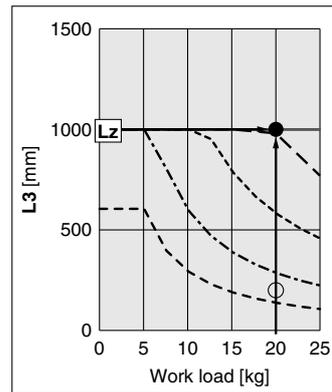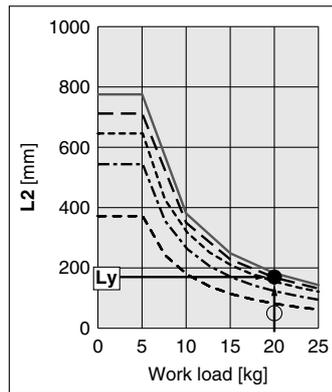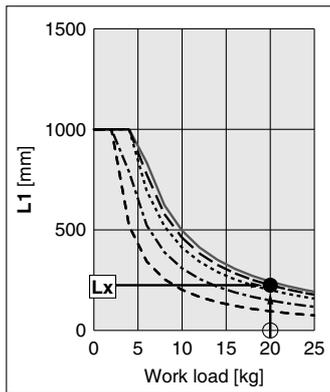

LEFB Series

AC Servo Motor



Table Accuracy (Reference Value)

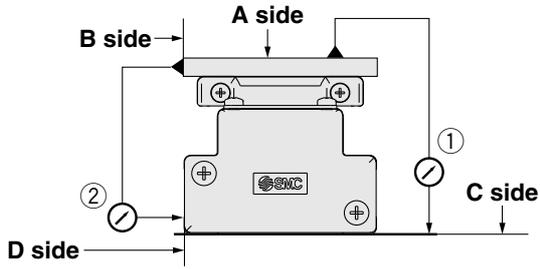

Model	Travelling parallelism [mm] (Every 300 mm)	
	① C side travelling parallelism to A side	② D side travelling parallelism to B side
LEFB25	0.05	0.03
LEFB32	0.05	0.03
LEFB40	0.05	0.03


* Travelling parallelism does not include the mounting surface accuracy. (Excludes when the stroke exceeds 2000 mm)

Table Displacement (Reference Value)

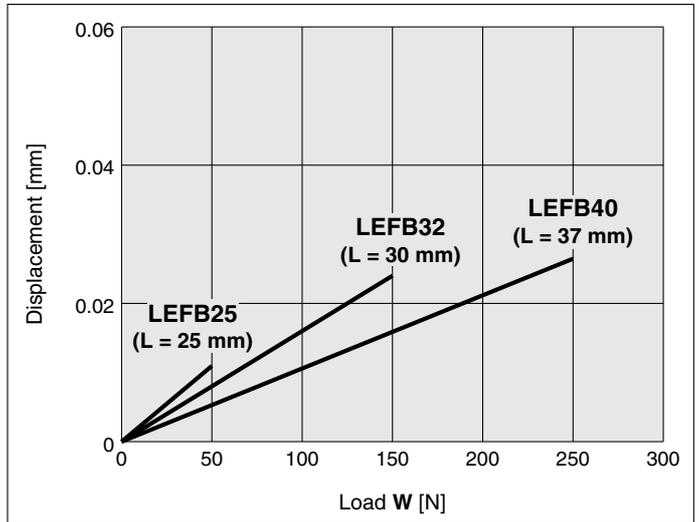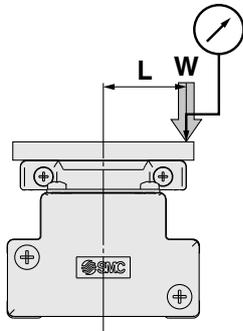

* This displacement is measured when a 15 mm magnetising plate is mounted and fixed on the table.
 * Check the clearance and play of the guide separately.

Overhang Displacement Due to Table Clearance (Initial Reference Value)

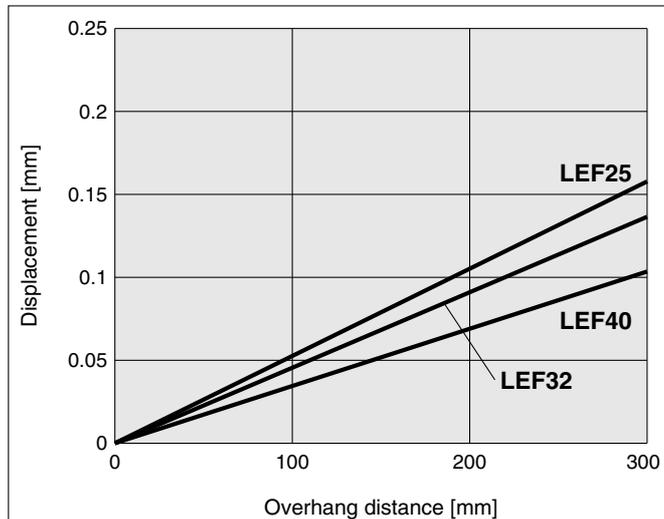

Slider Type

Support Guide/(11-)LEFG Series

Clean Room Specification

Model Selection




Rated Load

Unit: N

Rated load	LEFG16	LEFG25	LEFG32	LEFG40
Basic dynamic rated load	6250	8950	16500	22700
Basic static rated load	8350	13900	22000	34500



Table Accuracy (Reference Value)

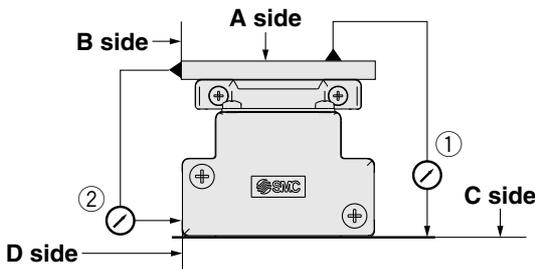

Model	Travelling parallelism [mm] (Every 300 mm)	
	① C side travelling parallelism to A side	② D side travelling parallelism to B side
LEFG16	0.05	0.03
LEFG25	0.05	0.03
LEFG32	0.05	0.03
LEFG40	0.05	0.03

* Travelling parallelism does not include the mounting surface accuracy.
(Excludes when the stroke exceeds 2000 mm)

Table Displacement (Reference Value)

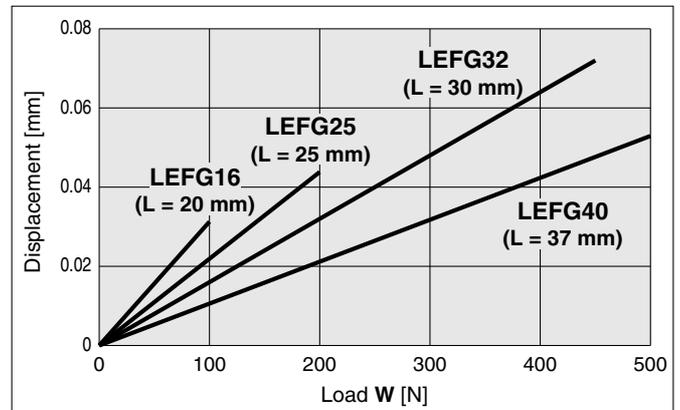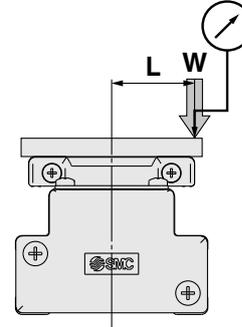

* This displacement is measured when a 15 mm magnetising plate is mounted and fixed on the table.
* Check the clearance and play of the guide separately.

(11-)LEFG Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

AC Servo Motor

Clean Room Specification

* These graphs show the amount of allowable overhang (guide unit) when the centre of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to the "Calculation of Guide Load Factor" or the Electric Actuator Model Selection Software for confirmation: <https://www.smc.eu>

Dynamic Allowable Moment

Acceleration/Deceleration ——— 1000 mm/s² - - - - 3000 mm/s² 5000 mm/s² - - - - 10000 mm/s² - - - - 20000 mm/s²

Orientation	Load overhanging direction m : Work load [kg] Me : Allowable moment [N·m] L : Overhang to the work load centre of gravity [mm]	Model			
		(11-)LEFG16	(11-)LEFG25	(11-)LEFG32	(11-)LEFG40
Horizontal/Bottom	X 				
	Y 				
	Z 				
Wall	X 				
	Y 				
	Z 				

* These graphs show the amount of allowable overhang (guide unit) when the centre of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to the "Calculation of Guide Load Factor" or the Electric Actuator Model Selection Software for confirmation: <https://www.smc.eu>

Dynamic Allowable Moment

Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s² 5000 mm/s² - - - - 10000 mm/s² - - - - 20000 mm/s²

Orientation	Load overhanging direction m : Work load [kg] Me : Allowable moment [N·m] L : Overhang to the work load centre of gravity [mm]	Model			
		(11-)LEFG16	(11-)LEFG25	(11-)LEFG32	(11-)LEFG40
Vertical	Y 				
	Z 				

Calculation of Guide Load Factor

- Decide operating conditions.

Model: LEFG

Size: 16/25/32/40

Mounting orientation: Horizontal/Bottom/Wall/Vertical

Acceleration [mm/s²]: a

Work load [kg]: m

Work load centre position [mm]: Xc/Yc/Zc

- Select the target graph while referencing the model, size, and mounting orientation.

- Based on the acceleration and work load, find the overhang [mm]: Lx/Ly/Lz from the graph.

- Calculate the load factor for each direction.





$$\alpha_x = X_c/L_x, \alpha_y = Y_c/L_y, \alpha_z = Z_c/L_z$$

- Confirm the total of α_x , α_y , and α_z is 1 or less.

$$\alpha_x + \alpha_y + \alpha_z \leq 1$$

When 1 is exceeded, please consider a reduction of acceleration and work load, or a change of the work load centre position and series.

Mounting orientation



Example

- Operating conditions

Model: LEFG40

Size: 40

Mounting orientation: Horizontal

Acceleration [mm/s²]: 3000

Work load [kg]: 20

Work load centre position [mm]: Xc = 0, Yc = 50, Zc = 200

- Select the graphs for horizontal of the (11-)LEFG40 on page 43.

- Lx = 400 mm, Ly = 250 mm, Lz = 1500 mm




- The load factor for each direction can be found as follows.

$$\alpha_x = 0/400 = 0$$

$$\alpha_y = 50/250 = 0.2$$

$$\alpha_z = 200/1500 = 0.13$$

- $\alpha_x + \alpha_y + \alpha_z = 0.33 \leq 1$

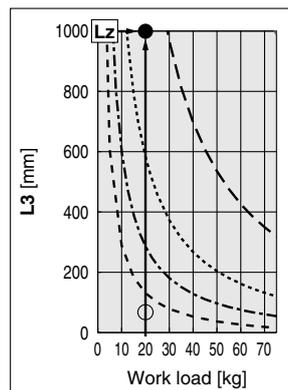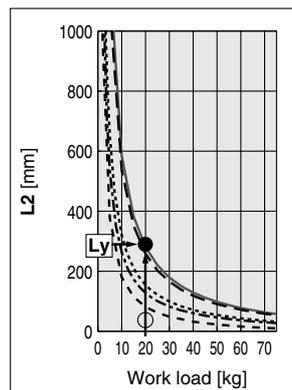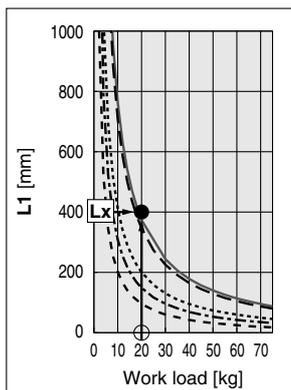


Slider Type/Ball Screw Drive

LEFS Series LEFS16, 25, 32, 40



* For details, refer to www.smc.eu and onward.

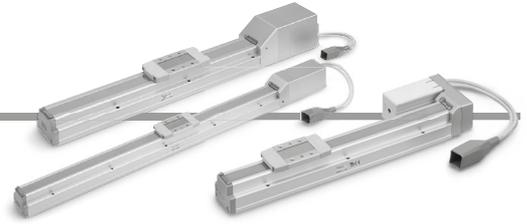

How to Order

LEFS H 25 R E B - 200 C N K - R1 CD17T

1
2
3
4
5
6
7
8
9
10
11
12

For details on controllers, refer to the next page.

1 Accuracy

—	Basic type
H	High-precision type

2 Size

16
25
32
40

3 Motor mounting position

—	In-line
R	Right side parallel
L	Left side parallel

4 Motor type

E	Battery-less absolute (Step motor 24 VDC)
---	---

5 Lead [mm]

Symbol	LEFS16	LEFS25	LEFS32	LEFS40
H	—	20	24	30
A	10	12	16	20
B	5	6	8	10

6 Stroke*1 [mm]

Stroke	Note	
	Size	Applicable stroke
50 to 500	16	50, 100, 150, 200, 250, 300, 350, 400, 450, 500
50 to 800	25	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800
50 to 1000	32	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000
150 to 1200	40	150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000, 1100, 1200

7 Motor option

—	Without option
B	With lock

8 Auto switch compatibility (In-line only)*2 *3 *4 *5

—	None
C	With (Includes 1 mounting bracket)

9 Grease application (Seal band part)

—	With
N	Without (Roller specification)

10 Positioning pin hole

—	Housing B bottom*6	
K	Body bottom 2 locations	

11 Actuator cable type/length

Robotic cable [m]			
—	None	R8	8*7
R1	1.5	RA	10*7
R3	3	RB	15*7
R5	5	RC	20*7

For details on auto switches, refer to pages 181 to 184.

12 Controller

—	Without controller
C□1□□	With controller

C D 1 7 T

Interface (Communication protocol/Input/Output)

Symbol	Type	Number of axes, Special specification	
		Standard	With STO sub-function
5	Parallel input (NPN)	●	
6	Parallel input (PNP)	●	
E	EtherCAT	●	●
9	EtherNet/IP™	●	●
P	PROFINET	●	●
D	DeviceNet®	●	
L	IO-Link	●	●
M	CC-Link	●	

Mounting

7	Screw mounting
8*8	DIN rail

Number of axes, Special specification

Symbol	Number of axes	Specification
1	Single axis	Standard
F	Single axis	With STO sub-function

Communication plug connector, I/O cable*9

Symbol	Type	Applicable interface
—	Without accessory	—
S	Straight type communication plug connector	DeviceNet®
T	T-branch type communication plug connector	CC-Link Ver. 1.10
1	I/O cable (1.5 m)	Parallel input (NPN) Parallel input (PNP)
3	I/O cable (3 m)	
5	I/O cable (5 m)	

- *1 Please contact SMC for non-standard strokes as they are produced as special orders.
- *2 Excludes the LEF16
- *3 If 2 or more are required, please order them separately. (Part no.: LEF-D-2-1 For details, refer to page 181.)
- *4 Order auto switches separately. (For details, refer to pages 182 to 184.)
- *5 When “—” is selected, the product will not come with a built-in magnet for an auto switch, and so a mounting bracket cannot be secured. Be sure to select an appropriate model initially as the product cannot be changed to have auto switch compatibility after purchase.

- *6 Refer to the body mounting example on page 186 for the mounting method.
- *7 Produced upon receipt of order
- *8 The DIN rail is not included. It must be ordered separately.
- *9 Select “—” for anything other than DeviceNet®, CC-Link, or parallel input.
Select “—,” “S,” or “T” for DeviceNet® or CC-Link.
Select “—,” “1,” “3,” or “5” for parallel input.

⚠ Caution

[CE/UKCA-compliant products]

EMC compliance was tested by combining the electric actuator LEF series and the controller JXC series.

The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, compliance with the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify compliance with the EMC directive for the machinery and equipment as a whole.

[Precautions relating to differences in controller versions]

When the JXC series is to be used in combination with the battery-less absolute encoder, use a controller that is version V3.4 or S3.4 or higher.

[UL certification]


The JXC series controllers used in combination with electric actuators are UL certified.

The actuator and controller are sold as a package.

Confirm that the combination of the controller and actuator is correct.

<Check the following before use.>

- ① Check the actuator label for the model number. This number should match that of the controller.
- ② Check that the Parallel I/O configuration matches (NPN or PNP).

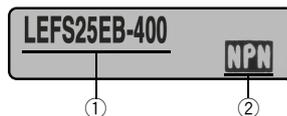

* Refer to the Operation Manual for using the products.
Please download it via our website: <https://www.smc.eu>

Type	Step data input type	EtherCAT direct input type	EtherCAT direct input type with STO sub-function	EtherNet/IP™ direct input type	EtherNet/IP™ direct input type with STO sub-function	PROFINET direct input type	PROFINET direct input type with STO sub-function	DeviceNet® direct input type	IO-Link direct input type	IO-Link direct input type with STO sub-function	CC-Link direct input type
Image											
Series	JXC51 JXC61	JXCE1	JXCEF	JXC91	JXC9F	JXCP1	JXC PF	JXCD1	JXCL1	JXCLF	JXCM1
Features	Parallel I/O	EtherCAT direct input	EtherCAT direct input with STO sub-function	EtherNet/IP™ direct input	EtherNet/IP™ direct input with STO sub-function	PROFINET direct input	PROFINET direct input with STO sub-function	DeviceNet® direct input	IO-Link direct input	IO-Link direct input with STO sub-function	CC-Link direct input
Compatible motor	Battery-less absolute (Step motor 24 VDC)										
Max. number of step data	64 points										
Power supply voltage	24 VDC										

LEFS Series

Battery-less Absolute (Step Motor 24 VDC)

Specifications

Battery-less Absolute (Step Motor 24 VDC)

Model			LEFS16□E		LEFS25□E			LEFS32□E			LEFS40□E				
Stroke [mm]*1			50 to 500		50 to 800			50 to 1000			150 to 1200				
Work load [kg]*2	Horizontal		14	15	12	25	30	20	45	50	25	55	65		
	Vertical		2	4	0.5	7.5	15	4	10	20	2	2	23		
Speed*2 [mm/s]	In-line	Stroke range	Up to 450	10 to 700	5 to 360	20 to 1100	12 to 750	6 to 400	24 to 1200	16 to 800	8 to 400	30 to 1200	20 to 850	10 to 300	
			451 to 500	10 to 600	5 to 300	20 to 1100	12 to 750	6 to 400	24 to 1200	16 to 800	8 to 400	30 to 1200	20 to 850	10 to 300	
			501 to 600	—	—	20 to 900	12 to 540	6 to 270	24 to 1200	16 to 800	8 to 400	30 to 1200	20 to 850	10 to 300	
			601 to 700	—	—	20 to 630	12 to 420	6 to 230	24 to 930	16 to 620	8 to 310	30 to 1200	20 to 850	10 to 300	
			701 to 800	—	—	20 to 550	12 to 330	6 to 180	24 to 750	16 to 500	8 to 250	30 to 1140	20 to 760	10 to 300	
			801 to 900	—	—	—	—	—	24 to 610	16 to 410	8 to 200	30 to 930	20 to 620	10 to 300	
			901 to 1000	—	—	—	—	—	24 to 500	16 to 340	8 to 170	30 to 780	20 to 520	10 to 250	
			1001 to 1100	—	—	—	—	—	—	—	—	30 to 660	20 to 440	10 to 220	
			1101 to 1200	—	—	—	—	—	—	—	—	30 to 570	20 to 380	10 to 190	
	Parallel	Stroke range	Up to 450	10 to 700	5 to 360	20 to 900	12 to 600	6 to 300	24 to 800	16 to 650	8 to 325	30 to 750	20 to 550	10 to 300	
			451 to 500	10 to 600	5 to 300	20 to 900	12 to 600	6 to 300	24 to 800	16 to 650	8 to 325	30 to 750	20 to 550	10 to 300	
			501 to 600	—	—	20 to 900	12 to 540	6 to 270	24 to 800	16 to 650	8 to 325	30 to 750	20 to 550	10 to 300	
			601 to 700	—	—	20 to 630	12 to 420	6 to 230	24 to 800	16 to 620	8 to 310	30 to 750	20 to 550	10 to 300	
			701 to 800	—	—	20 to 550	12 to 330	6 to 180	24 to 750	16 to 500	8 to 250	30 to 750	20 to 550	10 to 300	
			801 to 900	—	—	—	—	—	24 to 610	16 to 410	8 to 200	30 to 750	20 to 550	10 to 300	
			901 to 1000	—	—	—	—	—	24 to 500	16 to 340	8 to 170	30 to 750	20 to 520	10 to 250	
			1001 to 1100	—	—	—	—	—	—	—	—	30 to 660	20 to 440	10 to 220	
			1101 to 1200	—	—	—	—	—	—	—	—	30 to 570	20 to 380	10 to 190	
Max. acceleration/deceleration [mm/s ²]			3000												
Positioning repeatability [mm]			Basic type		±0.02										
			High-precision type		±0.015 (Lead H: ±0.02)										
Lost motion [mm]*3			Basic type		0.1 or less										
			High-precision type		0.05 or less										
Lead [mm]			10	5	20	12	6	24	16	8	30	20	10		
Impact/Vibration resistance [m/s ²]*4			50/20												
Actuation type			Ball screw (LEFS□), Ball screw + Belt (LEFS□ ^R)												
Guide type			Linear guide												
Static allowable moment*5 [N·m]		Mep (Pitching)	10		27			46			110				
		Mey (Yawing)	10		27			46			110				
		Mer (Rolling)	20		52			101			207				
Operating temperature range [°C]			5 to 40												
Operating humidity range [%RH]			90 or less (No condensation)												
Enclosure			IP30												
Electric specifications			Motor size		□28		□42			□56.4					
			Motor type			Battery-less absolute (Step motor 24 VDC)									
			Encoder			Battery-less absolute									
			Power supply voltage [V]			24 VDC ±10 %									
Power [W]*6 *8			Max. power 51		Max. power 57			Max. power 123			Max. power 141				
Lock unit specifications			Type*7			Non-magnetising lock									
			Holding force [N]		29	59	47	78	157	72	118	216	75	113	245
			Power [W]*8		2.9		5			5			5		
			Rated voltage [V]			24 VDC ±10 %									

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 Speed changes according to the work load. Check the "Speed-Work Load Graph (Guide)" on pages 12 and 13. Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10 % for each 5 m.

*3 A reference value for correcting errors in reciprocal operation

*4 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*5 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*6 Indicates the max. power during operation (including the controller). This value can be used for the selection of the power supply.

*7 With lock only

*8 For an actuator with lock, add the power for the lock.

Weight

Series	LEFS16□E									
Stroke [mm]	50	100	150	200	250	300	350	400	450	500
Product weight [kg]	0.85	0.92	1.00	1.07	1.15	1.22	1.30	1.37	1.45	1.52
Additional weight with lock [kg]	0.12									

Series	LEFS25□E															
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
Product weight [kg]	1.70	1.84	1.98	2.12	2.26	2.40	2.54	2.68	2.82	2.96	3.10	3.24	3.38	3.52	3.66	3.80
Additional weight with lock [kg]	0.26															

Series	LEFS32□E																			
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
Product weight [kg]	3.15	3.35	3.55	3.75	3.95	4.15	4.35	4.55	4.75	4.95	5.15	5.35	5.55	5.75	5.95	6.15	6.35	6.55	6.75	6.95
Additional weight with lock [kg]	0.53																			


Series	LEFS40□E																			
Stroke [mm]	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200
Product weight [kg]	5.37	5.65	5.93	6.21	6.49	6.77	7.15	7.33	7.61	7.89	8.17	8.45	8.73	9.01	9.29	9.57	9.85	10.13	10.69	11.25
Additional weight with lock [kg]	0.53																			

LEFS Series

Battery-less Absolute (Step Motor 24 VDC)

Construction: In-line Motor

LEFS16, 25, 32, 40

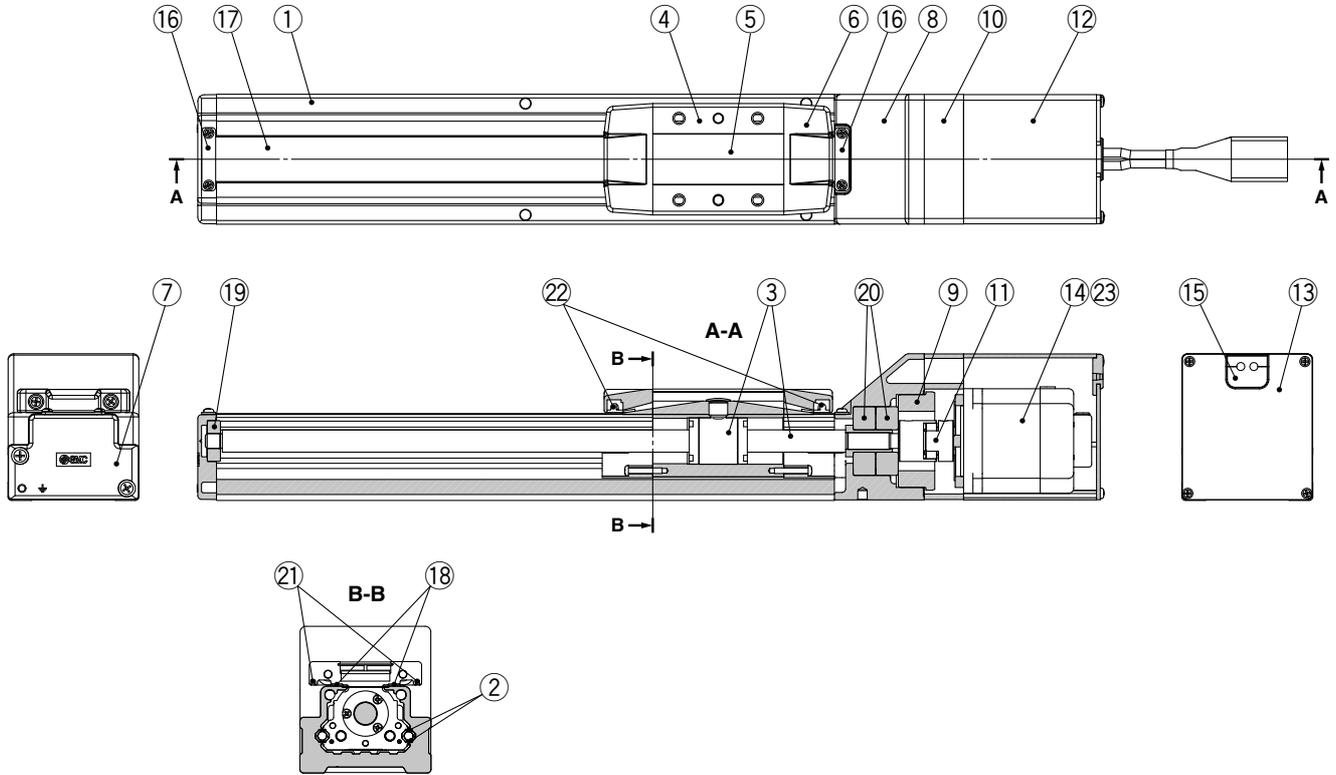

Component Parts


No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide	—	
3	Ball screw assembly	—	
4	Table	Aluminium alloy	Anodised
5	Blanking plate	Aluminium alloy	Anodised
6	Seal band holder	Synthetic resin	
7	Housing A	Aluminium die-casted	Coating
8	Housing B	Aluminium die-casted	Coating
9	Bearing stopper	Aluminium alloy	
10	Motor mount	Aluminium alloy	Coating/Anodised
11	Coupling	—	
12	Motor cover	Aluminium alloy	Anodised
13	End cover	Aluminium alloy	Anodised
14	Motor	—	
15	Rubber bushing	NBR	

No.	Description	Material	Note
16	Band stopper	Stainless steel	
17	Dust seal band	Stainless steel	
18	Seal magnet	LEFS40	—
19	Bearing	—	Stroke 250 mm or more
20	Bearing	—	
21	Magnet	—	With auto switch compatibility
22	Roller assembly	—	Without grease application
23	Heat dissipation sheet	LEFS16	—

Replacement Parts/Grease Pack

Applied portion	Order no.
Ball screw	GR-S-010 (10 g) GR-S-020 (20 g)
Rail guide	
Dust seal band	
(When "Without" is selected for the grease application, grease is applied only on the back side.)	

Construction: Motor Parallel

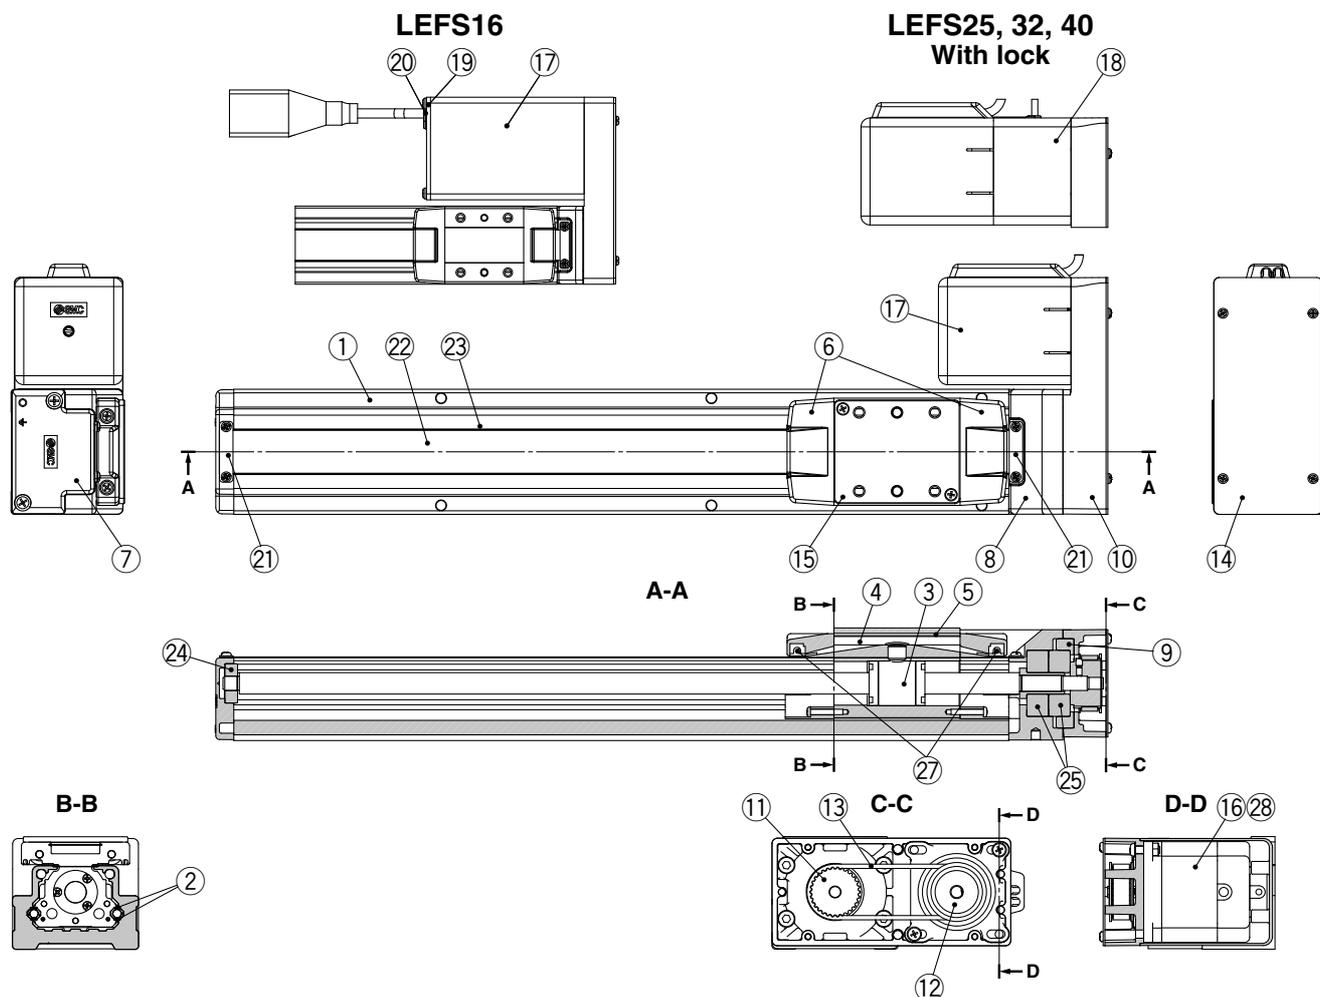

Component Parts

No.	Description	Material	Note	
1	Body	Aluminium alloy	Anodised	
2	Rail guide	—		
3	Ball screw assembly	—		
4	Table	Aluminium alloy	Anodised	
5	Blanking plate	Aluminium alloy	Anodised	
6	Seal band holder	Synthetic resin		
7	Housing A	Aluminium die-casted	Coating	
8	Housing B	Aluminium die-casted	Coating	
9	Bearing stopper	Aluminium alloy		
10	Return plate	Aluminium alloy	Coating/Anodised	
11	Pulley	Aluminium alloy		
12	Pulley	Aluminium alloy		
14	Cover plate	Aluminium alloy	Anodised	
15	Table spacer	LEFS32 Aluminium alloy	Anodised (LEFS32 only)	
16	Motor	—		
17	Motor cover	LEFS16	Aluminium alloy	Anodised
		LEFS25/32/40	Synthetic resin	
18	Motor cover with lock	LEFS25/32/40 Aluminium alloy	Anodised	
19	End cover	LEFS16 Aluminium alloy	Anodised	
20	Rubber bushing	LEFS16 NBR		

No.	Description	Material	Note
21	Band stopper	Stainless steel	
22	Dust seal band	Stainless steel	
23	Seal magnet	LEFS40	—
24	Bearing	—	Stroke 250 mm or more
25	Bearing	—	
27	Roller assembly	—	Without grease application
28	Heat dissipation sheet	LEFS16	—

Replacement Parts/Belt

No.	Size	Order no.
13	16	LE-D-6-5
	25	LE-D-6-2
	32	LE-D-6-3
	40	LE-D-6-4

Replacement Parts/Grease Pack


Applied portion	Order no.
Ball screw	GR-S-010 (10 g) GR-S-020 (20 g)
Rail guide	
Dust seal band	
(When "Without" is selected for the grease application, grease is applied only on the back side.)	

LEFS Series

Battery-less Absolute (Step Motor 24 VDC)

Dimensions: In-line Motor

LEFS16E

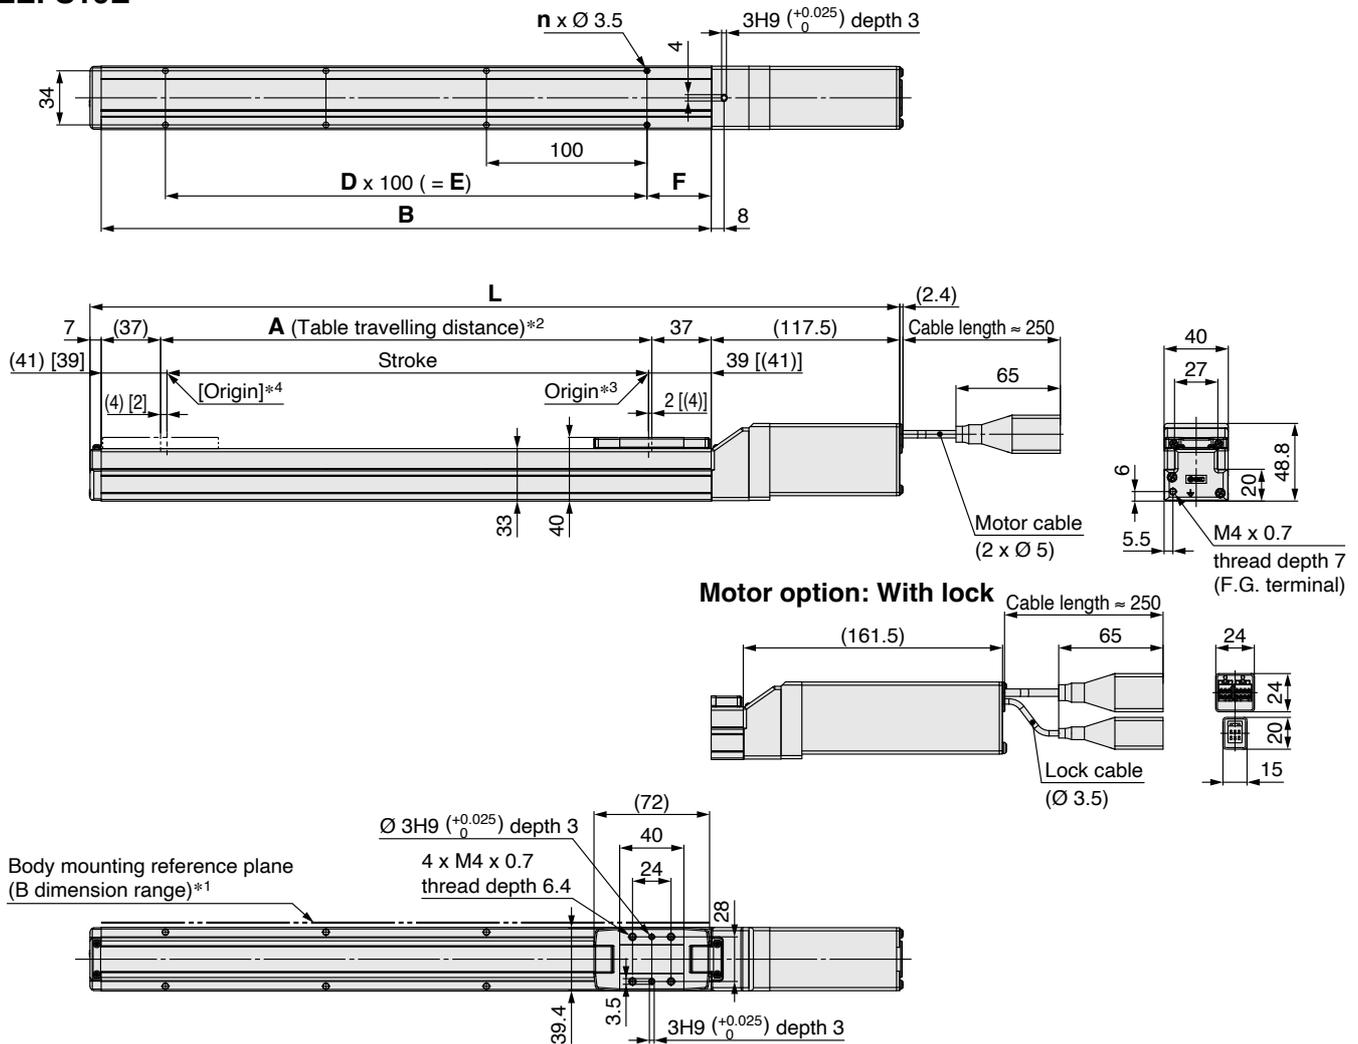

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed


Dimensions

Model	L		A	B	n	D	E	F
	Without lock	With lock						
LEFS□16E□-50□	254.5	298.5	56	130	4	—	—	15
LEFS□16E□-100□	304.5	348.5	106	180				
LEFS□16E□-150□	354.5	398.5	156	230				
LEFS□16E□-200□	404.5	448.5	206	280	6	2	200	40
LEFS□16E□-250□	454.5	498.5	256	330				
LEFS□16E□-300□	504.5	548.5	306	380	8	3	300	
LEFS□16E□-350□	554.5	598.5	356	430				
LEFS□16E□-400□	604.5	648.5	406	480				
LEFS□16E□-450□	654.5	698.5	456	530	10	4	400	
LEFS□16E□-500□	704.5	748.5	506	580				

Dimensions: In-line Motor

LEFS16E

Positioning pin hole*1 (Option): Body bottom

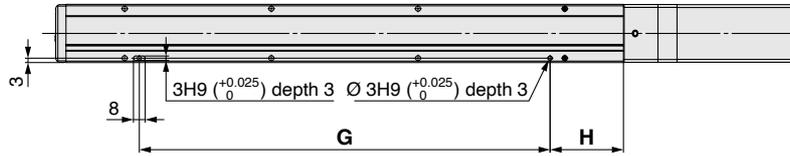

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions [mm]


Model	Positioning pin hole: K	
	G	H
LEFS□16E□-50□	80	25
LEFS□16E□-100□		50
LEFS□16E□-150□		
LEFS□16E□-200□		
LEFS□16E□-250□	180	
LEFS□16E□-300□	280	
LEFS□16E□-350□	380	
LEFS□16E□-400□	480	
LEFS□16E□-450□		
LEFS□16E□-500□		

LEFS Series

Battery-less Absolute (Step Motor 24 VDC)

Dimensions: In-line Motor

LEFS25E

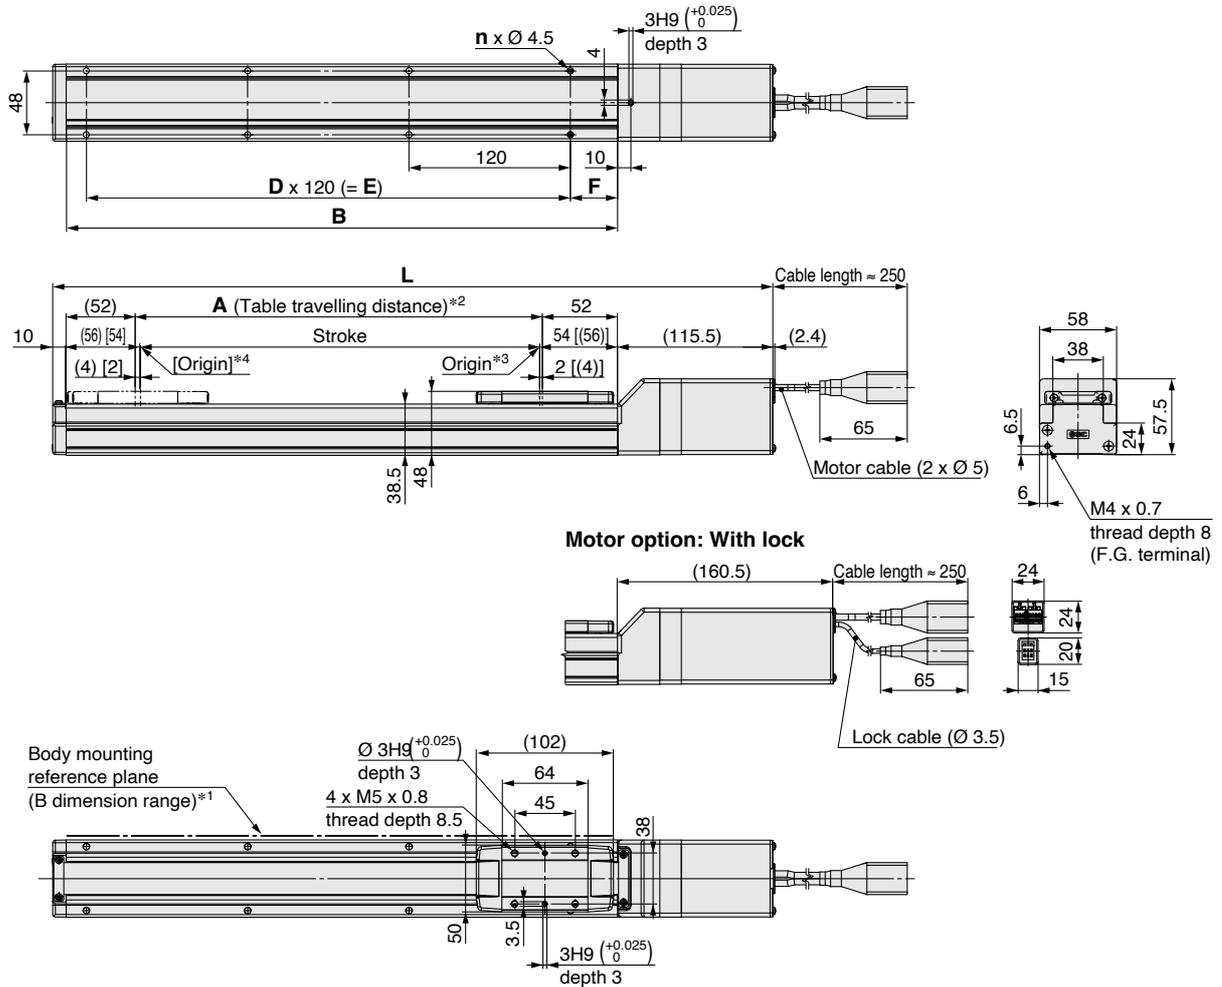

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed


Dimensions

Model	L		A	B	n	D	E	F
	Without lock	With lock						
LEFS□25E□-50□	285.5	330.5	56	160	4	—	—	20
LEFS□25E□-100□	335.5	380.5	106	210	4	—	—	35
LEFS□25E□-150□	385.5	430.5	156	260	4	—	—	
LEFS□25E□-200□	435.5	480.5	206	310	6	2	240	
LEFS□25E□-250□	485.5	530.5	256	360	6	2	240	
LEFS□25E□-300□	535.5	580.5	306	410	8	3	360	
LEFS□25E□-350□	585.5	630.5	356	460	8	3	360	
LEFS□25E□-400□	635.5	680.5	406	510	8	3	360	
LEFS□25E□-450□	685.5	730.5	456	560	10	4	480	
LEFS□25E□-500□	735.5	780.5	506	610	10	4	480	
LEFS□25E□-550□	785.5	830.5	556	660	12	5	600	
LEFS□25E□-600□	835.5	880.5	606	710	12	5	600	
LEFS□25E□-650□	885.5	930.5	656	760	12	5	600	
LEFS□25E□-700□	935.5	980.5	706	810	14	6	720	
LEFS□25E□-750□	985.5	1030.5	756	860	14	6	720	
LEFS□25E□-800□	1035.5	1080.5	806	910	16	7	840	

Dimensions: In-line Motor


LEFS25E

Positioning pin hole*1 (Option): Body bottom

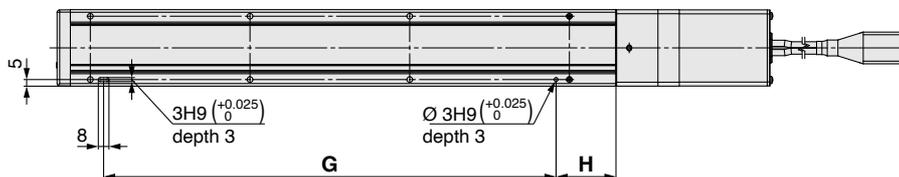

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

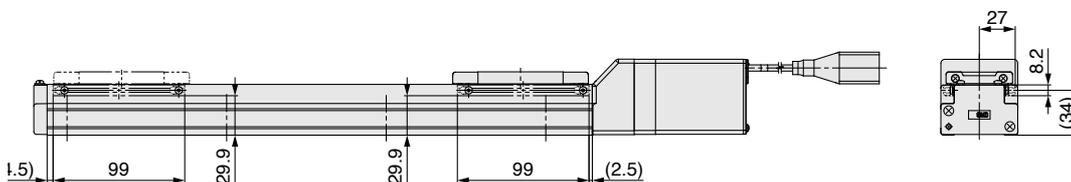

* For strokes of 99 mm or less, only 2 auto switch mounting brackets can be installed on the motor side.

Dimensions

[mm]


Model	G	H
LEFS□25E□-50□	100	30
LEFS□25E□-100□	100	45
LEFS□25E□-150□	100	45
LEFS□25E□-200□	220	45
LEFS□25E□-250□	220	45
LEFS□25E□-300□	340	45
LEFS□25E□-350□	340	45
LEFS□25E□-400□	340	45
LEFS□25E□-450□	460	45
LEFS□25E□-500□	460	45
LEFS□25E□-550□	580	45
LEFS□25E□-600□	580	45
LEFS□25E□-650□	580	45
LEFS□25E□-700□	700	45
LEFS□25E□-750□	700	45
LEFS□25E□-800□	820	45

LEFS Series

Battery-less Absolute (Step Motor 24 VDC)

Dimensions: In-line Motor

LEFS32E

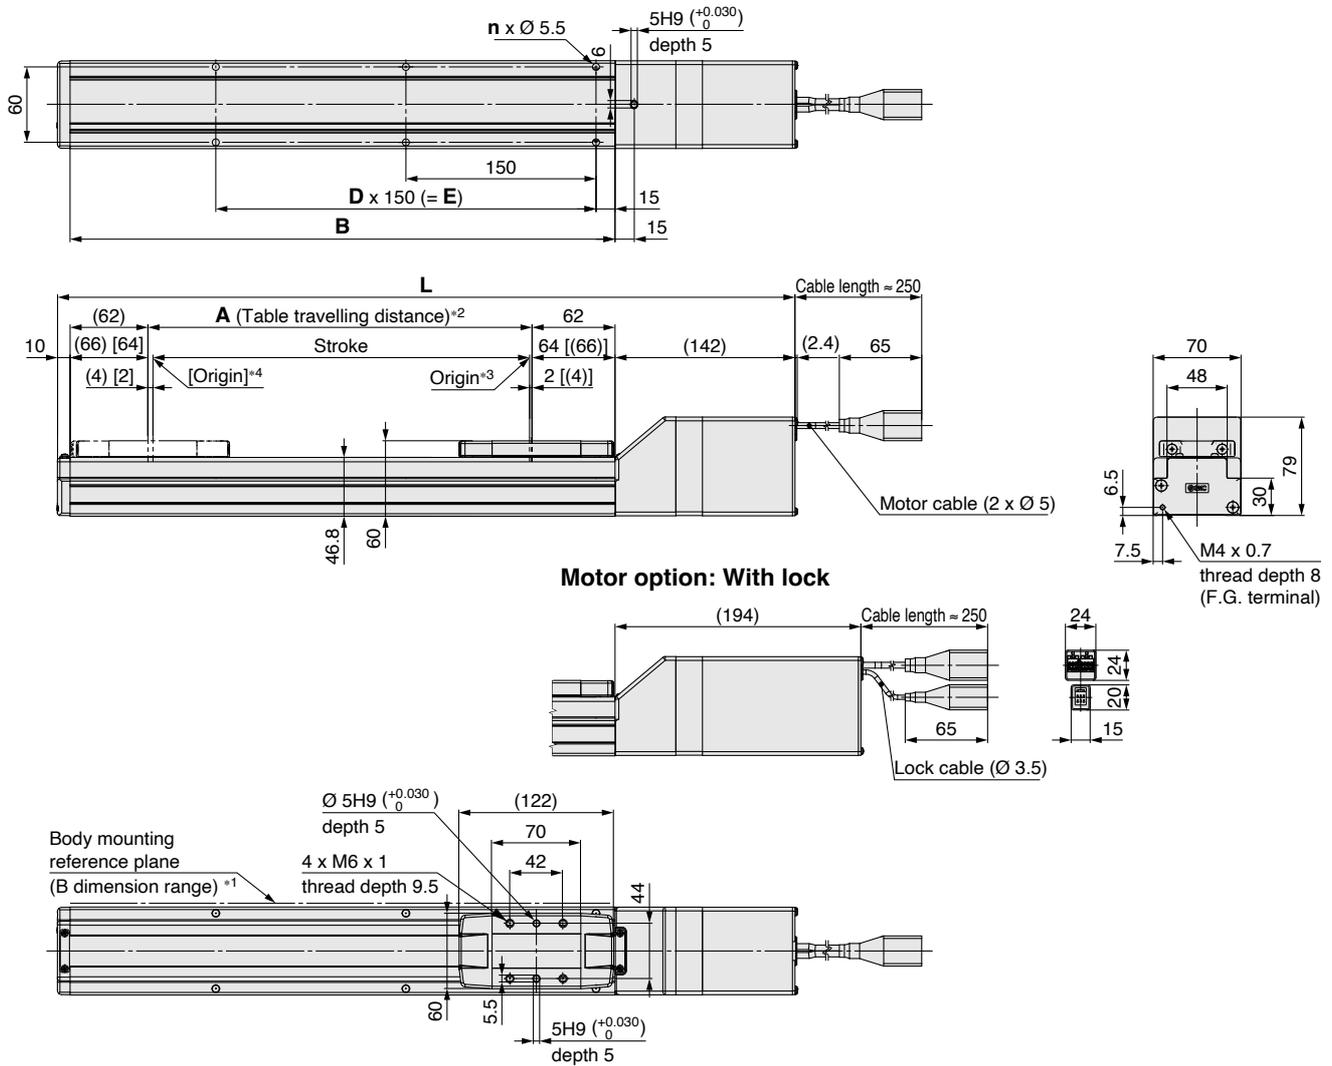

Motor option: With lock

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed


Dimensions

Model	L		A	B	n	D	E
	Without lock	With lock					
LEFS□32E□-50□	332	384	56	180	4	—	—
LEFS□32E□-100□	382	434	106	230	4	—	—
LEFS□32E□-150□	432	484	156	280	4	—	—
LEFS□32E□-200□	482	534	206	330	6	2	300
LEFS□32E□-250□	532	584	256	380	6	2	300
LEFS□32E□-300□	582	634	306	430	6	2	300
LEFS□32E□-350□	632	684	356	480	8	3	450
LEFS□32E□-400□	682	734	406	530	8	3	450
LEFS□32E□-450□	732	784	456	580	8	3	450
LEFS□32E□-500□	782	834	506	630	10	4	600
LEFS□32E□-550□	832	884	556	680	10	4	600
LEFS□32E□-600□	882	934	606	730	10	4	600
LEFS□32E□-650□	932	984	656	780	12	5	750
LEFS□32E□-700□	982	1034	706	830	12	5	750
LEFS□32E□-750□	1032	1084	756	880	12	5	750
LEFS□32E□-800□	1082	1134	806	930	14	6	900
LEFS□32E□-850□	1132	1184	856	980	14	6	900
LEFS□32E□-900□	1182	1234	906	1030	14	6	900
LEFS□32E□-950□	1232	1284	956	1080	16	7	1050
LEFS□32E□-1000□	1282	1334	1006	1130	16	7	1050

Dimensions: In-line Motor


LEFS32E

Positioning pin hole*1 (Option): Body bottom

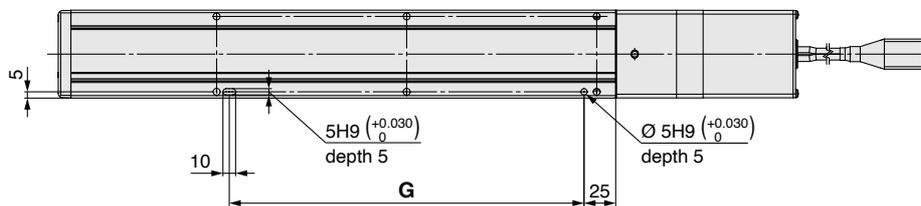

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

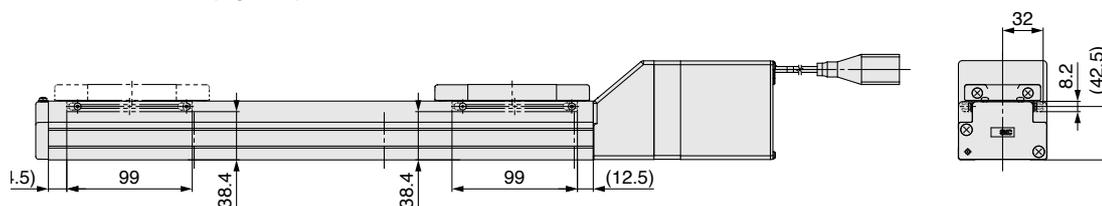

* For strokes of 99 mm or less, only 2 auto switch mounting brackets can be installed on the motor side.


Dimensions [mm]	
Model	G
LEFS□32E□-50□	130
LEFS□32E□-100□	130
LEFS□32E□-150□	130
LEFS□32E□-200□	280
LEFS□32E□-250□	280
LEFS□32E□-300□	280
LEFS□32E□-350□	430
LEFS□32E□-400□	430
LEFS□32E□-450□	430
LEFS□32E□-500□	580
LEFS□32E□-550□	580
LEFS□32E□-600□	580
LEFS□32E□-650□	730
LEFS□32E□-700□	730
LEFS□32E□-750□	730
LEFS□32E□-800□	880
LEFS□32E□-850□	880
LEFS□32E□-900□	880
LEFS□32E□-950□	1030
LEFS□32E□-1000□	1030

LEFS Series

Battery-less Absolute (Step Motor 24 VDC)

Dimensions: In-line Motor

LEFS40E

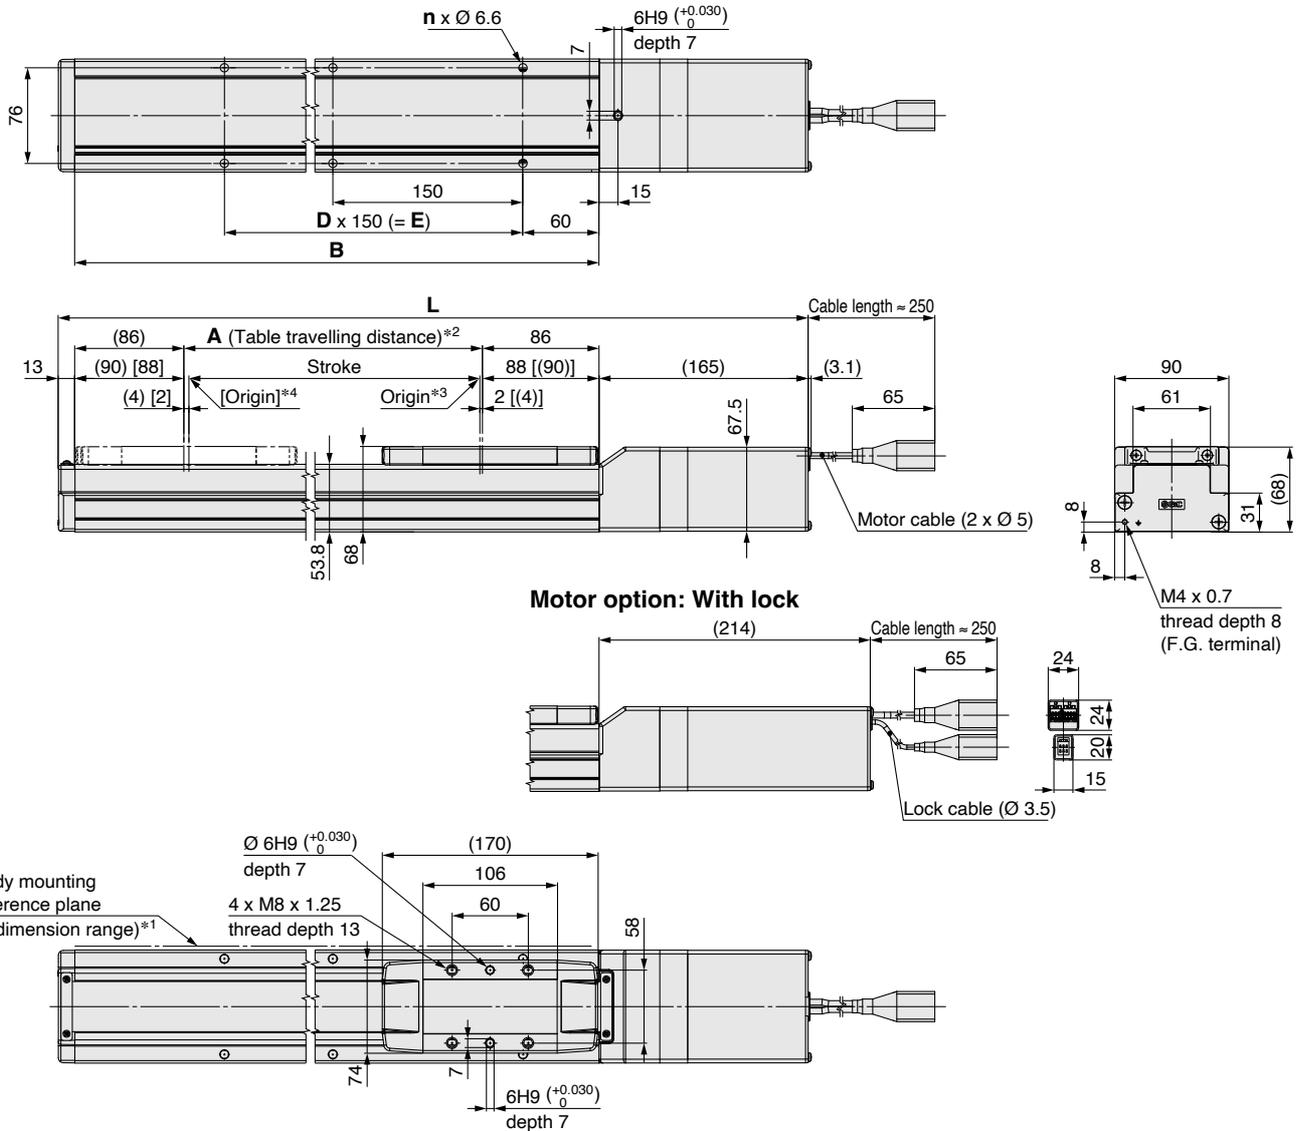

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed


Dimensions

Model	L		A	B	n	D	E
	Without lock	With lock					
LEFS□40E□-150□	506	555	156	328	4	—	150
LEFS□40E□-200□	556	605	206	378	6	2	300
LEFS□40E□-250□	606	655	256	428	6	2	300
LEFS□40E□-300□	656	705	306	478	6	2	300
LEFS□40E□-350□	706	755	356	528	8	3	450
LEFS□40E□-400□	756	805	406	578	8	3	450
LEFS□40E□-450□	806	855	456	628	8	3	450
LEFS□40E□-500□	856	905	506	678	10	4	600
LEFS□40E□-550□	906	955	556	728	10	4	600
LEFS□40E□-600□	956	1005	606	778	10	4	600
LEFS□40E□-650□	1006	1055	656	828	12	5	750
LEFS□40E□-700□	1056	1105	706	878	12	5	750
LEFS□40E□-750□	1106	1155	756	928	12	5	750
LEFS□40E□-800□	1156	1205	806	978	14	6	900
LEFS□40E□-850□	1206	1255	856	1028	14	6	900
LEFS□40E□-900□	1256	1305	906	1078	14	6	900
LEFS□40E□-950□	1306	1355	956	1128	16	7	1050
LEFS□40E□-1000□	1356	1405	1006	1178	16	7	1050
LEFS□40E□-1100□	1456	1505	1106	1278	18	8	1200
LEFS□40E□-1200□	1556	1605	1206	1378	18	8	1200

Dimensions: In-line Motor


LEFS40E

Positioning pin hole*1 (Option): Body bottom

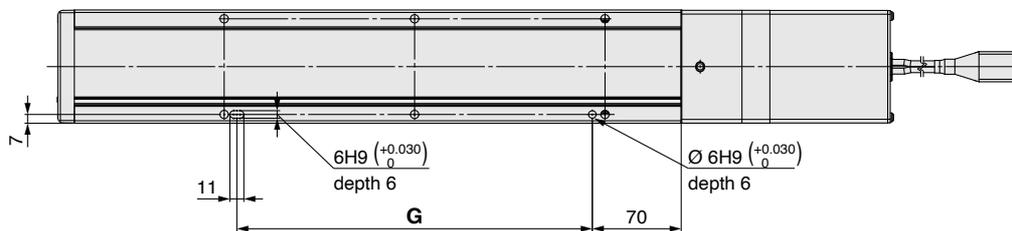

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

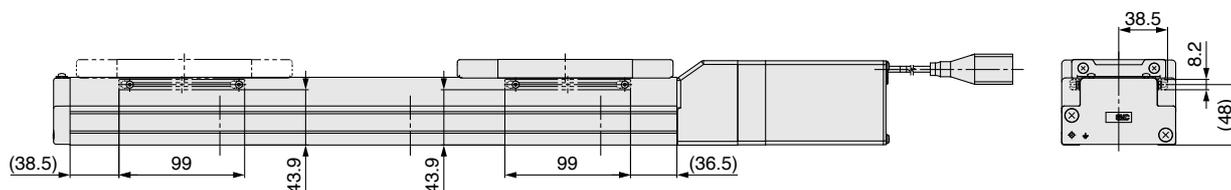

Dimensions

[mm]




Model	G
LEFS□40E□-150□	130
LEFS□40E□-200□	280
LEFS□40E□-250□	280
LEFS□40E□-300□	280
LEFS□40E□-350□	430
LEFS□40E□-400□	430
LEFS□40E□-450□	430
LEFS□40E□-500□	580
LEFS□40E□-550□	580
LEFS□40E□-600□	580
LEFS□40E□-650□	730
LEFS□40E□-700□	730
LEFS□40E□-750□	730
LEFS□40E□-800□	880
LEFS□40E□-850□	880
LEFS□40E□-900□	880
LEFS□40E□-950□	1030
LEFS□40E□-1000□	1030
LEFS□40E□-1100□	1180
LEFS□40E□-1200□	1180

LEFS Series



Battery-less Absolute (Step Motor 24 VDC)

Dimensions: Motor Parallel



LEFS16RE

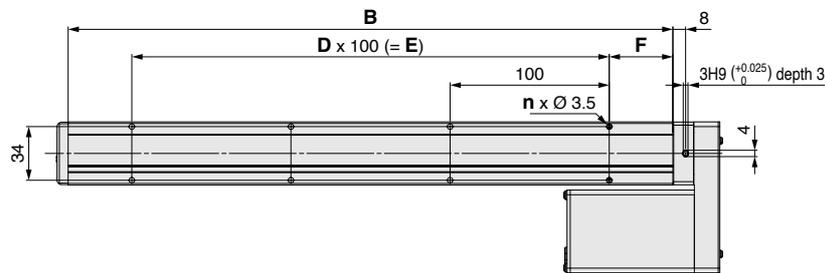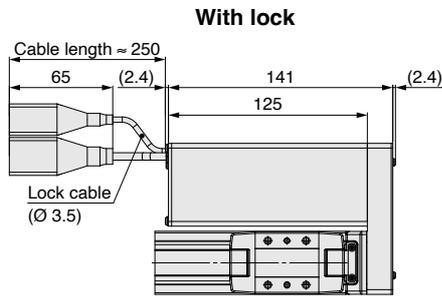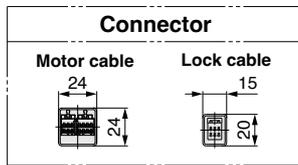

Motor mounting position:
Left side parallel
LEFS16L□

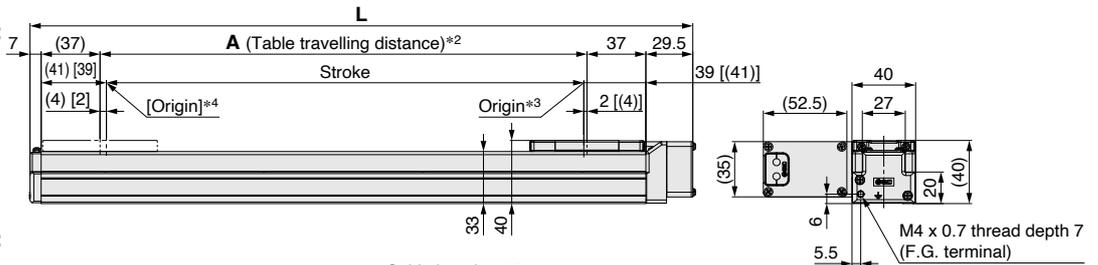

Motor mounting position:
Right side parallel
LEFS16R□

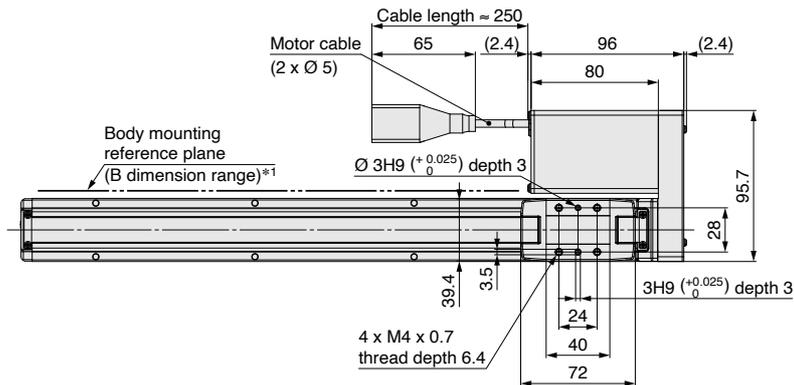

*1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 2 mm or more because of round chamfering. (Recommended height: 5 mm)

In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.

*2 This is the distance within which the table can move when it returns to origin.

Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.

*3 Position after returning to origin

*4 [] for when the direction of return to origin has changed


Dimensions

Model	L	A	B	n	D	E	F
LEFS□16□E□-50□	166.5	56	130	4	—	—	15
LEFS□16□E□-100□	216.5	106	180				
LEFS□16□E□-150□	266.5	156	230				
LEFS□16□E□-200□	316.5	206	280	6	2	200	40
LEFS□16□E□-250□	366.5	256	330				
LEFS□16□E□-300□	416.5	306	380	8	3	300	
LEFS□16□E□-350□	466.5	356	430				
LEFS□16□E□-400□	516.5	406	480				
LEFS□16□E□-450□	566.5	456	530	10	4	400	
LEFS□16□E□-500□	616.5	506	580				

Dimensions: Motor Parallel

LEFS16R

Positioning pin hole*1 (Option): Body bottom

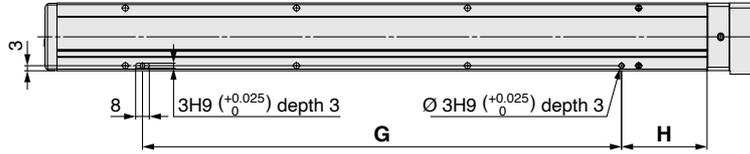

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions [mm]






Model	Positioning pin hole: K	
	G	H
LEFS□16□E□-50□	80	25
LEFS□16□E□-100□		50
LEFS□16□E□-150□		
LEFS□16□E□-200□		
LEFS□16□E□-250□		
LEFS□16□E□-300□	280	
LEFS□16□E□-350□	380	
LEFS□16□E□-400□	480	
LEFS□16□E□-450□		
LEFS□16□E□-500□		

LEFS Series

Battery-less Absolute (Step Motor 24 VDC)

Dimensions: Motor Parallel

LEFS25R

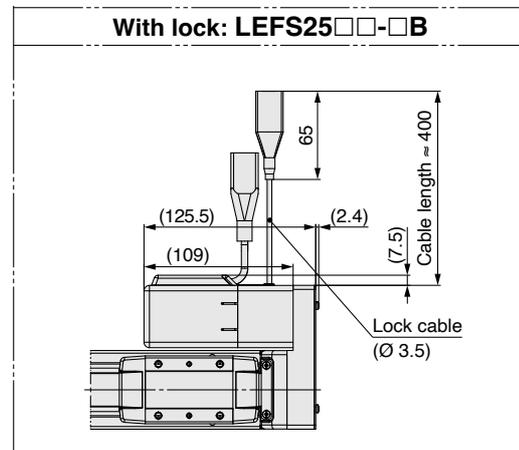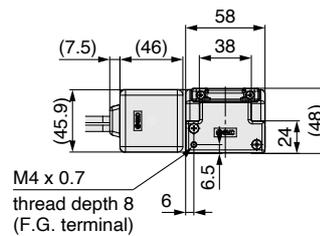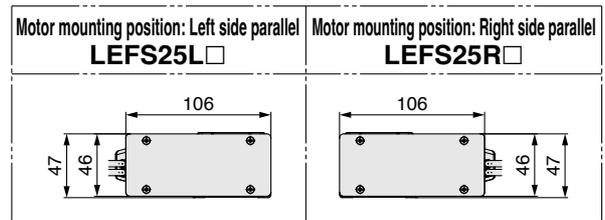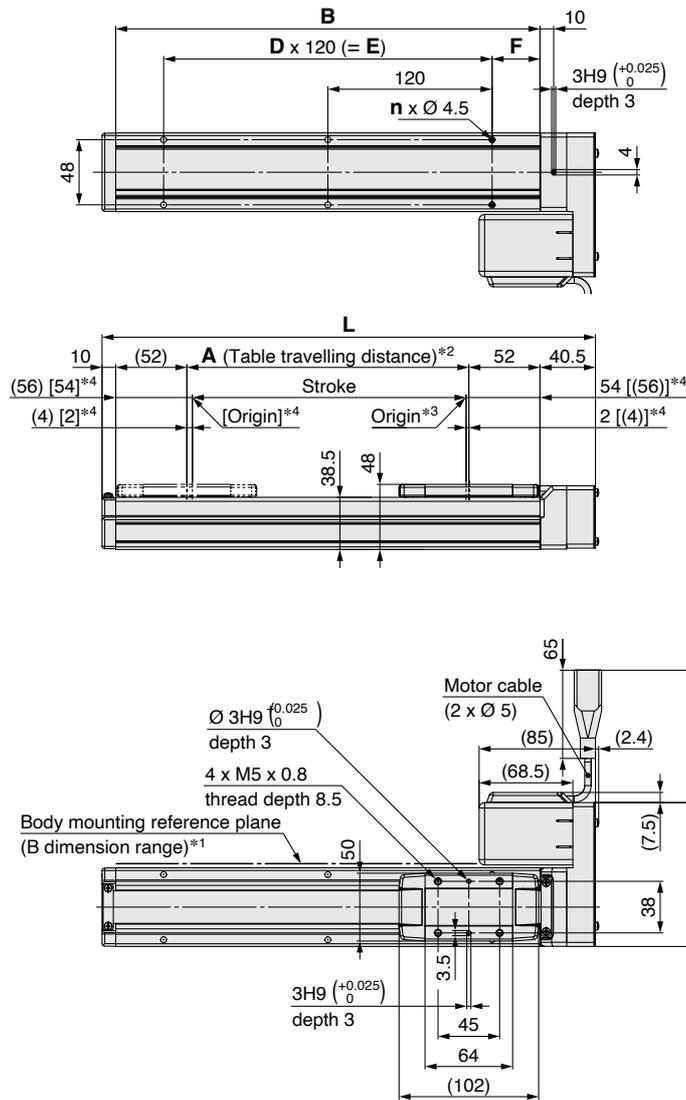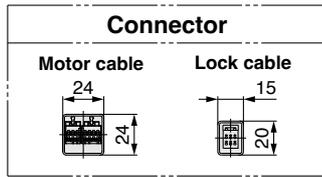

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm) In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed


Model	L	A	B	n	D	E	F
LEFS□25□E□-50□	210.5	56	160	4	—	—	20
LEFS□25□E□-100□	260.5	106	210	4	—	—	—
LEFS□25□E□-150□	310.5	156	260	4	—	—	—
LEFS□25□E□-200□	360.5	206	310	6	2	240	—
LEFS□25□E□-250□	410.5	256	360	6	2	240	35
LEFS□25□E□-300□	460.5	306	410	8	3	360	—
LEFS□25□E□-350□	510.5	356	460	8	3	360	—
LEFS□25□E□-400□	560.5	406	510	8	3	360	—

Model	L	A	B	n	D	E	F
LEFS□25□E□-450□	610.5	456	560	10	4	480	—
LEFS□25□E□-500□	660.5	506	610	10	4	480	—
LEFS□25□E□-550□	710.5	556	660	12	5	600	—
LEFS□25□E□-600□	760.5	606	710	12	5	600	35
LEFS□25□E□-650□	810.5	656	760	12	5	600	—
LEFS□25□E□-700□	860.5	706	810	14	6	720	—
LEFS□25□E□-750□	910.5	756	860	14	6	720	—
LEFS□25□E□-800□	960.5	806	910	16	7	840	—

Dimensions: Motor Parallel

LEFS25R

Positioning pin hole*1 (Option): Body bottom

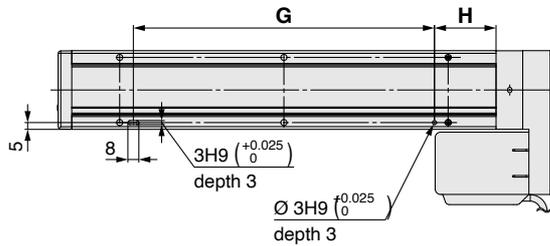

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions	[mm]	
Model	G	H
LEFS□25□E□-50□	100	30
LEFS□25□E□-100□	100	45
LEFS□25□E□-150□	100	45
LEFS□25□E□-200□	220	45
LEFS□25□E□-250□	220	45
LEFS□25□E□-300□	340	45
LEFS□25□E□-350□	340	45
LEFS□25□E□-400□	340	45


Dimensions	[mm]	
Model	G	H
LEFS□25□E□-450□	460	45
LEFS□25□E□-500□	460	45
LEFS□25□E□-550□	580	45
LEFS□25□E□-600□	580	45
LEFS□25□E□-650□	580	45
LEFS□25□E□-700□	700	45
LEFS□25□E□-750□	700	45
LEFS□25□E□-800□	820	45

LEFS Series


Battery-less Absolute (Step Motor 24 VDC)

Dimensions: Motor Parallel






LEFS32R

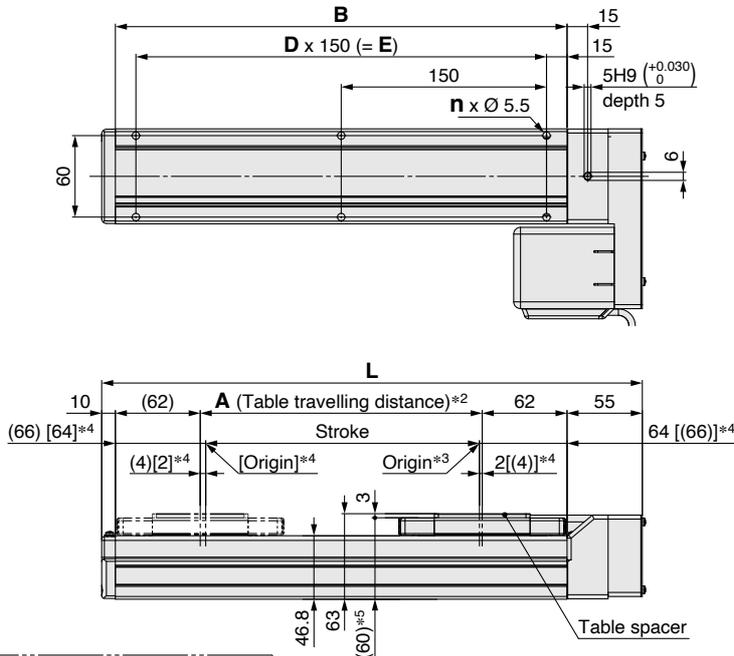

Motor mounting position: Left side parallel
LEFS32L

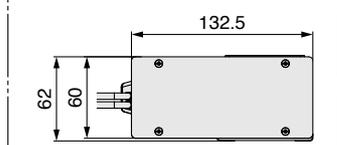

Motor mounting position: Right side parallel
LEFS32R

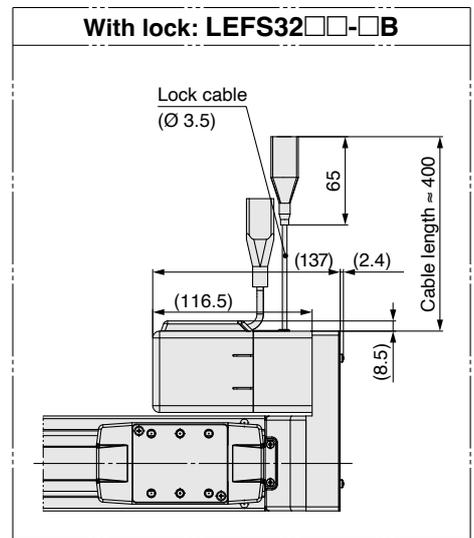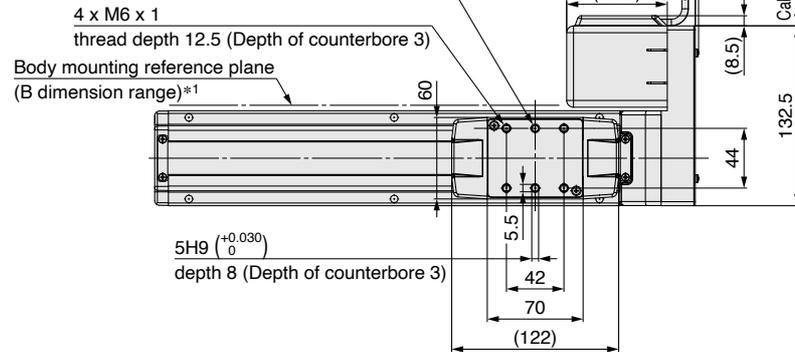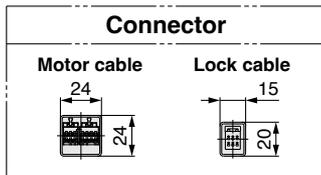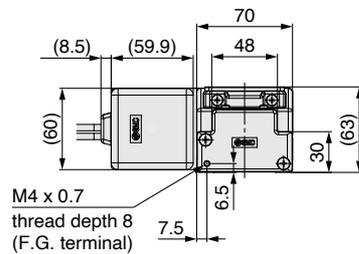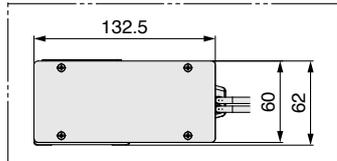

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane.
Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed
- *5 When the table spacer is removed

Dimensions

Model	L	A	B	n	D	E
LEFS32E-50	245	56	180	4	—	—
LEFS32E-100	295	106	230	4	—	—
LEFS32E-150	345	156	280	4	—	—
LEFS32E-200	395	206	330	6	2	300
LEFS32E-250	445	256	380	6	2	300
LEFS32E-300	495	306	430	6	2	300
LEFS32E-350	545	356	480	8	3	450
LEFS32E-400	595	406	530	8	3	450
LEFS32E-450	645	456	580	8	3	450
LEFS32E-500	695	506	630	10	4	600


Dimensions

Model	L	A	B	n	D	E
LEFS32E-550	745	556	680	10	4	600
LEFS32E-600	795	606	730	10	4	600
LEFS32E-650	845	656	780	12	5	750
LEFS32E-700	895	706	830	12	5	750
LEFS32E-750	945	756	880	12	5	750
LEFS32E-800	995	806	930	14	6	900
LEFS32E-850	1045	856	980	14	6	900
LEFS32E-900	1095	906	1030	14	6	900
LEFS32E-950	1145	956	1080	16	7	1050
LEFS32E-1000	1195	1006	1130	16	7	1050

Dimensions: Motor Parallel

LEFS32R

Positioning pin hole*1 (Option): Body bottom

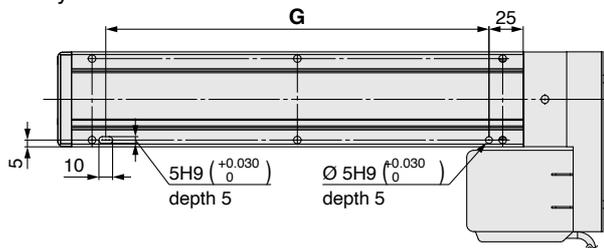

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions	[mm]
Model	G
LEFS□32□E□-50□	130
LEFS□32□E□-100□	130
LEFS□32□E□-150□	130
LEFS□32□E□-200□	280
LEFS□32□E□-250□	280
LEFS□32□E□-300□	280
LEFS□32□E□-350□	430
LEFS□32□E□-400□	430
LEFS□32□E□-450□	430
LEFS□32□E□-500□	580


Dimensions	[mm]
Model	G
LEFS□32□E□-550□	580
LEFS□32□E□-600□	580
LEFS□32□E□-650□	730
LEFS□32□E□-700□	730
LEFS□32□E□-750□	730
LEFS□32□E□-800□	880
LEFS□32□E□-850□	880
LEFS□32□E□-900□	880
LEFS□32□E□-950□	1030
LEFS□32□E□-1000□	1030

LEFS Series

Battery-less Absolute (Step Motor 24 VDC)

Dimensions: Motor Parallel

LEFS40R

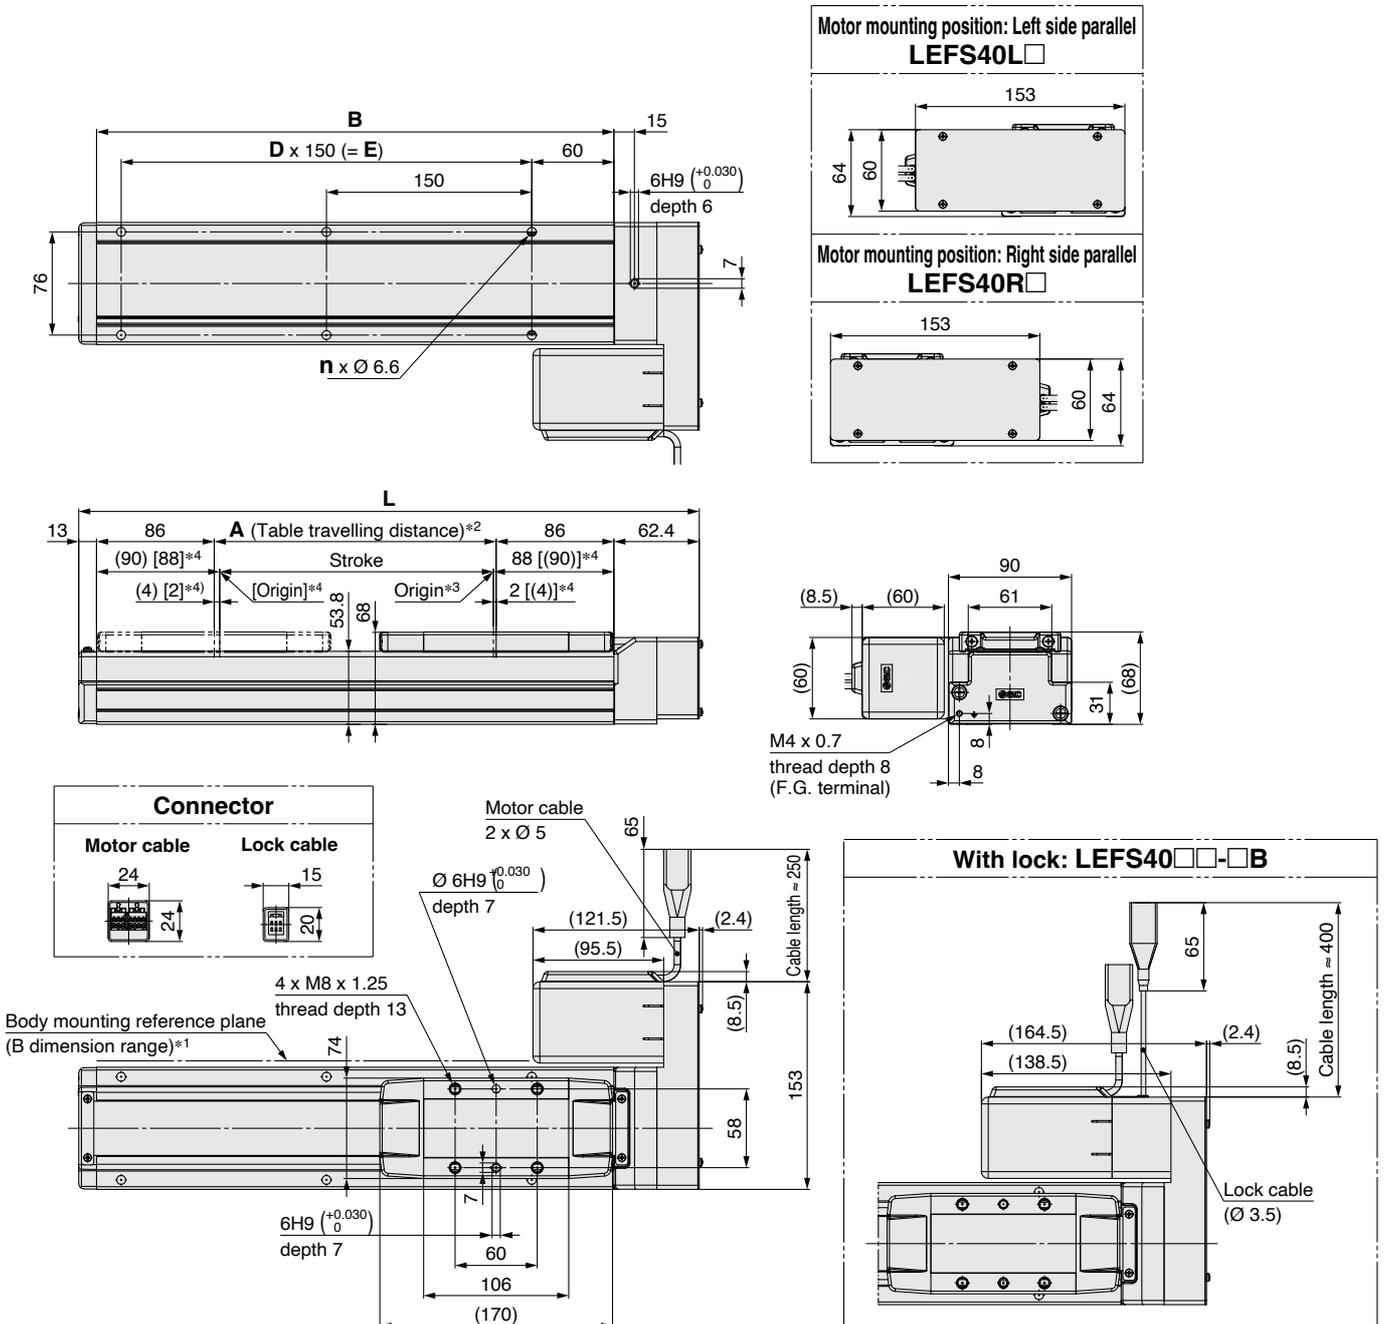

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane.
Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed


Model	L	A	B	n	D	E
LEFS□40□E□-150□	403.4	156	328	4	—	150
LEFS□40□E□-200□	453.4	206	378	6	2	300
LEFS□40□E□-250□	503.4	256	428	6	2	300
LEFS□40□E□-300□	553.4	306	478	6	2	300
LEFS□40□E□-350□	603.4	356	528	8	3	450
LEFS□40□E□-400□	653.4	406	578	8	3	450
LEFS□40□E□-450□	703.4	456	628	8	3	450
LEFS□40□E□-500□	753.4	506	678	10	4	600
LEFS□40□E□-550□	803.4	556	728	10	4	600
LEFS□40□E□-600□	853.4	606	778	10	4	600

Model	L	A	B	n	D	E
LEFS□40□E□-650□	903.4	656	828	12	5	750
LEFS□40□E□-700□	953.4	706	878	12	5	750
LEFS□40□E□-750□	1003.4	756	928	12	5	750
LEFS□40□E□-800□	1053.4	806	978	14	6	900
LEFS□40□E□-850□	1103.4	856	1028	14	6	900
LEFS□40□E□-900□	1153.4	906	1078	14	6	900
LEFS□40□E□-950□	1203.4	956	1128	16	7	1050
LEFS□40□E□-1000□	1253.4	1006	1178	16	7	1050
LEFS□40□E□-1100□	1353.4	1106	1278	18	8	1200
LEFS□40□E□-1200□	1453.4	1206	1378	18	8	1200

Dimensions: Motor Parallel

LEFS40R

Positioning pin hole*1 (Option): Body bottom

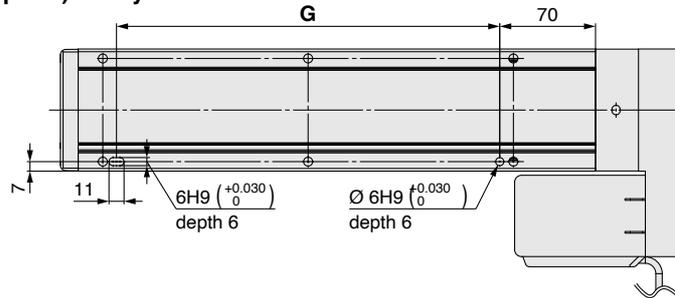

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions	[mm]
Model	G
LEFS□40□E□-150□	130
LEFS□40□E□-200□	280
LEFS□40□E□-250□	280
LEFS□40□E□-300□	280
LEFS□40□E□-350□	430
LEFS□40□E□-400□	430
LEFS□40□E□-450□	430
LEFS□40□E□-500□	580
LEFS□40□E□-550□	580
LEFS□40□E□-600□	580

Dimensions	[mm]
Model	G
LEFS□40□E□-650□	730
LEFS□40□E□-700□	730
LEFS□40□E□-750□	730
LEFS□40□E□-800□	880
LEFS□40□E□-850□	880
LEFS□40□E□-900□	880
LEFS□40□E□-950□	1030
LEFS□40□E□-1000□	1030
LEFS□40□E□-1100□	1180
LEFS□40□E□-1200□	1180

Slider Type Ball Screw Drive

LEFS Series LEFS16, 25, 32, 40



* For details, refer to www.smc.eu and onward.

RoHS

How to Order



LEFS **H** **25** **R** **B** - **200** **C** **N** **K** - **S1**

1 2 3 4 5 6 7 8 9 10 11

JXC□ Series

CD17T

LEC□ Series

AN

1

□

12

13

14

For details on controllers, refer to page 68.

1 Accuracy

—	Basic type
H	High-precision type

2 Size

16
25
32
40

3 Motor mounting position

—	In-line
R	Right side parallel
L	Left side parallel

4 Motor type

Symbol	Type	Applicable size				Compatible controllers/drivers
		LEFS16	LEFS25	LEFS32	LEFS40	
—	Step motor (Servo/24 VDC)	●	●	●	●	JXC51 JXCEF JXC61 JXC9F JXCE1 JXCPF JXC91 JXCLF JXCP1 JXCD1 JXCL1 LECPA JXCM1
A	Servo motor (24 VDC)	●	●	—	—	LECA6

5 Lead [mm]

Symbol	LEFS16	LEFS25	LEFS32	LEFS40
H	—	20	24	30
A	10	12	16	20
B	5	6	8	10

6 Stroke*1 [mm]

Stroke	Size	Note
		Applicable stroke
50 to 500	16	50, 100, 150, 200, 250, 300, 350, 400, 450, 500
50 to 800	25	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800
50 to 1000	32	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000
150 to 1200	40	150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000, 1100, 1200

7 Motor option

—	Without option
B	With lock

8 Auto switch compatibility*2 *3 *4 *5

—	None
C	With (Includes 1 mounting bracket)

9 Grease application (Seal band part)

—	With
N	Without (Roller specification)

10 Positioning pin hole


—	Housing B bottom*6	
K	Body bottom 2 locations	

11 Actuator cable type/length*8

Standard cable [m]	Robotic cable [m]			
	R1	R3	R5	R8
—	None	1.5	3	8*7
S1	1.5*10	3	5	8*7
S3	3*10	5	8*7	8*7
S5	5*10	8*7	8*7	8*7

Support Guide/LEFG Series

The support guide was designed to support workpieces with significant overhang.



For auto switches, refer to pages 181 to 184.

JXC Series

12 Controller

—	Without controller
C□1□□	With controller

C D 1 7 T

Interface (Communication protocol/Input/Output)

Symbol	Type	Number of axes, Special specification	
		Standard	With STO sub-function
5	Parallel input (NPN)	●	
6	Parallel input (PNP)	●	
E	EtherCAT	●	●
9	EtherNet/IP™	●	●
P	PROFINET	●	●
D	DeviceNet®	●	
L	IO-Link	●	●
M	CC-Link	●	

Mounting

7	Screw mounting
8*14	DIN rail

Number of axes, Special specification

Symbol	Number of axes	Specification
1	Single axis	Standard
F	Single axis	With STO sub-function

Communication plug connector, I/O cable*15

Symbol	Type	Applicable interface
—	Without accessory	—
S	Straight type communication plug connector	DeviceNet® CC-Link Ver. 1.10
T	T-branch type communication plug connector	DeviceNet® CC-Link Ver. 1.10
1	I/O cable (1.5 m)	Parallel input (NPN)
3	I/O cable (3 m)	Parallel input (NPN)
5	I/O cable (5 m)	Parallel input (NPN)



LEC Series

AN 1

12 13 14

12 Controller/Driver type*9

—	Without controller/driver	
6N	LECA6 (Step data input type)	NPN
6P		PNP
AN	LECPA *10 *11 (Pulse input type)	NPN
AP		PNP

13 I/O cable length*12

—	Without cable (Without communication plug connector)	
1	1.5 m	
3	3 m*13	
5	5 m*13	

14 Controller/Driver mounting

—	Screw mounting
D	DIN rail*14



- *1 Please contact SMC for non-standard strokes as they are produced as special orders.
- *2 Excluding the LEF16
- *3 If 2 or more are required, please order them separately. (Part no.: LEF-D-2-1 For details, refer to page 181.)
- *4 Order auto switches separately. (For details, refer to pages 182 to 184.)
- *5 When “—” is selected, the product will not come with a built-in magnet for an auto switch, and so a mounting bracket cannot be secured. Be sure to select an appropriate model initially as the product cannot be changed to have auto switch compatibility after purchase.
- *6 Refer to the body mounting example on page 186 for the mounting method.
- *7 Produced upon receipt of order (Robotic cable only)
- *8 The standard cable should only be used on fixed parts.
For use on moving parts, select the robotic cable.
Refer to the www.smc.eu if only the actuator cable is required.

- *9 For details on controllers/drivers and compatible motors, refer to the compatible controllers/drivers on the next page.
- *10 Only available for the motor type “Step motor”
- *11 When pulse signals are open collector, order the current limiting resistor (LEC-PA-R-□) separately.
- *12 When “Without controllers/drivers” is selected for controller/driver types, I/O cable cannot be selected. If an I/O cable is required, refer to the cable for the LECA6 (www.smc.eu) or LECPA (www.smc.eu).
- *13 When “Pulse input type” is selected for controller/driver types, pulse input usable only with differential. Only 1.5 m cables usable with open collector
- *14 The DIN rail is not included. It must be ordered separately.
- *15 Select “—” for anything other than DeviceNet®, CC-Link, or parallel input. Select “—,” “S,” or “T” for DeviceNet® or CC-Link. Select “—,” “1,” “3,” or “5” for parallel input.

⚠ Caution

[CE/UKCA-compliant products]

- ① EMC compliance was tested by combining the electric actuator LEF series and the controller LEC/JXC series.
The EMC depends on the configuration of the customer’s control panel and the relationship with other electrical equipment and wiring. Therefore, compliance with the EMC directive cannot be certified for SMC components incorporated into the customer’s equipment under actual operating conditions. As a result, it is necessary for the customer to verify compliance with the EMC directive for the machinery and equipment as a whole.
- ② For the incremental (servo motor 24 VDC) specification, EMC compliance was tested by installing a noise filter set (LEC-NFA). Refer to the LECA series Operation Manual for installation.

[UL-compliant products (For the LEC series)]


When compliance with UL is required, the electric actuator and controller/driver should be used with a UL1310 Class 2 power supply.

The actuator and controller/driver are sold as a package.

Confirm that the combination of the controller/driver and actuator is correct.

<Check the following before use.>

- ① Check the actuator label for the model number. This number should match that of the controller/driver.
- ② Check that the Parallel I/O configuration matches (NPN or PNP).

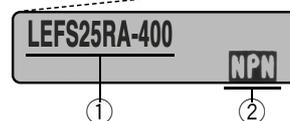

* Refer to the Operation Manual for using the products. Please download it via our website: <https://www.smc.eu>

LEFS Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Compatible Controllers/Drivers

Type	Step data input type	Step data input type	Pulse input type
			
Series	JXC51 JXC61	LECA6	LECPA
Features	Parallel I/O	Parallel I/O	Operation by pulse signals
Compatible motor	Step motor (Servo/24 VDC)	Servo motor (24 VDC)	Step motor (Servo/24 VDC)
Max. number of step data	64 points		—
Power supply voltage	24 VDC		

Type	EtherCAT direct input type	EtherCAT direct input type with STO sub-function	EtherNet/IP™ direct input type	EtherNet/IP™ direct input type with STO sub-function	PROFINET direct input type	PROFINET direct input type with STO sub-function	DeviceNet® direct input type	IO-Link direct input type	IO-Link direct input type with STO sub-function	CC-Link direct input type
										
Series	JXCE1	JXCEF	JXC91	JXC9F	JXCP1	JXCPF	JXCD1	JXCL1	JXCLF	JXCM1
Features	EtherCAT direct input	EtherCAT direct input with STO sub-function	EtherNet/IP™ direct input	EtherNet/IP™ direct input with STO sub-function	PROFINET direct input	PROFINET direct input with STO sub-function	DeviceNet® direct input	IO-Link direct input	IO-Link direct input with STO sub-function	CC-Link direct input
Compatible motor	Step motor (Servo/24 VDC)									
Max. number of step data	64 points									
Power supply voltage	24 VDC									

Specifications

Step Motor (Servo/24 VDC)

Model			LEFS16		LEFS25			LEFS32			LEFS40			
Stroke [mm]*1			50 to 500		50 to 800			50 to 1000			150 to 1200			
Work load [kg]*2	Horizontal	JXC□1/JXC□F	14	15	12	25	30	20	45	50	25	55	65	
		LECPA/JXC□ ₃	9	10	10	20	20	15	40	45	20	50	60	
Vertical			2	4	0.5	7.5	15	4	10	20	2	2	23	
Controller type: JXC□1, JXC□F	Speed [mm/s]*2	Stroke range	Up to 500	10 to 700	5 to 360	20 to 1100	12 to 750	6 to 400	24 to 1200	16 to 800	8 to 520	30 to 1200	20 to 1000	10 to 300
			501 to 600	—	—	20 to 900	12 to 540	6 to 270	24 to 1200	16 to 800	8 to 400	30 to 1200	20 to 1000	10 to 300
			601 to 700	—	—	20 to 630	12 to 420	6 to 230	24 to 930	16 to 620	8 to 310	30 to 1200	20 to 900	10 to 300
			701 to 800	—	—	20 to 550	12 to 330	6 to 180	24 to 750	16 to 500	8 to 250	30 to 1140	20 to 760	10 to 300
			801 to 900	—	—	—	—	—	24 to 610	16 to 410	8 to 200	30 to 930	20 to 620	10 to 300
			901 to 1000	—	—	—	—	—	24 to 500	16 to 340	8 to 170	30 to 780	20 to 520	10 to 250
			1001 to 1100	—	—	—	—	—	—	—	—	30 to 660	20 to 440	10 to 220
			1101 to 1200	—	—	—	—	—	—	—	—	30 to 570	20 to 380	10 to 190
Driver type: LECPA, JXC□₃	Speed [mm/s]*2	Stroke range	Up to 500	10 to 500	5 to 250	20 to 1000	12 to 500	6 to 250	24 to 1200	16 to 500	8 to 250	30 to 500	20 to 500	10 to 250
			501 to 600	—	—	20 to 900	12 to 500	6 to 250	24 to 1200	16 to 500	8 to 250	30 to 500	20 to 500	10 to 250
			601 to 700	—	—	20 to 630	12 to 420	6 to 230	24 to 930	16 to 500	8 to 250	30 to 500	20 to 500	10 to 250
			701 to 800	—	—	20 to 550	12 to 330	6 to 180	24 to 750	16 to 500	8 to 250	30 to 500	20 to 500	10 to 250
			801 to 900	—	—	—	—	—	24 to 610	16 to 410	8 to 200	30 to 500	20 to 500	10 to 250
			901 to 1000	—	—	—	—	—	24 to 500	16 to 340	8 to 170	30 to 500	20 to 500	10 to 250
			1001 to 1100	—	—	—	—	—	—	—	—	30 to 500	20 to 440	10 to 220
			1101 to 1200	—	—	—	—	—	—	—	—	30 to 500	20 to 380	10 to 190
Max. acceleration/deceleration [mm/s²]			3000											
Positioning repeatability [mm]	Basic type		±0.02											
	High-precision type		±0.015 (Lead H: ±0.02)											
Lost motion [mm]*3	Basic type		0.1 or less											
	High-precision type		0.05 or less											
Lead [mm]			10	5	20	12	6	24	16	8	30	20	10	
Impact/Vibration resistance [m/s²]*4			50/20											
Actuation type			Ball screw (LEFS□), Ball screw + Belt (LEFS□ ^R)											
Guide type			Linear guide											
Static allowable moment*5 [N·m]	Mep (Pitching)		10		27			46			110			
	Mey (Yawing)		10		27			46			110			
	Mer (Rolling)		20		52			101			207			
Operating temperature range [°C]			5 to 40											
Operating humidity range [%RH]			90 or less (No condensation)											
Enclosure			IP30											
Electric specifications	Motor size			□28		□42			□56.4					
	Motor type			Step motor (Servo/24 VDC)										
	Encoder			Incremental										
	Power supply voltage [V]			24 VDC ±10 %										
Lock unit specifications	Power [W]*6 *8			Max. power 51		Max. power 57			Max. power 123			Max. power 141		
	Type*7			Non-magnetising lock										
	Holding force [N]			29	59	47	78	157	72	118	216	75	113	245
	Power [W]*8			2.9		5			5			5		
Rated voltage [V]			24 VDC ±10 %											

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 Speed changes according to the controller/driver type and work load. Check the "Speed-Work Load Graph (Guide)" on pages 20 and 21. Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10 % for each 5 m.

*3 A reference value for correcting errors in reciprocal operation

*4 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*5 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*6 Indicates the max. power during operation (including the controller)

This value can be used for the selection of the power supply.

*7 With lock only

*8 For an actuator with lock, add the power for the lock.

Specifications

Servo Motor (24 VDC)

Model		LEFS16A		LEFS25A						
Stroke [mm] ^{*1}		50 to 500			50 to 800					
Work load ^{*2} [kg]	Horizontal	7	10	5	11	18				
	Vertical	2	4	1	2.5	5				
Speed ^{*2} [mm/s]	Stroke range	Up to 500	1 to 500	1 to 250	2 to 800	2 to 500	1 to 250			
		501 to 600	—	—	2 to 800	2 to 500	1 to 250			
		601 to 700	—	—	2 to 630	2 to 420	1 to 230			
		701 to 800	—	—	2 to 550	2 to 330	1 to 180			
Max. acceleration/deceleration [mm/s ²]		3000								
Positioning repeatability [mm]	Basic type	±0.02								
	High-precision type	±0.015 (Lead H: ±0.02)								
Lost motion ^{*3} [mm]	Basic type	0.1 or less								
	High-precision type	0.05 or less								
Lead [mm]		10	5	20	12	6				
Impact/Vibration resistance [m/s ²] ^{*4}		50/20								
Actuation type		Ball screw (LEFS□), Ball screw + Belt (LEFS□ [†])								
Guide type		Linear guide								
Static allowable moment ^{*5} [N·m]	Mep (Pitching)	10			27					
	Mey (Yawing)	10			27					
	Mer (Rolling)	20			52					
Operating temperature range [°C]		5 to 40								
Operating humidity range [%RH]		90 or less (No condensation)								
Enclosure		IP30								
Electric specifications	Motor size	□28			□42					
	Motor output [W]	30			36					
	Motor type	Servo motor (24 VDC)								
	Encoder	Incremental								
	Power supply voltage [V]	24 VDC ±10 %								
Lock unit specifications	Power [W] ^{*6 *8}	Max. power 70			Max. power 113					
	Type ^{*7}	Non-magnetising lock								
	Holding force [N]	29	59	47	78	157				
	Power [W] ^{*8}	2.9			5					
Rated voltage [V]		24 VDC ±10 %								

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 Check the "Speed-Work Load Graph (Guide)" on page 23 for details.

Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10 % for each 5 m.

*3 A reference value for correcting errors in reciprocal operation

*4 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*5 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*6 Indicates the max. power during operation (including the controller)

This value can be used for the selection of the power supply.

*7 With lock only

*8 For an actuator with lock, add the power for the lock.

Weight

Series	LEFS16									
Stroke [mm]	50	100	150	200	250	300	350	400	450	500
Product weight [kg]	0.83	0.90	0.98	1.05	1.13	1.20	1.28	1.35	1.43	1.50
Additional weight with lock [kg]	0.12									


Series	LEFS25															
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
Product weight [kg]	1.70	1.84	1.98	2.12	2.26	2.40	2.54	2.68	2.82	2.96	3.10	3.24	3.38	3.52	3.66	3.80
Additional weight with lock [kg]	0.26															

Series	LEFS32																			
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
Product weight [kg]	3.15	3.35	3.55	3.75	3.95	4.15	4.35	4.55	4.75	4.95	5.15	5.35	5.55	5.75	5.95	6.15	6.35	6.55	6.75	6.95
Additional weight with lock [kg]	0.53																			


Series	LEFS40																			
Stroke [mm]	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200
Product weight [kg]	5.37	5.65	5.93	6.21	6.49	6.77	7.15	7.33	7.61	7.89	8.17	8.45	8.73	9.01	9.29	9.57	9.85	10.13	10.69	11.25
Additional weight with lock [kg]	0.53																			

Construction: In-line Motor

LEFS16, 25, 32

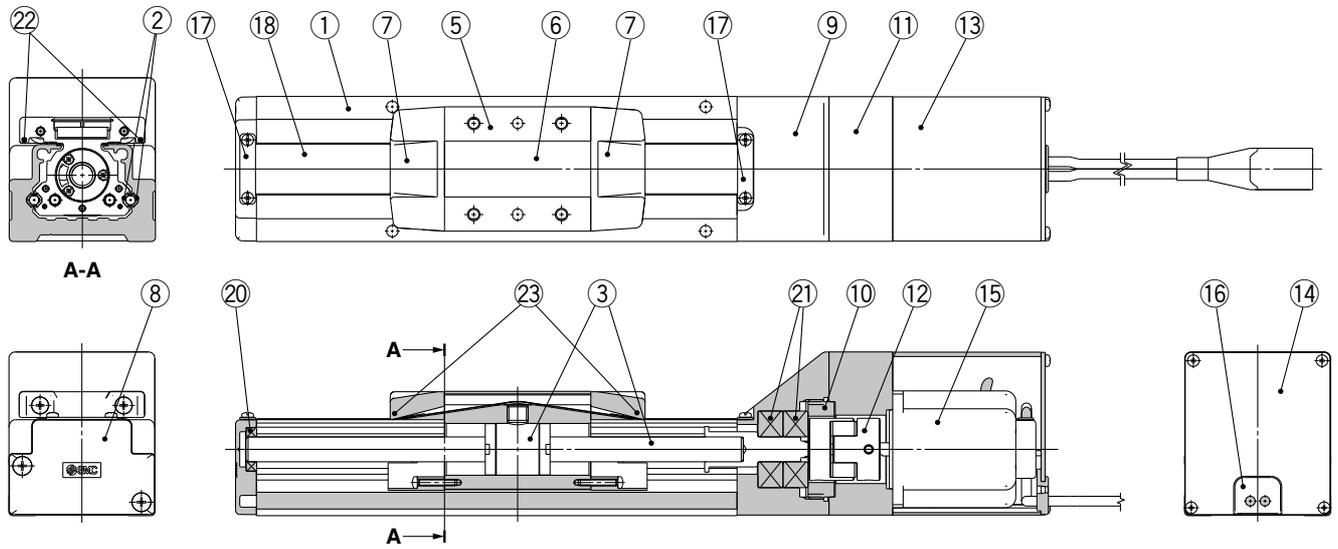

LEFS40

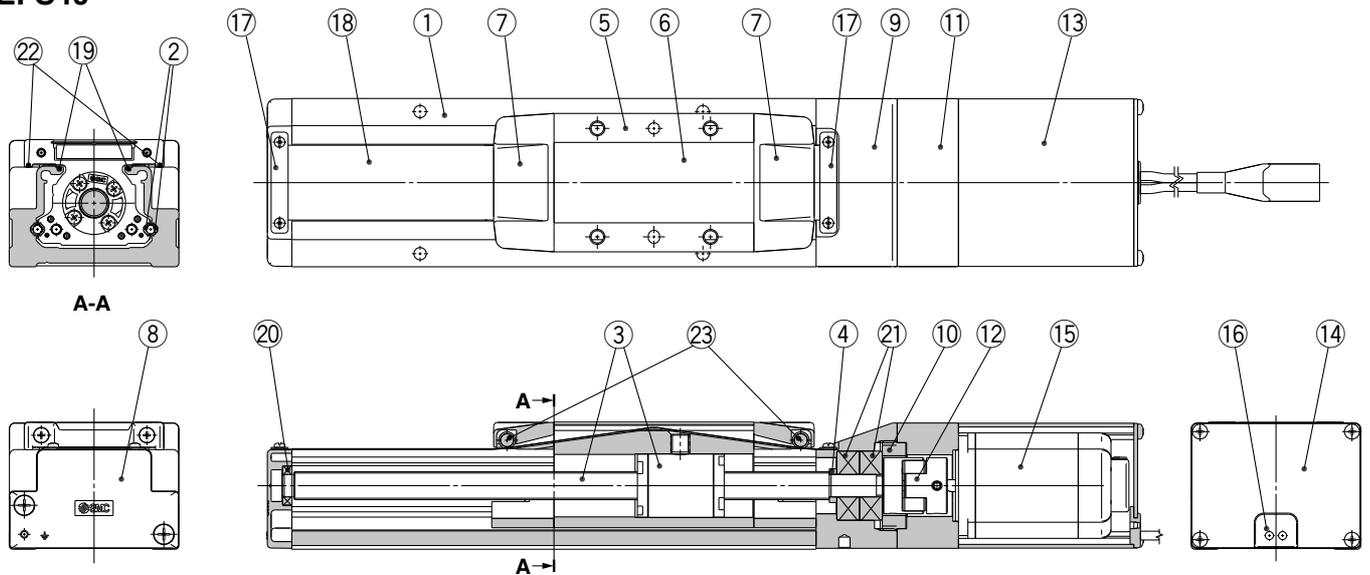

Component Parts

No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide	—	
3	Ball screw assembly	—	
4	Spacer	LEFS40	—
5	Table	Aluminium alloy	Anodised
6	Blanking plate	Aluminium alloy	Anodised
7	Seal band holder	Synthetic resin	
8	Housing A	Aluminium die-casted	Coating
9	Housing B	Aluminium die-casted	Coating
10	Bearing stopper	Aluminium alloy	
11	Motor mount	Aluminium alloy	Coating
12	Coupling	—	
13	Motor cover	Aluminium alloy	Anodised
14	End cover	Aluminium alloy	Anodised
15	Motor	—	

No.	Description	Material	Note
16	Rubber bushing	NBR	
17	Band stopper	Stainless steel	
18	Dust seal band	Stainless steel	
19	Seal magnet	—	
20	Bearing	—	Stroke 250 mm or more
21	Bearing	—	
22	Magnet	—	With auto switch compatibility
23	Roller assembly	—	Without grease application

Replacement Parts/Grease Pack


Applied portion	Order no.
Ball screw	GR-S-010 (10 g) GR-S-020 (20 g)
Rail guide	
Dust seal band (When "Without" is selected for the grease application, grease is applied only on the back side.)	

LEFS Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Construction: Motor Parallel

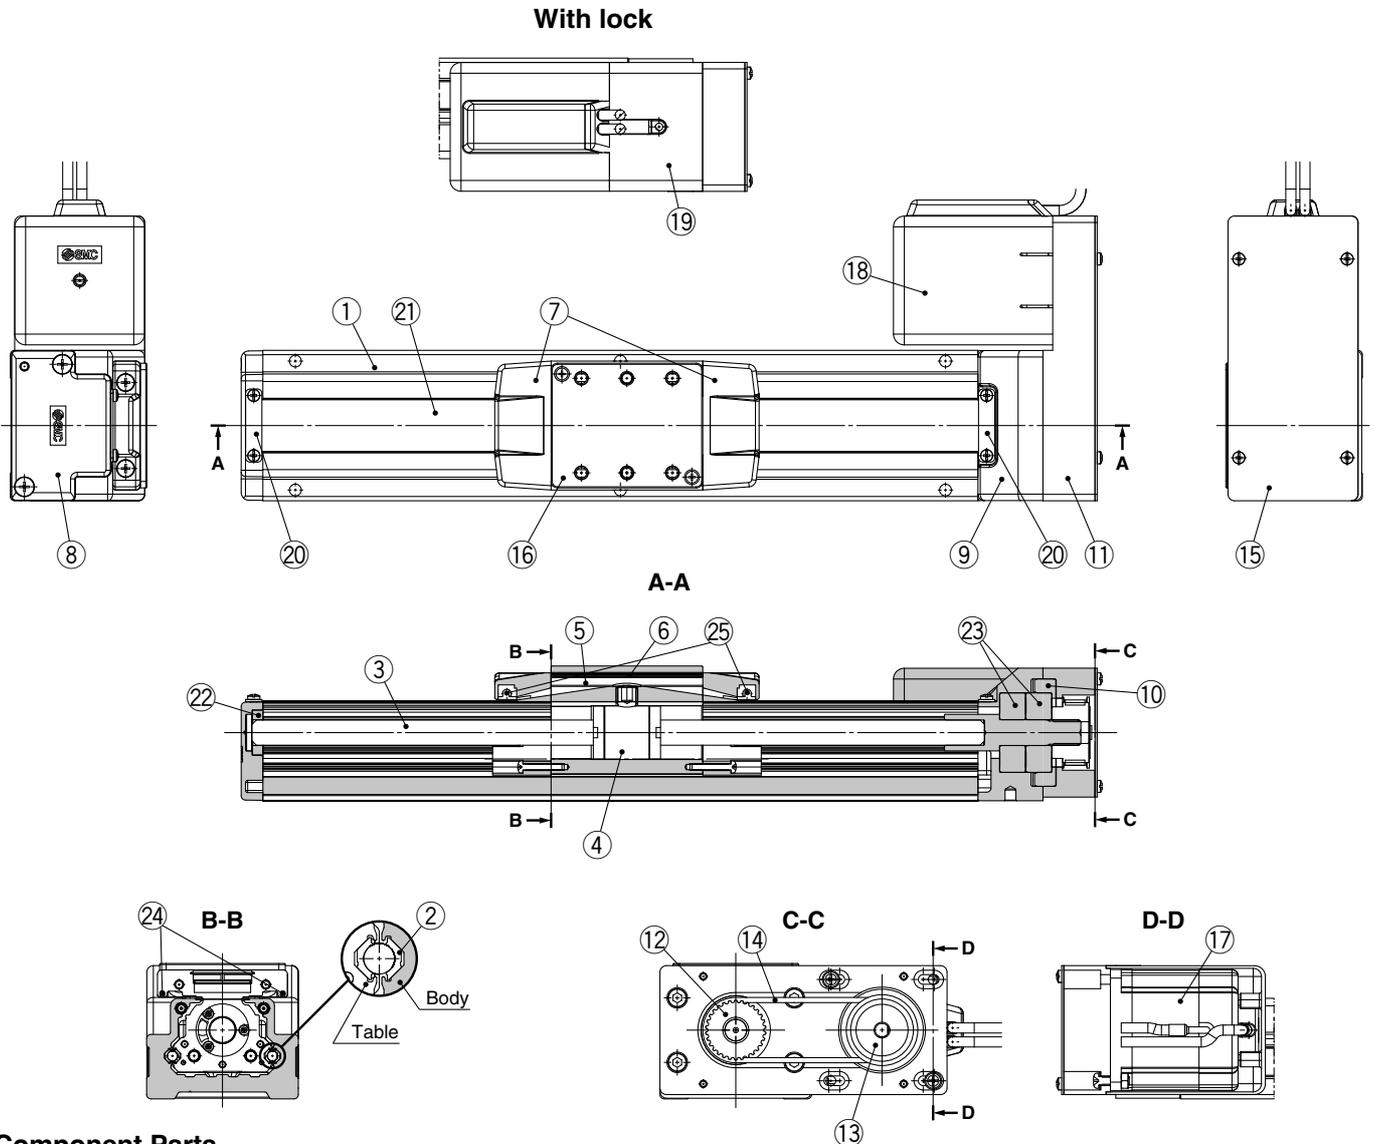

Component Parts

No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide	—	
3	Ball screw shaft	—	
4	Ball screw nut	—	
5	Table	Aluminium alloy	Anodised
6	Blanking plate	Aluminium alloy	Anodised
7	Seal band holder	Synthetic resin	
8	Housing A	Aluminium die-casted	Coating
9	Housing B	Aluminium die-casted	Coating
10	Bearing stopper	Aluminium alloy	
11	Return plate	Aluminium alloy	Coating
12	Pulley	Aluminium alloy	
13	Pulley	Aluminium alloy	
15	Cover plate	Aluminium alloy	Anodised
16	Table spacer	Aluminium alloy	Anodised (LEFS32 only)
17	Motor	—	
18	Motor cover	Synthetic resin	
19	Motor cover with lock	Aluminium alloy	Anodised
20	Band stopper	Stainless steel	

No.	Description	Material	Note
21	Dust seal band	Stainless steel	
22	Bearing	—	Stroke 250 mm or more
23	Bearing	—	
24	Magnet	—	With auto switch compatibility
25	Roller assembly	—	Without grease application

Replacement Parts/Belt


No.	Size	Order no.
14	16	LE-D-6-1
	25	LE-D-6-2
	32	LE-D-6-3
	40	LE-D-6-4

Replacement Parts/Grease Pack


Applied portion	Order no.
Ball screw	GR-S-010 (10 g) GR-S-020 (20 g)
Rail guide	
Dust seal band	
(When "Without" is selected for the grease application, grease is applied only on the back side.)	

Dimensions: In-line Motor

LEFS16

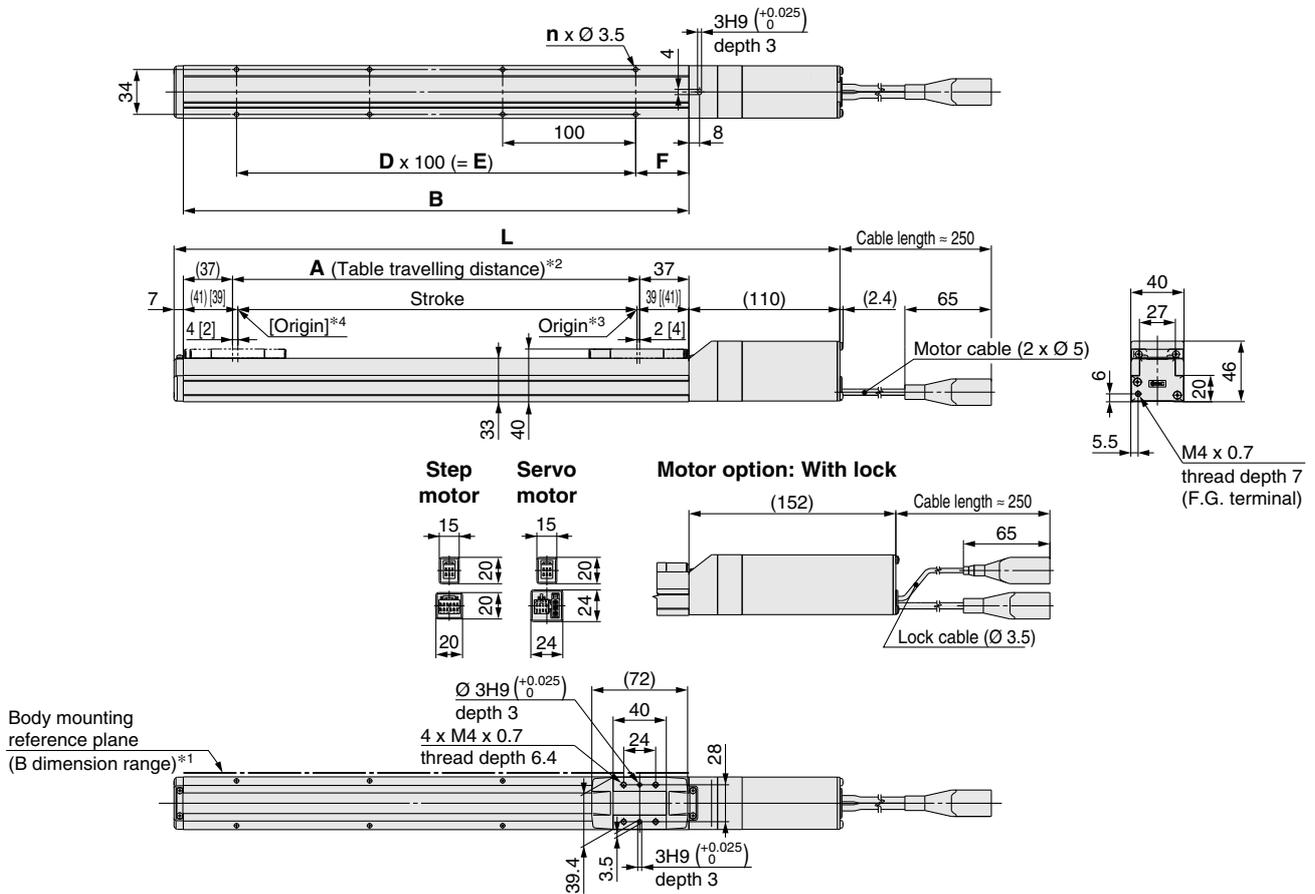

Positioning pin hole*5 (Option): Body bottom

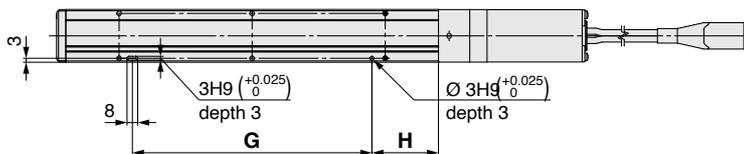

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 2 mm or more because of round chamfering. (Recommended height: 5 mm)
 In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
 Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed
- *5 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions

Model	L		A	B	n	D	E	F	G	H
	Without lock	With lock								
LEFS□16□-50□	247	289	56	130	4	—	—	40	80	25
LEFS□16□-100□	297	339	106	180	4	—	—		80	50
LEFS□16□-150□	347	389	156	230	4	—	—		80	50
LEFS□16□-200□	397	439	206	280	6	2	200		180	50
LEFS□16□-250□	447	489	256	330	6	2	200		180	50
LEFS□16□-300□	497	539	306	380	8	3	300		280	50
LEFS□16□-350□	547	589	356	430	8	3	300		280	50
LEFS□16□-400□	597	639	406	480	10	4	400		380	50
LEFS□16□-450□	647	689	456	530	10	4	400		380	50
LEFS□16□-500□	697	739	506	580	12	5	500		480	50


LEFS Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dimensions: In-line Motor

LEFS25

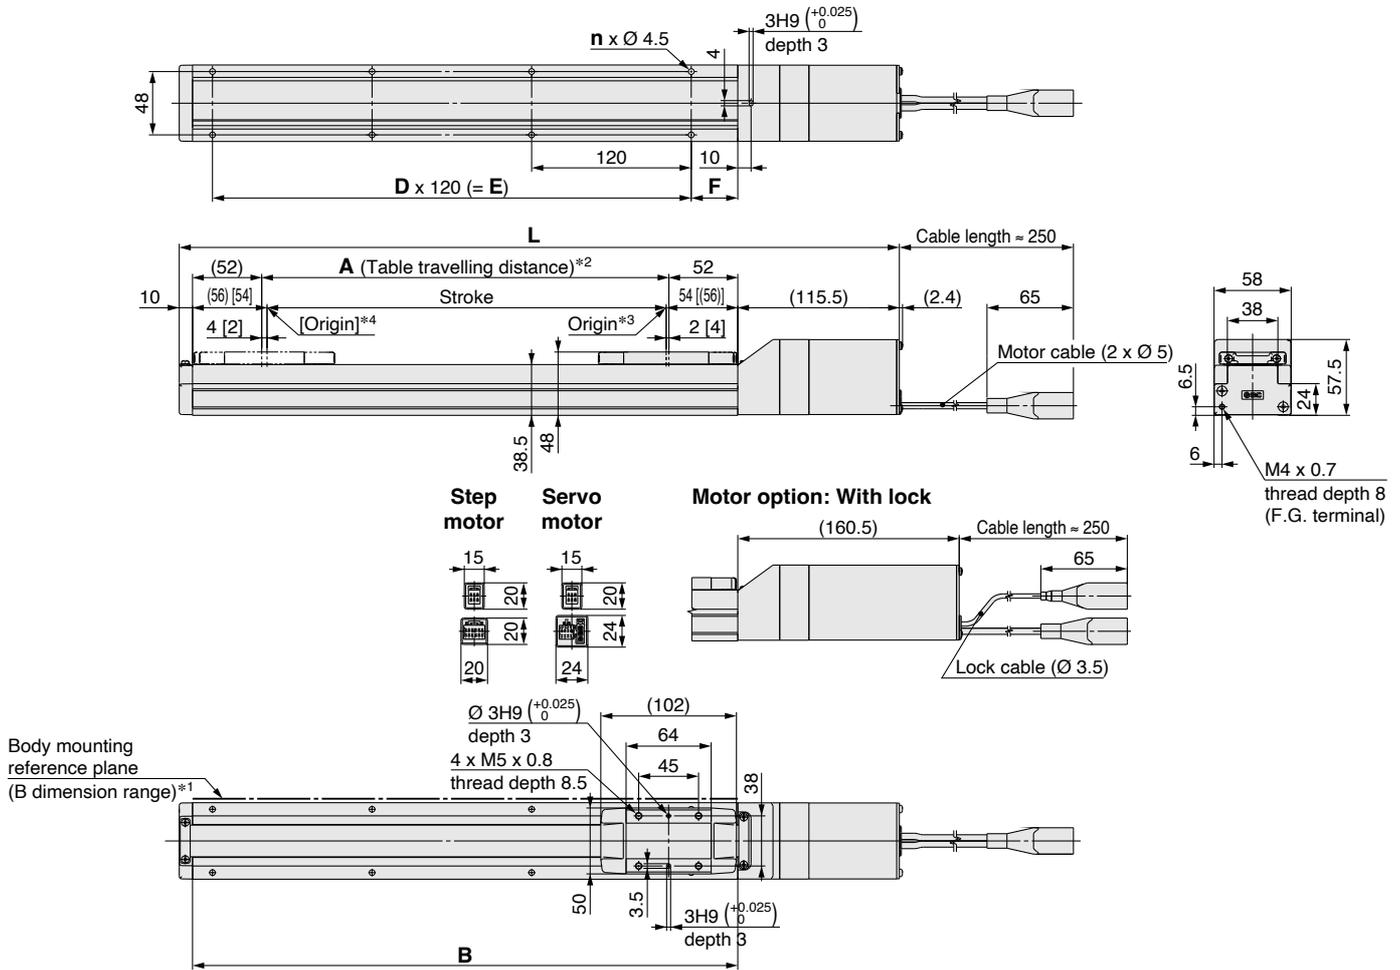

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed


Dimensions

Model	L		A	B	n	D	E	F
	Without lock	With lock						
LEFS□25□-50□	285.5	330.5	56	160	4	—	—	20
LEFS□25□-100□	335.5	380.5	106	210	4	—	—	35
LEFS□25□-150□	385.5	430.5	156	260	4	—	—	
LEFS□25□-200□	435.5	480.5	206	310	6	2	240	
LEFS□25□-250□	485.5	530.5	256	360	6	2	240	
LEFS□25□-300□	535.5	580.5	306	410	8	3	360	
LEFS□25□-350□	585.5	630.5	356	460	8	3	360	
LEFS□25□-400□	635.5	680.5	406	510	8	3	360	
LEFS□25□-450□	685.5	730.5	456	560	10	4	480	
LEFS□25□-500□	735.5	780.5	506	610	10	4	480	
LEFS□25□-550□	785.5	830.5	556	660	12	5	600	
LEFS□25□-600□	835.5	880.5	606	710	12	5	600	
LEFS□25□-650□	885.5	930.5	656	760	12	5	600	
LEFS□25□-700□	935.5	980.5	706	810	14	6	720	
LEFS□25□-750□	985.5	1030.5	756	860	14	6	720	
LEFS□25□-800□	1035.5	1080.5	806	910	16	7	840	

Dimensions: In-line Motor


LEFS25

Positioning pin hole*1 (Option): Body bottom

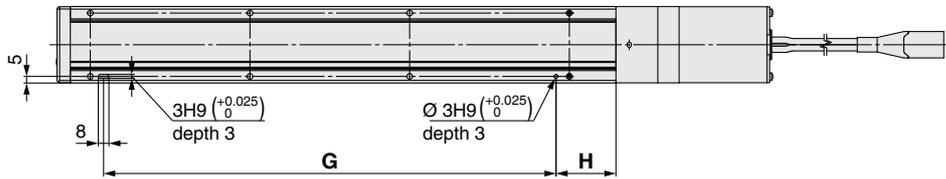

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

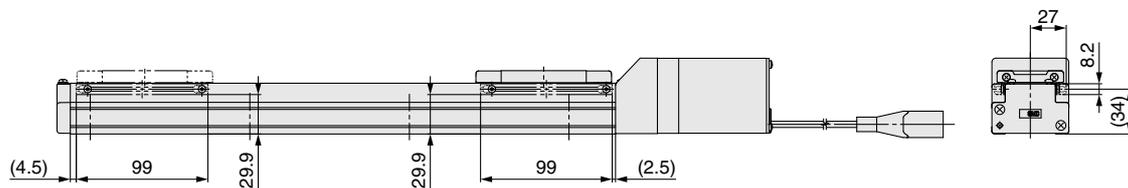

* For strokes of 99 mm or less, only 2 auto switch mounting brackets can be installed on the motor side.

Dimensions [mm]

Model	G	H
LEFS□25□-50□	100	30
LEFS□25□-100□	100	45
LEFS□25□-150□	100	45
LEFS□25□-200□	220	45
LEFS□25□-250□	220	45
LEFS□25□-300□	340	45
LEFS□25□-350□	340	45
LEFS□25□-400□	340	45
LEFS□25□-450□	460	45
LEFS□25□-500□	460	45
LEFS□25□-550□	580	45
LEFS□25□-600□	580	45
LEFS□25□-650□	580	45
LEFS□25□-700□	700	45
LEFS□25□-750□	700	45
LEFS□25□-800□	820	45


LEFS Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dimensions: In-line Motor

LEFS32

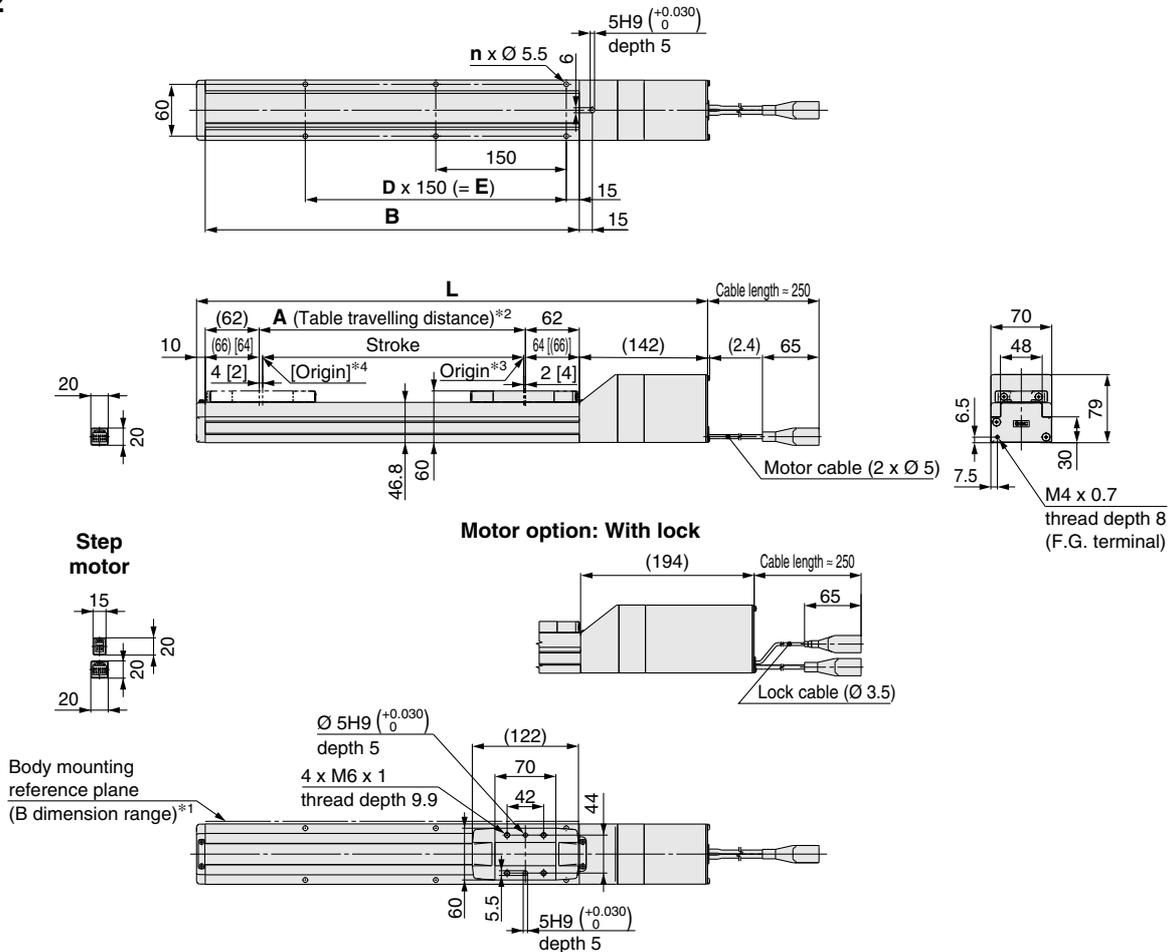

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed

Dimensions


[mm]

Model	L		A	B	n	D	E
	Without lock	With lock					
LEFS□32□-50□	332	384	56	180	4	—	—
LEFS□32□-100□	382	434	106	230	4	—	—
LEFS□32□-150□	432	484	156	280	4	—	—
LEFS□32□-200□	482	534	206	330	6	2	300
LEFS□32□-250□	532	584	256	380	6	2	300
LEFS□32□-300□	582	634	306	430	6	2	300
LEFS□32□-350□	632	684	356	480	8	3	450
LEFS□32□-400□	682	734	406	530	8	3	450
LEFS□32□-450□	732	784	456	580	8	3	450
LEFS□32□-500□	782	834	506	630	10	4	600
LEFS□32□-550□	832	884	556	680	10	4	600
LEFS□32□-600□	882	934	606	730	10	4	600
LEFS□32□-650□	932	984	656	780	12	5	750
LEFS□32□-700□	982	1034	706	830	12	5	750
LEFS□32□-750□	1032	1084	756	880	12	5	750
LEFS□32□-800□	1082	1134	806	930	14	6	900
LEFS□32□-850□	1132	1184	856	980	14	6	900
LEFS□32□-900□	1182	1234	906	1030	14	6	900
LEFS□32□-950□	1232	1284	956	1080	16	7	1050
LEFS□32□-1000□	1282	1334	1006	1130	16	7	1050

Dimensions: In-line Motor


LEFS32

Positioning pin hole*1 (Option): Body bottom

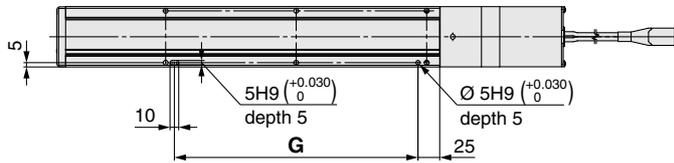

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

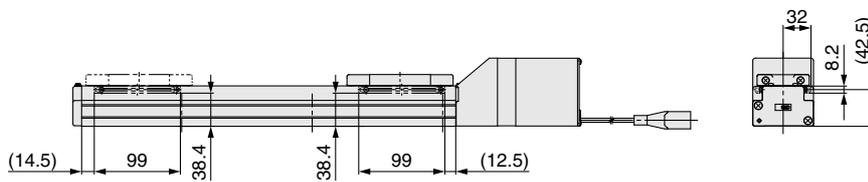

* For strokes of 99 mm or less, only 2 auto switch mounting brackets can be installed on the motor side.

Dimensions [mm]	
Model	G
LEFS□32□-50□	130
LEFS□32□-100□	130
LEFS□32□-150□	130
LEFS□32□-200□	280
LEFS□32□-250□	280
LEFS□32□-300□	280
LEFS□32□-350□	430
LEFS□32□-400□	430
LEFS□32□-450□	430
LEFS□32□-500□	580
LEFS□32□-550□	580
LEFS□32□-600□	580
LEFS□32□-650□	730
LEFS□32□-700□	730
LEFS□32□-750□	730
LEFS□32□-800□	880
LEFS□32□-850□	880
LEFS□32□-900□	880
LEFS□32□-950□	1030
LEFS□32□-1000□	1030


LEFS Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dimensions: In-line Motor

LEFS40

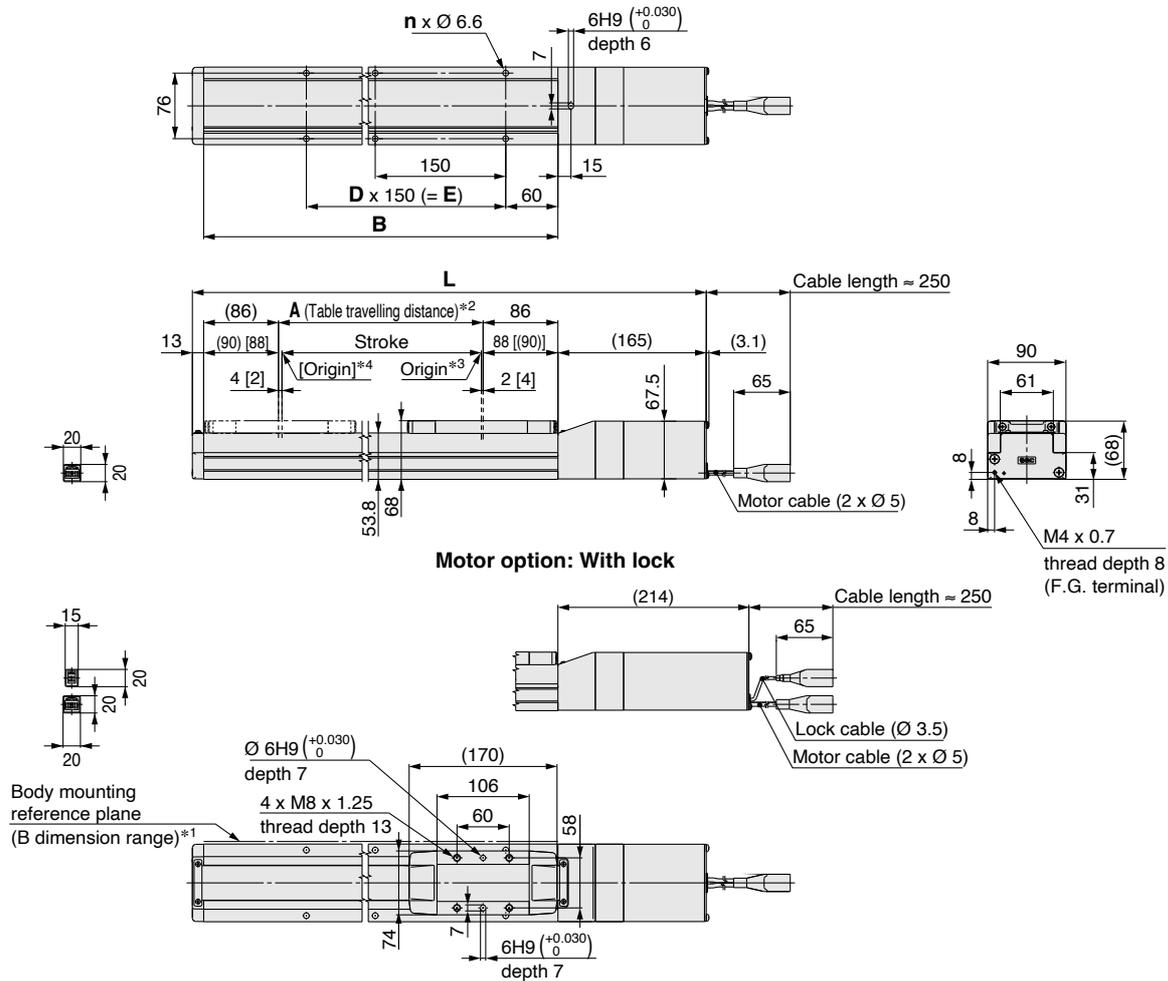

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed


Dimensions

Model	L		A	B	n	D	E
	Without lock	With lock					
LEFS□40□-150□	506	555	156	328	4	—	150
LEFS□40□-200□	556	605	206	378	6	2	300
LEFS□40□-250□	606	655	256	428	6	2	300
LEFS□40□-300□	656	705	306	478	6	2	300
LEFS□40□-350□	706	755	356	528	8	3	450
LEFS□40□-400□	756	805	406	578	8	3	450
LEFS□40□-450□	806	855	456	628	8	3	450
LEFS□40□-500□	856	905	506	678	10	4	600
LEFS□40□-550□	906	955	556	728	10	4	600
LEFS□40□-600□	956	1005	606	778	10	4	600
LEFS□40□-650□	1006	1055	656	828	12	5	750
LEFS□40□-700□	1056	1105	706	878	12	5	750
LEFS□40□-750□	1106	1155	756	928	12	5	750
LEFS□40□-800□	1156	1205	806	978	14	6	900
LEFS□40□-850□	1206	1255	856	1028	14	6	900
LEFS□40□-900□	1256	1305	906	1078	14	6	900
LEFS□40□-950□	1306	1355	956	1128	16	7	1050
LEFS□40□-1000□	1356	1405	1006	1178	16	7	1050
LEFS□40□-1100□	1456	1505	1106	1278	18	8	1200
LEFS□40□-1200□	1556	1605	1206	1378	18	8	1200

Dimensions: In-line Motor


LEFS40

Positioning pin hole*1 (Option): Body bottom

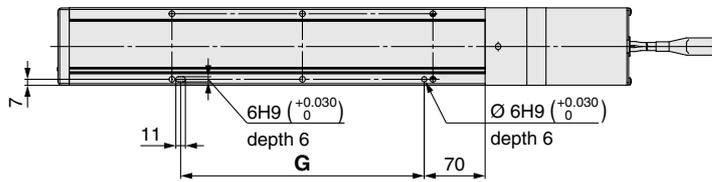

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

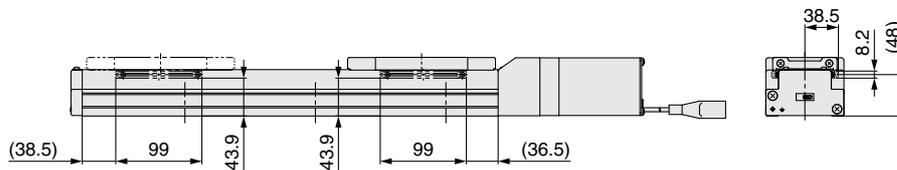

Dimensions

[mm]

Model	G
LEFS□40□-150□	130
LEFS□40□-200□	280
LEFS□40□-250□	280
LEFS□40□-300□	280
LEFS□40□-350□	430
LEFS□40□-400□	430
LEFS□40□-450□	430
LEFS□40□-500□	580
LEFS□40□-550□	580
LEFS□40□-600□	580
LEFS□40□-650□	730
LEFS□40□-700□	730
LEFS□40□-750□	730
LEFS□40□-800□	880
LEFS□40□-850□	880
LEFS□40□-900□	880
LEFS□40□-950□	1030
LEFS□40□-1000□	1030
LEFS□40□-1100□	1180
LEFS□40□-1200□	1180





LEFS Series

Incremental (Step Motor 24 VDC)



Incremental (Servo Motor 24 VDC)

Dimensions: Motor Parallel

LEFS16

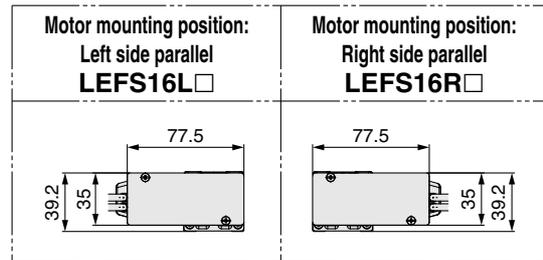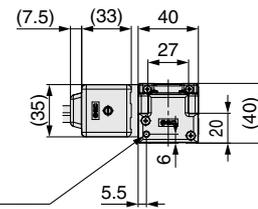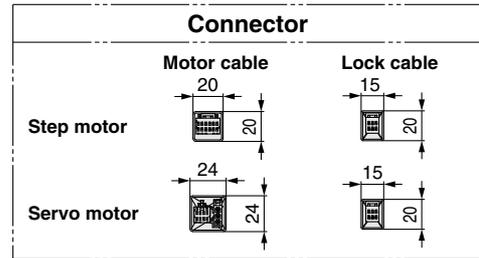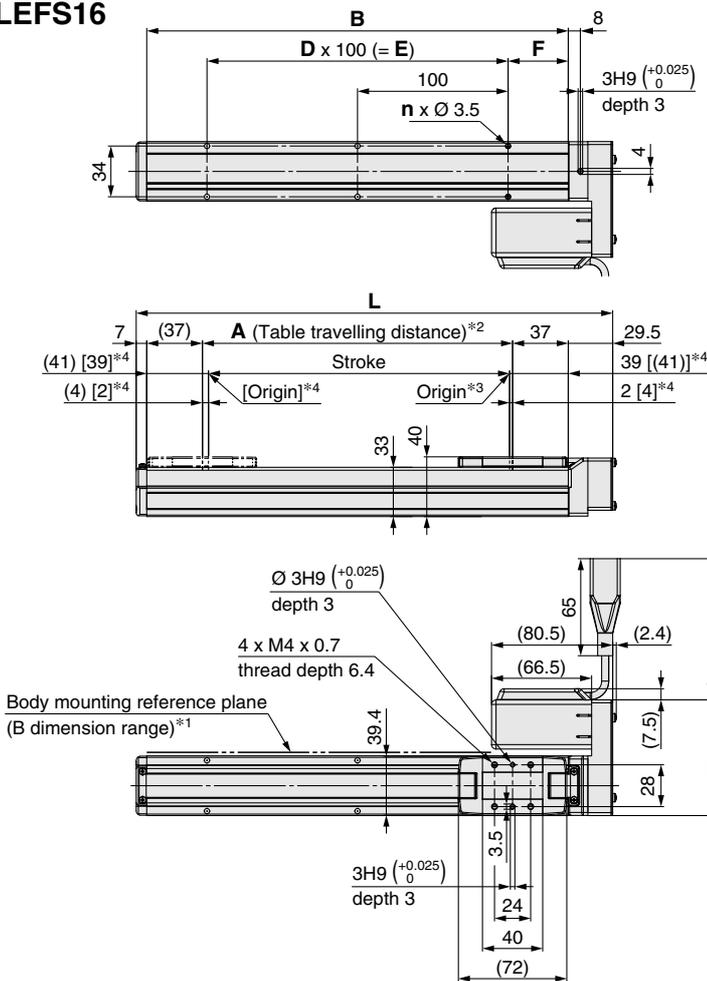

Positioning pin hole*5 (Option): Body bottom

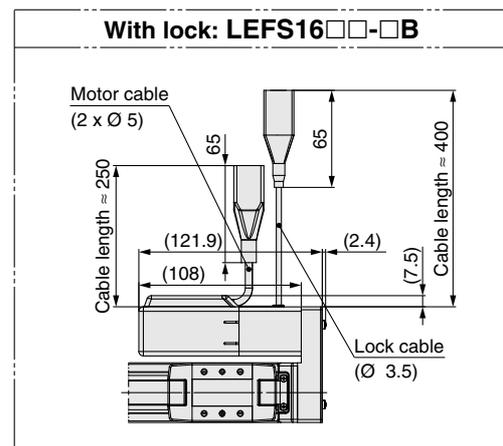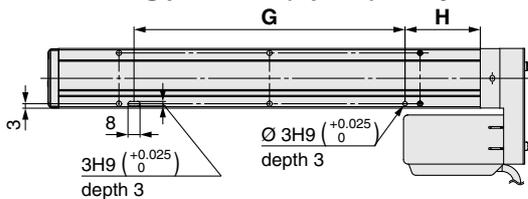






- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 2 mm or more. (Recommended height: 5 mm) In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed
- *5 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions

Model	L	A	B	n	D	E	F	G	H
LEFS□16□□-50□	166.5	56	130	4	—	—	15	80	25
LEFS□16□□-100□	216.5	106	180	4	—	—	40	80	50
LEFS□16□□-150□	266.5	156	230	4	—	—		80	50
LEFS□16□□-200□	316.5	206	280	6	2	200		180	50
LEFS□16□□-250□	366.5	256	330	6	2	200		180	50
LEFS□16□□-300□	416.5	306	380	8	3	300		280	50
LEFS□16□□-350□	466.5	356	430	8	3	300		280	50
LEFS□16□□-400□	516.5	406	480	10	4	400		380	50
LEFS□16□□-450□	566.5	456	530	10	4	400		380	50
LEFS□16□□-500□	616.5	506	580	12	5	500		480	50

Dimensions: Motor Parallel

LEFS25R

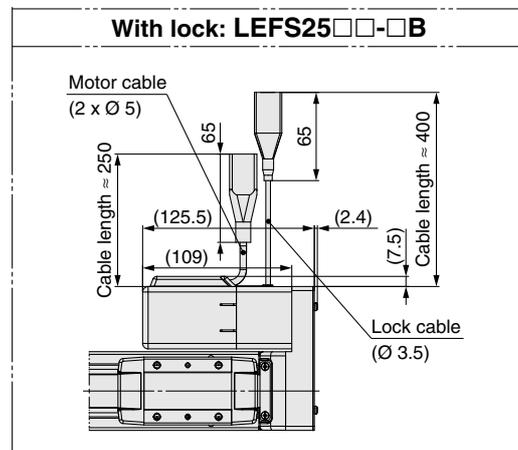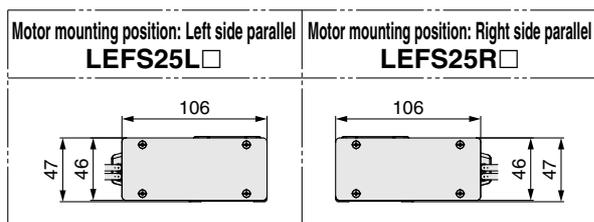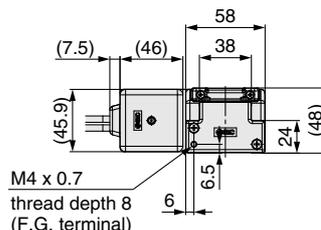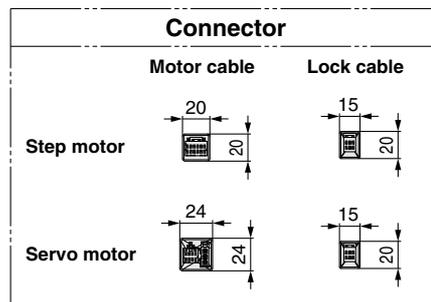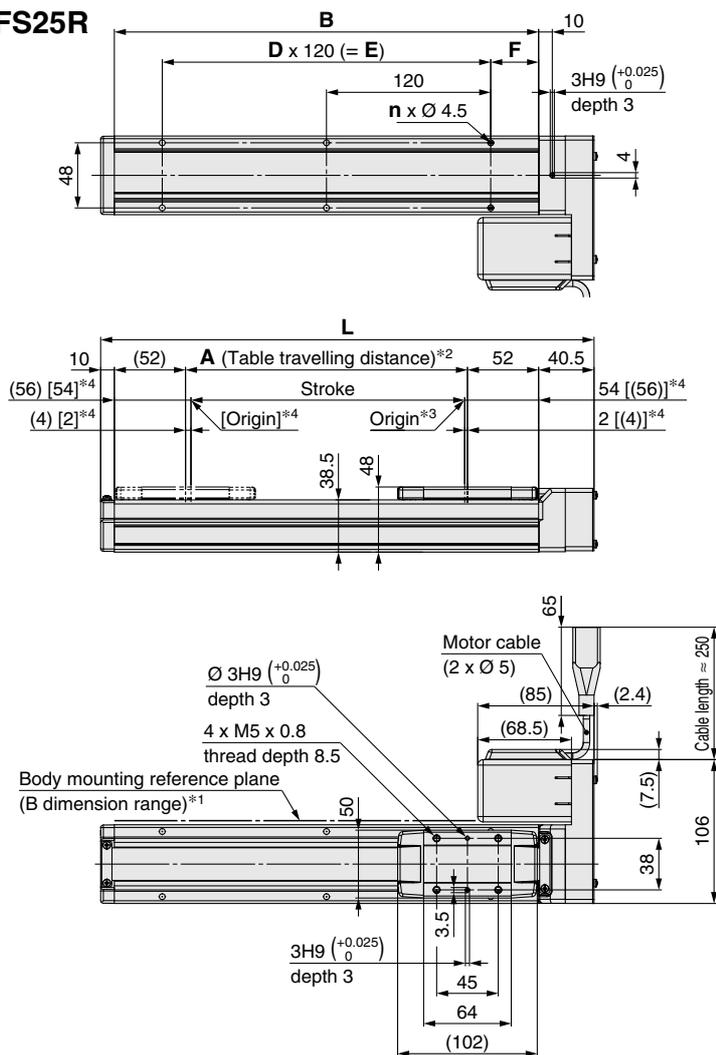

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm)
 In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
 Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed

Dimensions	[mm]							
Model	L	A	B	n	D	E	F	
LEFS□25□□-50□	210.5	56	160	4	—	—	20	
LEFS□25□□-100□	260.5	106	210	4	—	—		
LEFS□25□□-150□	310.5	156	260	4	—	—		
LEFS□25□□-200□	360.5	206	310	6	2	240		
LEFS□25□□-250□	410.5	256	360	6	2	240		35
LEFS□25□□-300□	460.5	306	410	8	3	360		
LEFS□25□□-350□	510.5	356	460	8	3	360		
LEFS□25□□-400□	560.5	406	510	8	3	360		

Dimensions	[mm]							
Model	L	A	B	n	D	E	F	
LEFS□25□□-450□	610.5	456	560	10	4	480		
LEFS□25□□-500□	660.5	506	610	10	4	480		
LEFS□25□□-550□	710.5	556	660	12	5	600		
LEFS□25□□-600□	760.5	606	710	12	5	600		35
LEFS□25□□-650□	810.5	656	760	12	5	600		
LEFS□25□□-700□	860.5	706	810	14	6	720		
LEFS□25□□-750□	910.5	756	860	14	6	720		
LEFS□25□□-800□	960.5	806	910	16	7	840		

LEFS Series


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dimensions: Motor Parallel

LEFS25R


Positioning pin hole*1 (Option): Body bottom

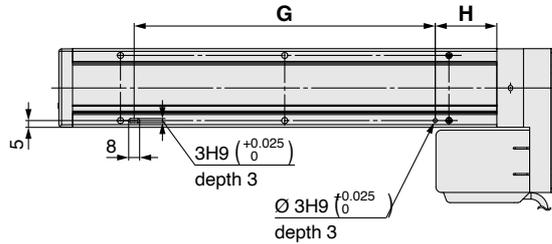


*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

LEFS25R

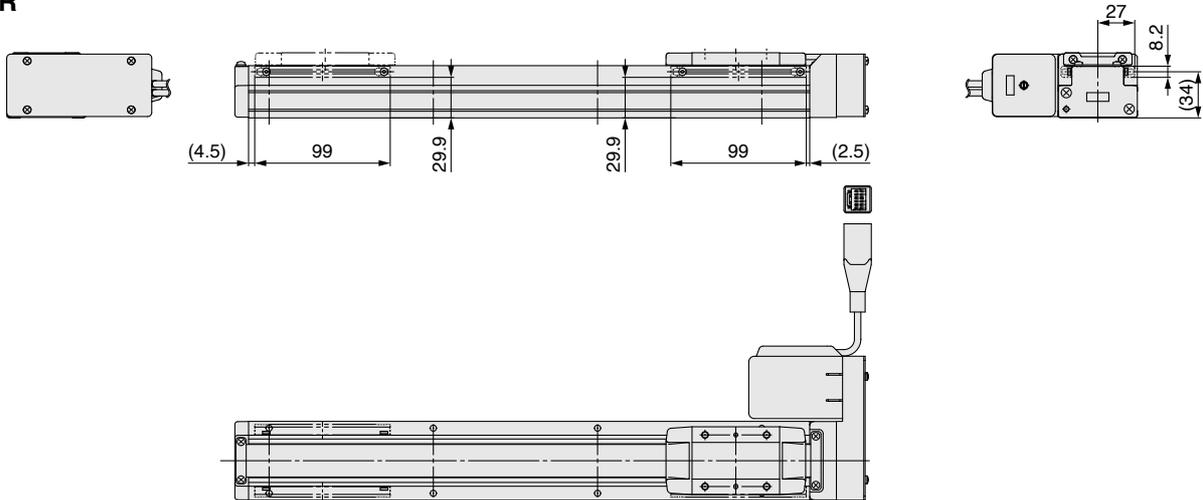

LEFS25L

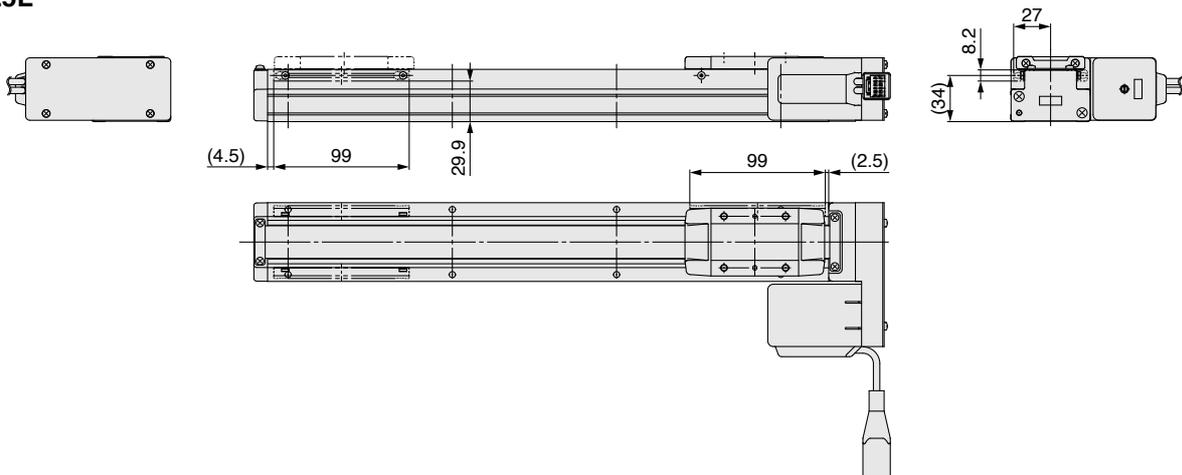


Model	G	H
LEFS□25□□-50□	100	30
LEFS□25□□-100□	100	45
LEFS□25□□-150□	100	45
LEFS□25□□-200□	220	45
LEFS□25□□-250□	220	45
LEFS□25□□-300□	340	45
LEFS□25□□-350□	340	45
LEFS□25□□-400□	340	45

Model	G	H
LEFS□25□□-450□	460	45
LEFS□25□□-500□	460	45
LEFS□25□□-550□	580	45
LEFS□25□□-600□	580	45
LEFS□25□□-650□	580	45
LEFS□25□□-700□	700	45
LEFS□25□□-750□	700	45
LEFS□25□□-800□	820	45

* For strokes of 99 mm or less, only 1 auto switch mounting bracket can be installed on the motor side.

Dimensions: Motor Parallel

LEFS32R

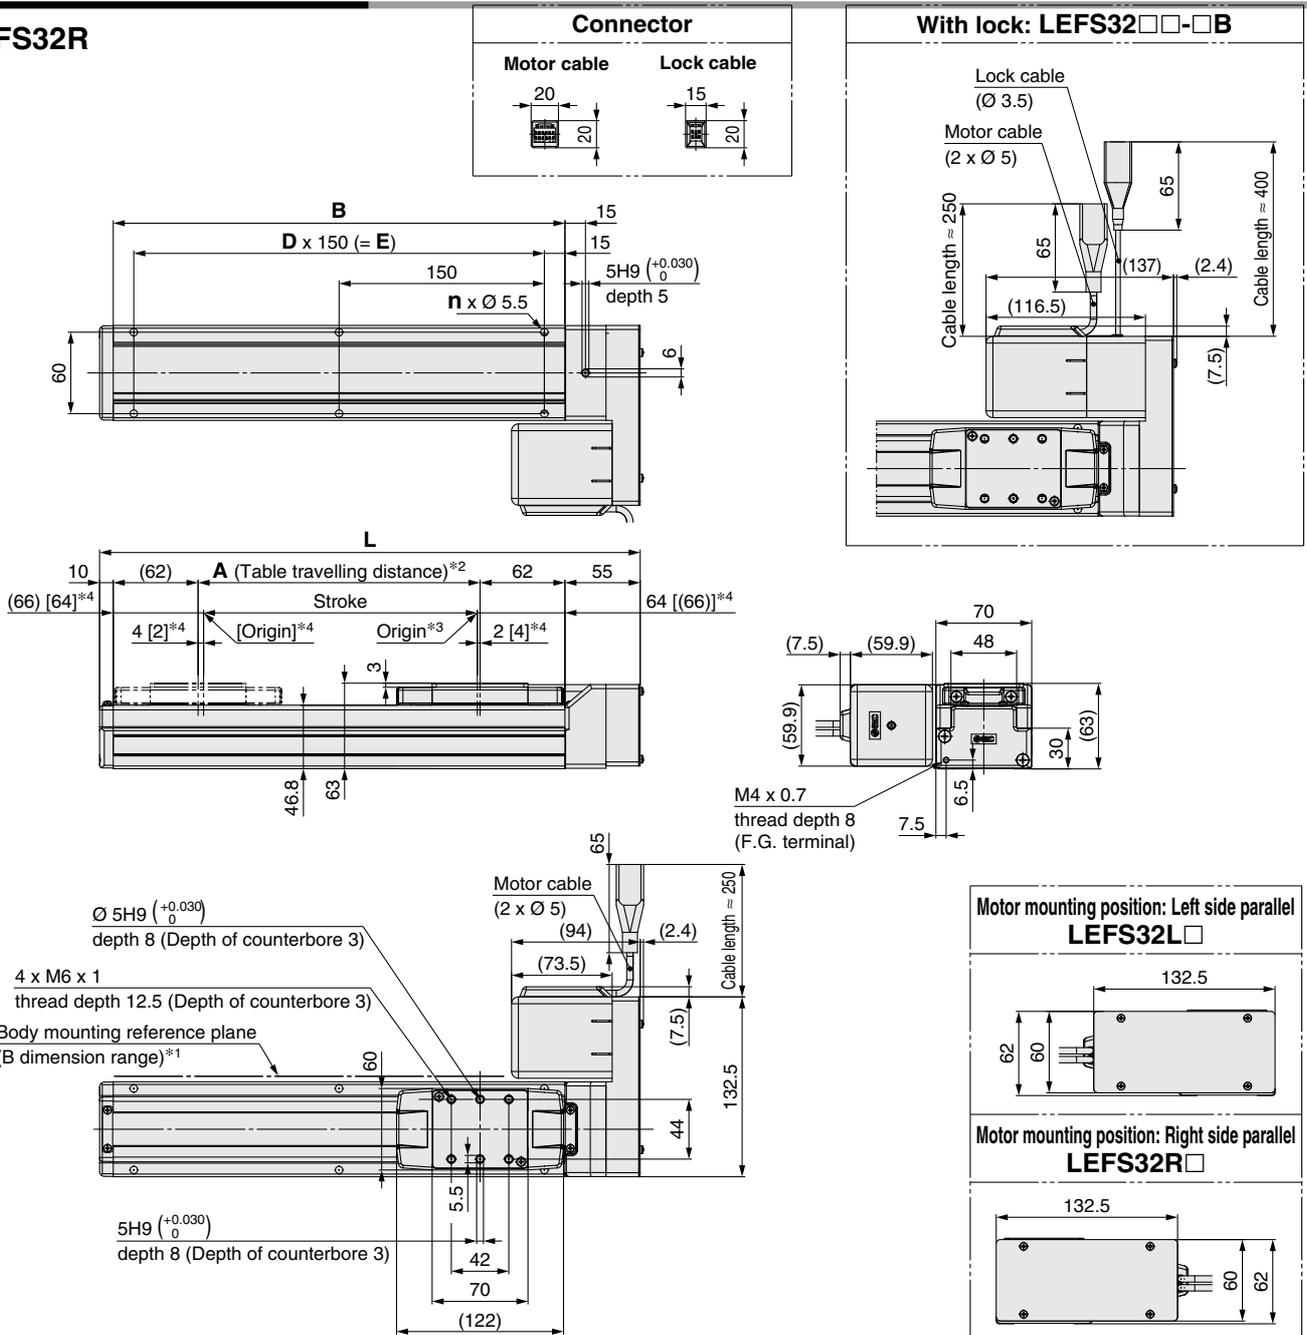

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm)
 In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane.
 Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
 Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed
- *5 When the table spacer is removed

Dimensions

Model	L	A	B	n	D	E
LEFS□32□□-50□	245	56	180	4	—	—
LEFS□32□□-100□	295	106	230	4	—	—
LEFS□32□□-150□	345	156	280	4	—	—
LEFS□32□□-200□	395	206	330	6	2	300
LEFS□32□□-250□	445	256	380	6	2	300
LEFS□32□□-300□	495	306	430	6	2	300
LEFS□32□□-350□	545	356	480	8	3	450
LEFS□32□□-400□	595	406	530	8	3	450
LEFS□32□□-450□	645	456	580	8	3	450
LEFS□32□□-500□	695	506	630	10	4	600

Dimensions

Model	L	A	B	n	D	E
LEFS□32□□-550□	745	556	680	10	4	600
LEFS□32□□-600□	795	606	730	10	4	600
LEFS□32□□-650□	845	656	780	12	5	750
LEFS□32□□-700□	895	706	830	12	5	750
LEFS□32□□-750□	945	756	880	12	5	750
LEFS□32□□-800□	995	806	930	14	6	900
LEFS□32□□-850□	1045	856	980	14	6	900
LEFS□32□□-900□	1095	906	1030	14	6	900
LEFS□32□□-950□	1145	956	1080	16	7	1050
LEFS□32□□-1000□	1195	1006	1130	16	7	1050

LEFS Series


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dimensions: Motor Parallel

LEFS32R




Positioning pin hole*1 (Option): Body bottom

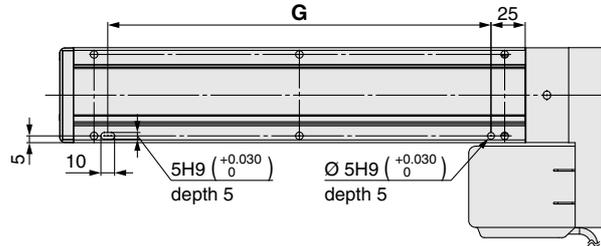



*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

LEFS32R

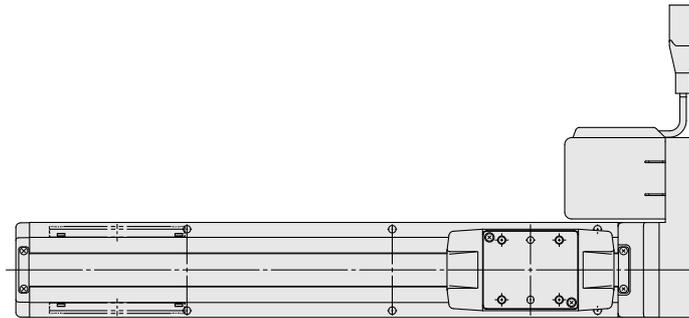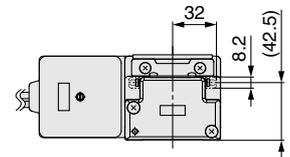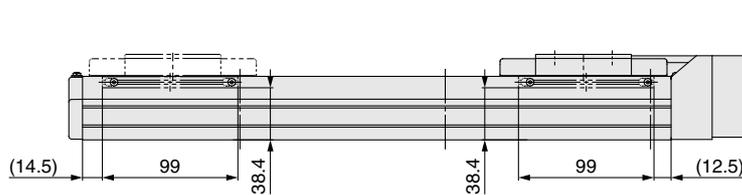

LEFS32L

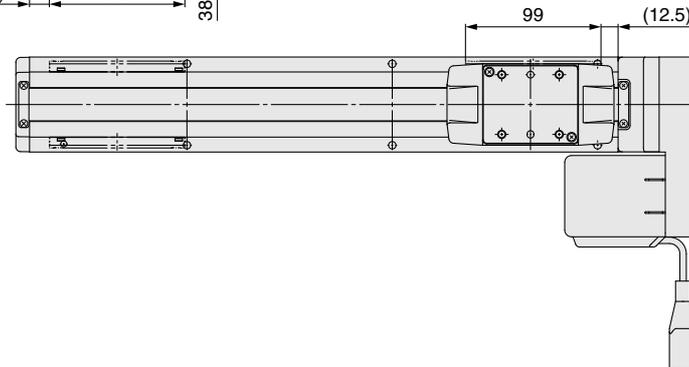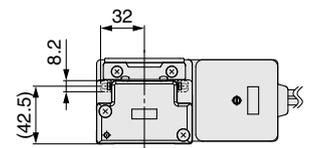





Model	Dimensions [mm]
LEFS□32□□-50□	G 130
LEFS□32□□-100□	G 130
LEFS□32□□-150□	G 130
LEFS□32□□-200□	G 280
LEFS□32□□-250□	G 280
LEFS□32□□-300□	G 280
LEFS□32□□-350□	G 430
LEFS□32□□-400□	G 430
LEFS□32□□-450□	G 430
LEFS□32□□-500□	G 580

Model	Dimensions [mm]
LEFS□32□□-550□	G 580
LEFS□32□□-600□	G 580
LEFS□32□□-650□	G 730
LEFS□32□□-700□	G 730
LEFS□32□□-750□	G 730
LEFS□32□□-800□	G 880
LEFS□32□□-850□	G 880
LEFS□32□□-900□	G 880
LEFS□32□□-950□	G 1030
LEFS□32□□-1000□	G 1030

* For strokes of 9.9 mm or less, only 1 auto switch mounting bracket can be installed on the motor side.

Dimensions: Motor Parallel

LEFS40R

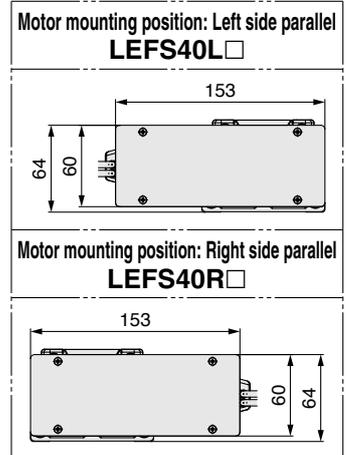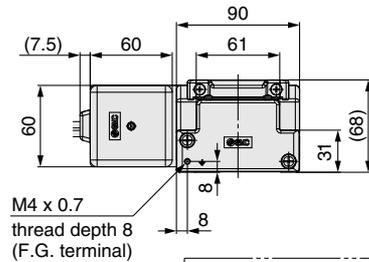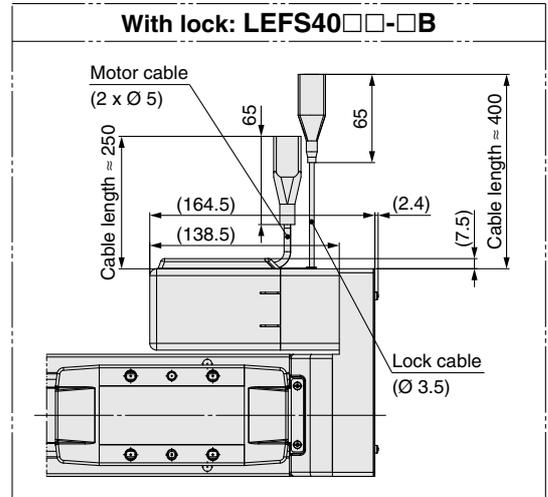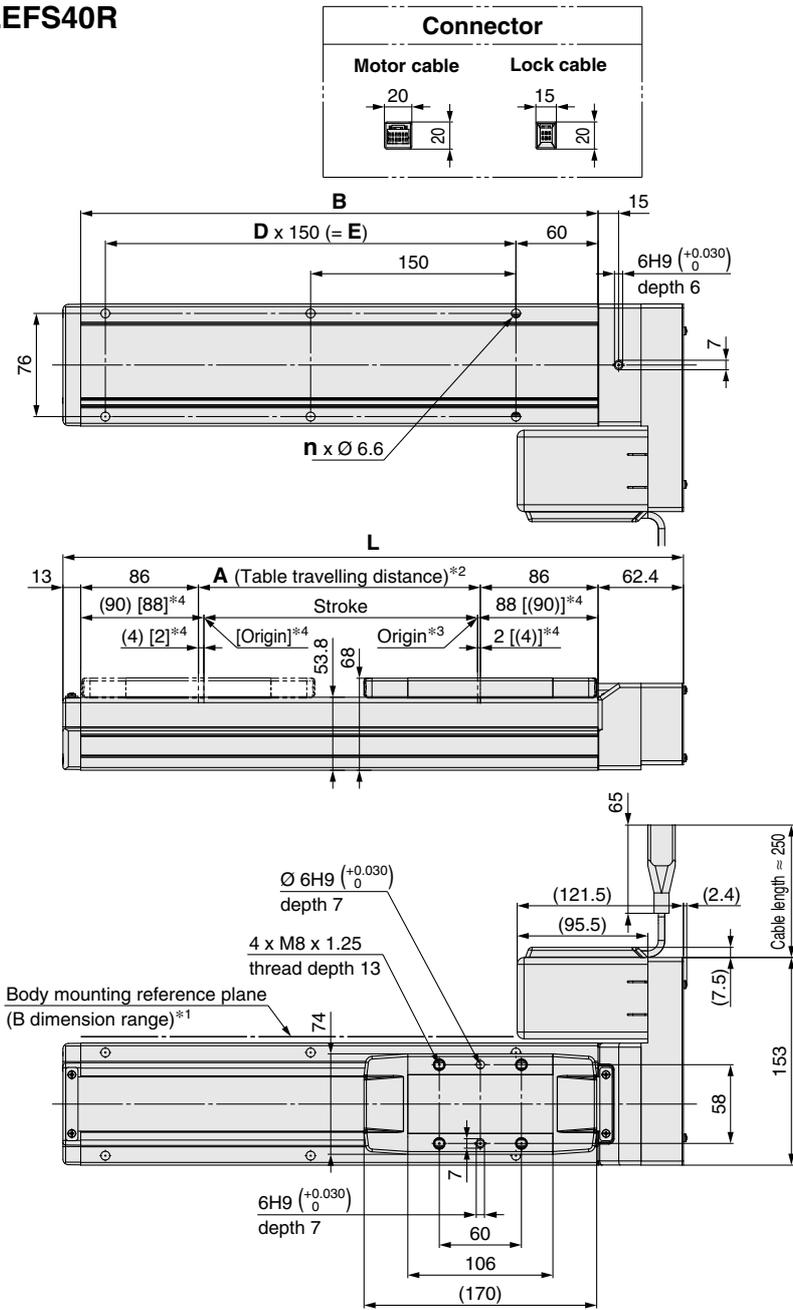

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm)
 In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane.
 Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
 Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed

Dimensions	[mm]					
Model	L	A	B	n	D	E
LEFS□40□□-150□	403.4	156	328	4	—	150
LEFS□40□□-200□	453.4	206	378	6	2	300
LEFS□40□□-250□	503.4	256	428	6	2	300
LEFS□40□□-300□	553.4	306	478	6	2	300
LEFS□40□□-350□	603.4	356	528	8	3	450
LEFS□40□□-400□	653.4	406	578	8	3	450
LEFS□40□□-450□	703.4	456	628	8	3	450
LEFS□40□□-500□	753.4	506	678	10	4	600
LEFS□40□□-550□	803.4	556	728	10	4	600
LEFS□40□□-600□	853.4	606	778	10	4	600

Dimensions	[mm]					
Model	L	A	B	n	D	E
LEFS□40□□-650□	903.4	656	828	12	5	750
LEFS□40□□-700□	953.4	706	878	12	5	750
LEFS□40□□-750□	1003.4	756	928	12	5	750
LEFS□40□□-800□	1053.4	806	978	14	6	900
LEFS□40□□-850□	1103.4	856	1028	14	6	900
LEFS□40□□-900□	1153.4	906	1078	14	6	900
LEFS□40□□-950□	1203.4	956	1128	16	7	1050
LEFS□40□□-1000□	1253.4	1006	1178	16	7	1050
LEFS□40□□-1100□	1353.4	1106	1278	18	8	1200
LEFS□40□□-1200□	1453.4	1206	1378	18	8	1200

LEFS Series


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dimensions: Motor Parallel

LEFS40R


Positioning pin hole*1 (Option): Body bottom

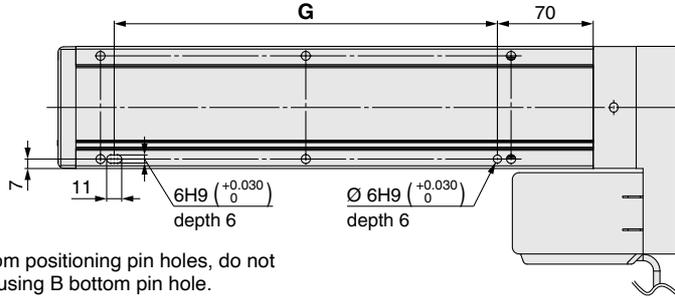


*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

LEFS40R

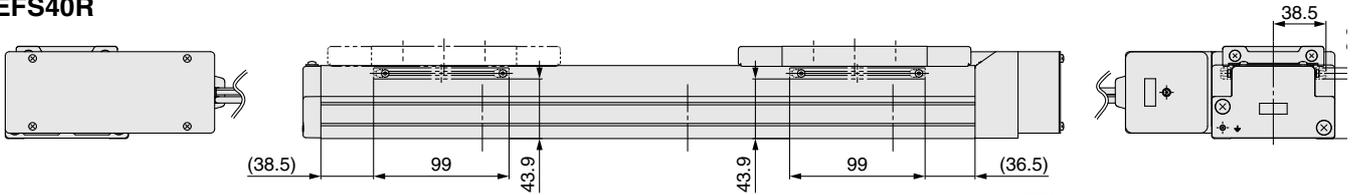

LEFS40L

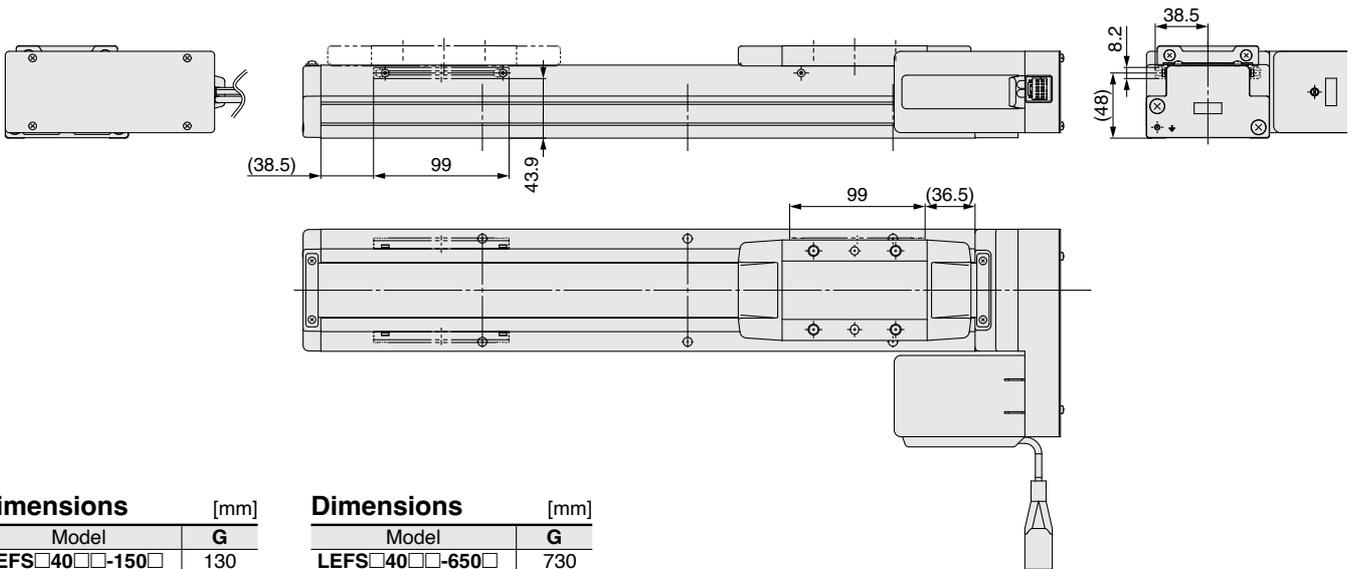

Dimensions [mm]	
Model	G
LEFS□40□□-150□	130
LEFS□40□□-200□	280
LEFS□40□□-250□	280
LEFS□40□□-300□	280
LEFS□40□□-350□	430
LEFS□40□□-400□	430
LEFS□40□□-450□	430
LEFS□40□□-500□	580
LEFS□40□□-550□	580
LEFS□40□□-600□	580

Dimensions [mm]	
Model	G
LEFS□40□□-650□	730
LEFS□40□□-700□	730
LEFS□40□□-750□	730
LEFS□40□□-800□	880
LEFS□40□□-850□	880
LEFS□40□□-900□	880
LEFS□40□□-950□	1030
LEFS□40□□-1000□	1030
LEFS□40□□-1100□	1180
LEFS□40□□-1200□	1180


Slider Type Ball Screw Drive

LEFS Series LEFS25, 32, 40



* For details, refer to www.smc.eu and onward.

How to Order

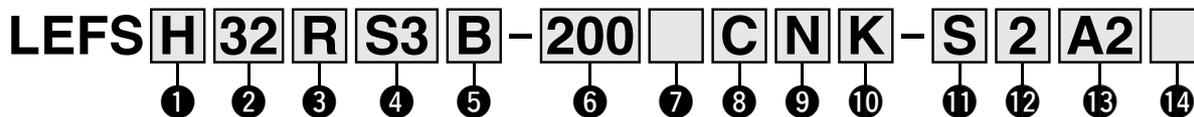

① Accuracy

—	Basic type
H	High-precision type

② Size

25
32
40

③ Motor mounting position

—	In-line
R	Right side parallel
L	Left side parallel

⑤ Lead [mm]

Symbol	LEFS25	LEFS32	LEFS40
H	20	24	30
A	12	16	20
B	6	8	10

⑥ Stroke [mm]

50	50
to	to
1200	1200

⑦ Motor option

—	Without option
B	With lock

④ Motor type

Symbol	Type	Output [W]	Actuator size	Compatible drivers
S2*1	AC servo motor (Incremental encoder)	100	25	LECSA□-S1
S3		200	32	LECSA□-S3
S4		400	40	LECSA□-S4
T6*2	AC servo motor (Absolute encoder)	100	25	LECSB2-T5
T7				200
T8		400	40	
				LECSB2-T7
				LECS2-T7-□
				LECS2-T7
				LECSB2-T8
				LECS2-T8
				LECS2-T8-□
				LECS2-T8

*1 For motor type S2, the compatible driver part number suffix is S1.
*2 For motor type T6, the compatible driver part number is LECS□-T5.

⑧ Auto switch compatibility

—	None
C	With (Includes 1 mounting bracket)

* If 2 or more are required, please order them separately. (Part no.: LEF-D-2-1 For details, refer to page 181.)
* Order auto switches separately. (For details, refer to pages 182 to 184.)
* When "—" is selected, the product will not come with a built-in magnet for an auto switch, and so a mounting bracket cannot be secured. Be sure to select an appropriate model initially as the product cannot be changed to have auto switch compatibility after purchase.

⑨ Grease application (Seal band part)

—	With
N	Without (Roller specification)

⑩ Positioning pin hole

—	Housing B bottom*1	
K	Body bottom 2 locations	

*1 Refer to the body mounting example on page 186 for the mounting method.

⑬ Driver type

Driver type	Compatible drivers	Power supply voltage [V]	Size		
			25	32	40
—	Without driver	—	●	●	●
A1	LECSA1-S□	100 to 120	●	●	—
A2	LECSA2-S□	200 to 230	●	●	●
B2	LECSB2-T□	200 to 240	●	●	●
C2	LECS2-T□	200 to 230	●	●	●
S2	LECS2-T□	200 to 240	●	●	●
N2	LECSN2-T5	200 to 240	●	—	—
E2	LECSN2-T5-E	200 to 240	●	—	—
92	LECSN2-T5-9	200 to 240	●	—	—
P2	LECSN2-T5-P	200 to 240	●	—	—
ND2	LECSND2-T□	200 to 240	—	●	●
ED2	LECSND2-T□-E	200 to 240	—	●	●
9D2	LECSND2-T□-9	200 to 240	—	●	●
PD2	LECSND2-T□-P	200 to 240	—	●	●

* When a driver type is selected, a cable is included. Select the cable type and cable length. Example) S2S2: Standard cable (2 m) + Driver (LECS2S2)
S2: Standard cable (2 m)
—: Without cable and driver

* When selecting "T6" for the motor type, select one of the following LECSN□-T series drivers: "N2," "E2," "92," or "P2."

⑪ Cable type*1 *2

—	Without cable
S	Standard cable
R	Robotic cable

*1 A motor cable and encoder cable are included with the product. (A lock cable is also included if motor option "B: With lock" is selected.)
*2 Standard cable entry direction is "(B) Counter axis side." For motor parallel type of the ball screw drive, the cable entry direction is "(A) Axis side."

⑭ I/O cable length [m]*1

—	Without cable
H	Without cable (Connector only)
1	1.5

*1 When "—" is selected for the driver type, only "—" Without cable" can be selected.

Support Guide/LEFG Series

The support guide was designed to support workpieces with significant overhang.



⑫ Cable length*1 [m]

—	Without cable
2	2
5	5
A	10

*1 The length of the motor, encoder, and lock cables are the same.

Applicable Stroke Table

Model	Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200
		LEFS25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—
LEFS32	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—
LEFS40	—	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

* Please contact SMC for non-standard strokes as they are produced as special orders.

Compatible Drivers

For auto switches, refer to pages 181 to 184.

Driver type	Pulse input type/ Positioning type	Pulse input type	CC-Link direct input type	SSCNET III/H type	Network card type
Series	LECSA	LECSB-T	LECS2-T	LECS2-T	LECSN□-T
Number of point tables*1	Up to 7	Up to 255	Up to 255 (2 stations occupied)	—	Up to 255
Pulse input	○	○	—	—	—
Applicable network	—	—	CC-Link	SSCNET III /H	PROFINET EtherCAT EtherNet/IP™
Control encoder	Incremental 17-bit encoder	Absolute 22-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder	Absolute 22-bit encoder
Communication function	USB communication	USB communication, RS422 communication	USB communication, RS422 communication	USB communication	USB communication
Power supply voltage [V]	100 to 120 VAC (50/60 Hz) 200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)

*1 The LECSN□-T point table mode is only available for PROFINET and EtherCAT.

LEFS Series

AC Servo Motor

Specifications

AC Servo Motor

Model			LEFS25S2/T6			LEFS32S3/T7			LEFS40S4/T8				
Actuator specifications	Stroke [mm] ^{*1}		50 to 800			50 to 1000			150 to 1200				
	Work load [kg] ^{*2}		Horizontal		10	20	20	30	40	45	30	50	60
			Vertical		4	8	15	5	10	20	7	15	30
	Max. speed [mm/s] ^{*3}	Stroke range	Up to 400		1500	900	450	1500	1000	500	1500	1000	500
			401 to 500		1200	720	360	1500	1000	500	1500	1000	500
			501 to 600		900	540	270	1200	800	400	1500	1000	500
			601 to 700		700	420	210	930	620	310	1410	940	470
			701 to 800		550	330	160	750	500	250	1140	760	380
			801 to 900		—	—	—	610	410	200	930	620	310
			901 to 1000		—	—	—	510	340	170	780	520	260
			1001 to 1100		—	—	—	—	—	—	500	440	220
	1101 to 1200		—	—	—	—	—	—	500	380	190		
	Max. acceleration/deceleration [mm/s ²]		20000 (Refer to pages 29 to 31 for limit according to work load and duty ratio.)										
	Positioning repeatability [mm]		Basic type		±0.02								
			High-precision type		±0.01								
	Lost motion [mm] ^{*4}		Basic type		0.1 or less								
			High-precision type		0.05 or less								
Lead [mm]		20	12	6	24	16	8	30	20	10			
Impact/Vibration resistance [m/s ²] ^{*5}		50/20											
Actuation type		Ball screw (LEFS□), Ball screw + Belt (LEFS□ [†])											
Guide type		Linear guide											
Static allowable moment ^{*6} [N·m]		Mep (Pitching)		27			46			110			
		Mey (Yawing)		27			46			110			
		Mer (Rolling)		52			101			207			
Operating temperature range [°C]		5 to 40											
Operating humidity range [%RH]		90 or less (No condensation)											
Enclosure		IP30											
Electric specifications	Motor output/Size		100 W/□40			200 W/□60			400 W/□60				
	Motor type		AC servo motor (100/200 VAC)										
	Encoder ^{*9}		Motor type S2, S3, S4: Incremental 17-bit encoder (Resolution: 131072 p/rev) Motor type T6, T7, T8: Absolute 22-bit encoder (Resolution: 4194304 p/rev) (For LECSB2-T□, LECS2-T□) Motor type T6, T7, T8: Absolute 18-bit encoder (Resolution: 262144 p/rev) (For LECS2-T□)										
	Power [W] ^{*7}		Max. power 445			Max. power 725			Max. power 1275				
Lock unit specifications	Type ^{*8}		Non-magnetising lock										
	Holding force [N]		78	131	255	131	197	385	220	330	660		
	Power [W] at 20 °C		6.3			7.9			7.9				
Rated voltage [V]		24 VDC ⁰ / _{-10%}											

- *1 Please contact SMC for non-standard strokes as they are produced as special orders.
- *2 For details, refer to the "Speed-Work Load Graph (Guide)" on page 28.
- *3 The allowable speed changes according to the stroke.
- *4 A reference value for correcting errors in reciprocal operation
- *5 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)
Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

- *6 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.
If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.
- *7 Indicates the max. power during operation (including the driver)
When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.
- *8 Only when motor option "With lock" is selected
- *9 For motor type T6, T7, and T8, the resolution will change depending on the driver type.


Weight

Series		LEFS25□□															
Stroke [mm]		50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
Motor type	S2	2.00	2.14	2.28	2.44	2.56	2.69	2.84	2.99	3.12	3.24	3.40	3.54	3.68	3.82	3.96	4.14
	T6	2.04	2.18	2.32	2.48	2.60	2.73	2.88	3.03	3.16	3.28	3.44	3.58	3.72	3.86	4.00	4.18
Additional weight with lock [kg]		S2: 0.2/T6: 0.3															

Series		LEFS32□□																			
Stroke [mm]		50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
Motor type	S3	3.40	3.60	3.80	4.00	4.20	4.40	4.60	4.80	5.00	5.20	5.40	5.60	5.80	6.00	6.20	6.40	6.60	6.80	7.00	7.20
	T7	3.31	3.51	3.71	3.91	4.11	4.31	4.51	4.71	4.91	5.11	5.31	5.51	5.71	5.91	6.11	6.31	6.51	6.71	6.91	7.11
Additional weight with lock [kg]		S3: 0.4/T7: 0.5																			

Series		LEFS40□□																			
Stroke [mm]		150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200
Motor type	S4	5.82	6.10	6.38	6.65	6.95	7.25	7.51	7.80	8.07	8.25	8.63	8.90	9.20	9.45	9.76	10.05	10.32	10.60	11.16	11.72
	T8	5.91	6.19	6.47	6.74	7.04	7.34	7.60	7.89	8.16	8.34	8.72	8.99	9.29	9.54	9.85	10.14	10.41	10.69	11.25	11.81
Additional weight with lock [kg]		S4: 0.5/T8: 0.5																			

Construction: In-line Motor

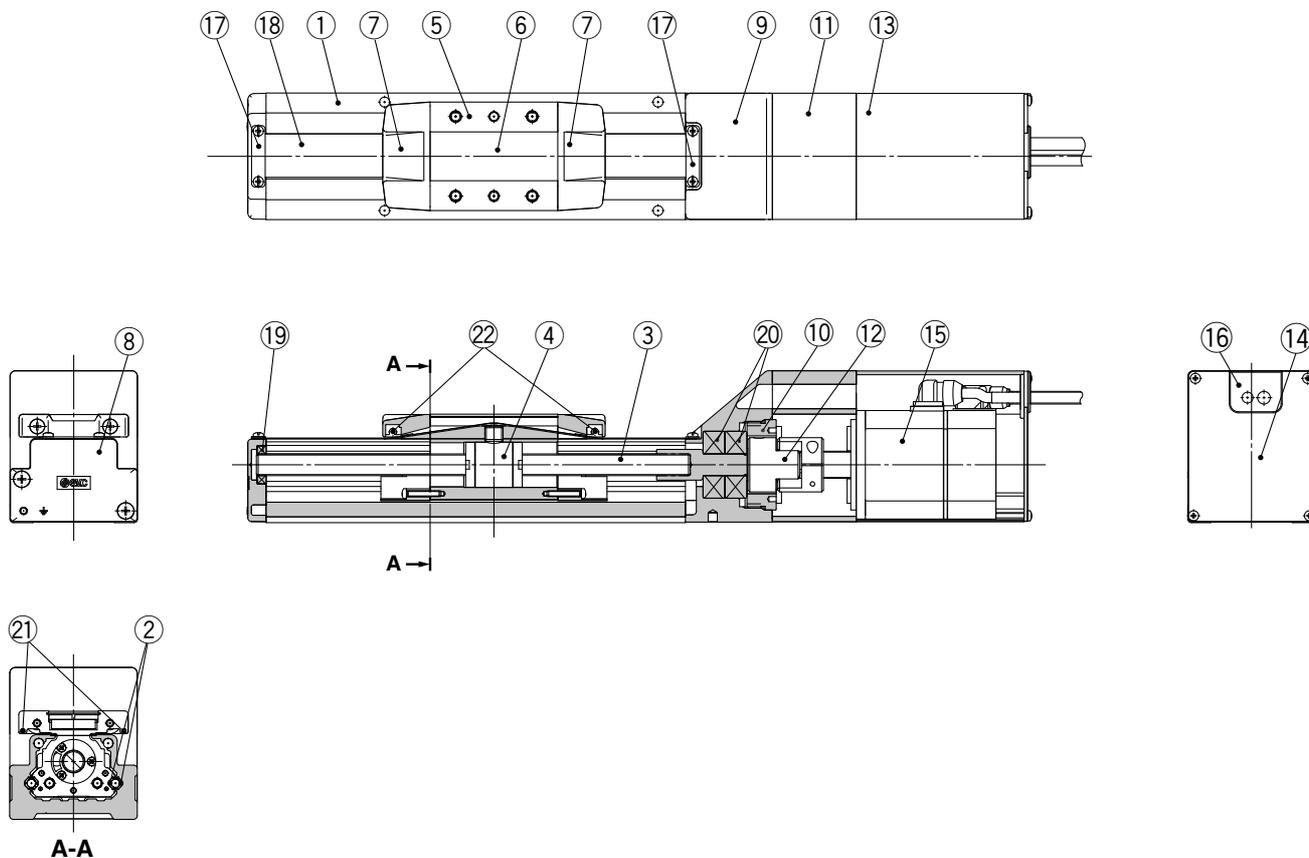

Component Parts

No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide	—	
3	Ball screw shaft	—	
4	Ball screw nut	—	
5	Table	Aluminium alloy	Anodised
6	Blanking plate	Aluminium alloy	Anodised
7	Seal band holder	Synthetic resin	
8	Housing A	Aluminium die-cast	Coating
9	Housing B	Aluminium die-cast	Coating
10	Bearing stopper	Aluminium alloy	
11	Motor mount	Aluminium alloy	Coating
12	Coupling	—	
13	Motor cover	Aluminium alloy	Anodised
14	Motor end cover	Aluminium alloy	Anodised
15	Motor	—	

No.	Description	Material	Note
16	Grommet	NBR	
17	Band stopper	Stainless steel	
18	Dust seal band	Stainless steel	
19	Bearing	—	Stroke 250 mm or more
20	Bearing	—	
21	Magnet	—	With auto switch compatibility
22	Roller assembly	—	Without grease application


Replacement Parts/Grease Pack

Applied portion	Order no.
Ball screw	GR-S-010 (10 g) GR-S-020 (20 g)
Rail guide	
Dust seal band (When "Without" is selected for the grease application, grease is applied only on the back side.)	

LEFS Series

AC Servo Motor

Construction: Motor Parallel

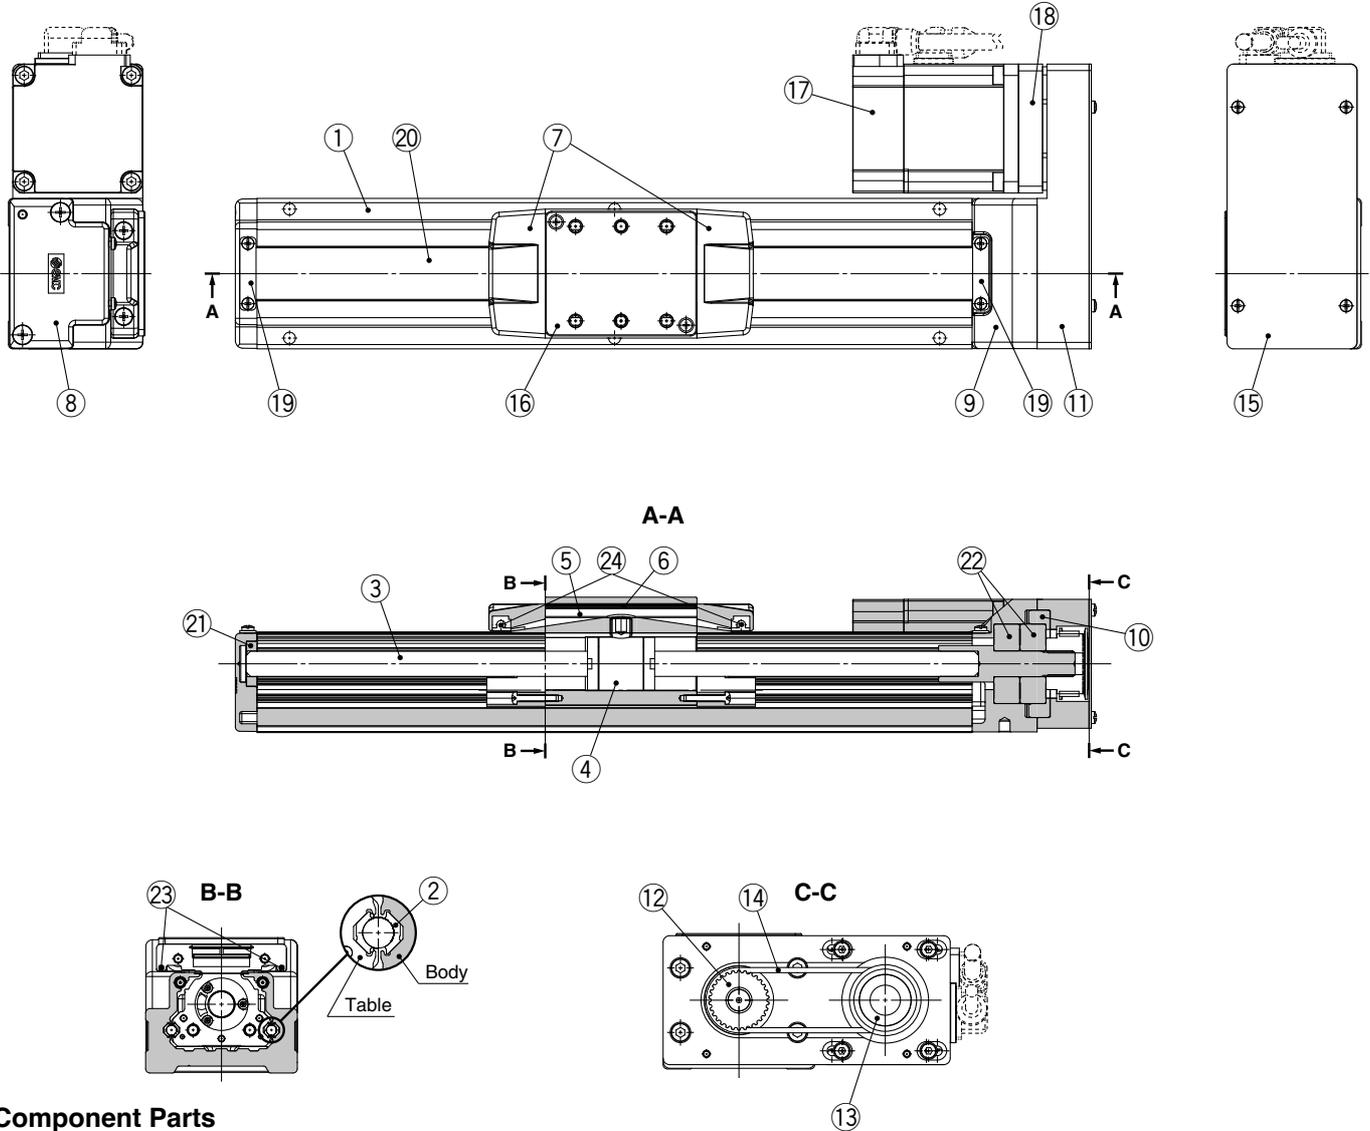

Component Parts

No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide	—	
3	Ball screw shaft	—	
4	Ball screw nut	—	
5	Table	Aluminium alloy	Anodised
6	Blanking plate	Aluminium alloy	Anodised
7	Seal band holder	Synthetic resin	
8	Housing A	Aluminium die-casted	Coating
9	Housing B	Aluminium die-casted	Coating
10	Bearing stopper	Aluminium alloy	
11	Return plate	Aluminium alloy	Coating
12	Pulley	Aluminium alloy	
13	Pulley	Aluminium alloy	
15	Cover plate	Aluminium alloy	Anodised
16	Table spacer	Aluminium alloy	Anodised (LEFS32 only)
17	Motor	—	
18	Motor adapter	Aluminium alloy	Coating
19	Band stopper	Stainless steel	
20	Dust seal band	Stainless steel	

No.	Description	Material	Note
21	Bearing	—	Stroke 250 mm or more
22	Bearing	—	
23	Magnet	—	With auto switch compatibility
24	Roller assembly	—	Without grease application

Replacement Parts/Belt


No.	Size	Order no.
14	25	LE-D-6-2
	32	LE-D-6-3
	40	LE-D-6-4

Replacement Parts/Grease Pack




Applied portion	Order no.
Ball screw	GR-S-010 (10 g) GR-S-020 (20 g)
Rail guide	
Dust seal band	
(When "Without" is selected for the grease application, grease is applied only on the back side.)	

Dimensions: In-line Motor

LEFS25

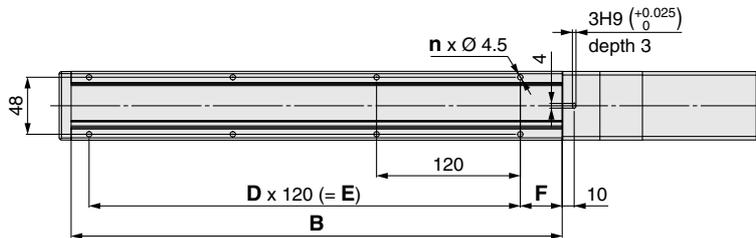

Motor option: With lock

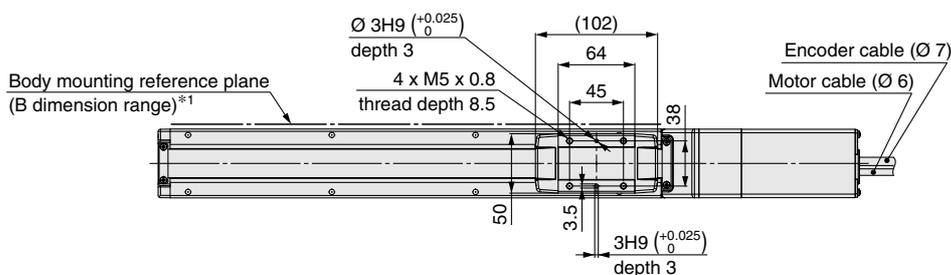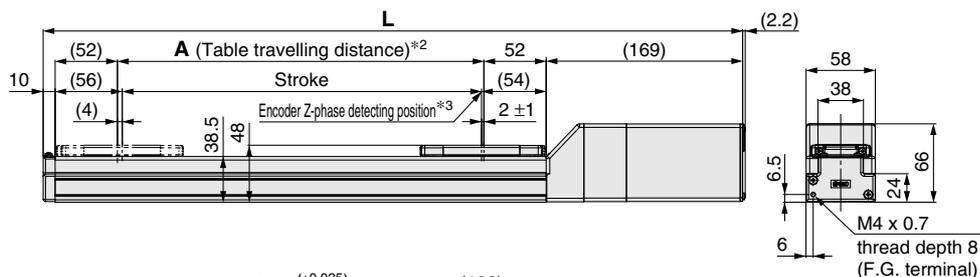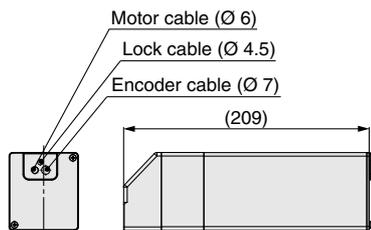

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Dimensions


[mm]

Model	L		A	B	n	D	E	F
	Without lock	With lock						
LEFS□25□□-50□	339	379	56	160	4	—	—	20
LEFS□25□□-100□	389	429	106	210	4	—	—	35
LEFS□25□□-150□	439	479	156	260	4	—	—	
LEFS□25□□-200□	489	529	206	310	6	2	240	
LEFS□25□□-250□	539	579	256	360	6	2	240	
LEFS□25□□-300□	589	629	306	410	8	3	360	
LEFS□25□□-350□	639	679	356	460	8	3	360	
LEFS□25□□-400□	689	729	406	510	8	3	360	
LEFS□25□□-450□	739	779	456	560	10	4	480	
LEFS□25□□-500□	789	829	506	610	10	4	480	
LEFS□25□□-550□	839	879	556	660	12	5	600	
LEFS□25□□-600□	889	929	606	710	12	5	600	
LEFS□25□□-650□	939	979	656	760	12	5	600	
LEFS□25□□-700□	989	1029	706	810	14	6	720	
LEFS□25□□-750□	1039	1079	756	860	14	6	720	
LEFS□25□□-800□	1089	1129	806	910	16	7	840	

Dimensions: In-line Motor


LEFS25

Positioning pin hole*1 (Option): Body bottom

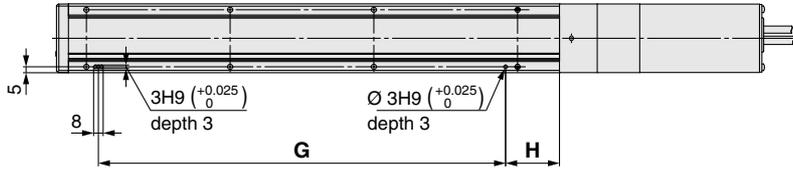

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

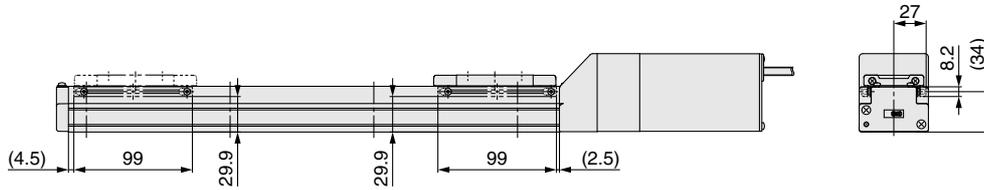

* For strokes of 99 mm or less, only 2 auto switch mounting brackets can be installed on the motor side.


Dimensions

[mm]

Model	G	H
LEFS□25□□-50□	100	30
LEFS□25□□-100□	100	45
LEFS□25□□-150□	100	45
LEFS□25□□-200□	220	45
LEFS□25□□-250□	220	45
LEFS□25□□-300□	340	45
LEFS□25□□-350□	340	45
LEFS□25□□-400□	340	45
LEFS□25□□-450□	460	45
LEFS□25□□-500□	460	45
LEFS□25□□-550□	580	45
LEFS□25□□-600□	580	45
LEFS□25□□-650□	580	45
LEFS□25□□-700□	700	45
LEFS□25□□-750□	700	45
LEFS□25□□-800□	820	45

Dimensions: In-line Motor

LEFS32

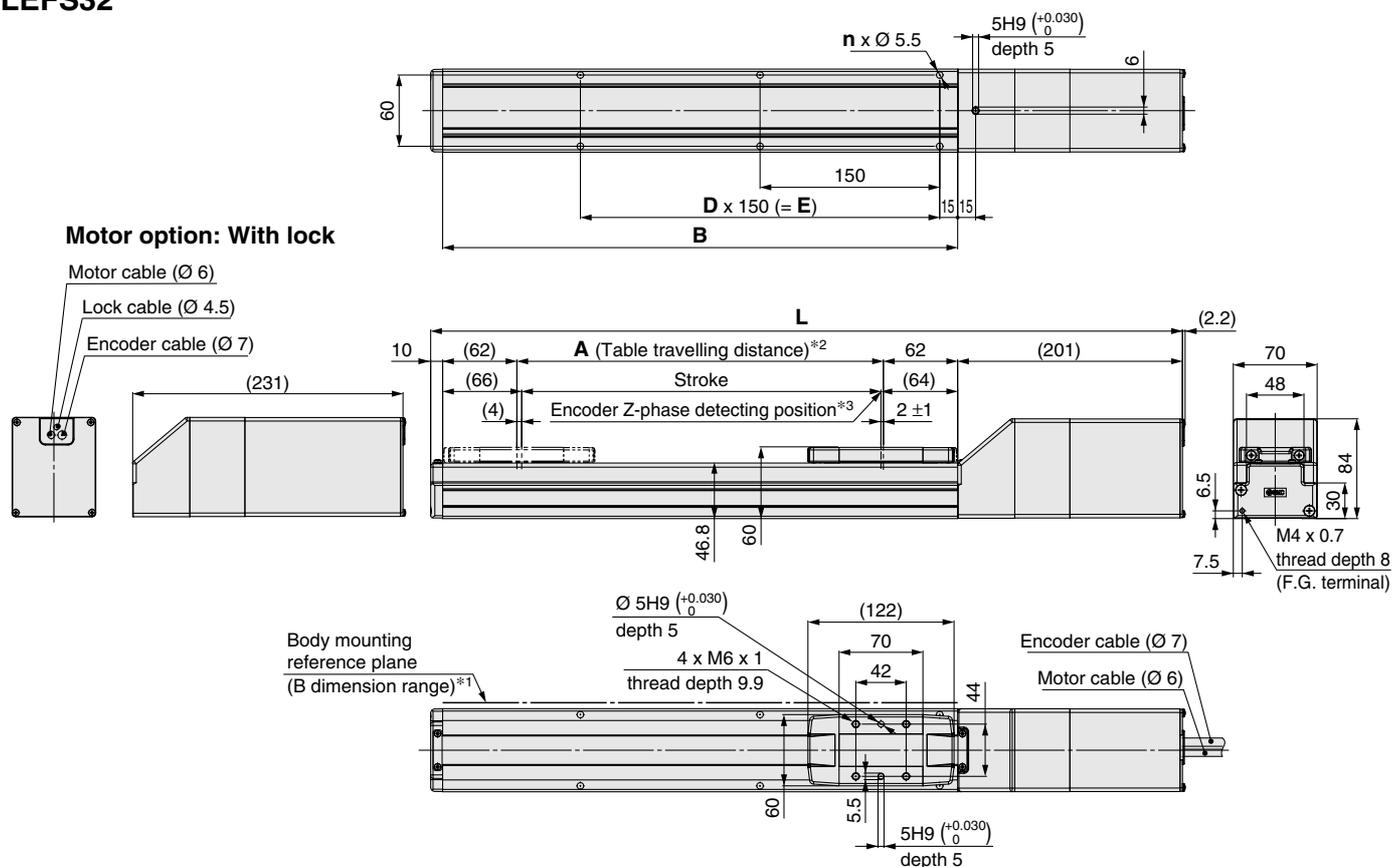

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Dimensions


[mm]

Model	L		A	B	n	D	E
	Without lock	With lock					
LEFS□32□□-50□	391	421	56	180	4	—	—
LEFS□32□□-100□	441	471	106	230	4	—	—
LEFS□32□□-150□	491	521	156	280	4	—	—
LEFS□32□□-200□	541	571	206	330	6	2	300
LEFS□32□□-250□	591	621	256	380	6	2	300
LEFS□32□□-300□	641	671	306	430	6	2	300
LEFS□32□□-350□	691	721	356	480	8	3	450
LEFS□32□□-400□	741	771	406	530	8	3	450
LEFS□32□□-450□	791	821	456	580	8	3	450
LEFS□32□□-500□	841	871	506	630	10	4	600
LEFS□32□□-550□	891	921	556	680	10	4	600
LEFS□32□□-600□	941	971	606	730	10	4	600
LEFS□32□□-650□	991	1021	656	780	12	5	750
LEFS□32□□-700□	1041	1071	706	830	12	5	750
LEFS□32□□-750□	1091	1121	756	880	12	5	750
LEFS□32□□-800□	1141	1171	806	930	14	6	900
LEFS□32□□-850□	1191	1221	856	980	14	6	900
LEFS□32□□-900□	1241	1271	906	1030	14	6	900
LEFS□32□□-950□	1291	1321	956	1080	16	7	1050
LEFS□32□□-1000□	1341	1371	1006	1130	16	7	1050

Dimensions: In-line Motor


LEFS32

Positioning pin hole*1 (Option): Body bottom

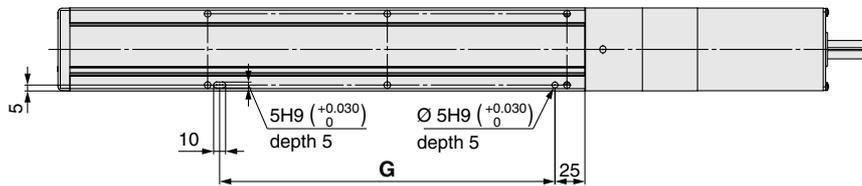

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

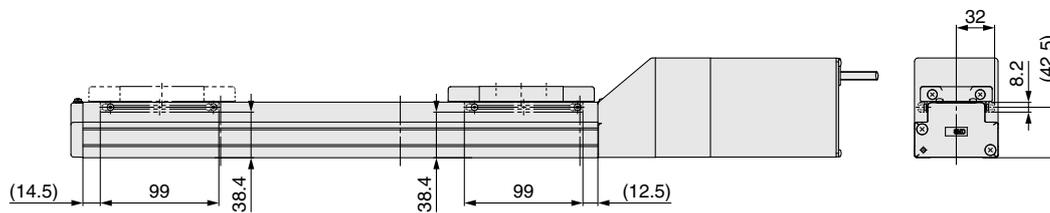


* For strokes of 99 mm or less, only 2 auto switch mounting brackets can be installed on the motor side.

Dimensions [mm]

Model	G
LEFS□32□□-50□	130
LEFS□32□□-100□	130
LEFS□32□□-150□	130
LEFS□32□□-200□	280
LEFS□32□□-250□	280
LEFS□32□□-300□	280
LEFS□32□□-350□	430
LEFS□32□□-400□	430
LEFS□32□□-450□	430
LEFS□32□□-500□	580
LEFS□32□□-550□	580
LEFS□32□□-600□	580
LEFS□32□□-650□	730
LEFS□32□□-700□	730
LEFS□32□□-750□	730
LEFS□32□□-800□	880
LEFS□32□□-850□	880
LEFS□32□□-900□	880
LEFS□32□□-950□	1030
LEFS□32□□-1000□	1030

Dimensions: In-line Motor

LEFS40

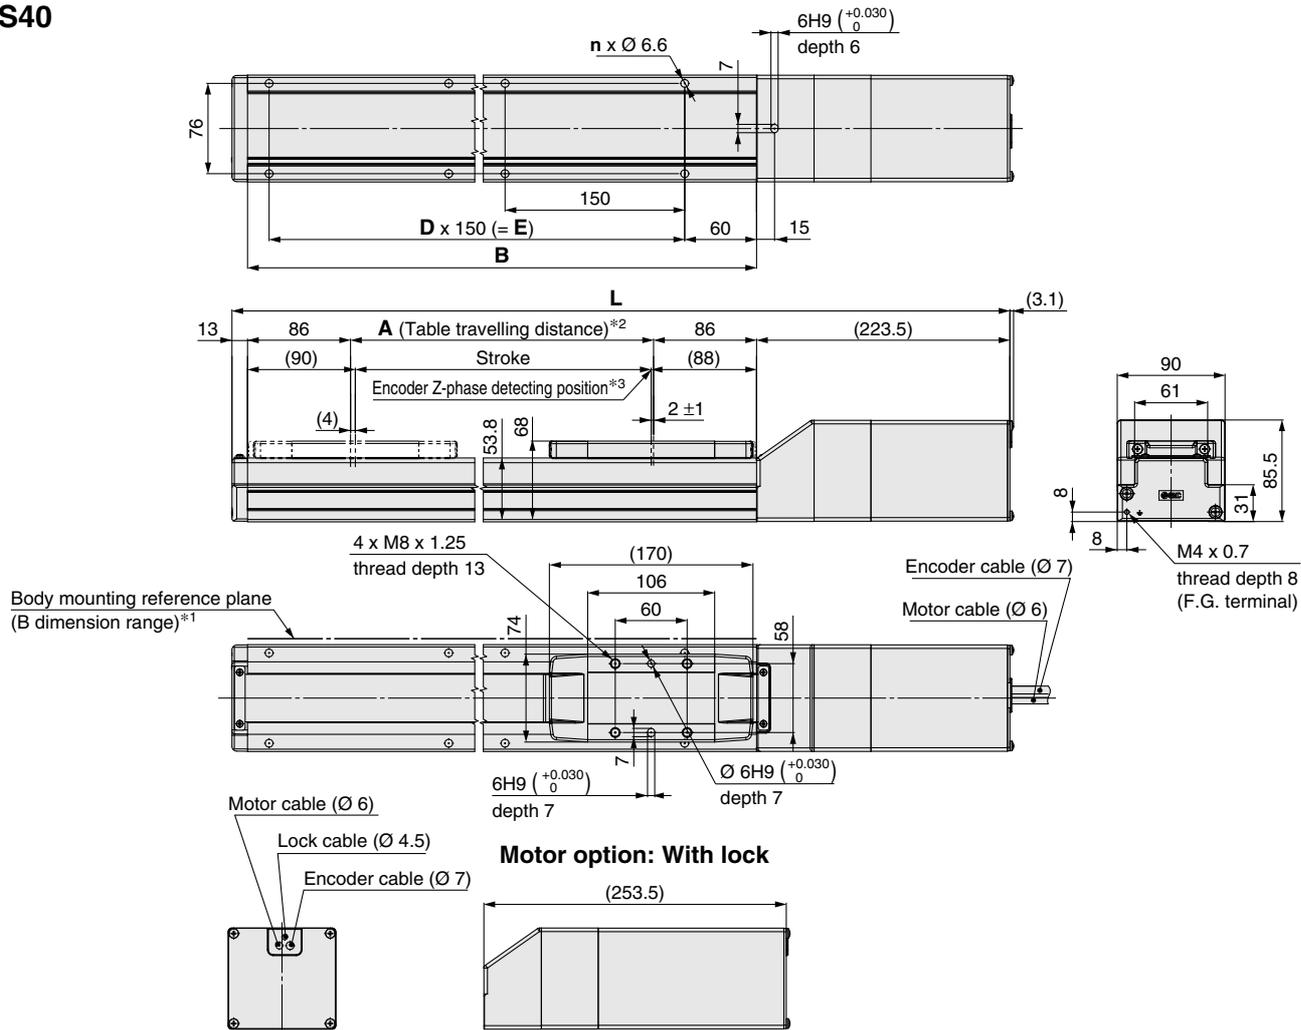

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Dimensions

Model	L		A	B	n	D	E
	Without lock	With lock					
LEFS□40□□-150□	564.5	594.5	156	328	4	—	150
LEFS□40□□-200□	614.5	644.5	206	378	6	2	300
LEFS□40□□-250□	664.5	694.5	256	428	6	2	300
LEFS□40□□-300□	714.5	744.5	306	478	6	2	300
LEFS□40□□-350□	764.5	794.5	356	528	8	3	450
LEFS□40□□-400□	814.5	844.5	406	578	8	3	450
LEFS□40□□-450□	864.5	894.5	456	628	8	3	450
LEFS□40□□-500□	914.5	944.5	506	678	10	4	600
LEFS□40□□-550□	964.5	994.5	556	728	10	4	600
LEFS□40□□-600□	1014.5	1044.5	606	778	10	4	600
LEFS□40□□-650□	1064.5	1094.5	656	828	12	5	750
LEFS□40□□-700□	1114.5	1144.5	706	878	12	5	750
LEFS□40□□-750□	1164.5	1194.5	756	928	12	5	750
LEFS□40□□-800□	1214.5	1244.5	806	978	14	6	900
LEFS□40□□-850□	1264.5	1294.5	856	1028	14	6	900
LEFS□40□□-900□	1314.5	1344.5	906	1078	14	6	900
LEFS□40□□-950□	1364.5	1394.5	956	1128	16	7	1050
LEFS□40□□-1000□	1414.5	1444.5	1006	1178	16	7	1050
LEFS□40□□-1100□	1514.5	1544.5	1106	1278	18	8	1200
LEFS□40□□-1200□	1614.5	1644.5	1206	1378	18	8	1200


LEFS Series

AC Servo Motor

Dimensions: In-line Motor


LEFS40

Positioning pin hole*1 (Option): Body bottom

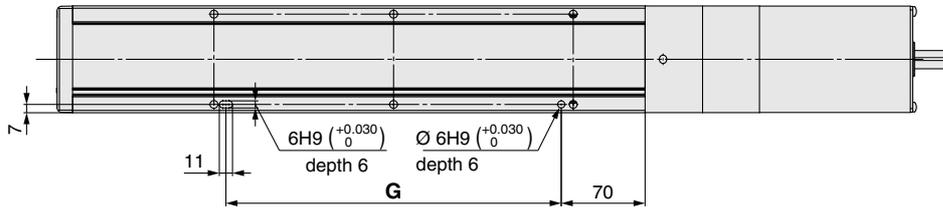

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

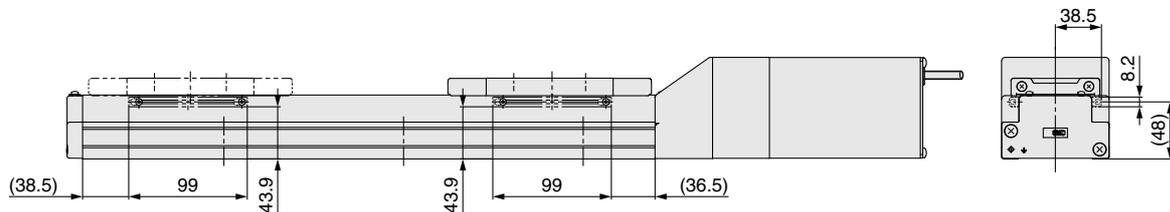


Dimensions [mm]

Model	G
LEFS□40□□-150□	130
LEFS□40□□-200□	280
LEFS□40□□-250□	280
LEFS□40□□-300□	280
LEFS□40□□-350□	430
LEFS□40□□-400□	430
LEFS□40□□-450□	430
LEFS□40□□-500□	580
LEFS□40□□-550□	580
LEFS□40□□-600□	580
LEFS□40□□-650□	730
LEFS□40□□-700□	730
LEFS□40□□-750□	730
LEFS□40□□-800□	880
LEFS□40□□-850□	880
LEFS□40□□-900□	880
LEFS□40□□-950□	1030
LEFS□40□□-1000□	1030
LEFS□40□□-1100□	1180
LEFS□40□□-1200□	1180

Dimensions: Motor Parallel

LEFS25R

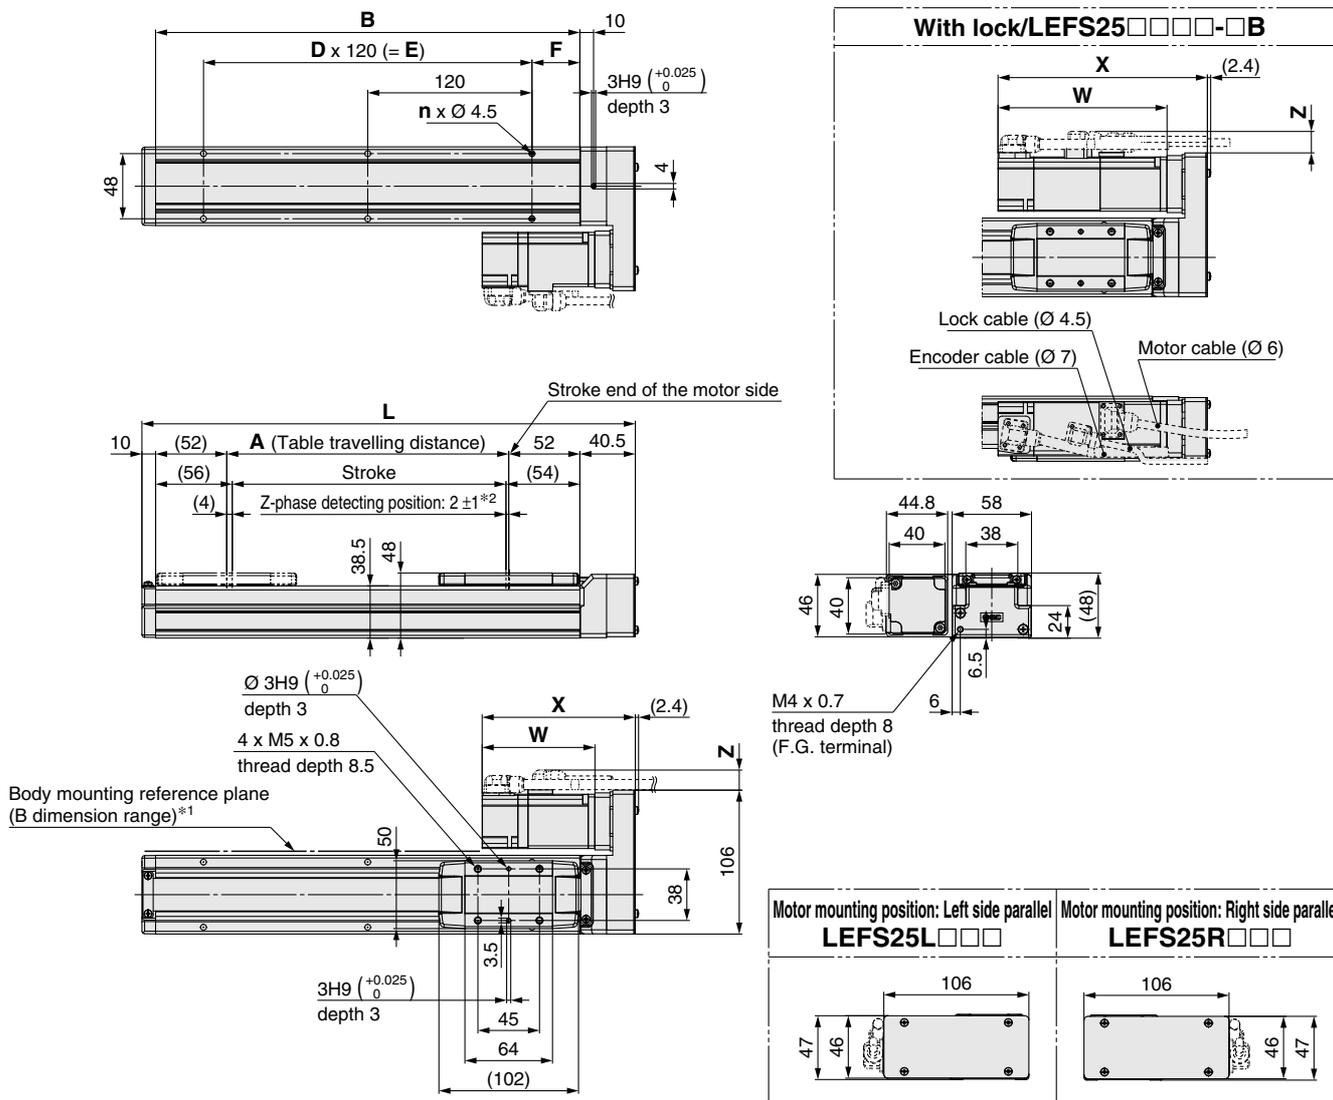

*1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.

*2 The Z-phase first detecting position from the stroke end of the motor side
Please contact SMC for adjusting the Z-phase detecting position at the stroke end of the end side.

Motor Dimensions

Motor type	X		W		Z		[mm]
	Without lock	With lock	Without lock	With lock	Without lock	With lock	
S2	116.5	153.4	87	123.9	14.1	15.8	
T6	111.9	152.5	82.4	123	14.1	15.8	

Dimensions

Model	L	A	B	n	D	E	F	[mm]
LEFS□25□□□-50□	210.5	56	160	4	—	—	—	20
LEFS□25□□□-100□	260.5	106	210	4	—	—	—	
LEFS□25□□□-150□	310.5	156	260	4	—	—	—	
LEFS□25□□□-200□	360.5	206	310	6	2	240	—	
LEFS□25□□□-250□	410.5	256	360	6	2	240	—	
LEFS□25□□□-300□	460.5	306	410	8	3	360	—	
LEFS□25□□□-350□	510.5	356	460	8	3	360	—	
LEFS□25□□□-400□	560.5	406	510	8	3	360	—	
LEFS□25□□□-450□	610.5	456	560	10	4	480	—	35
LEFS□25□□□-500□	660.5	506	610	10	4	480	—	
LEFS□25□□□-550□	710.5	556	660	12	5	600	—	
LEFS□25□□□-600□	760.5	606	710	12	5	600	—	
LEFS□25□□□-650□	810.5	656	760	12	5	600	—	
LEFS□25□□□-700□	860.5	706	810	14	6	720	—	
LEFS□25□□□-750□	910.5	756	860	14	6	720	—	
LEFS□25□□□-800□	960.5	806	910	16	7	840	—	


LEFS Series

AC Servo Motor

Dimensions: Motor Parallel

LEFS25R


Positioning pin hole*1 (Option): Body bottom

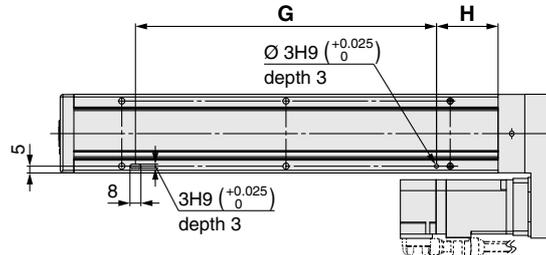


*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

LEFS25R

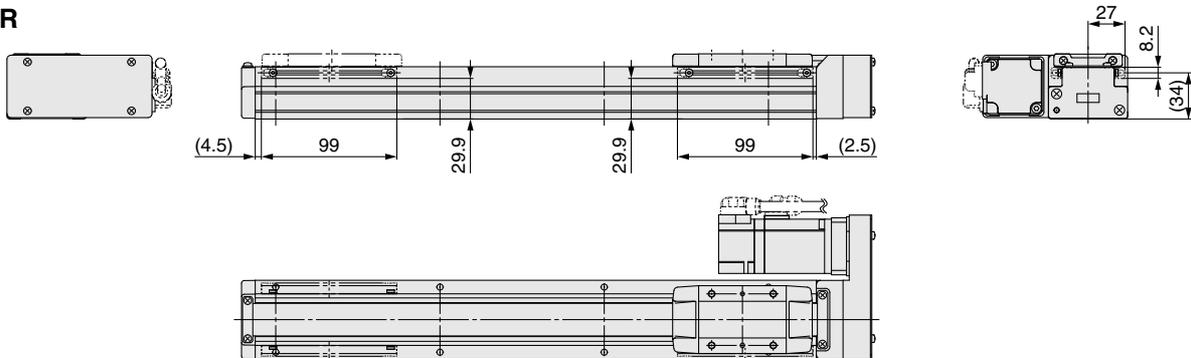

LEFS25L

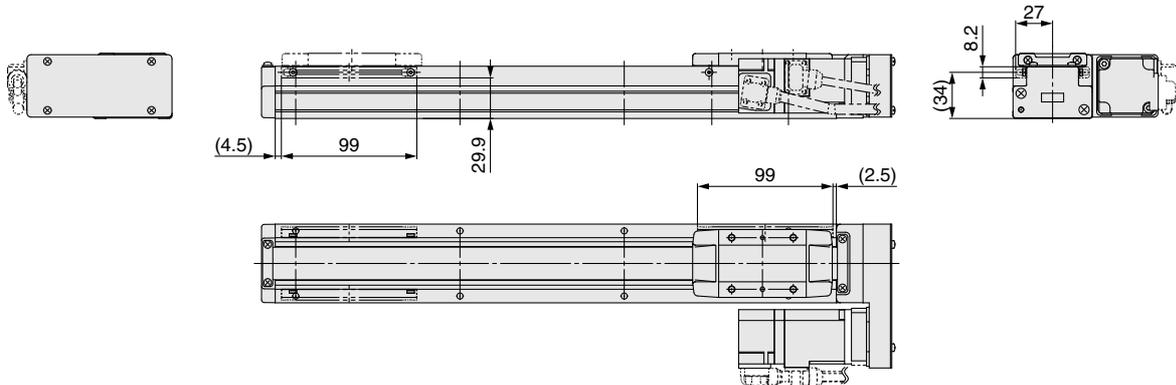


Dimensions

Model	G	H
LEFS□25□□□-50□	100	30
LEFS□25□□□-100□	100	45
LEFS□25□□□-150□	100	45
LEFS□25□□□-200□	220	45
LEFS□25□□□-250□	220	45
LEFS□25□□□-300□	340	45
LEFS□25□□□-350□	340	45
LEFS□25□□□-400□	340	45
LEFS□25□□□-450□	460	45
LEFS□25□□□-500□	460	45
LEFS□25□□□-550□	580	45
LEFS□25□□□-600□	580	45
LEFS□25□□□-650□	580	45
LEFS□25□□□-700□	700	45
LEFS□25□□□-750□	700	45
LEFS□25□□□-800□	820	45

* For strokes of 99 mm or less, only 1 auto switch mounting bracket can be installed on the motor side.

Dimensions: Motor Parallel

LEFS32R

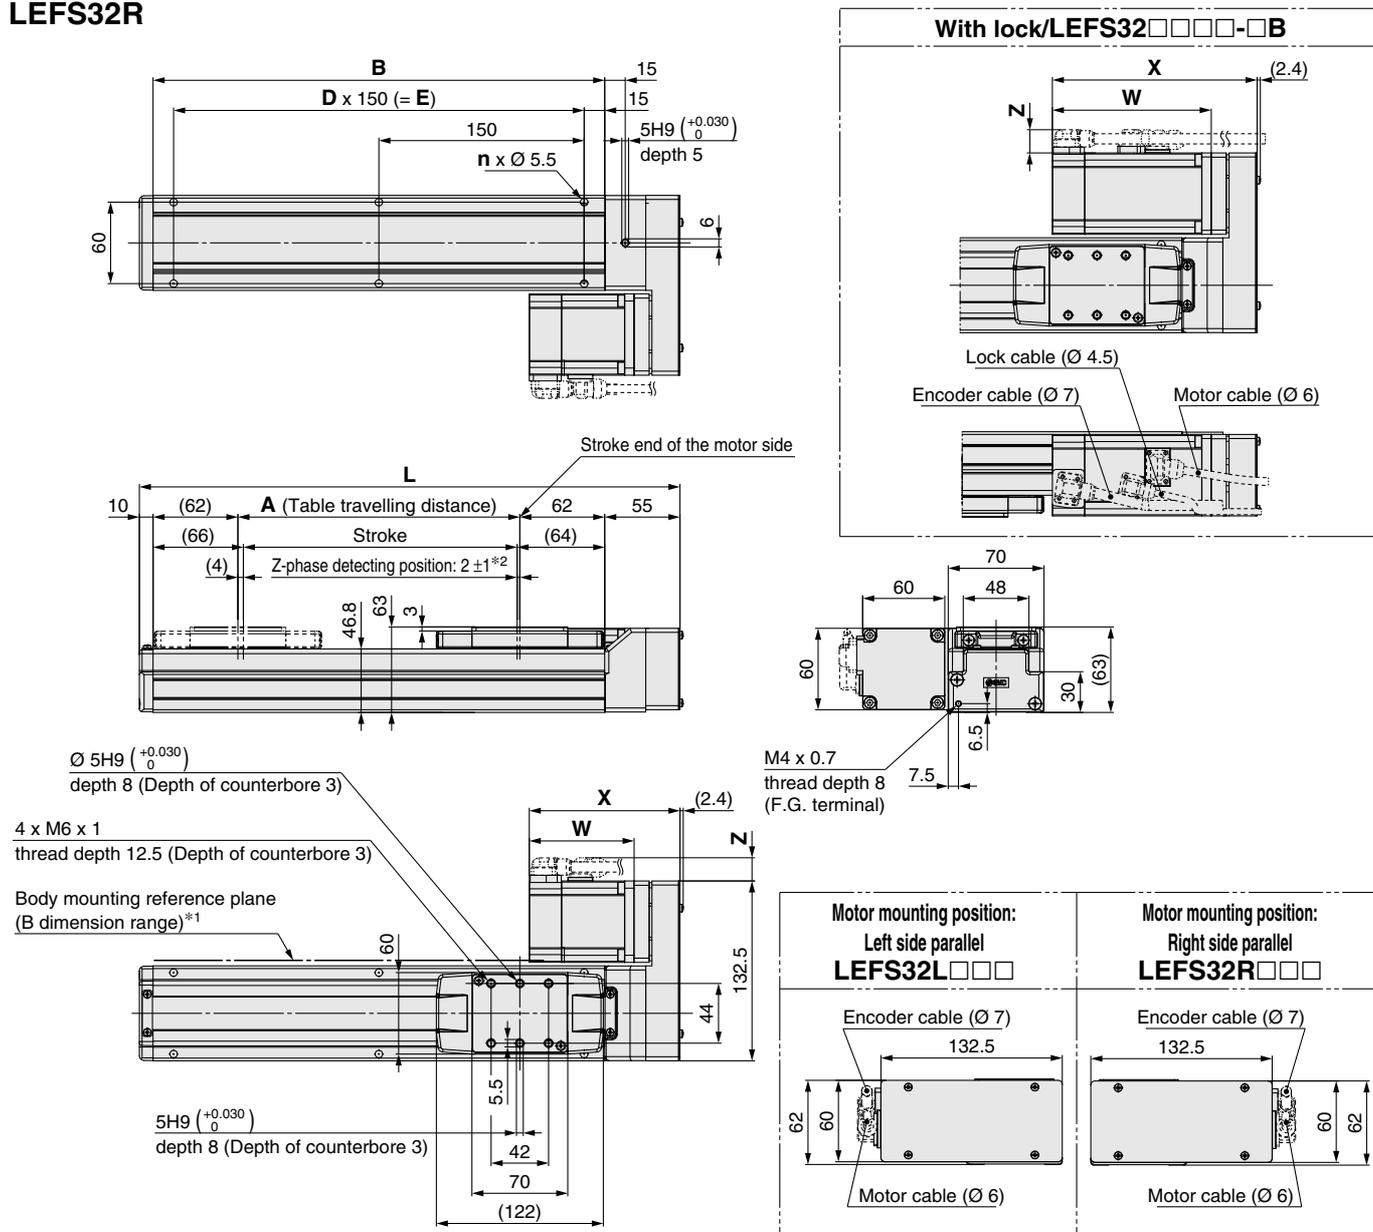

Motor Dimensions

Motor type	X		W		Z	
	Without lock	With lock	Without lock	With lock	Without lock	With lock
S3	121.7	150.3	88.2	116.8	17.1	17.1
T7	110.1	146.9	76.6	113.4	17.1	17.1

*1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.

*2 The Z-phase first detecting position from the stroke end of the motor side
Please contact SMC for adjusting the Z-phase detecting position at the stroke end of the end side.

*3 When the table spacer is removed

Dimensions

Model	L	A	B	n	D	E
LEFS32□□□□-50□	245	56	180	4	—	—
LEFS32□□□□-100□	295	106	230	4	—	—
LEFS32□□□□-150□	345	156	280	4	—	—
LEFS32□□□□-200□	395	206	330	6	2	300
LEFS32□□□□-250□	445	256	380	6	2	300
LEFS32□□□□-300□	495	306	430	6	2	300
LEFS32□□□□-350□	545	356	480	8	3	450
LEFS32□□□□-400□	595	406	530	8	3	450
LEFS32□□□□-450□	645	456	580	8	3	450
LEFS32□□□□-500□	695	506	630	10	4	600

Dimensions

Model	L	A	B	n	D	E
LEFS32□□□□-550□	745	556	680	10	4	600
LEFS32□□□□-600□	795	606	730	10	4	600
LEFS32□□□□-650□	845	656	780	12	5	750
LEFS32□□□□-700□	895	706	830	12	5	750
LEFS32□□□□-750□	945	756	880	12	5	750
LEFS32□□□□-800□	995	806	930	14	6	900
LEFS32□□□□-850□	1045	856	980	14	6	900
LEFS32□□□□-900□	1095	906	1030	14	6	900
LEFS32□□□□-950□	1145	956	1080	16	7	1050
LEFS32□□□□-1000□	1195	1006	1130	16	7	1050


LEFS Series

AC Servo Motor

Dimensions: Motor Parallel

LEFS32R


Positioning pin hole*1 (Option): Body bottom

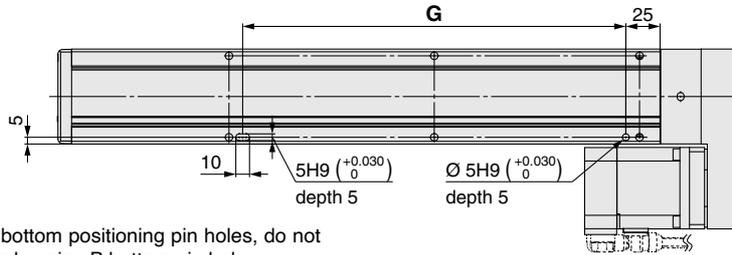


*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

LEFS32R

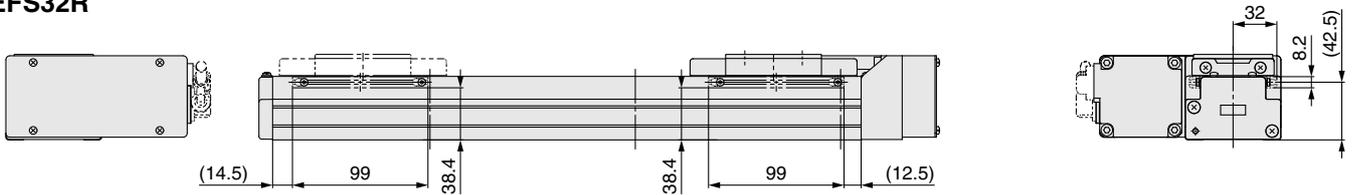

LEFS32L

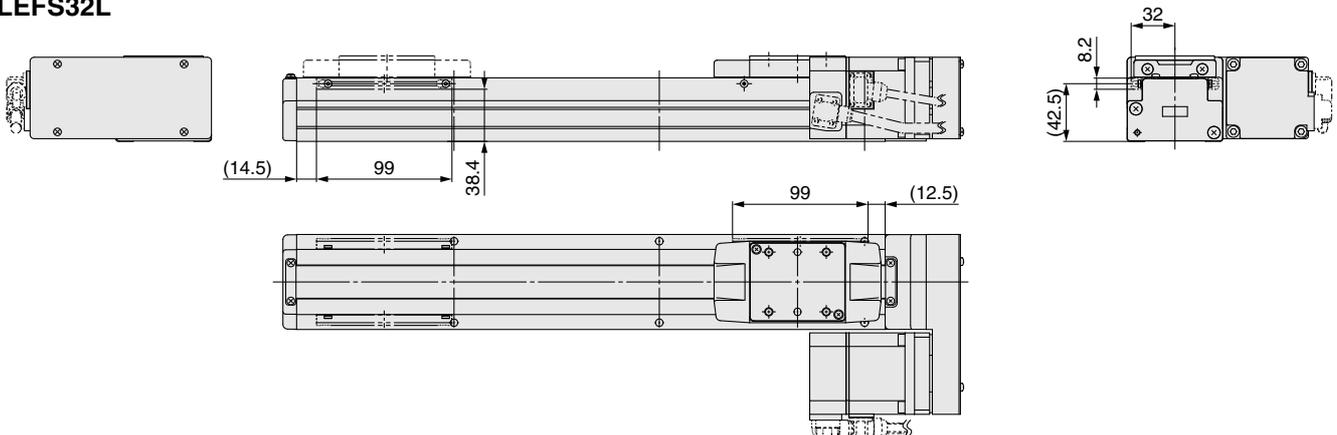





* For strokes of 99 mm or less, only 1 auto switch mounting bracket can be installed on the motor side.

Dimensions	[mm]
Model	G
LEFS□32□□□-50□	130
LEFS□32□□□-100□	130
LEFS□32□□□-150□	130
LEFS□32□□□-200□	280
LEFS□32□□□-250□	280
LEFS□32□□□-300□	280
LEFS□32□□□-350□	430
LEFS□32□□□-400□	430
LEFS□32□□□-450□	430
LEFS□32□□□-500□	580

Dimensions	[mm]
Model	G
LEFS□32□□□-550□	580
LEFS□32□□□-600□	580
LEFS□32□□□-650□	730
LEFS□32□□□-700□	730
LEFS□32□□□-750□	730
LEFS□32□□□-800□	880
LEFS□32□□□-850□	880
LEFS□32□□□-900□	880
LEFS□32□□□-950□	1030
LEFS□32□□□-1000□	1030

Dimensions: Motor Parallel

LEFS40R

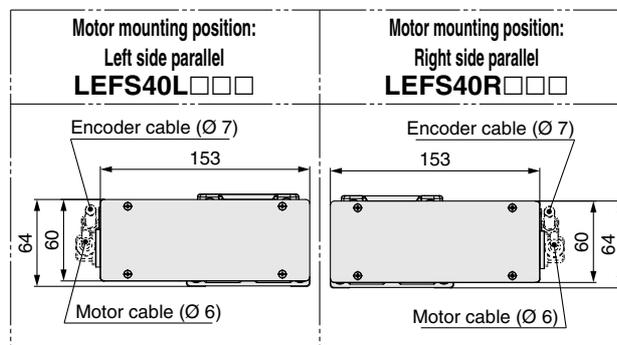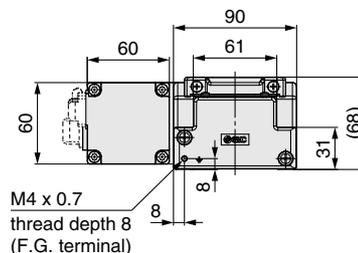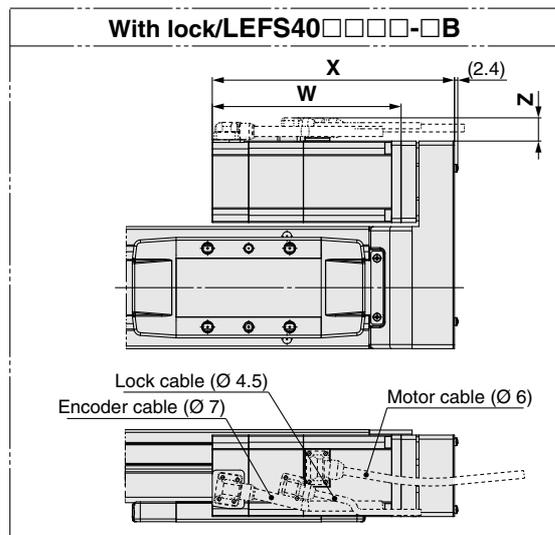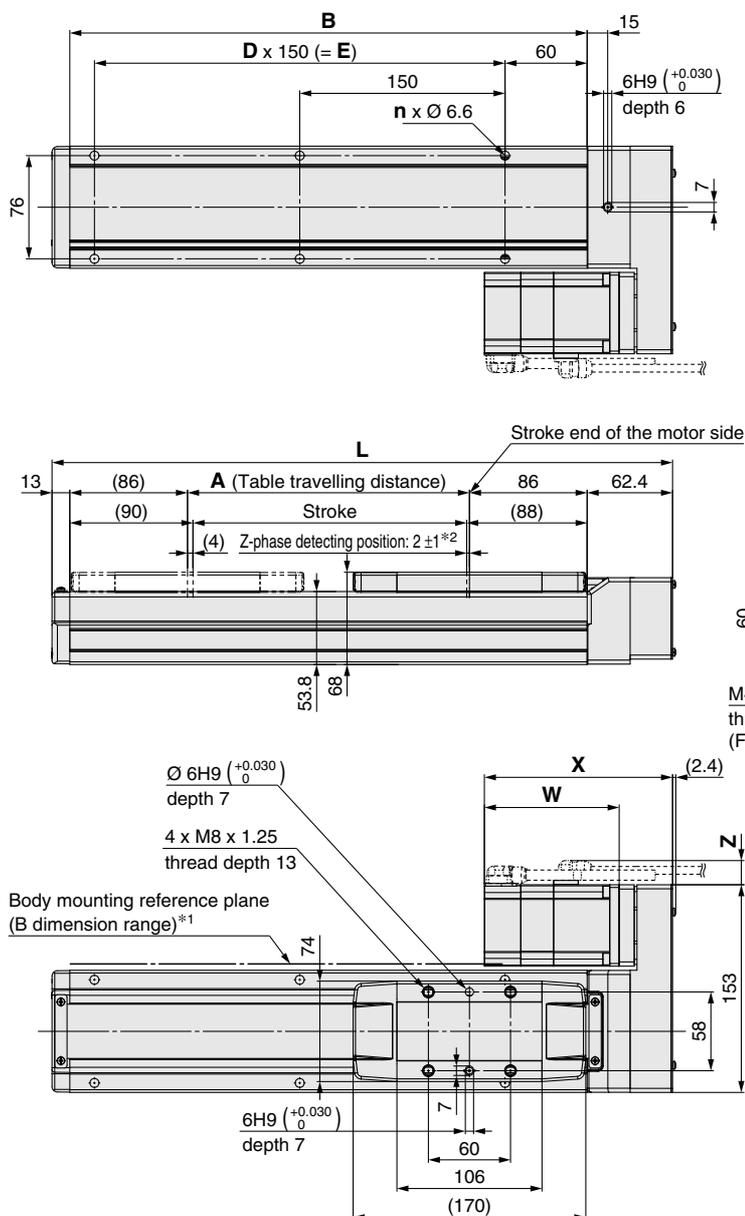

Dimensions

Model	L	A	B	n	D	E
LEFS40□□□-150□	403.4	156	328	4	—	150
LEFS40□□□-200□	453.4	206	378	6	2	300
LEFS40□□□-250□	503.4	256	428	6	2	300
LEFS40□□□-300□	553.4	306	478	6	2	300
LEFS40□□□-350□	603.4	356	528	8	3	450
LEFS40□□□-400□	653.4	406	578	8	3	450
LEFS40□□□-450□	703.4	456	628	8	3	450
LEFS40□□□-500□	753.4	506	678	10	4	600
LEFS40□□□-550□	803.4	556	728	10	4	600
LEFS40□□□-600□	853.4	606	778	10	4	600
LEFS40□□□-650□	903.4	656	828	12	5	750
LEFS40□□□-700□	953.4	706	878	12	5	750
LEFS40□□□-750□	1003.4	756	928	12	5	750
LEFS40□□□-800□	1053.4	806	978	14	6	900
LEFS40□□□-850□	1103.4	856	1028	14	6	900
LEFS40□□□-900□	1153.4	906	1078	14	6	900
LEFS40□□□-950□	1203.4	956	1128	16	7	1050
LEFS40□□□-1000□	1253.4	1006	1178	16	7	1050
LEFS40□□□-1100□	1353.4	1106	1278	18	8	1200
LEFS40□□□-1200□	1453.4	1206	1378	18	8	1200

*1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm)

In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.

*2 The Z-phase first detecting position from the stroke end of the motor side

Please contact SMC for adjusting the Z-phase detecting position at the stroke end of the end side.

Motor Dimensions

Motor type	X		W		Z	
	Without lock	With lock	Without lock	With lock	Without lock	With lock
S4	149.2	177.8	110.2	138.8	17.1	17.1
T8	137.3	174.1	98.3	135.1	17.1	17.1


LEFS Series

AC Servo Motor

Dimensions: Motor Parallel

LEFS40R


Positioning pin hole*1 (Option): Body bottom

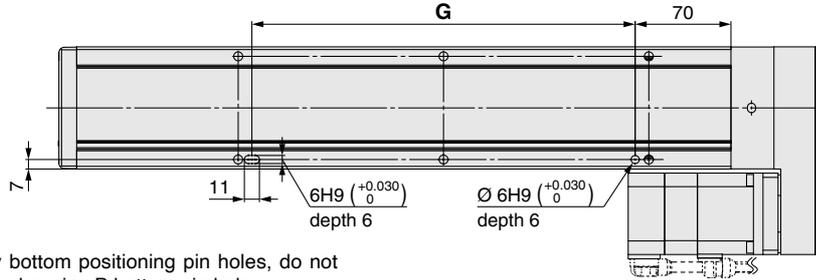


*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

LEFS40R

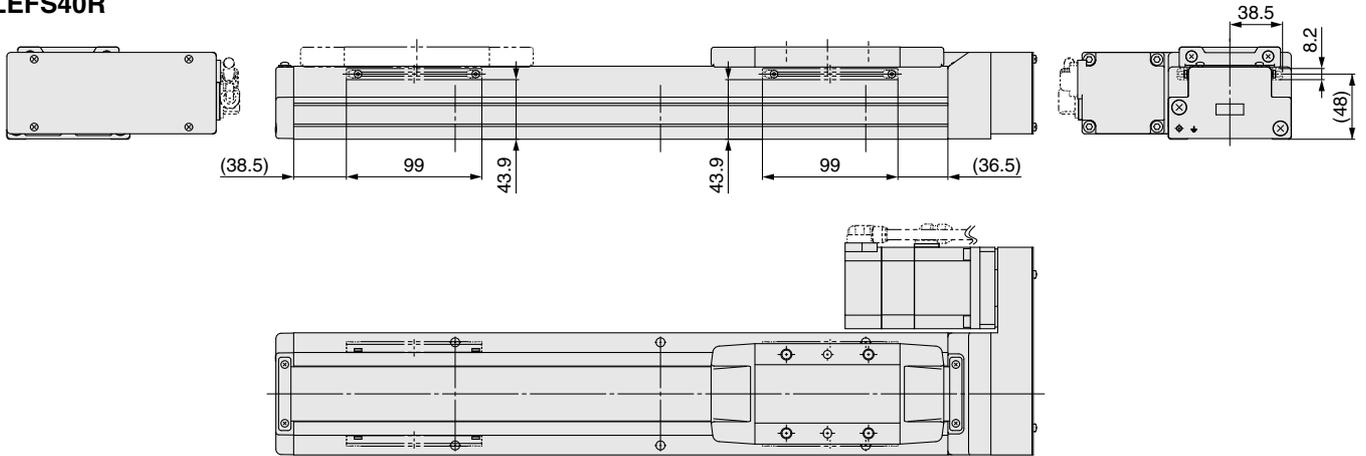

LEFS40L

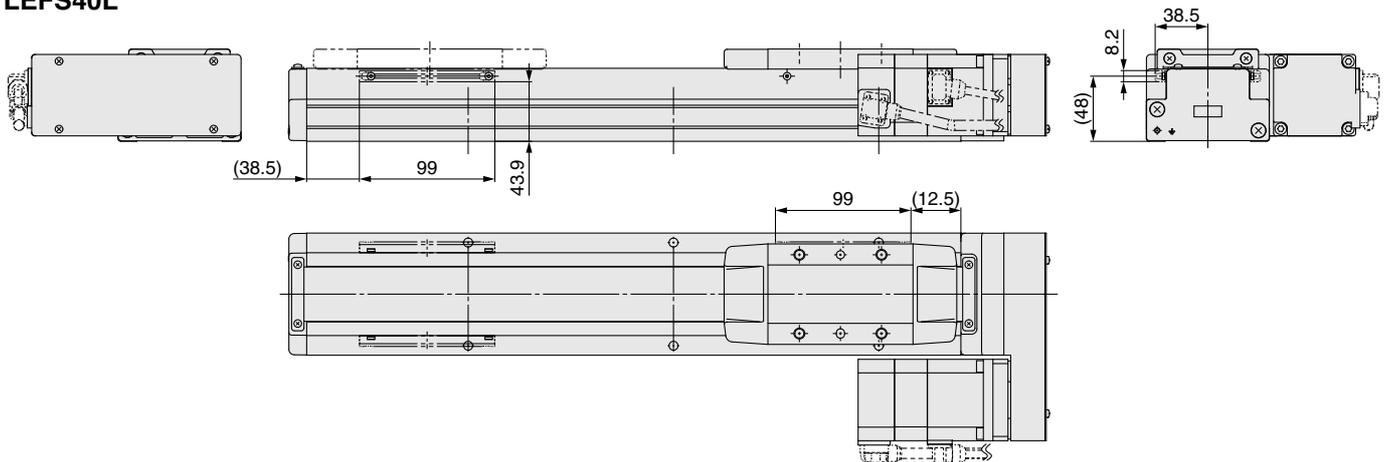

Dimensions	[mm]
Model	G
LEFS□40□□□-150□	130
LEFS□40□□□-200□	280
LEFS□40□□□-250□	280
LEFS□40□□□-300□	280
LEFS□40□□□-350□	430
LEFS□40□□□-400□	430
LEFS□40□□□-450□	430
LEFS□40□□□-500□	580
LEFS□40□□□-550□	580
LEFS□40□□□-600□	580

Dimensions	[mm]
Model	G
LEFS□40□□□-650□	730
LEFS□40□□□-700□	730
LEFS□40□□□-750□	730
LEFS□40□□□-800□	880
LEFS□40□□□-850□	880
LEFS□40□□□-900□	880
LEFS□40□□□-950□	1030
LEFS□40□□□-1000□	1030
LEFS□40□□□-1100□	1180
LEFS□40□□□-1200□	1180


Slider Type Ball Screw Drive

LEFS Series LEFS25, 32, 40



* For details, refer to
www.smc.eu and onward.

How to Order

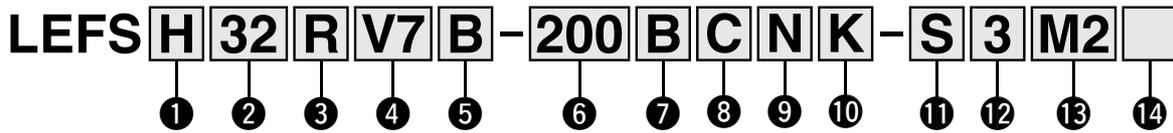

1 Accuracy

—	Basic type
H	High-precision type

2 Size

25
32
40

4 Motor type

Symbol	Type	Output [W]	2 Size	13 Driver type	Compatible drivers
*1 V6	AC servo motor (Absolute encoder)	100	25	M2	LECYM2-V5
V7		200	32	U2	LECYU2-V5
V8		400	40	M2	LECYM2-V7
				U2	LECYU2-V7
				M2	LECYM2-V8
				U2	LECYU2-V8

*1 For motor type V6, the compatible driver part number suffix is V5.

5 Lead [mm]

Symbol	LEFS25	LEFS32	LEFS40
H	20	24	30
A	12	16	20
B	6	8	10

3 Motor mounting position

—	In-line
R	Right side parallel
L	Left side parallel

6 Stroke [mm]

50	50
to	to
1200	1200

7 Motor option

—	Without option
B	With lock

8 Auto switch compatibility

—	None
C	With (Includes 1 mounting bracket)

* If 2 or more are required, please order them separately. (Part no.: LEF-D-2-1 For details, refer to page 181.)

* Order auto switches separately. (For details, refer to pages 182 to 184.)

* When “—” is selected, the product will not come with a built-in magnet for an auto switch, and so a mounting bracket cannot be secured. Be sure to select an appropriate model initially as the product cannot be changed to have auto switch compatibility after purchase.

9 Grease application (Seal band part)

—	With
N	Without (Roller specification)

12 Actuator cable length [m]

—	Without cable
3	3
5	5
A	10
C	20

10 Positioning pin hole

—	Housing B bottom*1	
K	Body bottom 2 locations	

*1 Refer to the body mounting example on page 186 for the mounting method.

13 Driver type

	Compatible drivers	Power supply voltage [V]
—	Without driver	—
M2	LECYM2-V□	200 to 230
U2	LECYU2-V□	200 to 230

* When a driver type is selected, a cable is included. Select the cable type and cable length.

11 Cable type

—	Without cable
S	Standard cable
R	Robotic cable

14 I/O cable length [m]*1

—	Without cable
H	Without cable (Connector only)
1	1.5

*1 When “—: Without driver” is selected for the driver type, only “—: Without cable” can be selected. Refer to www.smc.eu if an I/O cable is required.

Applicable Stroke Table

●: Standard

Model	Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200
LEFS25		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—
LEFS32		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—
LEFS40		—	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

* Please contact SMC for non-standard strokes as they are produced as special orders.

For auto switches, refer to pages 181 to 184.

Compatible Drivers

Driver type	MECHATROLINK-II type	MECHATROLINK-III type
Series	LECYM	LECYU
Applicable network	MECHATROLINK-II	MECHATROLINK-III
Control encoder	Absolute 20-bit encoder	
Communication device	USB communication, RS-422 communication	
Power supply voltage [V]	200 to 230 VAC (50/60 Hz)	

Specifications

AC Servo Motor

Model		LEFS25□V6			LEFS32□V7			LEFS40□V8				
Actuator specifications	Stroke [mm]*1	50 to 800			50 to 1000			150 to 1200				
	Work load [kg]*2	Horizontal	10	20	20	30	40	45	30	50	60	
		Vertical	4	8	15	5	10	20	7	15	30	
	Max. speed [mm/s]*3	Stroke range	Up to 400	1500	900	450	1500	1000	500	1500	1000	500
			401 to 500	1200	720	360	1500	1000	500	1500	1000	500
			501 to 600	900	540	270	1200	800	400	1500	1000	500
			601 to 700	700	420	210	930	620	310	1410	940	470
			701 to 800	550	330	160	750	500	250	1140	760	380
			801 to 900	—	—	—	610	410	200	930	620	310
			901 to 1000	—	—	—	510	340	170	780	520	260
			1001 to 1100	—	—	—	—	—	—	500	440	220
	1101 to 1200	—	—	—	—	—	—	500	380	190		
	Max. acceleration/deceleration [mm/s ²]	20000 (Refer to pages 29 to 31 for limit according to work load and duty ratio.)										
	Positioning repeatability [mm]	Basic type	±0.02									
		High-precision type	±0.01									
Lost motion [mm]*4	Basic type	0.1 or less										
	High-precision type	0.05 or less										
Lead [mm]	20	12	6	24	16	8	30	20	10			
Impact/Vibration resistance [m/s ²]*5	50/20											
Actuation type	Ball screw (LEFS□), Ball screw + Belt (LEFS□ [†])											
Guide type	Linear guide											
Static allowable moment*6 [N·m]	Mep (Pitching)	27			46			110				
	Mey (Yawing)	27			46			110				
	Mer (Rolling)	52			101			207				
Operating temperature range [°C]	5 to 40											
Operating humidity range [%RH]	90 or less (No condensation)											
Enclosure	IP30											
Motor output/Size	100 W/□40			200 W/□60			400 W/□60					
Motor type	AC servo motor (200 VAC)											
Encoder	Absolute 20-bit encoder (Resolution: 1048576 p/rev)											
Power [W]*7	Max. power 445			Max. power 725			Max. power 1275					
Type*8	Non-magnetising lock											
Holding force [N]	78	131	255	131	197	385	220	330	660			
Power [W] at 20 °C	5.5			6			6					
Rated voltage [V]	24 VDC ^{+10%} _{0%}											

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 For details, refer to the "Speed-Work Load Graph (Guide)" on page 36.

*3 The allowable speed changes according to the stroke.

*4 A reference value for correcting errors in reciprocal operation

*5 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a

perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*6 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*7 Indicates the max. power during operation (including the driver)

When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.

*8 Only when motor option "With lock" is selected

Weight


Series	LEFS25□V6															
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
Product weight [kg]	2.06	2.20	2.34	2.50	2.62	2.75	2.90	3.05	3.18	3.30	3.46	3.60	3.74	3.88	4.02	4.20
Additional weight with lock [kg]	0.3															

Series	LEFS32□V7																			
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
Product weight [kg]	3.40	3.60	3.80	4.00	4.20	4.40	4.60	4.80	5.00	5.20	5.40	5.60	5.80	6.00	6.20	6.40	6.60	6.80	7.00	7.20
Additional weight with lock [kg]	0.7																			


Series	LEFS40□V8																			
Stroke [mm]	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200
Product weight [kg]	5.92	6.20	6.48	6.75	7.05	7.35	7.61	7.90	8.17	8.35	8.73	9.00	9.30	9.55	9.86	10.15	10.42	10.70	11.26	11.82
Additional weight with lock [kg]	0.7																			

Construction

In-line motor

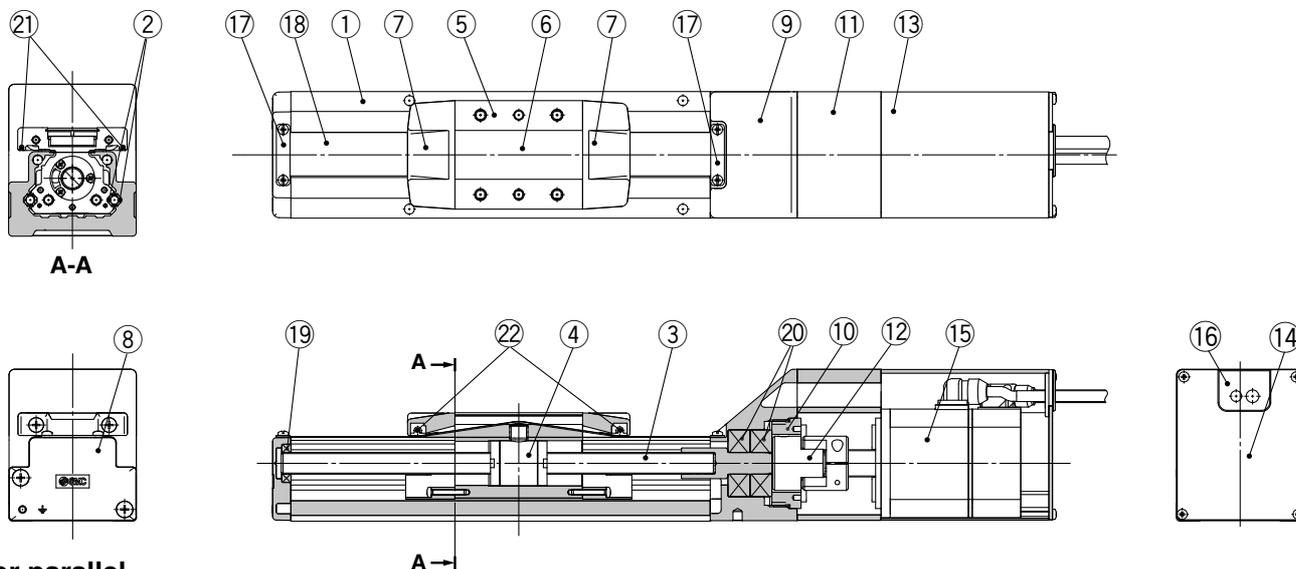

Motor parallel

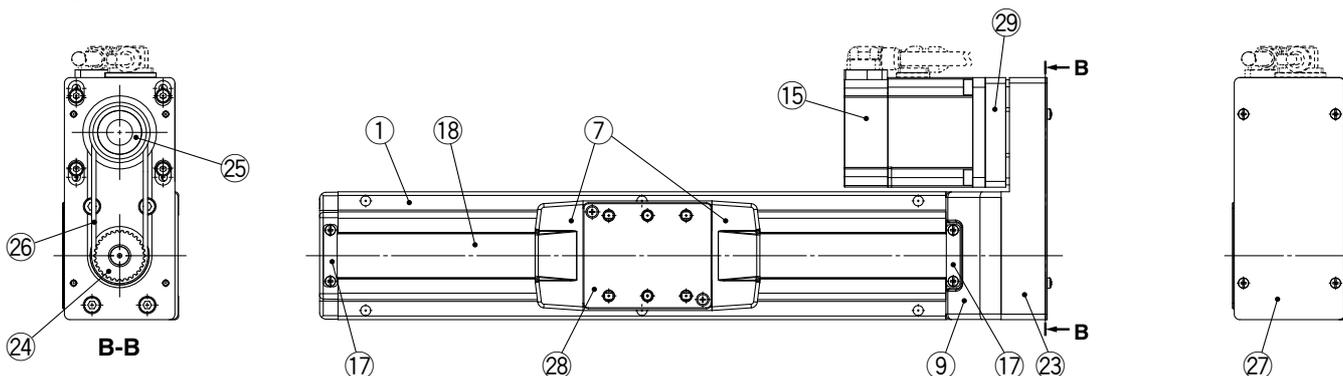

Component Parts

No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide	—	
3	Ball screw shaft	—	
4	Ball screw nut	—	
5	Table	Aluminium alloy	Anodised
6	Blanking plate	Aluminium alloy	Anodised
7	Seal band holder	Synthetic resin	
8	Housing A	Aluminium die-cast	Coating
9	Housing B	Aluminium die-cast	Coating
10	Bearing stopper	Aluminium alloy	
11	Motor mount	Aluminium alloy	Coating
12	Coupling	—	
13	Motor cover	Aluminium alloy	Anodised
14	Motor end cover	Aluminium alloy	Anodised
15	Motor	—	
16	Grommet	NBR	
17	Band stopper	Stainless steel	
18	Dust seal band	Stainless steel	
19	Bearing	—	Stroke 250 mm or more
20	Bearing	—	

No.	Description	Material	Note
21	Magnet	—	With auto switch compatibility
22	Roller assembly	—	Without grease application
23	Return plate	Aluminium die-casted	Coating
24	Pulley	Aluminium alloy	Anodised
25	Pulley	Aluminium alloy	Anodised
27	Cover plate	Aluminium alloy	Anodised
28	Table spacer	Aluminium alloy	Anodised (LEFS32 only)
29	Motor adapter	Aluminium alloy	Coating

Replacement Parts/Belt


No.	Size	Order no.
26	25	LE-D-6-2
	32	LE-D-6-3
	40	LE-D-6-4

Replacement Parts/Grease Pack

Applied portion	Order no.
Ball screw	GR-S-010 (10 g) GR-S-020 (20 g)
Rail guide	
Dust seal band (When "Without" is selected for the grease application, grease is applied only on the back side.)	

Dimensions: In-line Motor

LEFS25

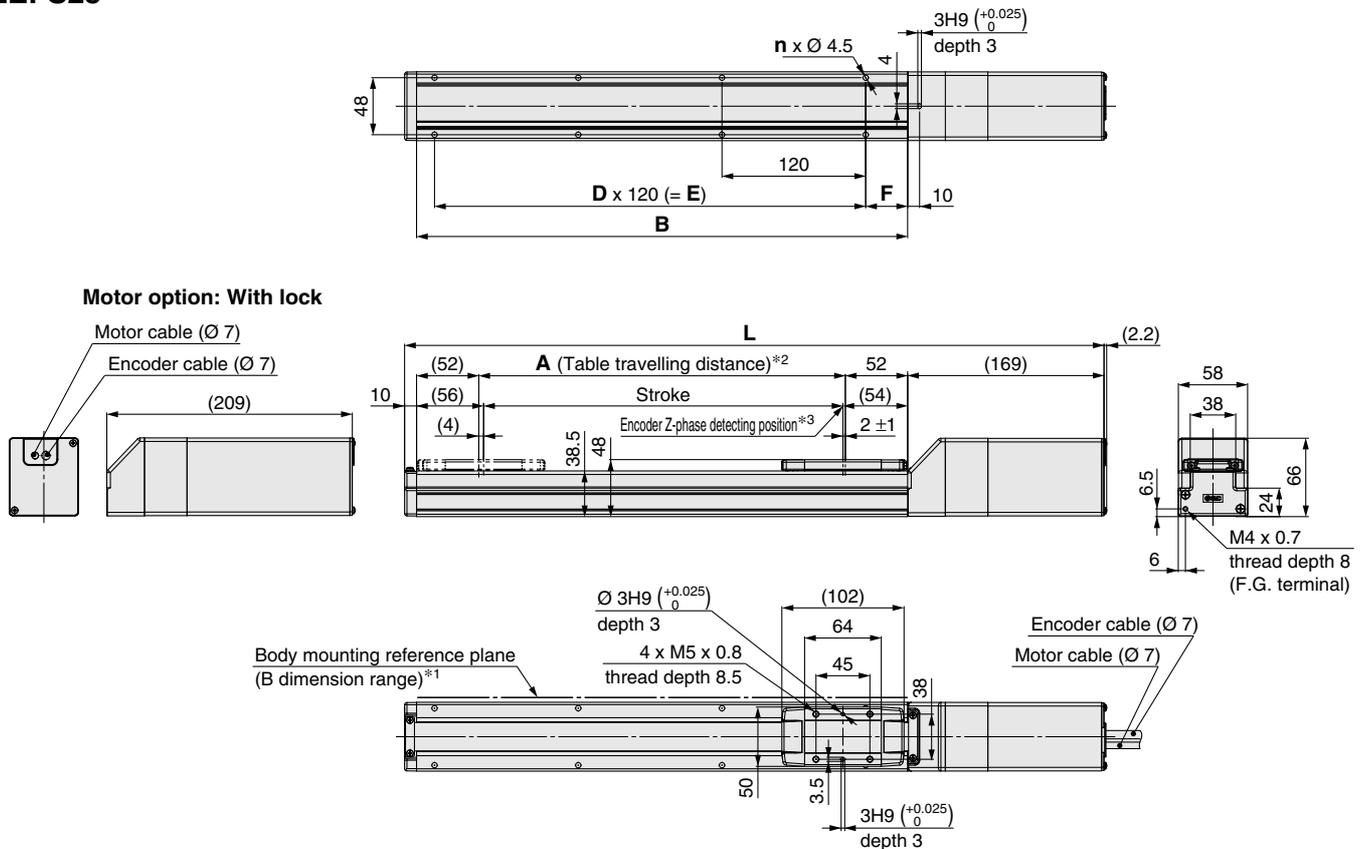

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Dimensions


[mm]

Model	L		A	B	n	D	E	F
	Without lock	With lock						
LEFS□25□□-50□	339	379	56	160	4	—	—	20
LEFS□25□□-100□	389	429	106	210	4	—	—	35
LEFS□25□□-150□	439	479	156	260	4	—	—	
LEFS□25□□-200□	489	529	206	310	6	2	240	
LEFS□25□□-250□	539	579	256	360	6	2	240	
LEFS□25□□-300□	589	629	306	410	8	3	360	
LEFS□25□□-350□	639	679	356	460	8	3	360	
LEFS□25□□-400□	689	729	406	510	8	3	360	
LEFS□25□□-450□	739	779	456	560	10	4	480	
LEFS□25□□-500□	789	829	506	610	10	4	480	
LEFS□25□□-550□	839	879	556	660	12	5	600	
LEFS□25□□-600□	889	929	606	710	12	5	600	
LEFS□25□□-650□	939	979	656	760	12	5	600	
LEFS□25□□-700□	989	1029	706	810	14	6	720	
LEFS□25□□-750□	1039	1079	756	860	14	6	720	
LEFS□25□□-800□	1089	1129	806	910	16	7	840	

Dimensions: In-line Motor


LEFS25

Positioning pin hole*1 (Option): Body bottom

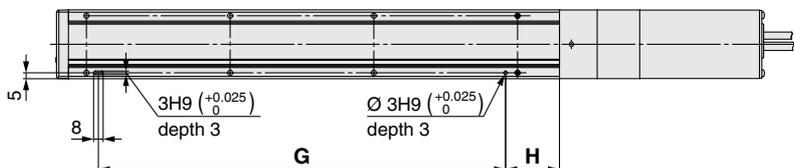

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

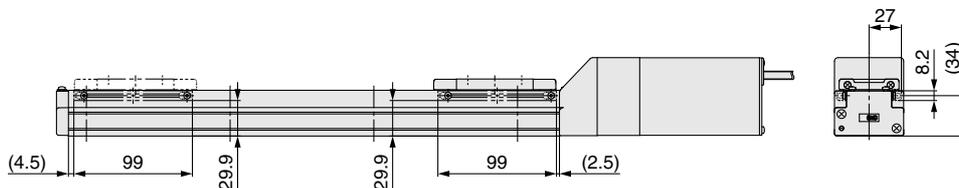

* For strokes of 99 mm or less, only 2 auto switch mounting brackets can be installed on the motor side.


Dimensions

[mm]


Model	G	H
LEFS□25□□-50□	100	30
LEFS□25□□-100□	100	45
LEFS□25□□-150□	100	45
LEFS□25□□-200□	220	45
LEFS□25□□-250□	220	45
LEFS□25□□-300□	340	45
LEFS□25□□-350□	340	45
LEFS□25□□-400□	340	45
LEFS□25□□-450□	460	45
LEFS□25□□-500□	460	45
LEFS□25□□-550□	580	45
LEFS□25□□-600□	580	45
LEFS□25□□-650□	580	45
LEFS□25□□-700□	700	45
LEFS□25□□-750□	700	45
LEFS□25□□-800□	820	45

Dimensions: In-line Motor

LEFS32

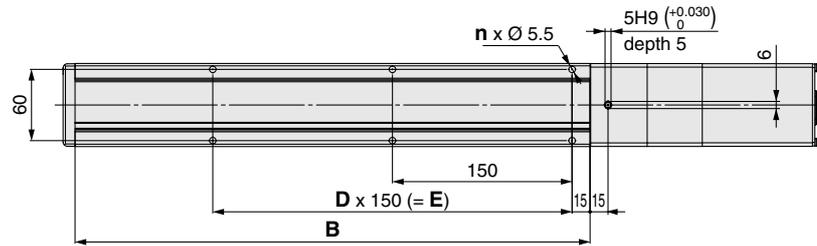

Motor option: With lock

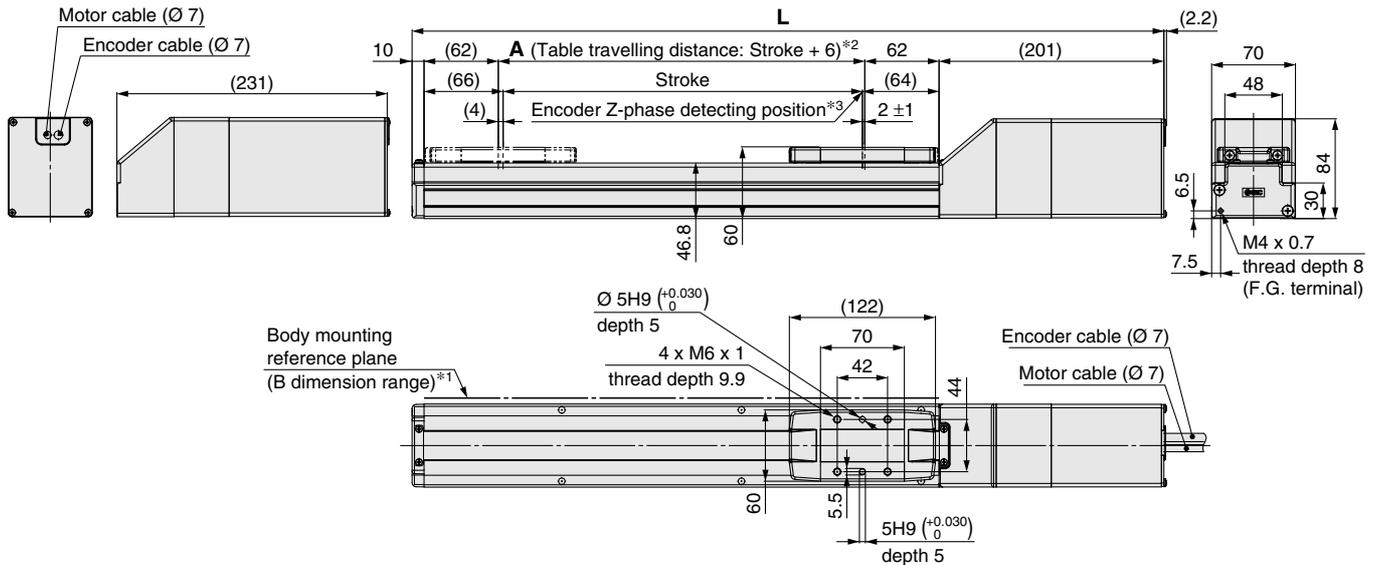

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Dimensions


[mm]

Model	L		A	B	n	D	E
	Without lock	With lock					
LEFS□32□□-50□	391	421	56	180	4	—	—
LEFS□32□□-100□	441	471	106	230	4	—	—
LEFS□32□□-150□	491	521	156	280	4	—	—
LEFS□32□□-200□	541	571	206	330	6	2	300
LEFS□32□□-250□	591	621	256	380	6	2	300
LEFS□32□□-300□	641	671	306	430	6	2	300
LEFS□32□□-350□	691	721	356	480	8	3	450
LEFS□32□□-400□	741	771	406	530	8	3	450
LEFS□32□□-450□	791	821	456	580	8	3	450
LEFS□32□□-500□	841	871	506	630	10	4	600
LEFS□32□□-550□	891	921	556	680	10	4	600
LEFS□32□□-600□	941	971	606	730	10	4	600
LEFS□32□□-650□	991	1021	656	780	12	5	750
LEFS□32□□-700□	1041	1071	706	830	12	5	750
LEFS□32□□-750□	1091	1121	756	880	12	5	750
LEFS□32□□-800□	1141	1171	806	930	14	6	900
LEFS□32□□-850□	1191	1221	856	980	14	6	900
LEFS□32□□-900□	1241	1271	906	1030	14	6	900
LEFS□32□□-950□	1291	1321	956	1080	16	7	1050
LEFS□32□□-1000□	1341	1371	1006	1130	16	7	1050

Dimensions: In-line Motor


LEFS32

Positioning pin hole*1 (Option): Body bottom

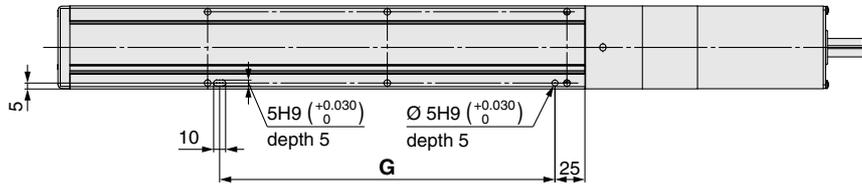

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

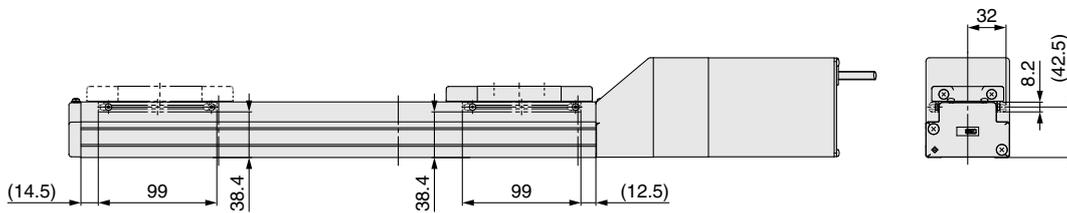


* For strokes of 99 mm or less, only 2 auto switch mounting brackets can be installed on the motor side.

Dimensions	[mm]
Model	G
LEFS□32□□-50□	130
LEFS□32□□-100□	130
LEFS□32□□-150□	130
LEFS□32□□-200□	280
LEFS□32□□-250□	280
LEFS□32□□-300□	280
LEFS□32□□-350□	430
LEFS□32□□-400□	430
LEFS□32□□-450□	430
LEFS□32□□-500□	580
LEFS□32□□-550□	580
LEFS□32□□-600□	580
LEFS□32□□-650□	730
LEFS□32□□-700□	730
LEFS□32□□-750□	730
LEFS□32□□-800□	880
LEFS□32□□-850□	880
LEFS□32□□-900□	880
LEFS□32□□-950□	1030
LEFS□32□□-1000□	1030

Dimensions: In-line Motor


LEFS40

Positioning pin hole*1 (Option): Body bottom

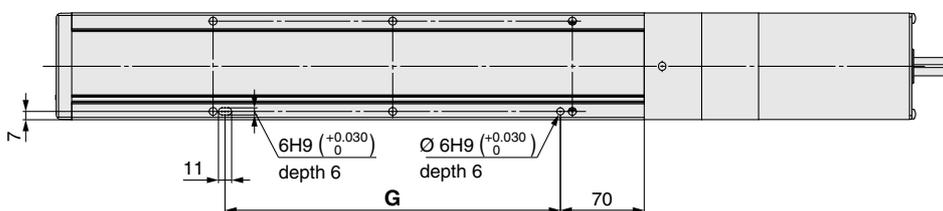

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

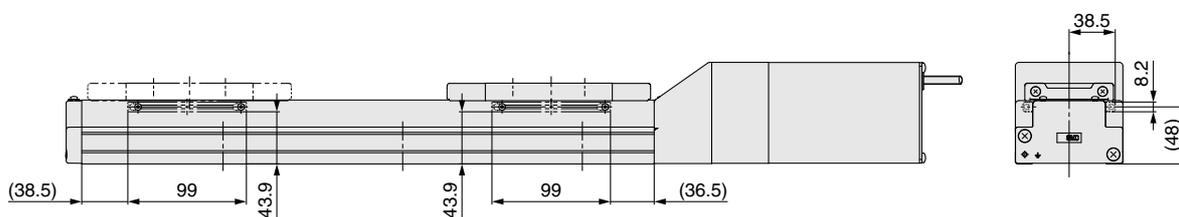


Dimensions [mm]

Model	G
LEFS□40□□-150□	130
LEFS□40□□-200□	280
LEFS□40□□-250□	280
LEFS□40□□-300□	280
LEFS□40□□-350□	430
LEFS□40□□-400□	430
LEFS□40□□-450□	430
LEFS□40□□-500□	580
LEFS□40□□-550□	580
LEFS□40□□-600□	580
LEFS□40□□-650□	730
LEFS□40□□-700□	730
LEFS□40□□-750□	730
LEFS□40□□-800□	880
LEFS□40□□-850□	880
LEFS□40□□-900□	880
LEFS□40□□-950□	1030
LEFS□40□□-1000□	1030
LEFS□40□□-1100□	1180
LEFS□40□□-1200□	1180

Dimensions: Motor Parallel

LEFS25R

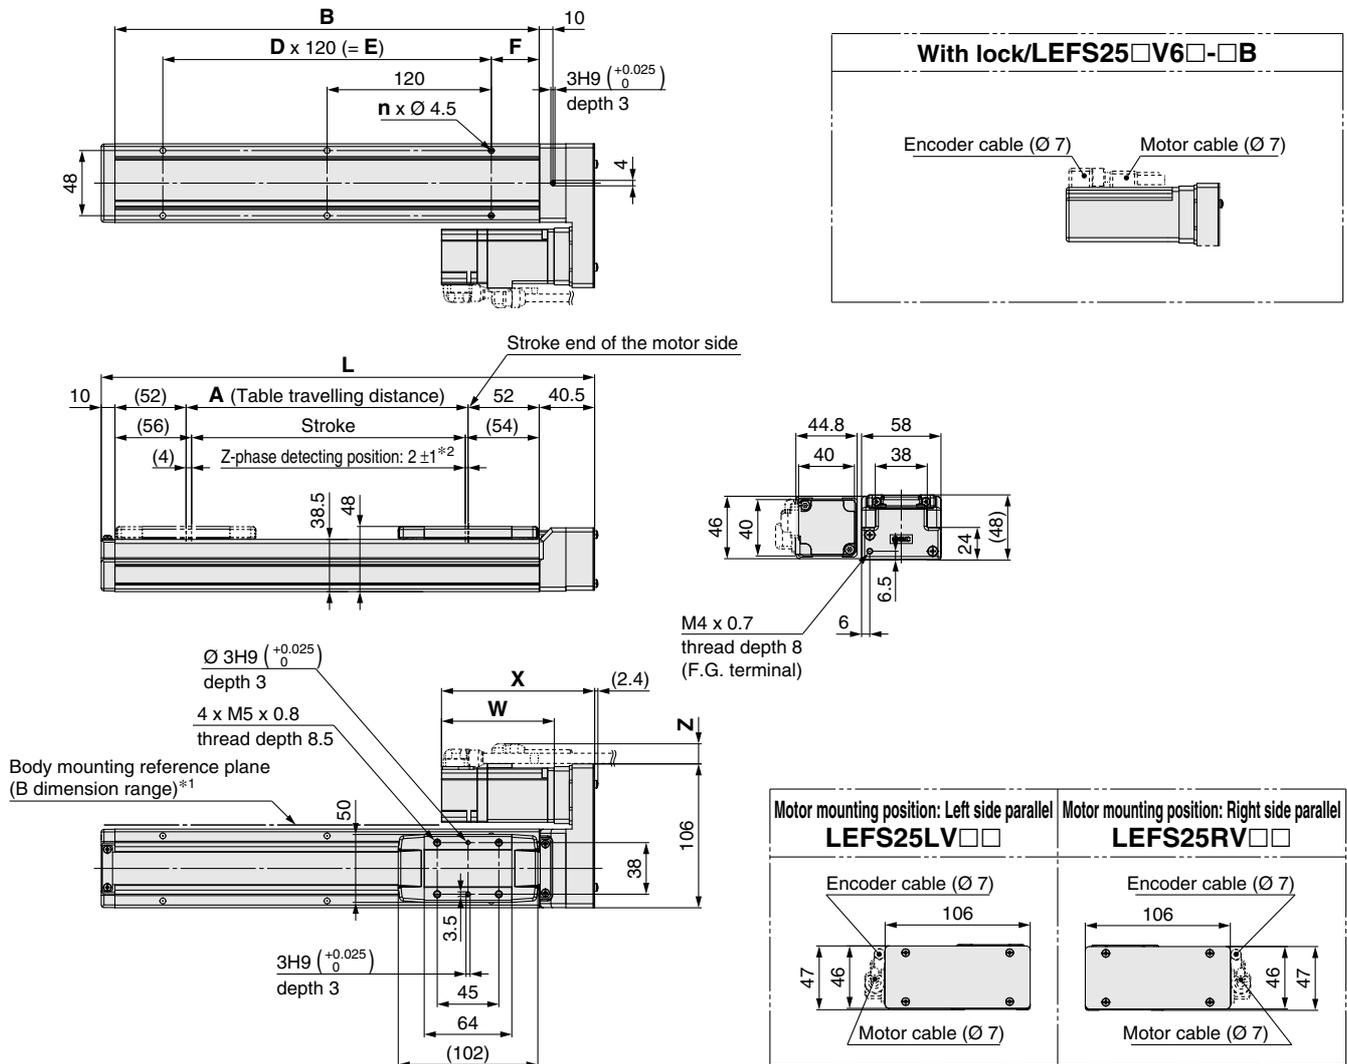

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 The Z-phase first detecting position from the stroke end of the motor side
Please contact SMC for adjusting the Z-phase detecting position at the stroke end of the end side.

Motor Dimensions

Motor type	X		W		Z	
	Without lock	With lock	Without lock	With lock	Without lock	With lock
V6	112	157	82.5	127.5	11	


Dimensions

Model	L	A	B	n	D	E	F
LEFS□25□□□-50□	210.5	56	160	4	—	—	20
LEFS□25□□□-100□	260.5	106	210	4	—	—	
LEFS□25□□□-150□	310.5	156	260	4	—	—	
LEFS□25□□□-200□	360.5	206	310	6	2	240	
LEFS□25□□□-250□	410.5	256	360	6	2	240	
LEFS□25□□□-300□	460.5	306	410	8	3	360	
LEFS□25□□□-350□	510.5	356	460	8	3	360	
LEFS□25□□□-400□	560.5	406	510	8	3	360	
LEFS□25□□□-450□	610.5	456	560	10	4	480	35
LEFS□25□□□-500□	660.5	506	610	10	4	480	
LEFS□25□□□-550□	710.5	556	660	12	5	600	
LEFS□25□□□-600□	760.5	606	710	12	5	600	
LEFS□25□□□-650□	810.5	656	760	12	5	600	
LEFS□25□□□-700□	860.5	706	810	14	6	720	
LEFS□25□□□-750□	910.5	756	860	14	6	720	
LEFS□25□□□-800□	960.5	806	910	16	7	840	

Dimensions: Motor Parallel

LEFS25R


Positioning pin hole*1 (Option): Body bottom

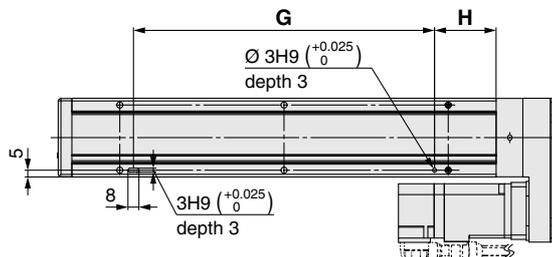


*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

LEFS25R

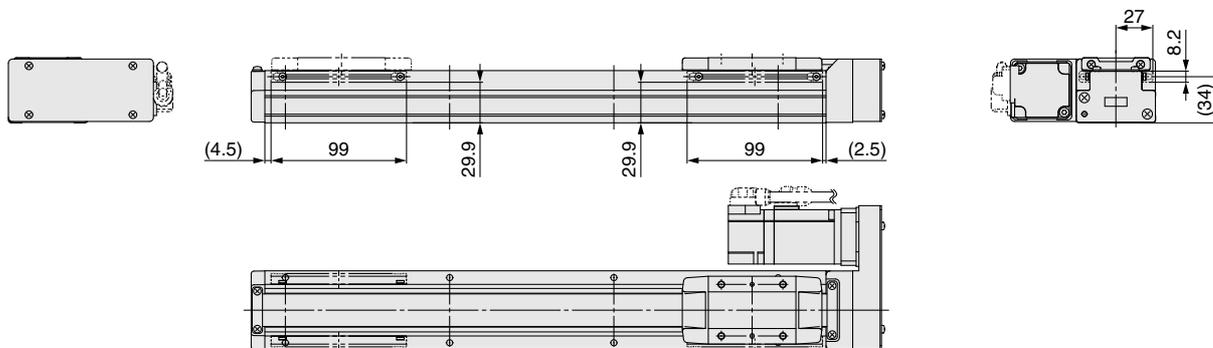

LEFS25L

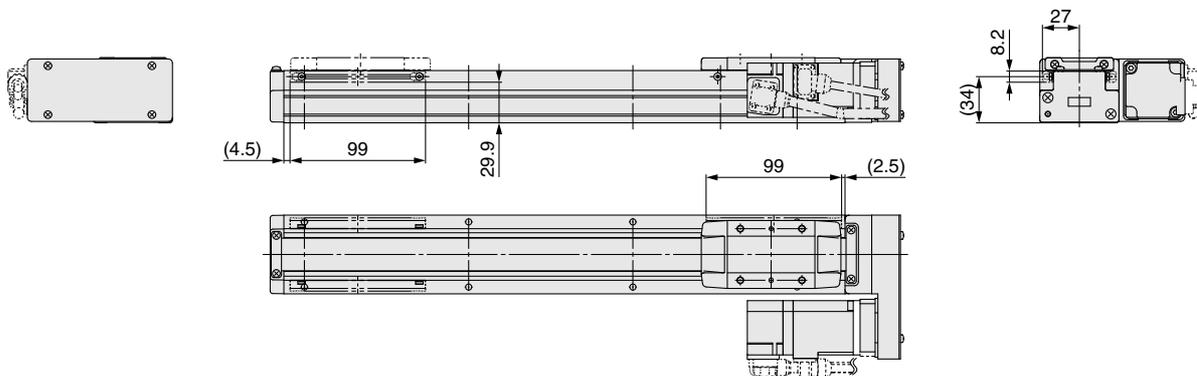

Dimensions

Model	G	H
LEFS□25□□□-50□	100	30
LEFS□25□□□-100□	100	45
LEFS□25□□□-150□	100	45
LEFS□25□□□-200□	220	45
LEFS□25□□□-250□	220	45
LEFS□25□□□-300□	340	45
LEFS□25□□□-350□	340	45
LEFS□25□□□-400□	340	45
LEFS□25□□□-450□	460	45
LEFS□25□□□-500□	460	45
LEFS□25□□□-550□	580	45
LEFS□25□□□-600□	580	45
LEFS□25□□□-650□	580	45
LEFS□25□□□-700□	700	45
LEFS□25□□□-750□	700	45
LEFS□25□□□-800□	820	45


* For strokes of 99 mm or less, only 1 auto switch mounting bracket can be installed on the motor side.

LEFS Series

AC Servo Motor

Dimensions: Motor Parallel

LEFS32R

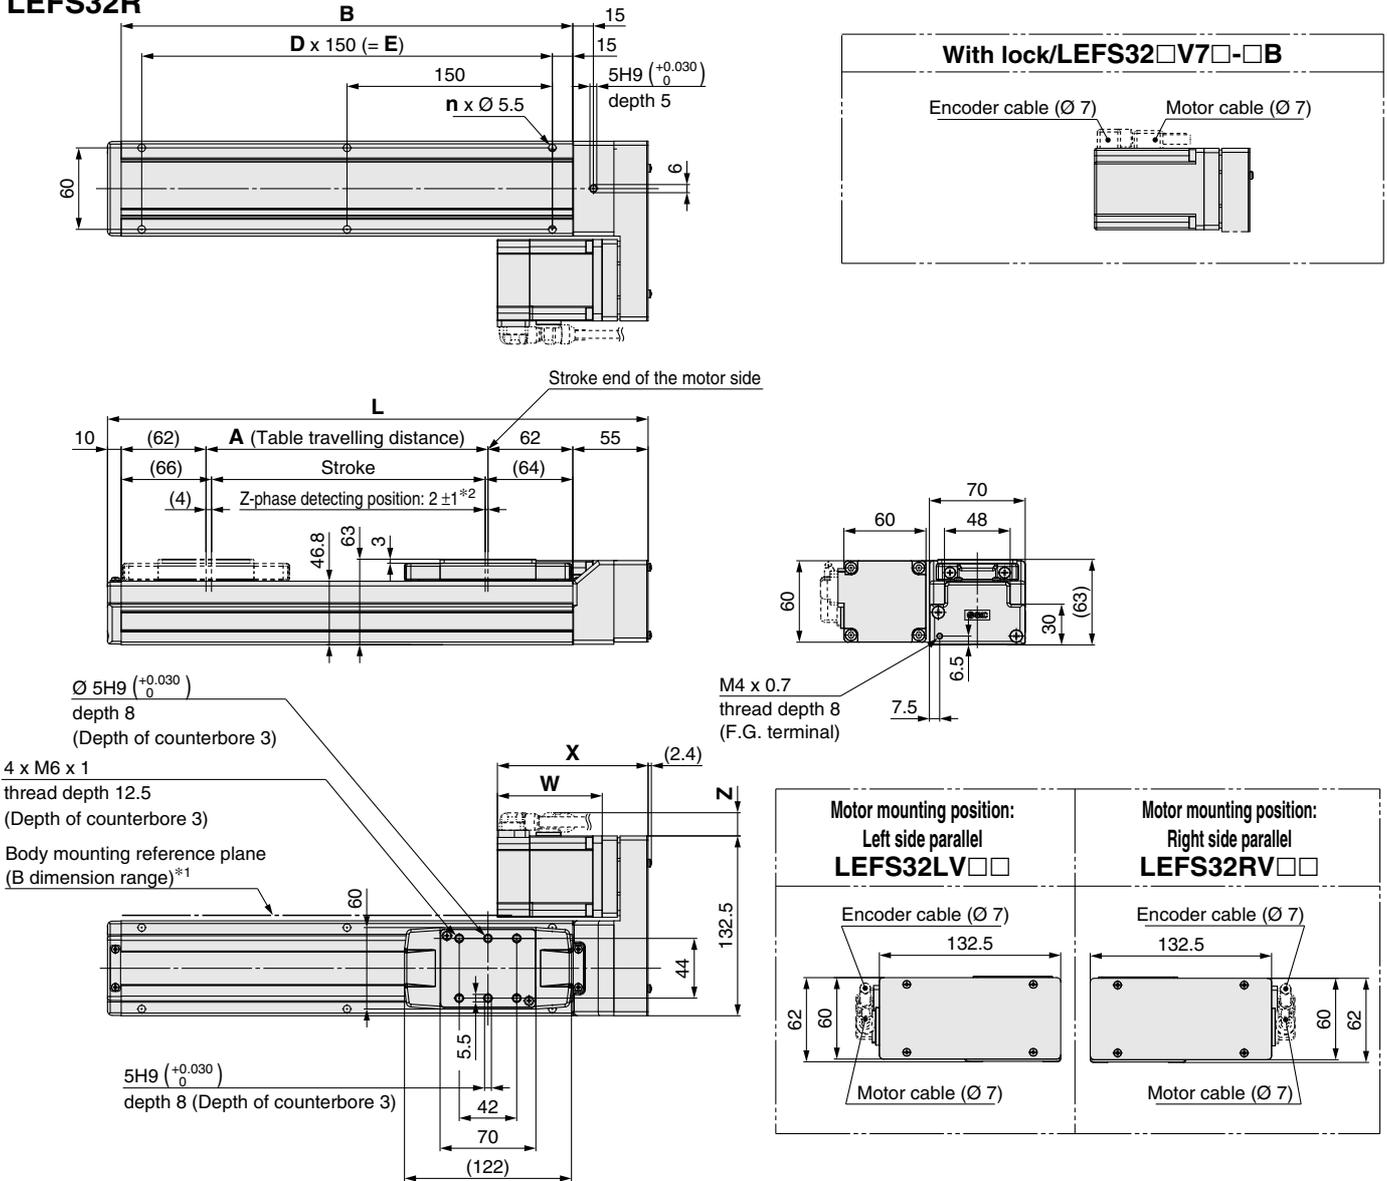

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 The Z-phase first detecting position from the stroke end of the motor side
Please contact SMC for adjusting the Z-phase detecting position at the stroke end of the end side.
- *3 When the table spacer is removed

Motor Dimensions

Motor type	X		W		Z	
	Without lock	With lock	Without lock	With lock	Without lock	With lock
V7	113.5	153.5	80	120	14	14

Dimensions

Model	L	A	B	n	D	E
LEFS□32□□□-50□	245	56	180	4	—	—
LEFS□32□□□-100□	295	106	230	4	—	—
LEFS□32□□□-150□	345	156	280	4	—	—
LEFS□32□□□-200□	395	206	330	6	2	300
LEFS□32□□□-250□	445	256	380	6	2	300
LEFS□32□□□-300□	495	306	430	6	2	300
LEFS□32□□□-350□	545	356	480	8	3	450
LEFS□32□□□-400□	595	406	530	8	3	450
LEFS□32□□□-450□	645	456	580	8	3	450
LEFS□32□□□-500□	695	506	630	10	4	600


Dimensions

Model	L	A	B	n	D	E
LEFS□32□□□-550□	745	556	680	10	4	600
LEFS□32□□□-600□	795	606	730	10	4	600
LEFS□32□□□-650□	845	656	780	12	5	750
LEFS□32□□□-700□	895	706	830	12	5	750
LEFS□32□□□-750□	945	756	880	12	5	750
LEFS□32□□□-800□	995	806	930	14	6	900
LEFS□32□□□-850□	1045	856	980	14	6	900
LEFS□32□□□-900□	1095	906	1030	14	6	900
LEFS□32□□□-950□	1145	956	1080	16	7	1050
LEFS□32□□□-1000□	1195	1006	1130	16	7	1050

Dimensions: Motor Parallel

LEFS32R


Positioning pin hole*1 (Option): Body bottom

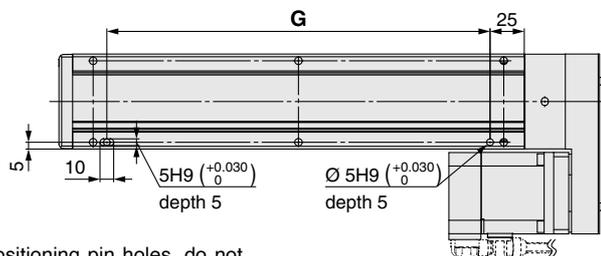


*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

LEFS32R

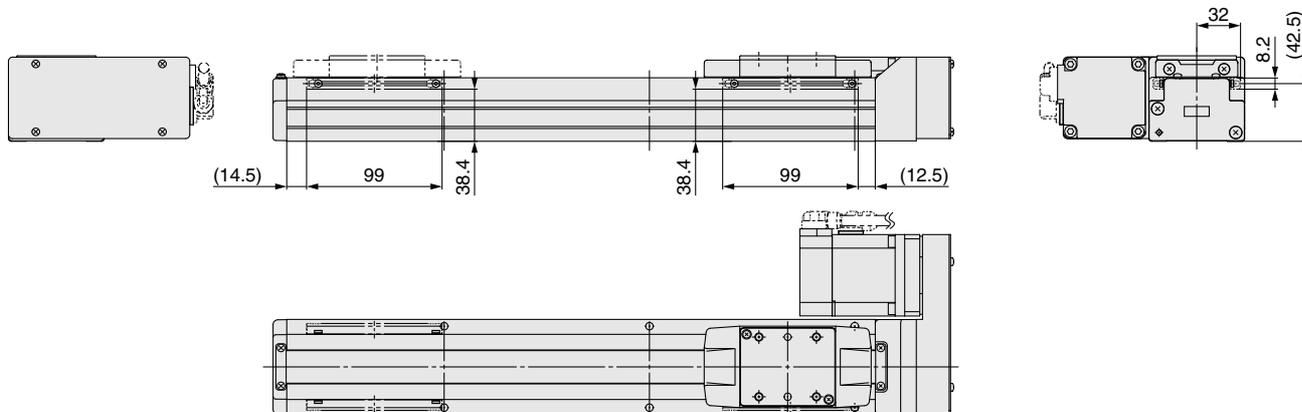

LEFS32L

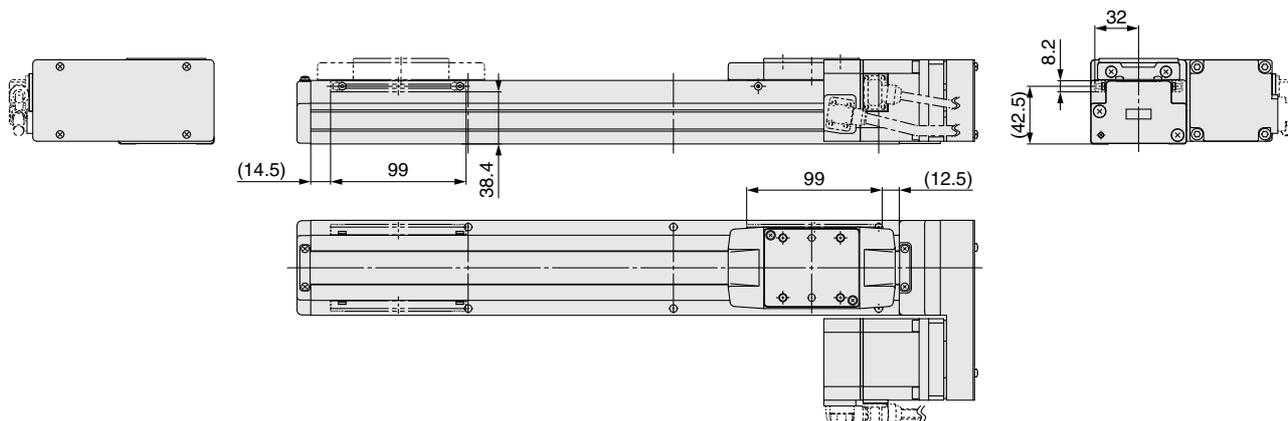

* For strokes of 99 mm or less, only 1 auto switch mounting bracket can be installed on the motor side.

Dimensions	[mm]
Model	G
LEFS□32□□□-50□	130
LEFS□32□□□-100□	130
LEFS□32□□□-150□	130
LEFS□32□□□-200□	280
LEFS□32□□□-250□	280
LEFS□32□□□-300□	280
LEFS□32□□□-350□	430
LEFS□32□□□-400□	430
LEFS□32□□□-450□	430
LEFS□32□□□-500□	580


Dimensions	[mm]
Model	G
LEFS□32□□□-550□	580
LEFS□32□□□-600□	580
LEFS□32□□□-650□	730
LEFS□32□□□-700□	730
LEFS□32□□□-750□	730
LEFS□32□□□-800□	880
LEFS□32□□□-850□	880
LEFS□32□□□-900□	880
LEFS□32□□□-950□	1030
LEFS□32□□□-1000□	1030

LEFS Series

AC Servo Motor

Dimensions: Motor Parallel

LEFS40R

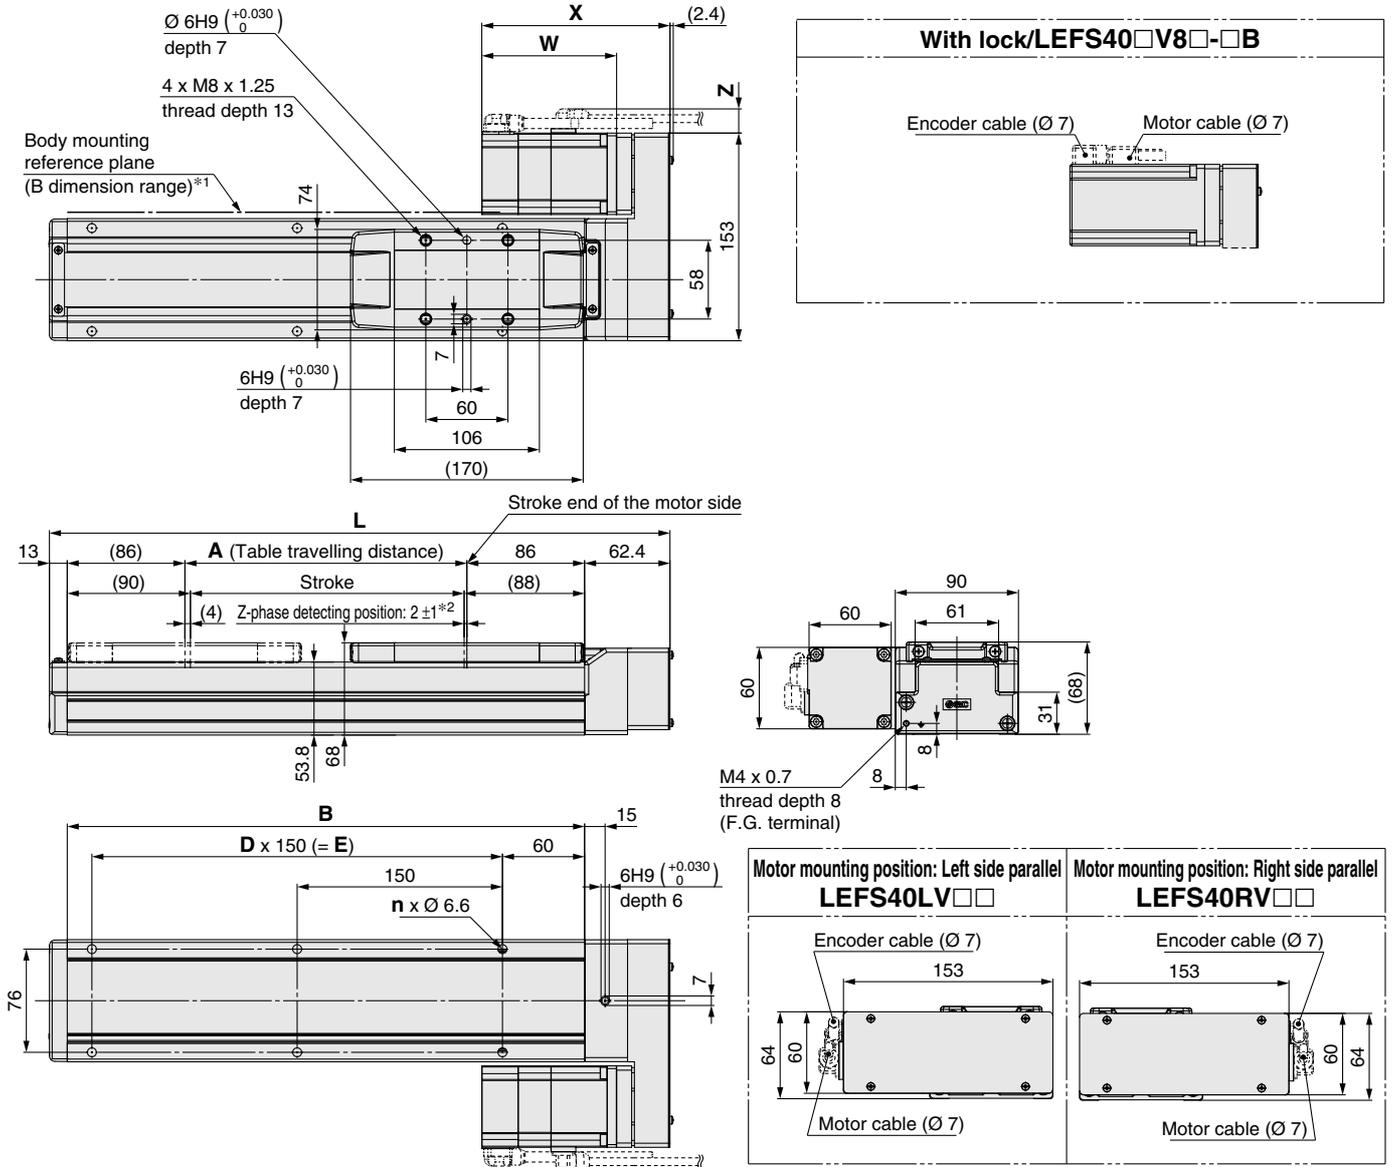

Dimensions

Model	L	A	B	n	D	E
LEFS□40□□□-150□	403.4	156	328	4	—	150
LEFS□40□□□-200□	453.4	206	378	6	2	300
LEFS□40□□□-250□	503.4	256	428	6	2	300
LEFS□40□□□-300□	553.4	306	478	6	2	300
LEFS□40□□□-350□	603.4	356	528	8	3	450
LEFS□40□□□-400□	653.4	406	578	8	3	450
LEFS□40□□□-450□	703.4	456	628	8	3	450
LEFS□40□□□-500□	753.4	506	678	10	4	600
LEFS□40□□□-550□	803.4	556	728	10	4	600
LEFS□40□□□-600□	853.4	606	778	10	4	600
LEFS□40□□□-650□	903.4	656	828	12	5	750
LEFS□40□□□-700□	953.4	706	878	12	5	750
LEFS□40□□□-750□	1003.4	756	928	12	5	750
LEFS□40□□□-800□	1053.4	806	978	14	6	900
LEFS□40□□□-850□	1103.4	856	1028	14	6	900
LEFS□40□□□-900□	1153.4	906	1078	14	6	900
LEFS□40□□□-950□	1203.4	956	1128	16	7	1050
LEFS□40□□□-1000□	1253.4	1006	1178	16	7	1050
LEFS□40□□□-1100□	1353.4	1106	1278	18	8	1200
LEFS□40□□□-1200□	1453.4	1206	1378	18	8	1200

Motor Dimensions


Motor type	X		W		Z	
	Without lock	With lock	Without lock	With lock	Without lock	With lock
V8	137.5	177.5	98.5	138.5	14	14

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 The Z-phase first detecting position from the stroke end of the motor side
Please contact SMC for adjusting the Z-phase detecting position at the stroke end of the end side.

Dimensions: Motor Parallel

LEFS40R


Positioning pin hole*1 (Option): Body bottom

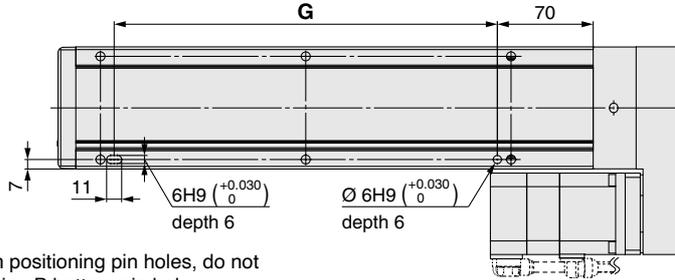


*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

LEFS40R

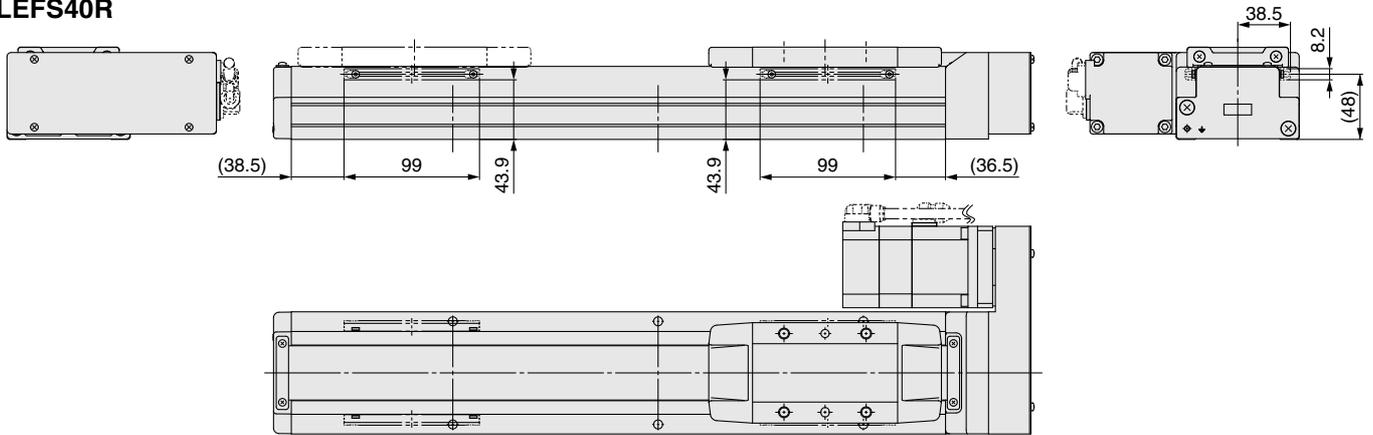

LEFS40L

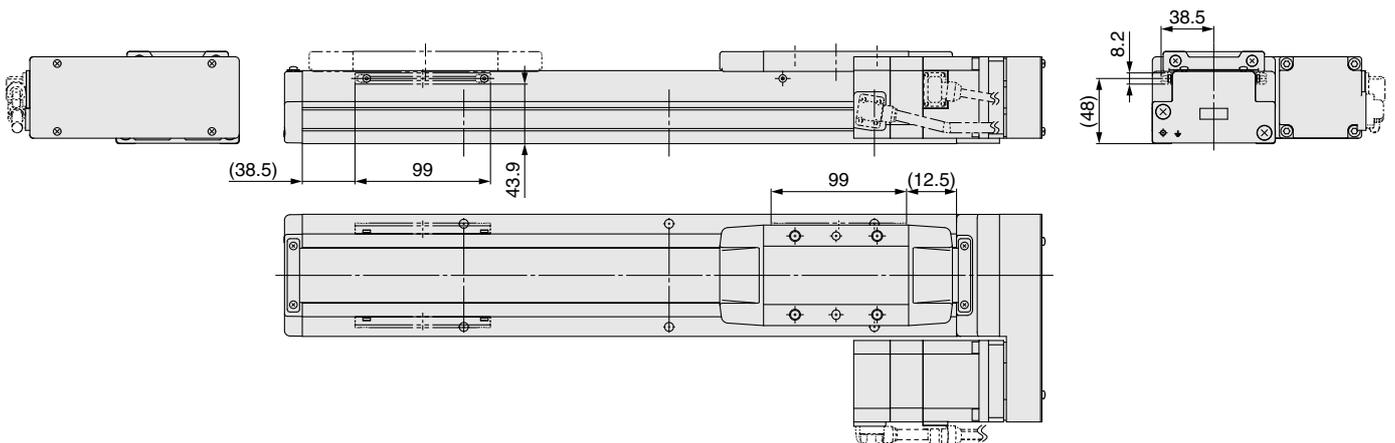

Dimensions	[mm]
Model	G
LEFS□40□□□-150□	130
LEFS□40□□□-200□	280
LEFS□40□□□-250□	280
LEFS□40□□□-300□	280
LEFS□40□□□-350□	430
LEFS□40□□□-400□	430
LEFS□40□□□-450□	430
LEFS□40□□□-500□	580
LEFS□40□□□-550□	580
LEFS□40□□□-600□	580

Dimensions	[mm]
Model	G
LEFS□40□□□-650□	730
LEFS□40□□□-700□	730
LEFS□40□□□-750□	730
LEFS□40□□□-800□	880
LEFS□40□□□-850□	880
LEFS□40□□□-900□	880
LEFS□40□□□-950□	1030
LEFS□40□□□-1000□	1030
LEFS□40□□□-1100□	1180
LEFS□40□□□-1200□	1180

Support Guide for Ball Screw Drive Actuator


LEFG Series LEFG16, 25, 32, 40

RoHS

Application example

The support guide was designed to support workpieces with significant overhang.

- As the dimensions are the same as the LEF series body, installation is simple and contributes to a reduction in installation and assembly labour.
- The standard-equipped seal bands prevent grease from splashing and external foreign matter from entering.

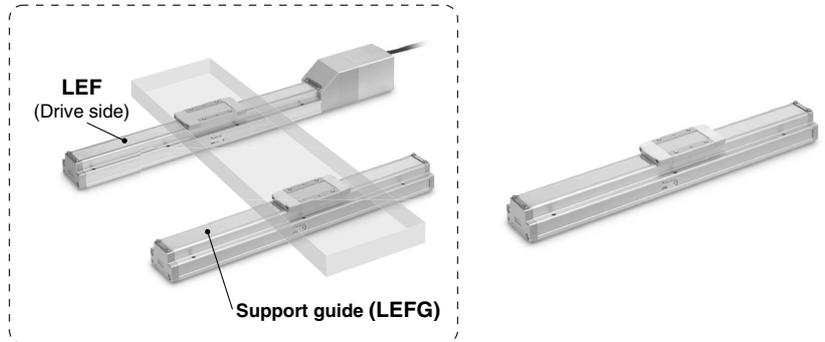

How to Order

LEFG **32** - **S** - **200** **N**

Support guide

1 Size

16
25
32
40

2 Type of mounting pitch

Symbol	LEFG16	LEFG25	LEFG32	LEFG40	Applicable model	
S	●	●	●	●	For ball screw drive	Step motor 24 VDC (Incremental, Battery-less absolute), Servo motor 24 VDC, AC servo motor, Motorless

3 Stroke [mm]

50	50
to	to
1200	1200

4 Grease application (Seal band part)

-	With
N	Without (Roller specification)

Applicable Stroke Table For Ball Screw Drive/S

Model	Stroke [mm]																						
	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200	
LEFG16-S	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	
LEFG25-S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LEFG32-S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LEFG40-S	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●


Weight

For Ball Screw Drive/S

Model	Stroke [mm]																					
	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200
LEFG16-S	0.25	0.31	0.37	0.43	0.49	0.55	0.61	0.67	0.73	0.79	-	-	-	-	-	-	-	-	-	-	-	-
LEFG25-S	0.56	0.67	0.78	0.89	1.00	1.11	1.22	1.33	1.44	1.55	1.66	1.77	1.88	1.99	2.10	2.21	-	-	-	-	-	-
LEFG32-S	0.92	1.08	1.23	1.4	1.56	1.72	1.88	2.04	2.20	2.36	2.52	2.68	2.84	3.00	3.16	3.32	3.48	3.64	3.80	3.96	-	-
LEFG40-S	-	-	2.07	2.29	2.51	2.72	2.94	3.15	3.37	3.58	3.80	4.01	4.23	4.44	4.66	4.87	5.09	5.30	5.52	5.73	6.16	6.59

Dimensions: For Ball Screw Drive

LEFG16-S

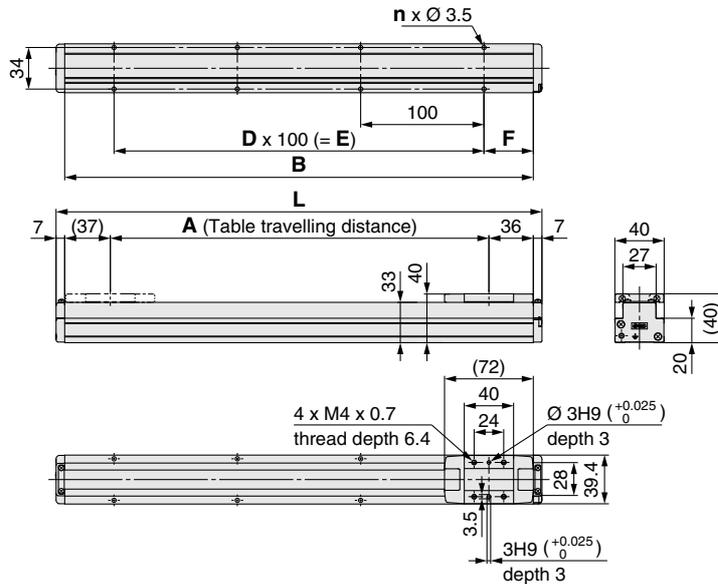


Dimensions [mm]

Model	L	A	B	n	D	E	F
LEFG16-S-50	144	57	130	4	—	—	15
LEFG16-S-100	194	107	180				40
LEFG16-S-150	244	157	230				40
LEFG16-S-200	294	207	280	6	2	200	40
LEFG16-S-250	344	257	330				

Dimensions [mm]

Model	L	A	B	n	D	E	F
LEFG16-S-300	394	307	380	8	3	300	40
LEFG16-S-350	444	357	430				
LEFG16-S-400	494	407	480				
LEFG16-S-450	544	457	530	12	5	500	40
LEFG16-S-500	594	507	580				

LEFG25-S

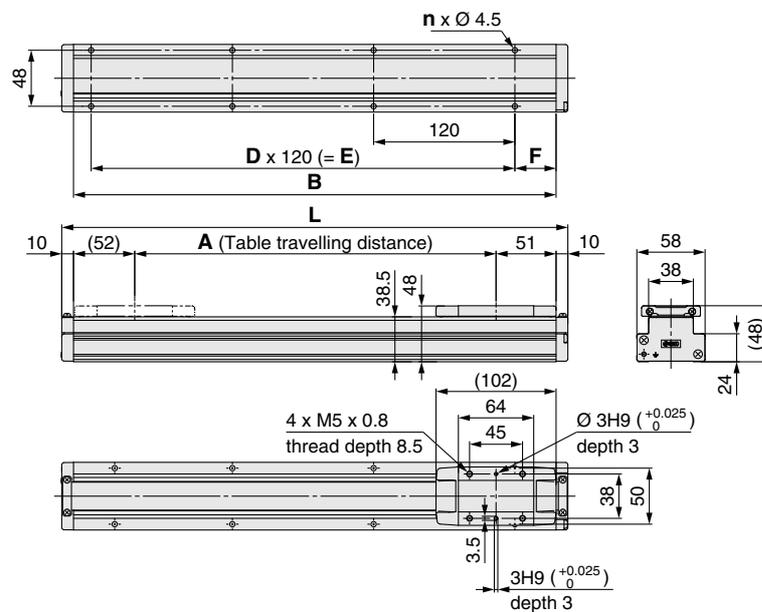

Dimensions [mm]

Model	L	A	B	n	D	E	F
LEFG25-S-50	180	57	160	4	—	—	20
LEFG25-S-100	230	107	210				35
LEFG25-S-150	280	157	260				35
LEFG25-S-200	330	207	310	6	2	240	35
LEFG25-S-250	380	257	360				
LEFG25-S-300	430	307	410	8	3	360	40
LEFG25-S-350	480	357	460				
LEFG25-S-400	530	407	510				


Dimensions [mm]

Model	L	A	B	n	D	E	F
LEFG25-S-450	580	457	560	10	4	480	40
LEFG25-S-500	630	507	610				
LEFG25-S-550	680	557	660				
LEFG25-S-600	730	607	710	12	5	600	35
LEFG25-S-650	780	657	760				
LEFG25-S-700	830	707	810	14	6	720	40
LEFG25-S-750	880	757	860				
LEFG25-S-800	930	807	910	16	7	840	40

LEFG Series

Dimensions: For Ball Screw Drive

LEFG32-S

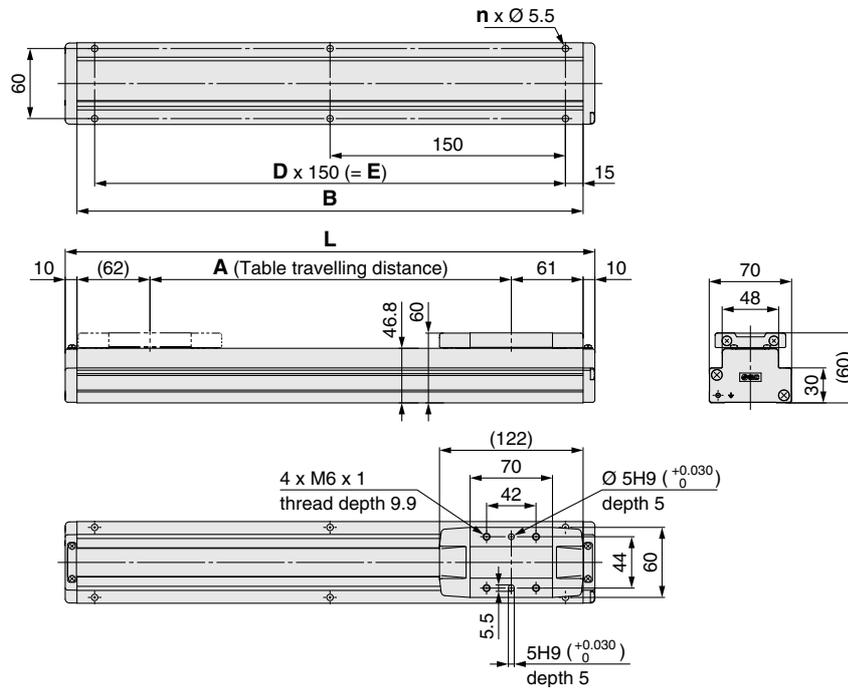


Model	L	A	B	n	D	E
LEFG32-S-50	200	57	180	4	—	—
LEFG32-S-100	250	107	230			
LEFG32-S-150	300	157	280			
LEFG32-S-200	350	207	330			
LEFG32-S-250	400	257	380	6	2	300
LEFG32-S-300	450	307	430			
LEFG32-S-350	500	357	480			
LEFG32-S-400	550	407	530			
LEFG32-S-450	600	457	580	8	3	450
LEFG32-S-500	650	507	630			
LEFG32-S-550	700	557	680			
LEFG32-S-600	750	607	730			
LEFG32-S-650	800	657	780	10	4	600
LEFG32-S-700	850	707	830			
LEFG32-S-750	900	757	880			
LEFG32-S-800	950	807	930			
LEFG32-S-850	1000	857	980	14	6	900
LEFG32-S-900	1050	907	1030			
LEFG32-S-950	1100	957	1080			
LEFG32-S-1000	1150	1007	1130			

Model	L	A	B	n	D	E
LEFG32-S-650	800	657	780	12	5	750
LEFG32-S-700	850	707	830			
LEFG32-S-750	900	757	880			
LEFG32-S-800	950	807	930			
LEFG32-S-850	1000	857	980	14	6	900
LEFG32-S-900	1050	907	1030			
LEFG32-S-950	1100	957	1080			
LEFG32-S-1000	1150	1007	1130			


* When a support guide is used for the LEFG32□□□□ (Motor parallel type), order a table spacer separately since the table height differs depending on the motor type.
Table spacer part number: LEF-TS32

Table spacer LEF-TS32

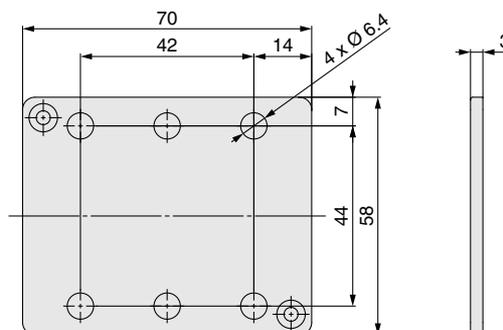

Dimensions: For Ball Screw Drive

LEFG40-S

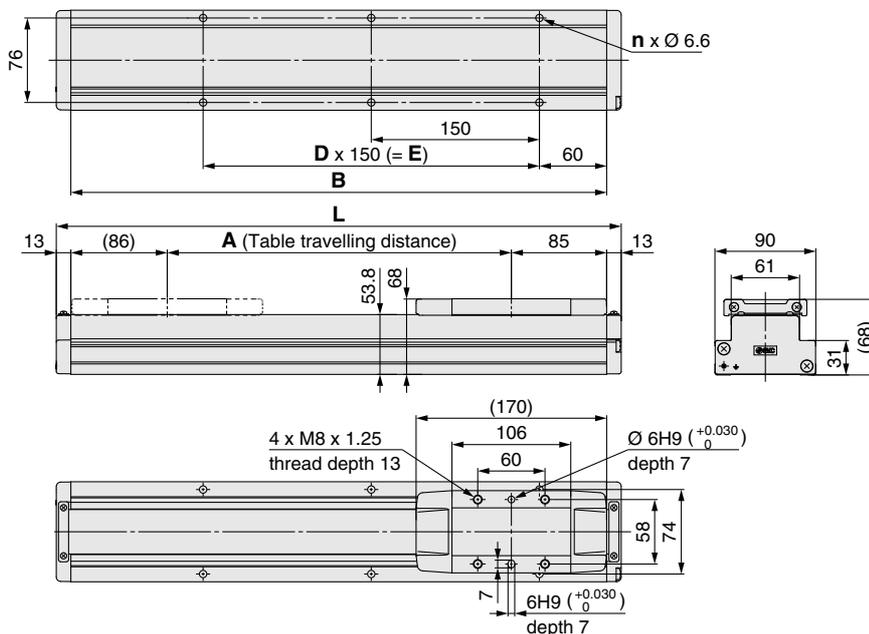

Dimensions

Model	L	A	B	n	D	E
LEFG40-S-150	354	157	328	4	—	150
LEFG40-S-200	404	207	378	6	2	300
LEFG40-S-250	454	257	428			
LEFG40-S-300	504	307	478	8	3	450
LEFG40-S-350	554	357	528			
LEFG40-S-400	604	407	578	10	4	600
LEFG40-S-450	654	457	628			
LEFG40-S-500	704	507	678			
LEFG40-S-550	754	557	728			
LEFG40-S-600	804	607	778			

Dimensions

Model	L	A	B	n	D	E
LEFG40-S-650	854	657	828	12	5	750
LEFG40-S-700	904	707	878			
LEFG40-S-750	954	757	928	14	6	900
LEFG40-S-800	1004	807	978			
LEFG40-S-850	1054	857	1028	16	7	1050
LEFG40-S-900	1104	907	1078			
LEFG40-S-950	1154	957	1128	18	8	1200
LEFG40-S-1000	1204	1007	1178			
LEFG40-S-1100	1304	1107	1278			
LEFG40-S-1200	1404	1207	1378			

Slider Type/Belt Drive

LEFB Series LEFB16, 25, 32



How to Order

LEFB **25** **ET** - **500** **C** **N** **K** - **R1** **CD17T**

①
②
③
④
⑤
⑥
⑦
⑧
⑨
⑩

For details on controllers, refer to the next page.

① Size

16
25
32

② Motor type

E	Battery-less absolute (Step motor 24 VDC)
---	---

③ Equivalent lead [mm]

T	48
---	----

④ Stroke*1 [mm]

Stroke	Note	
	Size	Applicable stroke
300 to 1000	16	300, 500, 600, 700, 800, 900, 1000
300 to 2000	25	300, 500, 600, 700, 800, 900, 1000, 1200, 1500, 1800, 2000
300 to 2000	32	300, 500, 600, 700, 800, 900, 1000, 1200, 1500, 1800, 2000

⑤ Motor option

—	Without option
B	With lock

⑥ Auto switch compatibility*2 *3 *4 *5

—	None
C	With (Includes 1 mounting bracket)

⑦ Grease application (Seal band part)

—	With
N	Without (Roller specification)

⑧ Positioning pin hole

—	Housing B bottom*6	
K	Body bottom 2 locations	

⑨ Actuator cable type/length

Robotic cable [m]			
—	None	R8	8*7
R1	1.5	RA	10*7
R3	3	RB	15*7
R5	5	RC	20*7

The belt drive actuator cannot be used for vertical applications.

⑩ Controller

—	Without controller
C□1□□	With controller

C D 1 7 T

Interface (Communication protocol/Input/Output)

Symbol	Type	Number of axes, Special specification	
		Standard	With STO sub-function
5	Parallel input (NPN)	●	
6	Parallel input (PNP)	●	
E	EtherCAT	●	●
9	EtherNet/IP™	●	●
P	PROFINET	●	●
D	DeviceNet®	●	
L	IO-Link	●	●
M	CC-Link	●	

Mounting

7	Screw mounting
8*8	DIN rail

Number of axes, Special specification

Symbol	Number of axes	Specification
1	Single axis	Standard
F	Single axis	With STO sub-function

Communication plug connector, I/O cable*9

Symbol	Type	Applicable interface
—	Without accessory	—
S	Straight type communication plug connector	DeviceNet®
T	T-branch type communication plug connector	CC-Link Ver. 1.10
1	I/O cable (1.5 m)	Parallel input (NPN) Parallel input (PNP)
3	I/O cable (3 m)	
5	I/O cable (5 m)	

- *1 Please contact SMC for non-standard strokes as they are produced as special orders.
- *2 Excludes the LEF16
- *3 If 2 or more are required, please order them separately. (Part no.: LEF-D-2-1 For details, refer to page 181.)
- *4 Order auto switches separately. (For details, refer to pages 182 to 184.)
- *5 When “—” is selected, the product will not come with a built-in magnet for an auto switch, and so a mounting bracket cannot be secured. Be sure to select an appropriate model initially as the product cannot be changed to have auto switch compatibility after purchase.

- *6 Refer to the body mounting example on page 186 for the mounting method.
- *7 Produced upon receipt of order
- *8 The DIN rail is not included. It must be ordered separately.
- *9 Select “—” for anything other than DeviceNet®, CC-Link, or parallel input. Select “—,” “S,” or “T” for DeviceNet® or CC-Link. Select “—,” “1,” “3,” or “5” for parallel input.

⚠ Caution

[CE/UKCA-compliant products]

EMC compliance was tested by combining the electric actuator LEF series and the controller JXC series.

The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, compliance with the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify compliance with the EMC directive for the machinery and equipment as a whole.

[Precautions relating to differences in controller versions]

When the JXC series is to be used in combination with the battery-less absolute encoder, use a controller that is version V3.4 or S3.4 or higher.

[UL certification]



The JXC series controllers used in combination with electric actuators are UL certified.

The actuator and controller are sold as a package.

Confirm that the combination of the controller and actuator is correct.

<Check the following before use.>

- ① Check the actuator label for the model number. This number should match that of the controller.
- ② Check that the Parallel I/O configuration matches (NPN or PNP).

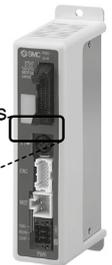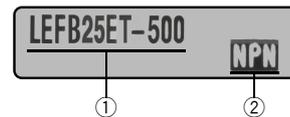

- * Refer to the Operation Manual for using the products. Please download it via our website: <https://www.smc.eu>

Type	Step data input type	EtherCAT direct input type	EtherCAT direct input type with STO sub-function	EtherNet/IP™ direct input type	EtherNet/IP™ direct input type with STO sub-function	PROFINET direct input type	PROFINET direct input type with STO sub-function	DeviceNet® direct input type	IO-Link direct input type	IO-Link direct input type with STO sub-function	CC-Link direct input type
Series	JXC51 JXC61	JXCE1	JXCEF	JXC91	JXC9F	JXCP1	JXC PF	JXCD1	JXCL1	JXCLF	JXCM1
Features	Parallel I/O	EtherCAT direct input	EtherCAT direct input with STO sub-function	EtherNet/IP™ direct input	EtherNet/IP™ direct input with STO sub-function	PROFINET direct input	PROFINET direct input with STO sub-function	DeviceNet® direct input	IO-Link direct input	IO-Link direct input with STO sub-function	CC-Link direct input
Compatible motor	Battery-less absolute (Step motor 24 VDC)										
Max. number of step data	64 points										
Power supply voltage	24 VDC										

LEFB Series

Battery-less Absolute (Step Motor 24 VDC)

Specifications

Battery-less Absolute (Step Motor 24 VDC)

Model		LEFB16E	LEFB25E	LEFB32E	
Actuator specifications	Stroke [mm] ^{*1}	300, 500, 600, 700 800, 900, 1000	300, 500, 600, 700, 800, 900 1000, 1200, 1500, 1800, 2000	300, 500, 600, 700, 800, 900 1000, 1200, 1500, 1800, 2000	
	Work load [kg] ^{*2}	1	10	19	
	Speed [mm/s] ^{*2}	48 to 1100	48 to 1400	48 to 1500	
	Max. acceleration/deceleration [mm/s ²]	3000			
	Positioning repeatability [mm]	±0.08			
	Lost motion [mm] ^{*3}	0.1 or less			
	Equivalent lead [mm]	48	48	48	
	Impact/Vibration resistance [m/s ²] ^{*4}	50/20			
	Actuation type	Belt			
	Guide type	Linear guide			
	Static allowable moment ^{*5} [N·m]	Mep (Pitching)	10	27	46
		Mey (Yawing)	10	27	46
		Mer (Rolling)	20	52	101
	Operating temperature range [°C]	5 to 40			
Operating humidity range [%RH]	90 or less (No condensation)				
Enclosure	IP30				
Electric specifications	Motor size	□28	□42	□56.4	
	Motor type	Battery-less absolute (Step motor 24 VDC)			
	Encoder	Battery-less absolute			
	Power supply voltage [V]	24 VDC ±10 %			
	Power [W] ^{*6 *8}	Max. power 51	Max. power 60	Max. power 127	
Lock unit specifications	Type ^{*7}	Non-magnetising lock			
	Holding force [N]	4	19	36	
	Power [W] ^{*8}	2.9	5	5	
	Rated voltage [V]	24 VDC ±10 %			

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 Speed changes according to the controller/driver type and work load. Check the "Speed-Work Load Graph (Guide)" on page 14.

Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10 % for each 5 m. Cannot be used for vertical applications

*3 A reference value for correcting errors in reciprocal operation

*4 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*5 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*6 Indicates the max. power during operation (including the controller). This value can be used for the selection of the power supply.

*7 With lock only

*8 For an actuator with lock, add the power for the lock.

Weight


Series	LEFB16E						
Stroke [mm]	300	500	600	700	800	900	1000
Product weight [kg]	1.19	1.45	1.58	1.71	1.84	1.97	2.10
Additional weight with lock [kg]	0.12						

Series	LEFB25E										
Stroke [mm]	300	500	600	700	800	900	1000	1200	1500	1800	2000
Product weight [kg]	2.39	2.85	3.08	3.31	3.54	3.77	4.00	4.46	5.15	5.84	6.30
Additional weight with lock [kg]	0.26										

Series	LEFB32E										
Stroke [mm]	300	500	600	700	800	900	1000	1200	1500	1800	2000
Product weight [kg]	4.12	4.80	5.14	5.48	5.82	6.16	6.50	7.18	8.20	9.22	9.90
Additional weight with lock [kg]	0.53										

Construction

LEFB Series

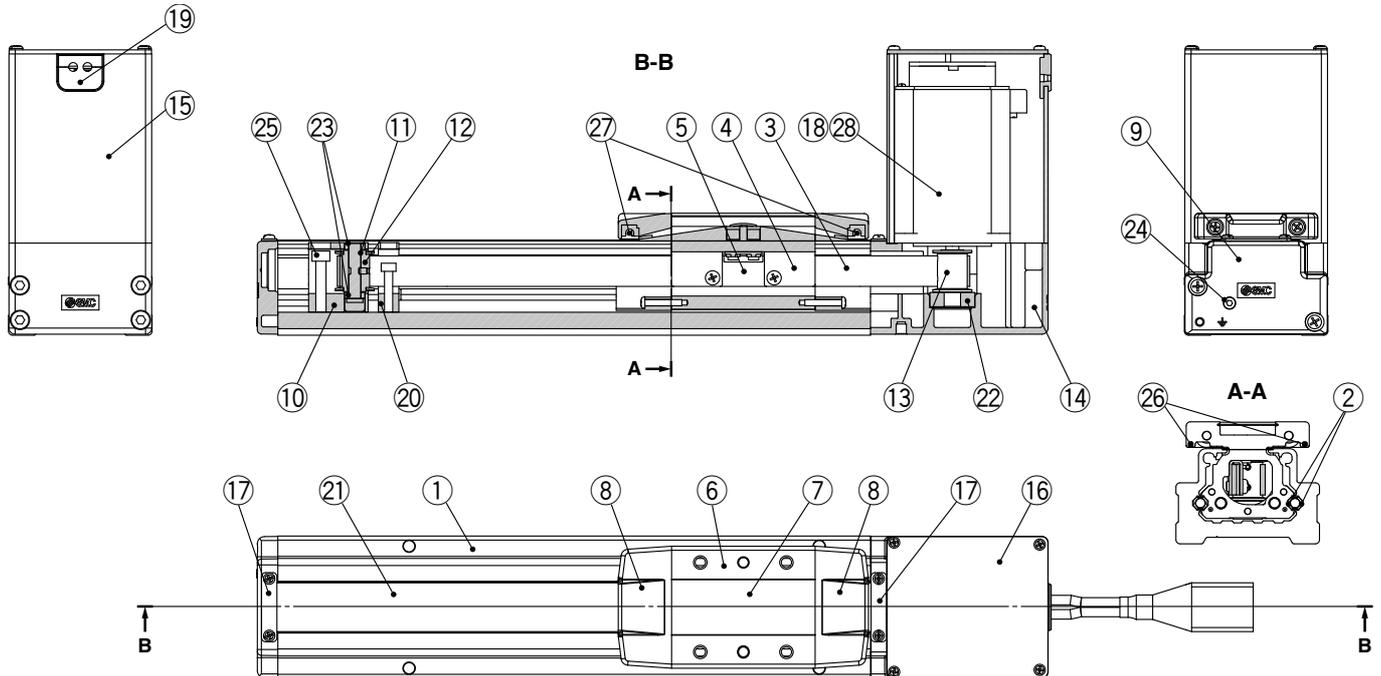

Component Parts

No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide	—	
3	Belt	—	
4	Belt holder	Carbon steel	Chromating
5	Belt stopper	Aluminium alloy	Anodised
6	Table	Aluminium alloy	Anodised
7	Blanking plate	Aluminium alloy	Anodised
8	Seal band holder	Synthetic resin	
9	Housing A	Aluminium die-cast	Coating
10	Pulley holder	Aluminium alloy	
11	Pulley shaft	Stainless steel	
12	End pulley	Aluminium alloy	Anodised
13	Motor pulley	Aluminium alloy	Anodised
14	Motor mount	Aluminium alloy	Coating/Anodised
15	Motor cover	Aluminium alloy	Anodised
16	End cover	Aluminium alloy	Anodised
17	Band stopper	Stainless steel	

No.	Description	Material	Note
18	Motor	—	
19	Rubber bushing	NBR	
20	Stopper	Aluminium alloy	
21	Dust seal band	Stainless steel	
22	Bearing	—	
23	Bearing	—	
24	Tension adjustment cap screw	Chromium molybdenum steel	Chromating
25	Pulley retaining screw	Chromium molybdenum steel	Chromating
26	Magnet	—	With auto switch compatibility
27	Roller assembly	—	Without grease application
28	Heat dissipation sheet	LEFB16	—

Replacement Parts/Grease Pack


Applied portion	Order no.
Rail guide	GR-S-010 (10 g) GR-S-020 (20 g)
Dust seal band (When "Without" is selected for the grease application, grease is applied only on the back side.)	

LEFB Series

Battery-less Absolute (Step Motor 24 VDC)

Dimensions: Belt Drive

LEFB16E

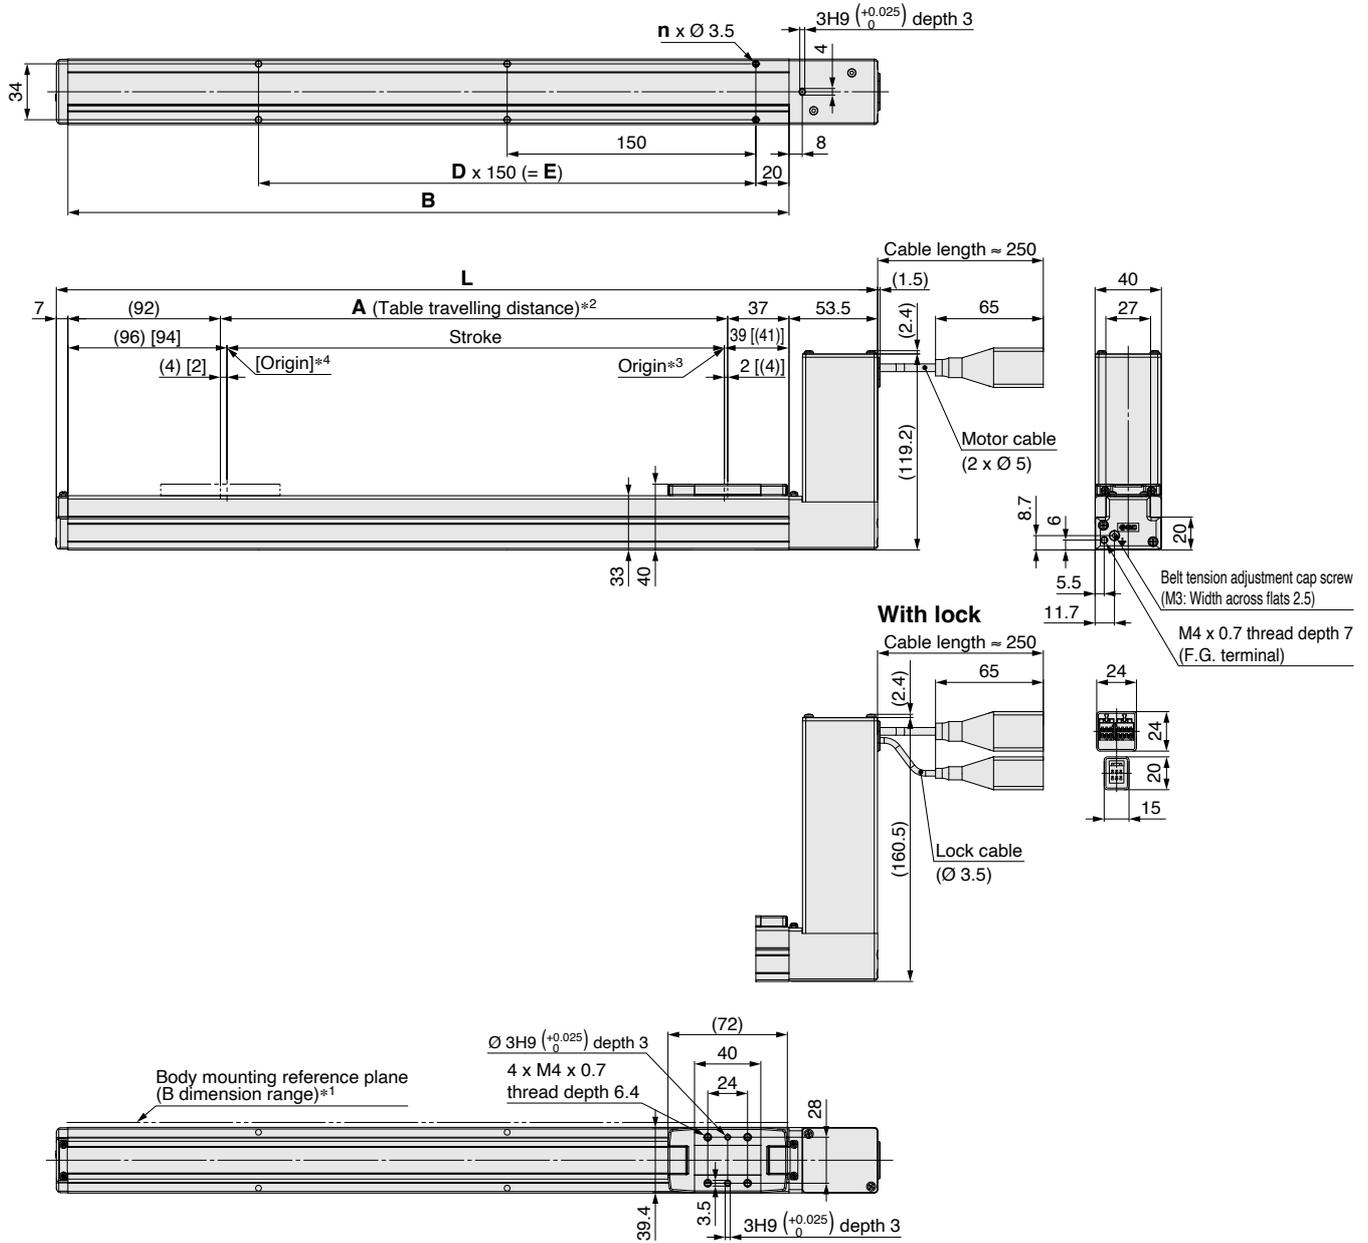

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 2 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed


Dimensions

Model	L	A	B	n	D	E
LEFB16ET-300□	495.5	306	435	6	2	300
LEFB16ET-500□	695.5	506	635	10	4	600
LEFB16ET-600□	795.5	606	735			
LEFB16ET-700□	895.5	706	835	14	6	900
LEFB16ET-800□	995.5	806	935			
LEFB16ET-900□	1095.5	906	1035	16	7	1050
LEFB16ET-1000□	1195.5	1006	1135			

Dimensions: Belt Drive

LEFB16E

Positioning pin hole*1 (Option): Body bottom

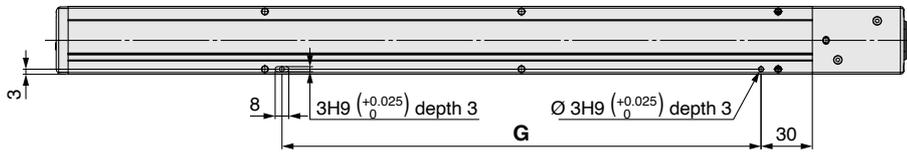

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.


Dimensions [mm]

Model	Positioning pin hole: K
	G
LEFB16ET-300□	280
LEFB16ET-500□	580
LEFB16ET-600□	730
LEFB16ET-700□	880
LEFB16ET-800□	1030
LEFB16ET-900□	
LEFB16ET-1000□	

Dimensions: Belt Drive


LEFB25E

Positioning pin hole*1 (Option): Body bottom

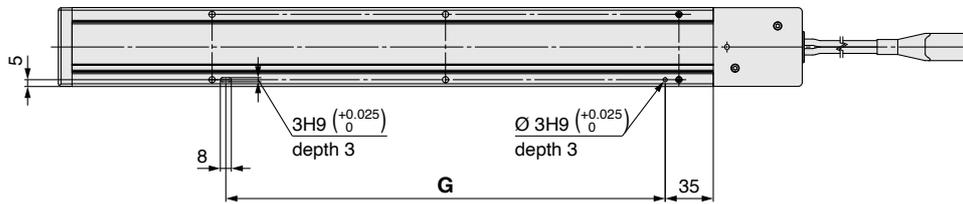

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

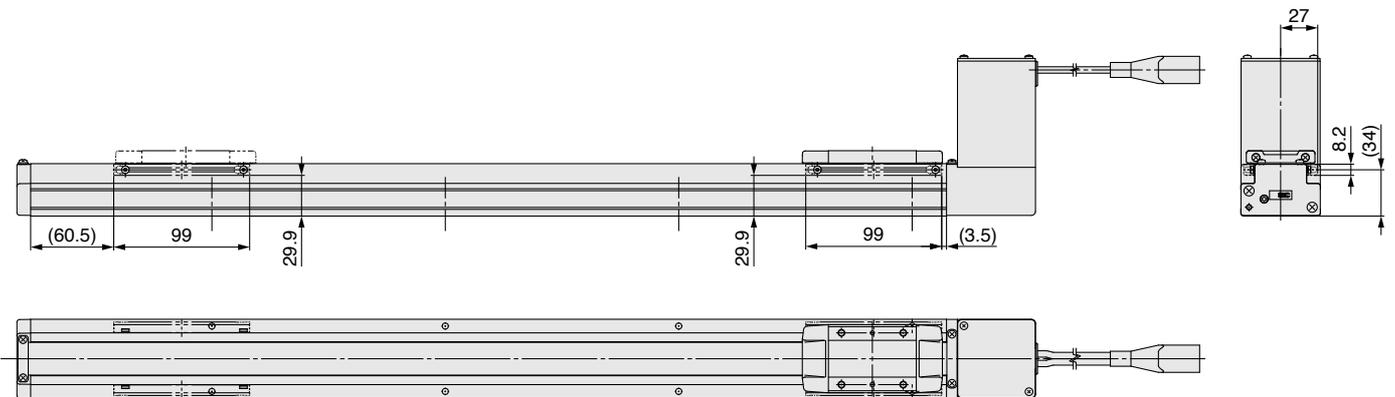


Dimensions [mm]	
Model	G
LEFB25ET-300□	320
LEFB25ET-500□	490
LEFB25ET-600□	660
LEFB25ET-700□	660
LEFB25ET-800□	830
LEFB25ET-900□	1000
LEFB25ET-1000□	1000
LEFB25ET-1200□	1170
LEFB25ET-1500□	1510
LEFB25ET-1800□	1850
LEFB25ET-2000□	2020

LEFB Series

Battery-less Absolute (Step Motor 24 VDC)

Dimensions: Belt Drive

LEFB32E

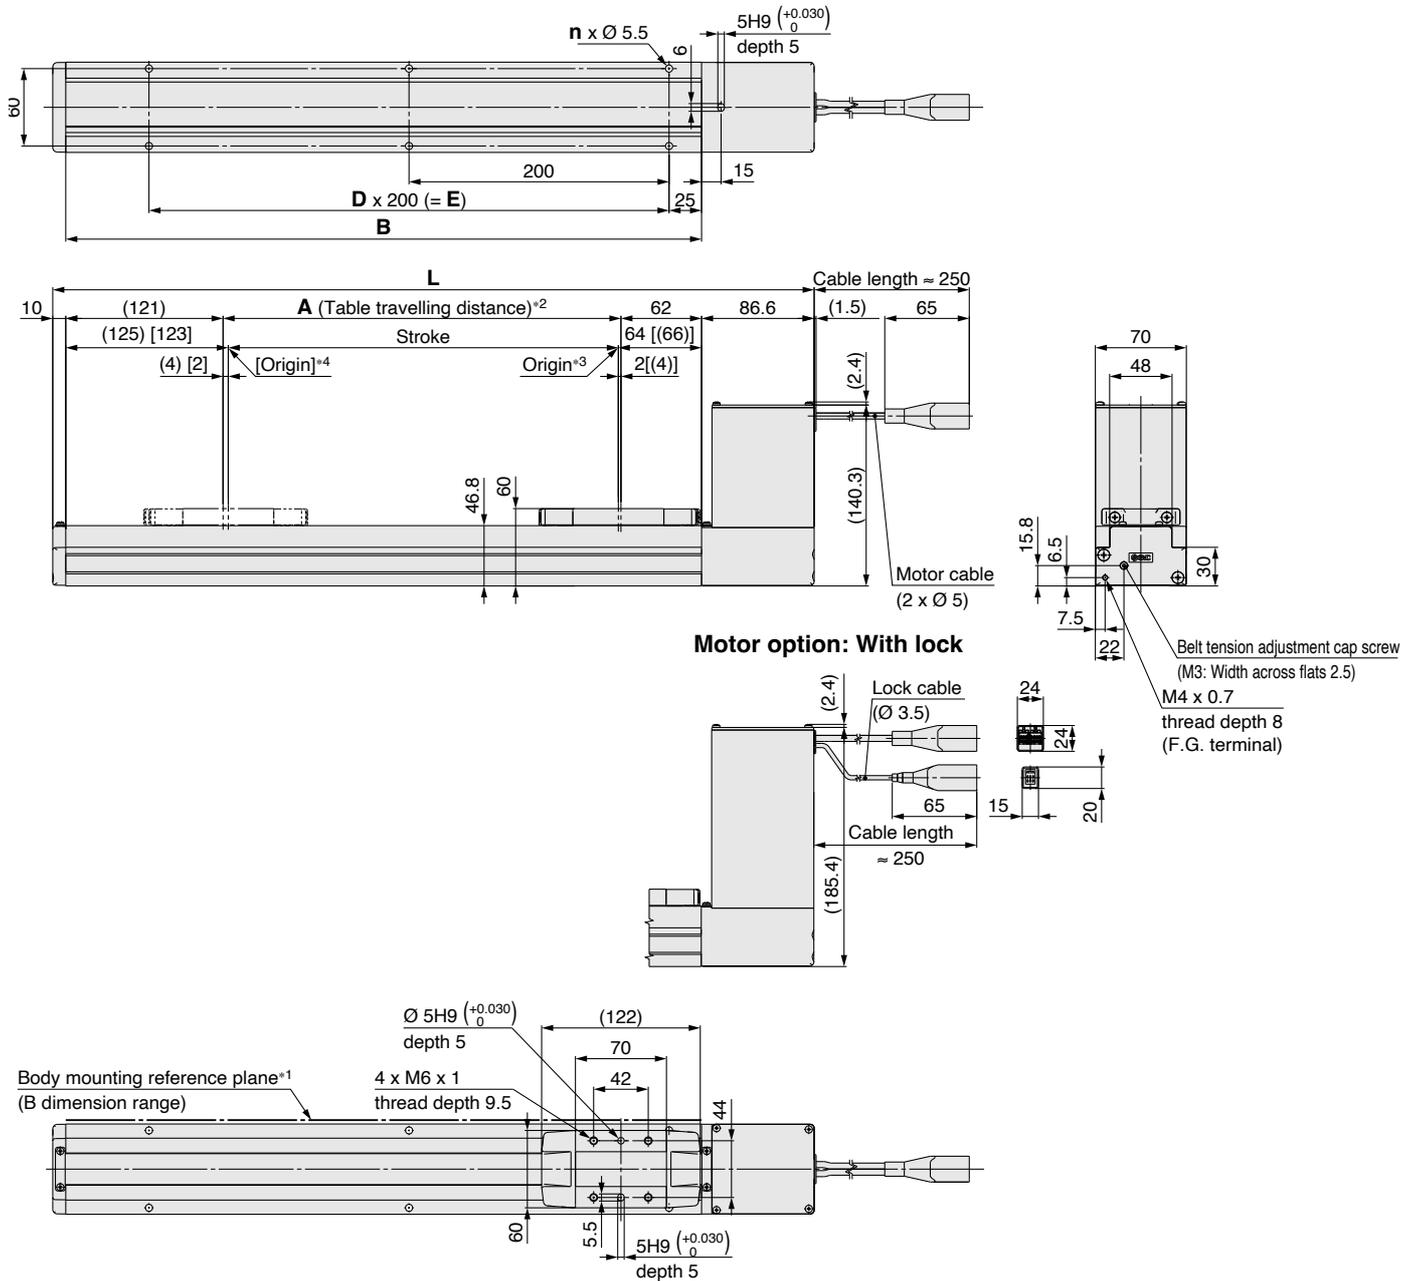

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed


Dimensions

Model	L	A	B	n	D	E	[mm]
LEFB32ET-300□	585.6	306	489	6	2	400	
LEFB32ET-500□	785.6	506	689	8	3	600	
LEFB32ET-600□	885.6	606	789	8	3	600	
LEFB32ET-700□	985.6	706	889	10	4	800	
LEFB32ET-800□	1085.6	806	989	10	4	800	
LEFB32ET-900□	1185.6	906	1089	12	5	1000	
LEFB32ET-1000□	1285.6	1006	1189	12	5	1000	
LEFB32ET-1200□	1485.6	1206	1389	14	6	1200	
LEFB32ET-1500□	1785.6	1506	1689	18	8	1600	
LEFB32ET-1800□	2085.6	1806	1989	20	9	1800	
LEFB32ET-2000□	2285.6	2006	2189	22	10	2000	

Dimensions: Belt Drive


LEFB32E

Positioning pin hole*1 (Option): Body bottom

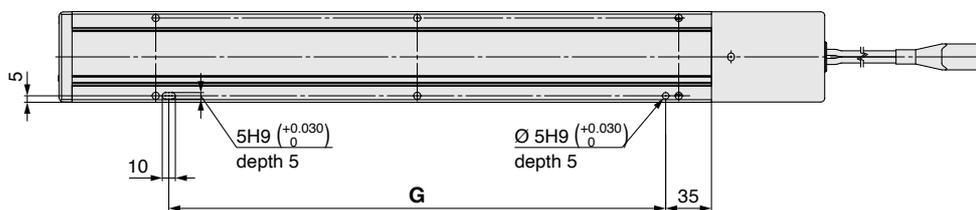

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

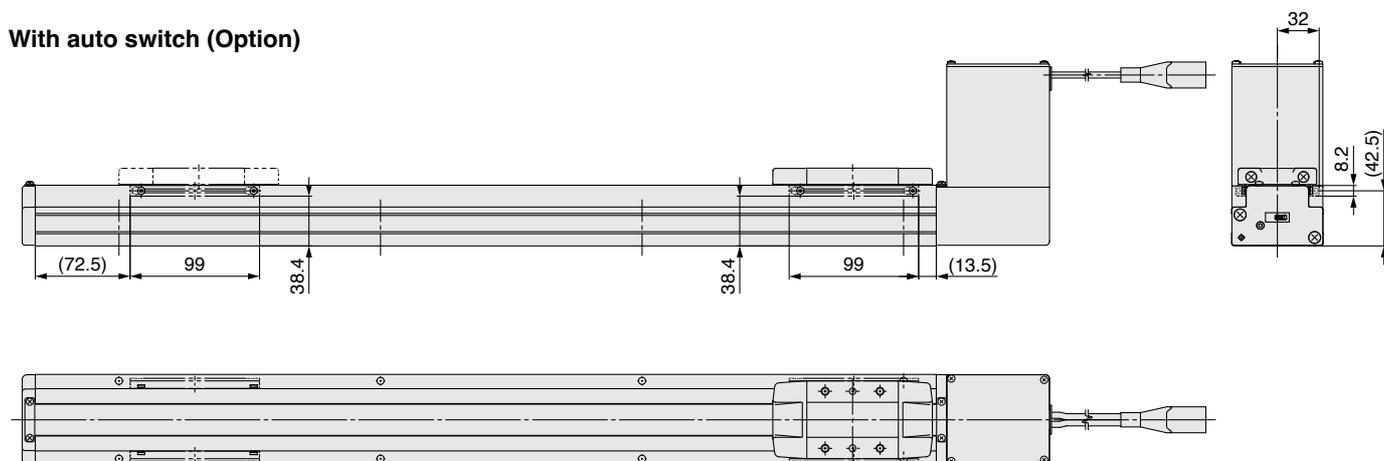

Dimensions [mm]	
Model	G
LEFB32ET-300□	380
LEFB32ET-500□	580
LEFB32ET-600□	580
LEFB32ET-700□	780
LEFB32ET-800□	780
LEFB32ET-900□	980
LEFB32ET-1000□	980
LEFB32ET-1200□	1180
LEFB32ET-1500□	1580
LEFB32ET-1800□	1780
LEFB32ET-2000□	1980

Slider Type Belt Drive

LEFB Series LEFB16, 25, 32





* For details, refer to www.smc.eu and onward.



The belt drive actuator cannot be used for vertical applications.

How to Order

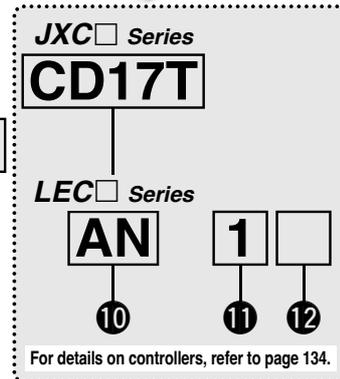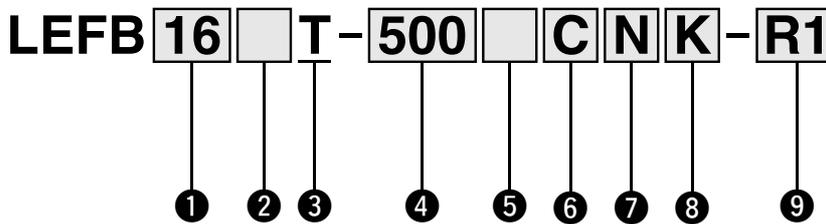

1 Size

16
25
32

2 Motor type

Symbol	Type	Applicable size			Compatible controllers/drivers
		LEFB16	LEFB25	LEFB32	
—	Step motor (Servo/24 VDC)	●	●	●	JXC51 JXCEF JXC61 JXC9F JXCE1 JXCPF JXC91 JXCLF JXCP1 JXCD1 JXCL1 LECPA JXCM1
A	Servo motor (24 VDC)	●	●	—	LECA6

3 Equivalent lead [mm]

T	48
---	----

4 Stroke*1 [mm]

Stroke	Note	
	Size	Applicable stroke
300 to 1000	16	300, 500, 600, 700, 800, 900, 1000
300 to 2000	25	300, 500, 600, 700, 800, 900, 1000, 1200, 1500, 1800, 2000
300 to 2000	32	300, 500, 600, 700, 800, 900, 1000, 1200, 1500, 1800, 2000

5 Motor option

—	Without option
B	With lock

7 Grease application (Seal band part)

—	With
N	Without (Roller specification)

6 Auto switch compatibility*2 *3 *4 *5

—	None
C	With (Includes 1 mounting bracket)

8 Positioning pin hole

—	Housing B bottom*6	
K	Body bottom 2 locations	

9 Actuator cable type/length*8

Standard cable [m]		Robotic cable [m]			
—	None	R1	1.5	RA	10*7
S1	1.5*10	R3	3	RB	15*7
S3	3*10	R5	5	RC	20*7
S5	5*10	R8	8*7		

Support Guide/LEFG Series

The support guide was designed to support workpieces with significant overhang.

For auto switches, refer to pages 181 to 184.

Slider Type/Belt Drive **LEFB Series**

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

JXC Series

10 Controller

—	Without controller
C□1□□	With controller

C D 1 7 T

Interface (Communication protocol/Input/Output)

Symbol	Type	Number of axes, Special specification	
		Standard	With STO sub-function
5	Parallel input (NPN)	●	
6	Parallel input (PNP)	●	
E	EtherCAT	●	●
9	EtherNet/IP™	●	●
P	PROFINET	●	●
D	DeviceNet®	●	
L	IO-Link	●	●
M	CC-Link	●	

Mounting

7	Screw mounting
8*14	DIN rail

Number of axes, Special specification

Symbol	Number of axes	Specification
1	Single axis	Standard
F	Single axis	With STO sub-function

Communication plug connector, I/O cable*15

Symbol	Type	Applicable interface
—	Without accessory	—
S	Straight type communication plug connector	DeviceNet® CC-Link Ver. 1.10
T	T-branch type communication plug connector	DeviceNet® CC-Link Ver. 1.10
1	I/O cable (1.5 m)	Parallel input (NPN)
3	I/O cable (3 m)	Parallel input (PNP)
5	I/O cable (5 m)	Parallel input (PNP)



LEC Series

AN 1

⑩ ⑪ ⑫

10 Controller/Driver type*9

—	Without controller/driver	
6N	LECA6	NPN
6P	(Step data input type)	PNP
AN	LECPA *10 *11	NPN
AP	(Pulse input type)	PNP

11 I/O cable length*12

—	Without cable (Without communication plug connector)
1	1.5 m
3	3 m*13
5	5 m*13

12 Controller/Driver mounting

—	Screw mounting
D	DIN rail*14



- *1 Please contact SMC for non-standard strokes as they are produced as special orders.
- *2 Excluding the LEF16
- *3 If 2 or more are required, please order them separately. (Part no.: LEF-D-2-1 For details, refer to page 181.)
- *4 Order auto switches separately. (For details, refer to pages 182 to 184.)
- *5 When “—” is selected, the product will not come with a built-in magnet for an auto switch, and so a mounting bracket cannot be secured. Be sure to select an appropriate model initially as the product cannot be changed to have auto switch compatibility after purchase.
- *6 Refer to the body mounting example on page 186 for the mounting method.
- *7 Produced upon receipt of order (Robotic cable only)
- *8 The standard cable should only be used on fixed parts.
For use on moving parts, select the robotic cable.
Refer to the www.smc.eu if only the actuator cable is required.

- *9 For details on controllers/drivers and compatible motors, refer to the compatible controllers/drivers on the next page.
- *10 Only available for the motor type “Step motor”
- *11 When pulse signals are open collector, order the current limiting resistor (LEC-PA-R-□) separately.
- *12 When “Without controllers/drivers” is selected for controller/driver types, I/O cable cannot be selected. If an I/O cable is required, refer to the cable for the LECA6 (www.smc.eu) or LECPA (www.smc.eu).
- *13 When “Pulse input type” is selected for controller/driver types, pulse input usable only with differential. Only 1.5 m cables usable with open collector
- *14 The DIN rail is not included. It must be ordered separately.
- *15 Select “—” for anything other than DeviceNet®, CC-Link, or parallel input. Select “—,” “S,” or “T” for DeviceNet® or CC-Link. Select “—,” “1,” “3,” or “5” for parallel input.

⚠ Caution

[CE/UKCA-compliant products]

- ① EMC compliance was tested by combining the electric actuator LEF series and the controller LEC/JXC series.
The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, compliance with the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify compliance with the EMC directive for the machinery and equipment as a whole.
- ② For the incremental (servo motor 24 VDC) specification, EMC compliance was tested by installing a noise filter set (LEC-NFA). Refer to the LECA series Operation Manual for installation.

[UL-compliant products (For the LEC series)]


When compliance with UL is required, the electric actuator and controller/driver should be used with a UL1310 Class 2 power supply.

The actuator and controller/driver are sold as a package.

Confirm that the combination of the controller/driver and actuator is correct.

<Check the following before use.>

- ① Check the actuator label for the model number. This number should match that of the controller/driver.
- ② Check that the Parallel I/O configuration matches (NPN or PNP).

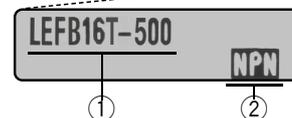

* Refer to the Operation Manual for using the products. Please download it via our website: <https://www.smc.eu>

LEFB Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Compatible Controllers/Drivers

Type	Step data input type	Step data input type	Pulse input type
			
Series	JXC51 JXC61	LECA6	LECPA
Features	Parallel I/O	Parallel I/O	Operation by pulse signals
Compatible motor	Step motor (Servo/24 VDC)	Servo motor (24 VDC)	Step motor (Servo/24 VDC)
Max. number of step data	64 points		—
Power supply voltage	24 VDC		

Type	EtherCAT direct input type	EtherCAT direct input type with STO sub-function	EtherNet/IP™ direct input type	EtherNet/IP™ direct input type with STO sub-function	PROFINET direct input type	PROFINET direct input type with STO sub-function	DeviceNet® direct input type	IO-Link direct input type	IO-Link direct input type with STO sub-function	CC-Link direct input type
										
Series	JXCE1	JXCEF	JXC91	JXC9F	JXCP1	JXCPF	JXCD1	JXCL1	JXCLF	JXCM1
Features	EtherCAT direct input	EtherCAT direct input with STO sub-function	EtherNet/IP™ direct input	EtherNet/IP™ direct input with STO sub-function	PROFINET direct input	PROFINET direct input with STO sub-function	DeviceNet® direct input	IO-Link direct input	IO-Link direct input with STO sub-function	CC-Link direct input
Compatible motor	Step motor (Servo/24 VDC)									
Max. number of step data	64 points									
Power supply voltage	24 VDC									

Specifications

Step Motor (Servo/24 VDC)

Model			LEFB16	LEFB25	LEFB32	
Actuator specifications	Stroke [mm]*1		300, 500, 600, 700 800, 900, 1000	300, 500, 600, 700, 800, 900 1000, 1200, 1500, 1800, 2000	300, 500, 600, 700, 800, 900 1000, 1200, 1500, 1800, 2000	
	Work load [kg]*2	Horizontal	JXC□1/JXC□F	1	10	19
			LECPA/JXC□ ² / ₃	1	5	14
	Speed [mm/s]*2		48 to 1100	48 to 1400	48 to 1500	
	Max. acceleration/deceleration [mm/s ²]		3000			
	Positioning repeatability [mm]		±0.08			
	Lost motion [mm]*3		0.1 or less			
	Equivalent lead [mm]		48	48	48	
	Impact/Vibration resistance [m/s ²]*4		50/20			
	Actuation type		Belt			
	Guide type		Linear guide			
	Static allowable moment*5 [N·m]	Mep (Pitching)		10	27	46
		Mey (Yawing)		10	27	46
		Mer (Rolling)		20	52	101
	Operating temperature range [°C]		5 to 40			
Operating humidity range [%RH]		90 or less (No condensation)				
Enclosure		IP30				
Electric specifications	Motor size		□28	□42	□56.4	
	Motor type		Step motor (Servo/24 VDC)			
	Encoder		Incremental			
	Power supply voltage [V]		24 VDC ±10 %			
	Power [W]*6 *8		Max. power 51	Max. power 60	Max. power 127	
Lock unit specifications	Type*7		Non-magnetising lock			
	Holding force [N]		4	19	36	
	Power [W]*8		2.9	5	5	
Rated voltage [V]		24 VDC ±10 %				

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 Speed changes according to the controller/driver type and work load. Check the "Speed-Work Load Graph (Guide)" on page 22.

Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10 % for each 5 m. Cannot be used for vertical applications

*3 A reference value for correcting errors in reciprocal operation

*4 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*5 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*6 Indicates the max. power during operation (including the controller)

This value can be used for the selection of the power supply.

*7 With lock only

*8 For an actuator with lock, add the power for the lock.

LEFB Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Specifications

Servo Motor (24 VDC)

Model		LEFB16A	LEFB25A	
Actuator specifications	Stroke [mm]*1	300, 500, 600, 700 800, 900, 1000	300, 500, 600, 700, 800, 900 1000, 1200, 1500, 1800, 2000	
	Work load [kg]*2	Horizontal	1	2
	Speed [mm/s]*2	5 to 2000		5 to 2000
	Max. acceleration/deceleration [mm/s ²]	3000		
	Positioning repeatability [mm]	±0.08		
	Lost motion [mm]*3	0.1 or less		
	Equivalent lead [mm]	48	48	
	Impact/Vibration resistance [m/s ²]*4	50/20		
	Actuation type	Belt		
	Guide type	Linear guide		
	Static allowable moment*5 [N·m]	Mep (Pitching)	10	27
		Mey (Yawing)	10	27
		Mer (Rolling)	20	52
	Operating temperature range [°C]	5 to 40		
Operating humidity range [%RH]	90 or less (No condensation)			
Enclosure	IP30			
Electric specifications	Motor size	□28	□42	
	Motor output [W]	30	36	
	Motor type	Servo motor (24 VDC)		
	Encoder	Incremental		
	Power supply voltage [V]	24 VDC ±10 %		
	Power [W]*6 *8	Max. power 87	Max. power 120	
Lock unit specifications	Type*7	Non-magnetising lock		
	Holding force [N]	4	19	
	Power [W]*8	2.9	5	
	Rated voltage [V]	24 VDC ±10 %		

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 Check the "Speed-Work Load Graph (Guide)" on page 23 for details. Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10 % for each 5 m.

*3 A reference value for correcting errors in reciprocal operation

*4 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*5 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*6 Indicates the max. power during operation (including the controller)

This value can be used for the selection of the power supply.

*7 With lock only

*8 For an actuator with lock, add the power for the lock.

Weight


Series	LEFB16						
Stroke [mm]	300	500	600	700	800	900	1000
Product weight [kg]	1.19	1.45	1.58	1.71	1.84	1.97	2.10
Additional weight with lock [kg]	0.12						

Series	LEFB25										
Stroke [mm]	300	500	600	700	800	900	1000	1200	1500	1800	2000
Product weight [kg]	2.39	2.85	3.08	3.31	3.54	3.77	4.00	4.46	5.15	5.84	6.30
Additional weight with lock [kg]	0.26										

Series	LEFB32										
Stroke [mm]	300	500	600	700	800	900	1000	1200	1500	1800	2000
Product weight [kg]	4.12	4.80	5.14	5.48	5.82	6.16	6.50	7.18	8.20	9.22	9.90
Additional weight with lock [kg]	0.53										

Construction

LEFB Series

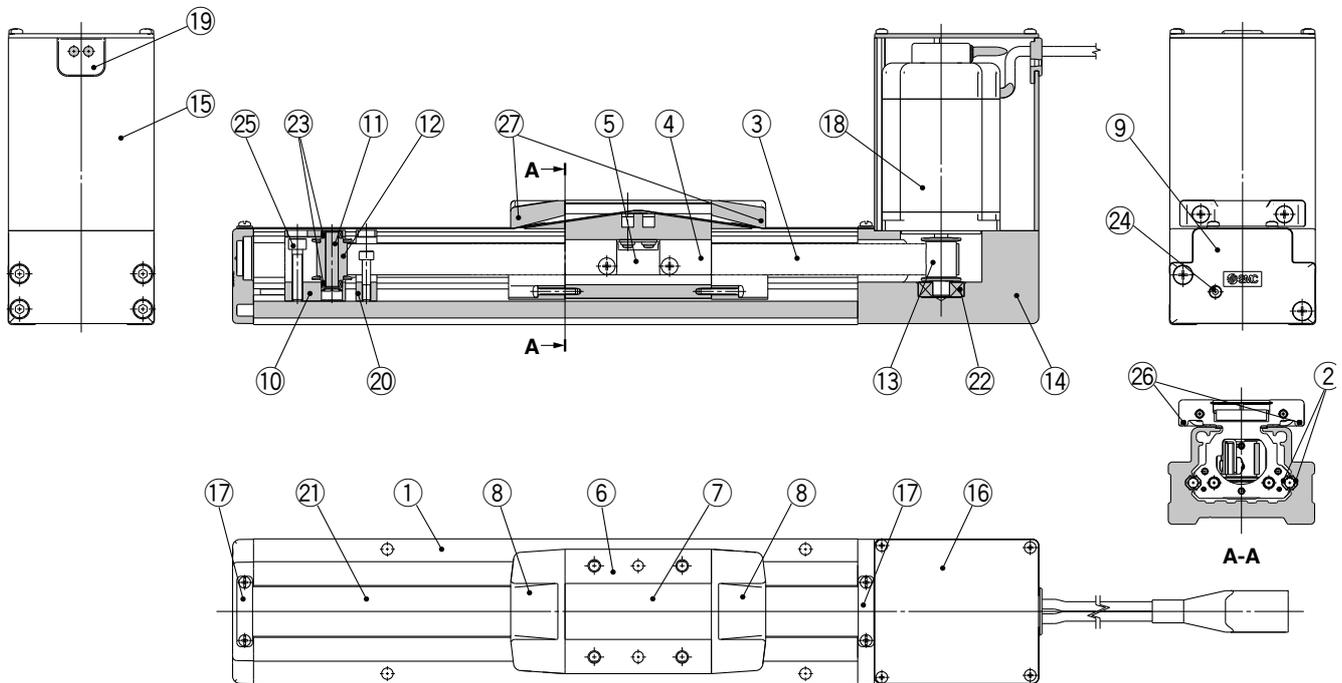

Component Parts

No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide	—	
3	Belt	—	
4	Belt holder	Carbon steel	Chromating
5	Belt stopper	Aluminium alloy	
6	Table	Aluminium alloy	Anodised
7	Blanking plate	Aluminium alloy	Anodised
8	Seal band holder	Synthetic resin	
9	Housing A	Aluminium die-cast	Coating
10	Pulley holder	Aluminium alloy	
11	Pulley shaft	Stainless steel	
12	End pulley	Aluminium alloy	Anodised
13	Motor pulley	Aluminium alloy	Anodised
14	Motor mount	Aluminium alloy	Coating
15	Motor cover	Aluminium alloy	Anodised
16	End cover	Aluminium alloy	Anodised
17	Band stopper	Stainless steel	

No.	Description	Material	Note
18	Motor	—	
19	Rubber bushing	NBR	
20	Stopper	Aluminium alloy	
21	Dust seal band	Stainless steel	
22	Bearing	—	
23	Bearing	—	
24	Tension adjustment cap screw	Chromium molybdenum steel	Chromating
25	Pulley retaining screw	Chromium molybdenum steel	Chromating
26	Magnet	—	With auto switch compatibility
27	Roller assembly	—	Without grease application

Replacement Parts/Grease Pack

Applied portion	Order no.
Rail guide	
Dust seal band (When "Without" is selected for the grease application, grease is applied only on the back side.)	GR-S-010 (10 g) GR-S-020 (20 g)


LEFB Series

Incremental (Step Motor 24 VDC)


Incremental (Servo Motor 24 VDC)

Dimensions: Belt Drive

LEFB16

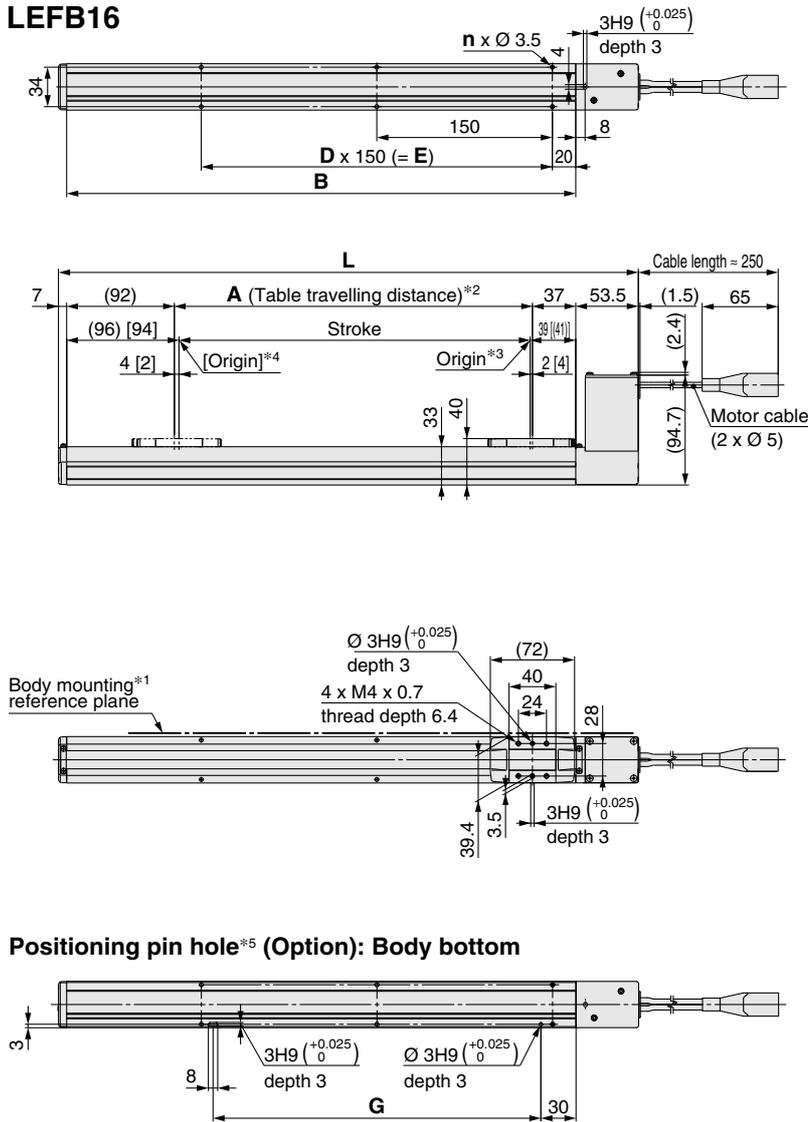

Positioning pin hole^{*5} (Option): Body bottom

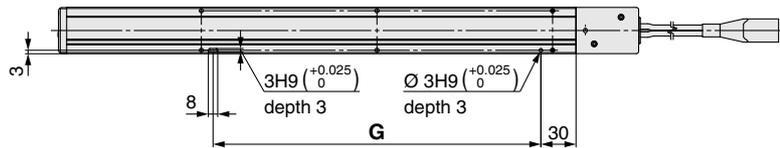


- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 2 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed
- *5 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions

Model	L	A	B	n	D	E	G	[mm]
LEFB16□T-300□	495.5	306	435	6	2	300	280	
LEFB16□T-500□	695.5	506	635	10	4	600	580	
LEFB16□T-600□	795.5	606	735	10	4	600	580	
LEFB16□T-700□	895.5	706	835	12	5	750	730	
LEFB16□T-800□	995.5	806	935	14	6	900	880	
LEFB16□T-900□	1095.5	906	1035	14	6	900	880	
LEFB16□T-1000□	1195.5	1006	1135	16	7	1050	1030	

Dimensions: Belt Drive

LEFB25

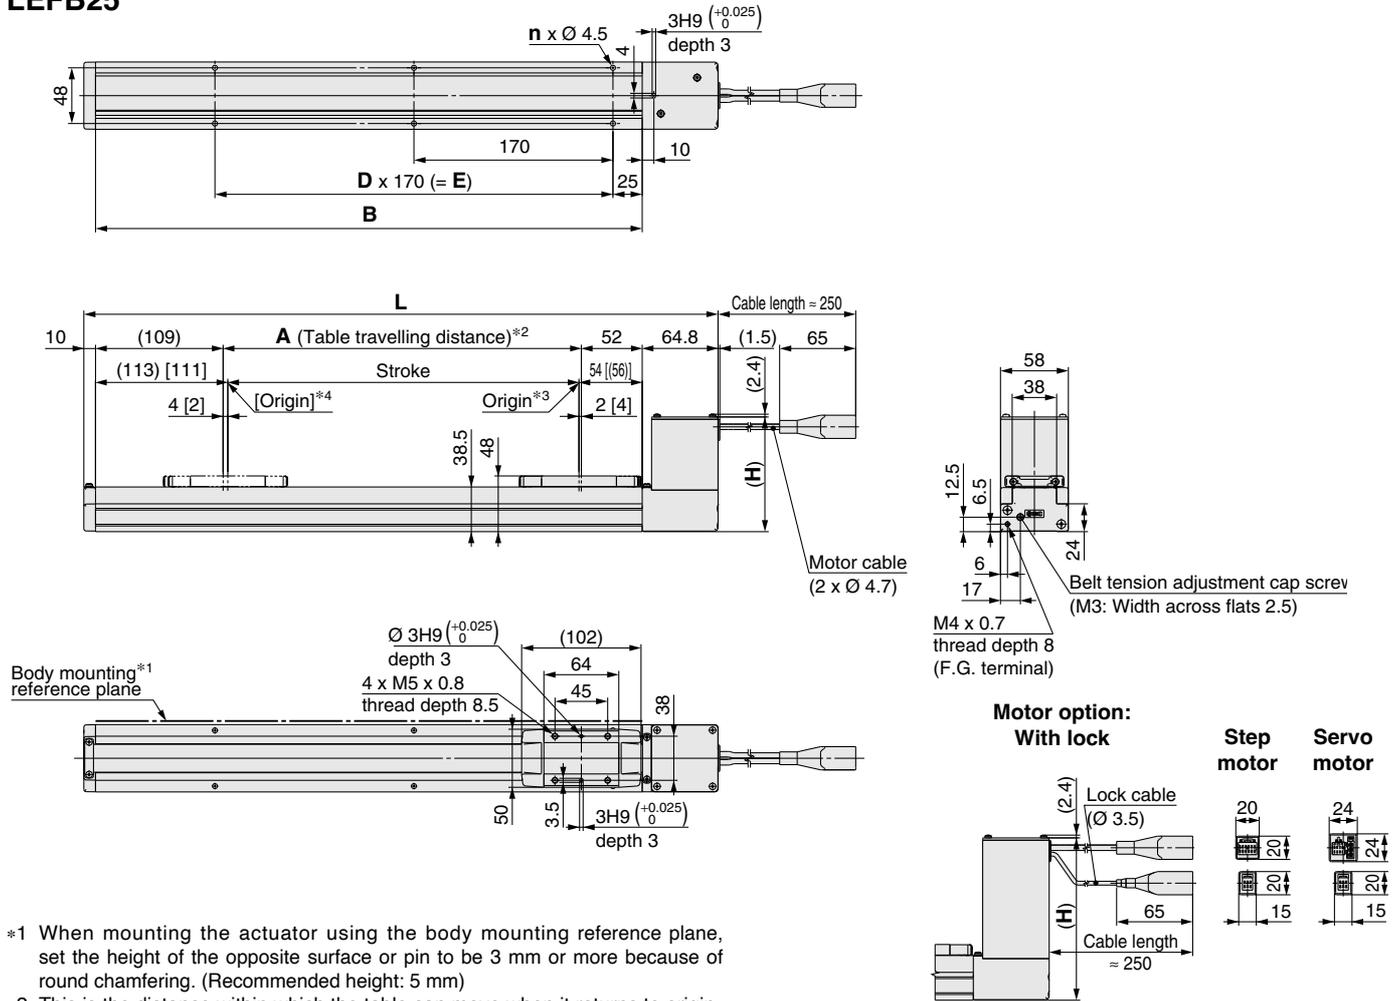

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed

		[mm]	
Model	H		
LEFB25T-[ST]	115.8		
LEFB25T-[ST]B	158.8		
LEFB25AT-[ST]	98.8		
LEFB25AT-[ST]B	139.8		

Dimensions

Model	L	A	B	n	D	E
LEFB25□T-300□	541.8	306	467	6	2	340
LEFB25□T-500□	741.8	506	667	8	3	510
LEFB25□T-600□	841.8	606	767	10	4	680
LEFB25□T-700□	941.8	706	867	10	4	680
LEFB25□T-800□	1041.8	806	967	12	5	850
LEFB25□T-900□	1141.8	906	1067	14	6	1020
LEFB25□T-1000□	1241.8	1006	1167	14	6	1020
LEFB25□T-1200□	1441.8	1206	1367	16	7	1190
LEFB25□T-1500□	1741.8	1506	1667	20	9	1530
LEFB25□T-1800□	2041.8	1806	1967	24	11	1870
LEFB25□T-2000□	2241.8	2006	2167	26	12	2040

LEFB Series


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dimensions: Belt Drive


LEFB25

Positioning pin hole*1 (Option): Body bottom

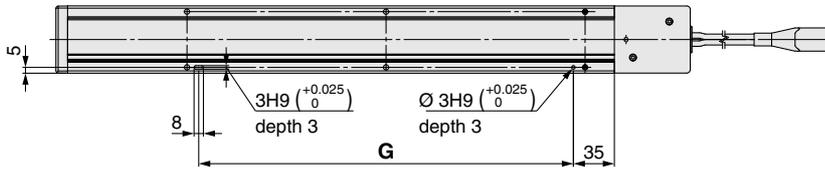

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

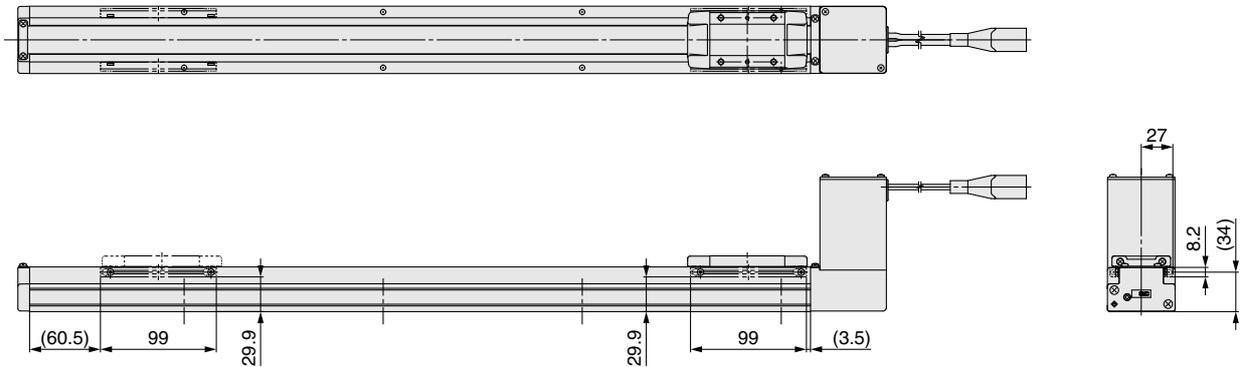


Dimensions [mm]

Model	G
LEFB25□T-300□	320
LEFB25□T-500□	490
LEFB25□T-600□	660
LEFB25□T-700□	660
LEFB25□T-800□	830
LEFB25□T-900□	1000
LEFB25□T-1000□	1000
LEFB25□T-1200□	1170
LEFB25□T-1500□	1510
LEFB25□T-1800□	1850
LEFB25□T-2000□	2020

Dimensions: Belt Drive

LEFB32

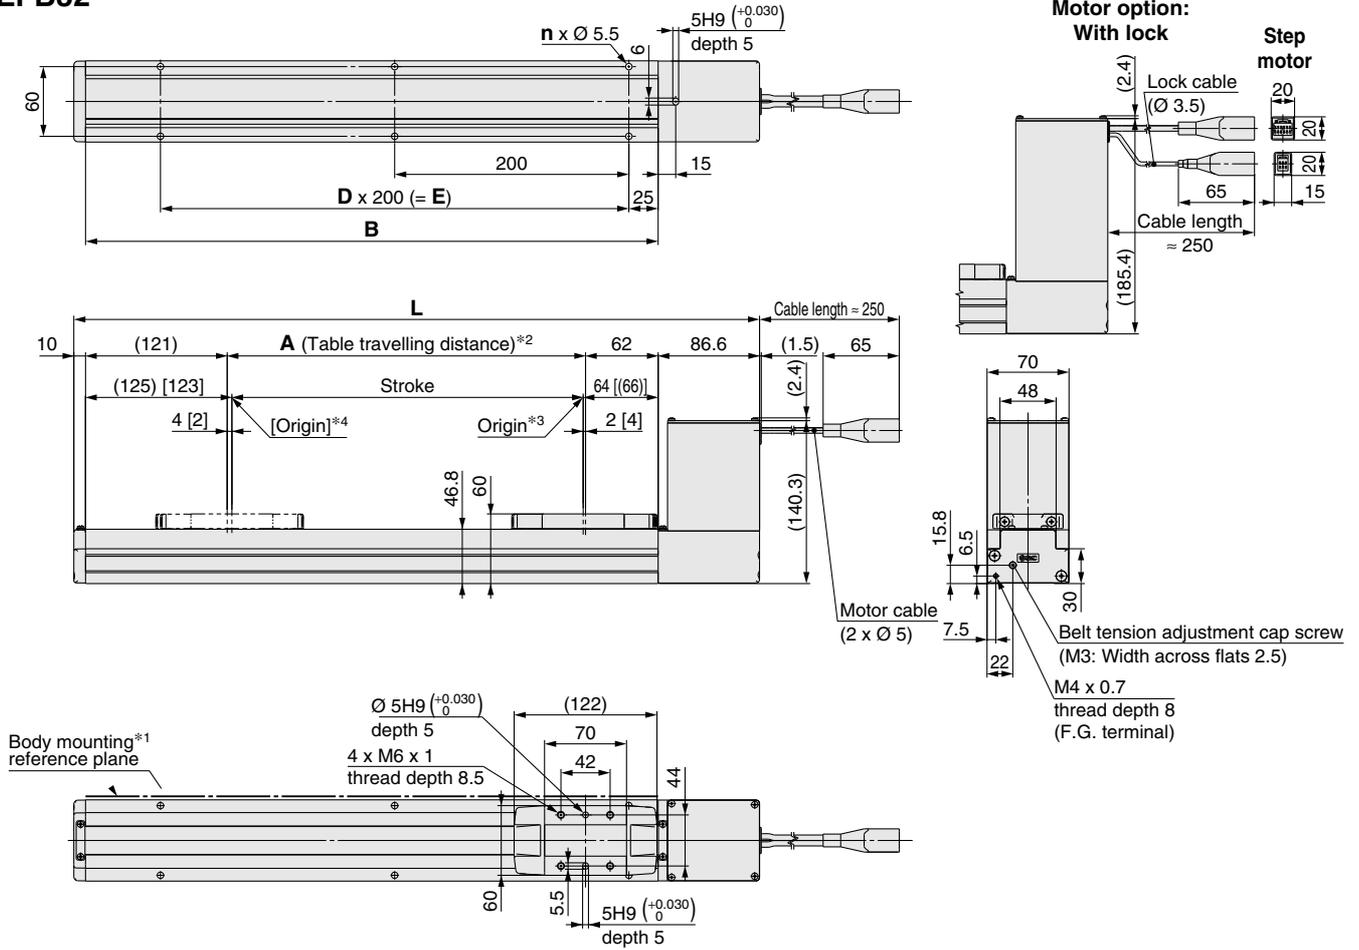

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed

Dimensions

Model	L	A	B	n	D	E
LEFB32□T-300□	585.6	306	489	6	2	400
LEFB32□T-500□	785.6	506	689	8	3	600
LEFB32□T-600□	885.6	606	789	8	3	600
LEFB32□T-700□	985.6	706	889	10	4	800
LEFB32□T-800□	1085.6	806	989	10	4	800
LEFB32□T-900□	1185.6	906	1089	12	5	1000
LEFB32□T-1000□	1285.6	1006	1189	12	5	1000
LEFB32□T-1200□	1485.6	1206	1389	14	6	1200
LEFB32□T-1500□	1785.6	1506	1689	18	8	1600
LEFB32□T-1800□	2085.6	1806	1989	20	9	1800
LEFB32□T-2000□	2285.6	2006	2189	22	10	2000

LEFB Series


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dimensions: Belt Drive


LEFB32

Positioning pin hole*1 (Option): Body bottom

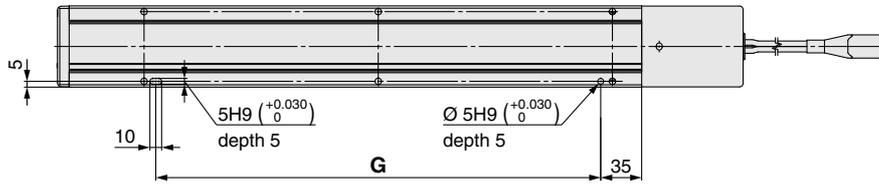

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

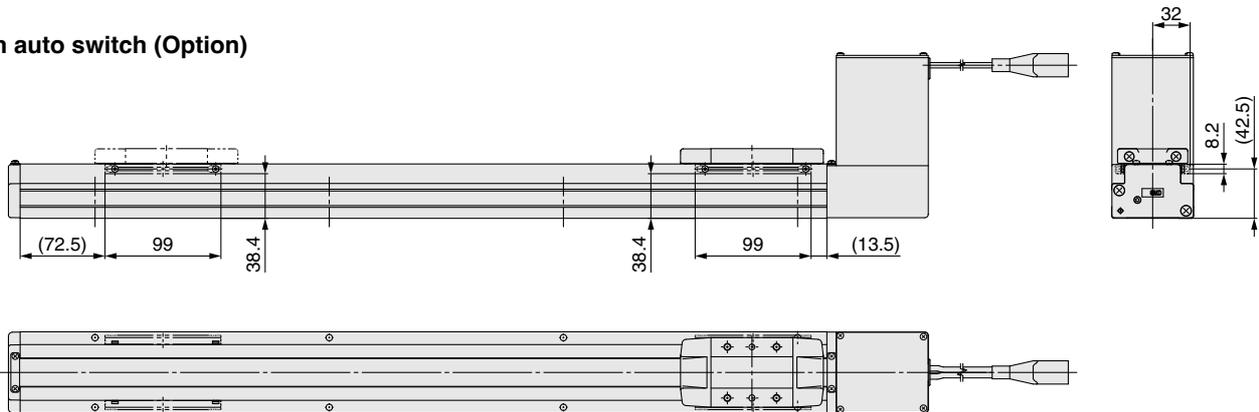


Dimensions

Model	G [mm]
LEFB32□T-300□	380
LEFB32□T-500□	580
LEFB32□T-600□	580
LEFB32□T-700□	780
LEFB32□T-800□	780
LEFB32□T-900□	980
LEFB32□T-1000□	980
LEFB32□T-1200□	1180
LEFB32□T-1500□	1580
LEFB32□T-1800□	1780
LEFB32□T-2000□	1980


Slider Type Belt Drive

LEFB Series LEFB25, 32, 40

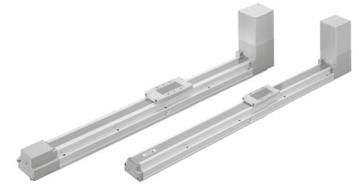

* For details, refer to www.smc.eu and onward.

How to Order

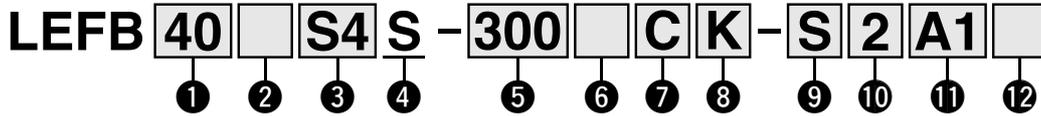

1 Size

25
32
40

2 Motor mounting position

-	Top mounting
U	Bottom mounting

4 Equivalent lead

S	54 mm
---	-------

5 Stroke

300	300 mm
to	to
3000	3000 mm

* For details, refer to the applicable stroke table below.

6 Motor option

-	Without option
B	With lock

3 Motor type

Symbol	Type	Output [W]	Actuator size	Compatible drivers		
S2*1	AC servo motor	100	25	LECSA□-S1		
S3	(Incremental encoder)	200	32	LECSA□-S3		
S4		400	40	LECSA2-S4		
T6*2	AC servo motor (Absolute encoder)	100	25	LECSB2-T5		
T7				200	32	LECS2-T5
T8						400
				LECSS2-T5		
				LECSB2-T7		
				LECS2-T7		
				LECSND2-T7-□		
				LECSS2-T7		
				LECSB2-T8		
				LECS2-T8		
				LECSND2-T8-□		
				LECSS2-T8		

*1 For motor type S 2, the compatible driver part number suffix is S1.

*2 For motor type T6, the compatible driver part number is LECS□2-T5.

9 Cable type*1 *2

-	Without cable
S	Standard cable
R	Robotic cable

*1 A motor cable and encoder cable are included with the product. (A lock cable is also included if motor option "B: With lock" is selected.)

*2 Standard cable entry direction is "(A) Axis side."

7 Auto switch compatibility

-	None
C	With (Includes 1 mounting bracket)

* If 2 or more are required, please order them separately. (Part no.: LEF-D-2-1 For details, refer to page 181.)

* Order auto switches separately. (For details, refer to pages 182 to 184.)

* When "-" is selected, the product will not come with a built-in magnet for an auto switch, and so a mounting bracket cannot be secured. Be sure to select an appropriate model initially as the product cannot be changed to have auto switch compatibility after purchase.

8 Positioning pin hole

-	Housing B bottom*1	
K	Body bottom 2 locations	

*1 Refer to the body mounting example on page 186 for the mounting method.

10 Cable length [m]

-	Without cable
2	2
5	5
A	10

* The length of the motor, encoder, and lock cables are the same.

11 Driver type

	Compatible drivers	Power supply voltage	Size		
			25	32	40
-	Without driver	-	●	●	●
A1	LECSA1-S□	100 to 120	●	●	-
A2	LECSA2-S□	200 to 230	●	●	●
B2	LECSB2-T□	200 to 240	●	●	●
C2	LECS2-T□	200 to 230	●	●	●
S2	LECSS2-T□	200 to 240	●	●	●
N2	LECSN2-T5	200 to 240	●	-	-
E2	LECSN2-T5-E	200 to 240	●	-	-
92	LECSN2-T5-9	200 to 240	●	-	-
P2	LECSN2-T5-P	200 to 240	●	-	-
ND2	LECSND2-T□	200 to 240	-	●	●
ED2	LECSND2-T□-E	200 to 240	-	●	●
9D2	LECSND2-T□-9	200 to 240	-	●	●
PD2	LECSND2-T□-P	200 to 240	-	●	●

* When a driver type is selected, a cable is included. Select the cable type and cable length.

Example) S2S2: Standard cable (2 m) + Driver (LECSS2)

S2: Standard cable (2 m)

-: Without cable and driver

* When selecting "T6" for the motor type, select one of the following LECSN□-T series drivers: "N2," "E2," "92," or "P2."

12 I/O cable length [m]*1

-	Without cable
H	Without cable (Connector only)
1	1.5

*1 When "-: Without driver" is selected for the driver type, only "-: Without cable" can be selected.

Refer to www.smc.eu if an I/O cable is required.

Support Guide/LEFG Series

The support guide was designed to support workpieces with significant overhang.



Applicable Stroke Table

●: Standard/○: Produced upon receipt of order

	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2500	3000	
LEFB25	●	●	●	●	●	●	●	●	○	●	○	○	○	○	○	○	○	○	○	-	-
LEFB32	●	●	●	●	●	●	●	●	○	●	○	○	○	○	○	○	○	○	○	-	-
LEFB40	●	●	●	●	●	●	●	●	○	●	○	○	○	○	○	○	○	○	○	-	-

* Please contact SMC for non-standard strokes as they are produced as special orders.

Compatible Drivers

For auto switches, refer to pages 181 to 184.

Driver type	Pulse input type/ Positioning type	Pulse input type	CC-Link direct input type	SSCNET III/H type	Network card type
Series	LECSA	LECSB-T	LECS2-T	LECSS-T	LECSN□-T
Number of point tables*1	Up to 7	Up to 255	Up to 255 (2 stations occupied)	-	Up to 255
Pulse input	○	○	-	-	-
Applicable network	-	-	CC-Link	SSCNET III/H	PROFINET EtherCAT EtherNet/IP™
Control encoder	Incremental 17-bit encoder	Absolute 22-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder	Absolute 22-bit encoder
Communication function	USB communication	USB communication, RS422 communication	USB communication, RS422 communication	USB communication	USB communication
Power supply voltage [V]	100 to 120 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)

*1 The LECSN□-T point table mode is only available for PROFINET and EtherCAT.

LEFB Series

AC Servo Motor

Specifications

AC Servo Motor

Model		LEFB25S2/T6	LEFB32S3/T7	LEFB40S4/T8	
Actuator specifications	Stroke [mm]*1	300, 400, 500 600, 700, 800 900, 1000, (1100) 1200, (1300, 1400) 1500, (1600, 1700) (1800, 1900), 2000	300, 400, 500 600, 700, 800 900, 1000, (1100) 1200, (1300, 1400) 1500, (1600, 1700) (1800, 1900), 2000 2500	300, 400, 500 600, 700, 800 900, 1000, (1100) 1200, (1300, 1400) 1500, (1600, 1700) (1800, 1900), 2000 2500, 3000	
	Work load [kg]*2	Horizontal	5	15	25
	Max. speed [mm/s]		2000	2000	2000
	Max. acceleration/deceleration [mm/s ²]		20000 (Refer to page 38 for limit according to work load and duty ratio.)*3		
	Positioning repeatability [mm]		±0.06		
	Lost motion [mm]*4		0.1 or less		
	Equivalent lead [mm]		54		
	Impact/Vibration resistance [m/s ²]*5		50/20		
	Actuation type		Belt		
	Guide type		Linear guide		
	Static allowable moment*6	Mep (Pitching)	27	46	110
		Mey (Yawing)	27	46	110
		Mer (Rolling)	52	101	207
Operating temperature range [°C]		5 to 40			
Operating humidity range [%RH]		90 or less (No condensation)			
Enclosure		IP30			
Electric specifications	Motor output/Size	100 W/□40	200 W/□60	400 W/□60	
	Motor type	AC servo motor (100/200 VAC)			
	Encoder*9	Motor type S2, S3, S4: Incremental 17-bit encoder (Resolution: 131072 p/rev) Motor type T6, T7, T8: Absolute 22-bit encoder (Resolution: 4194304 p/rev) (For LECSB2-T□, LECS2-T□) Motor type T6, T7, T8: Absolute 18-bit encoder (Resolution: 262144 p/rev) (For LECS2-T□)			
	Power [W]*7	Max. power 445	Max. power 725	Max. power 1275	
Lock unit specifications	Type*8	Non-magnetising lock			
	Holding force [N]	27	54	110	
	Power [W] at 20 °C	6.3	7.9	7.9	
	Rated voltage [V]	24 ⁰ ₋₁₀ %			

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 For details, refer to the "Speed-Work Load Graph (Guide)" on page 38.

*3 Maximum acceleration/deceleration changes according to the work load. Check the "Work Load-Acceleration/Deceleration Graph" of the catalogue.

*4 A reference value for correcting errors in reciprocal operation

*5 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*6 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*7 Indicates the max. power during operation (including the driver)

When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.

*8 Only when motor option "With lock" is selected

*9 For motor type T6, T7, and T8, the resolution will change depending on the driver type.

Weight


Series	LEFB25□□																		
Stroke [mm]	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	
Motor type	S2	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00	7.25
	T6	3.04	3.29	3.54	3.79	4.04	4.29	4.54	4.79	5.04	5.29	5.54	5.79	6.04	6.29	6.54	6.79	7.04	7.29
Additional weight with lock [kg]	S2: 0.2/T6: 0.3																		

Series	LEFB32□□																			
Stroke [mm]	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2500	
Motor type	S3	4.90	5.25	5.60	5.95	6.30	6.65	7.00	7.35	7.70	8.05	8.40	8.75	9.10	9.45	9.80	10.15	10.50	10.85	12.60
	T7	4.81	5.16	5.51	5.78	6.21	6.56	6.91	7.26	7.61	7.96	8.31	8.66	9.01	9.36	9.71	10.06	10.41	10.76	12.51
Additional weight with lock [kg]	S3: 0.4/T7: 0.5																			

Series	LEFB40□□																				
Stroke [mm]	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2500	3000	
Motor type	S4	7.12	7.57	8.02	8.47	8.92	9.37	9.82	10.27	10.72	11.17	11.62	12.07	12.52	12.97	13.42	13.87	14.32	14.77	17.02	19.27
	T8	7.21	7.66	8.11	8.56	9.01	9.46	9.91	10.36	10.81	11.26	11.71	12.16	12.61	13.06	13.51	13.96	14.41	14.81	17.11	19.36
Additional weight with lock [kg]	S4: 0.5/T8: 0.5																				

Construction

LEFB25S□S

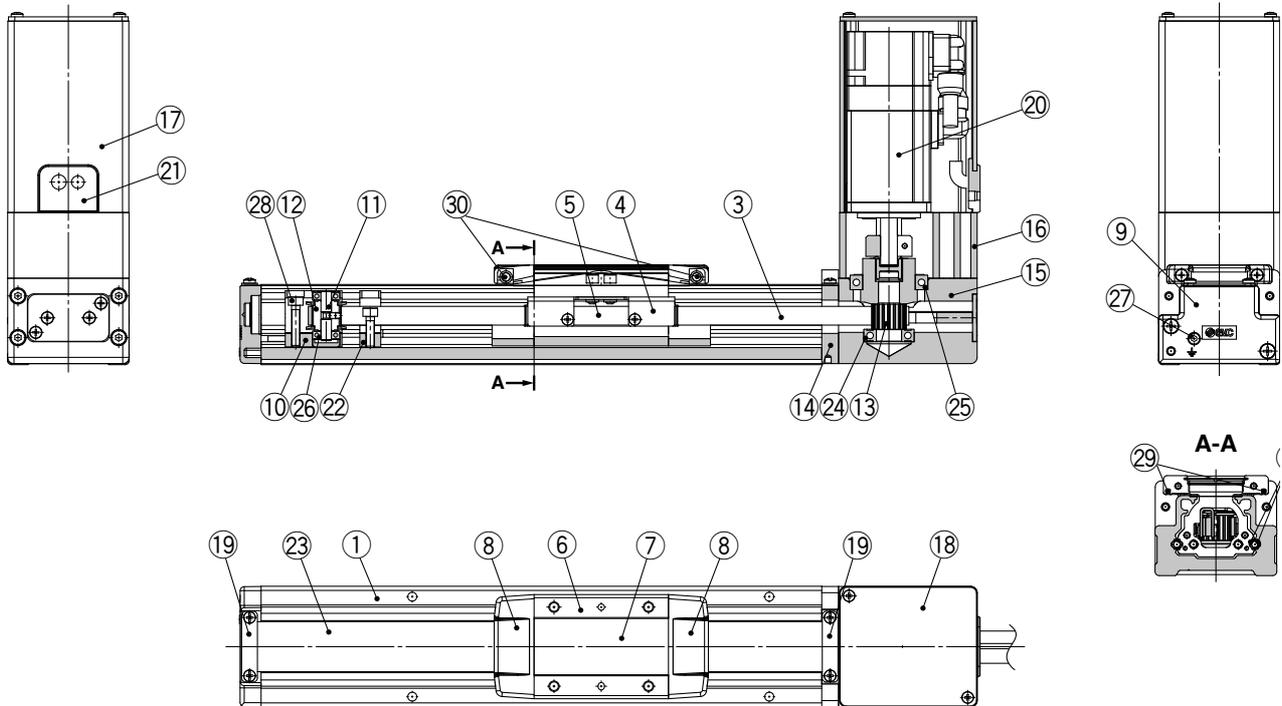

* Motor bottom mounting type is the same.

Component Parts

No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide		
3	Belt		
4	Belt holder	Carbon steel	Chromating
5	Belt stopper	Aluminium alloy	
6	Table	Aluminium alloy	Anodised
7	Blanking plate	Aluminium alloy	Anodised
8	Seal band holder	Synthetic resin	
9	Housing A	Aluminium die-cast	Coating
10	Pulley holder	Aluminium alloy	
11	Pulley shaft	Stainless steel	
12	End pulley	Aluminium alloy	Anodised
13	Motor pulley	Aluminium alloy	Anodised
14	Return flange	Aluminium alloy	Coating
15	Housing	Aluminium alloy	Coating
16	Motor mount	Aluminium alloy	Coating
17	Motor cover	Aluminium alloy	Anodised
18	Motor end cover	Aluminium alloy	Anodised

Component Parts

No.	Description	Material	Note
19	Band stopper	Stainless steel	
20	Motor		
21	Rubber bushing	NBR	
22	Stopper	Aluminium alloy	
23	Dust seal band	Stainless steel	
24	Bearing		
25	Bearing		
26	Spacer	Aluminium alloy	
27	Tension adjustment cap screw	Chromium molybdenum steel	Chromating
28	Pulley retaining screw	Chromium molybdenum steel	Chromating
29	Magnet	—	With auto switch compatibility
30	Roller assembly	—	

Replacement Parts/Grease Pack


Applied portion	Order no.
Rail guide	GR-S-010 (10 g)
Dust seal band (Back side)	GR-S-020 (20 g)

LEFB Series

AC Servo Motor

Construction

LEFB32/40S□S

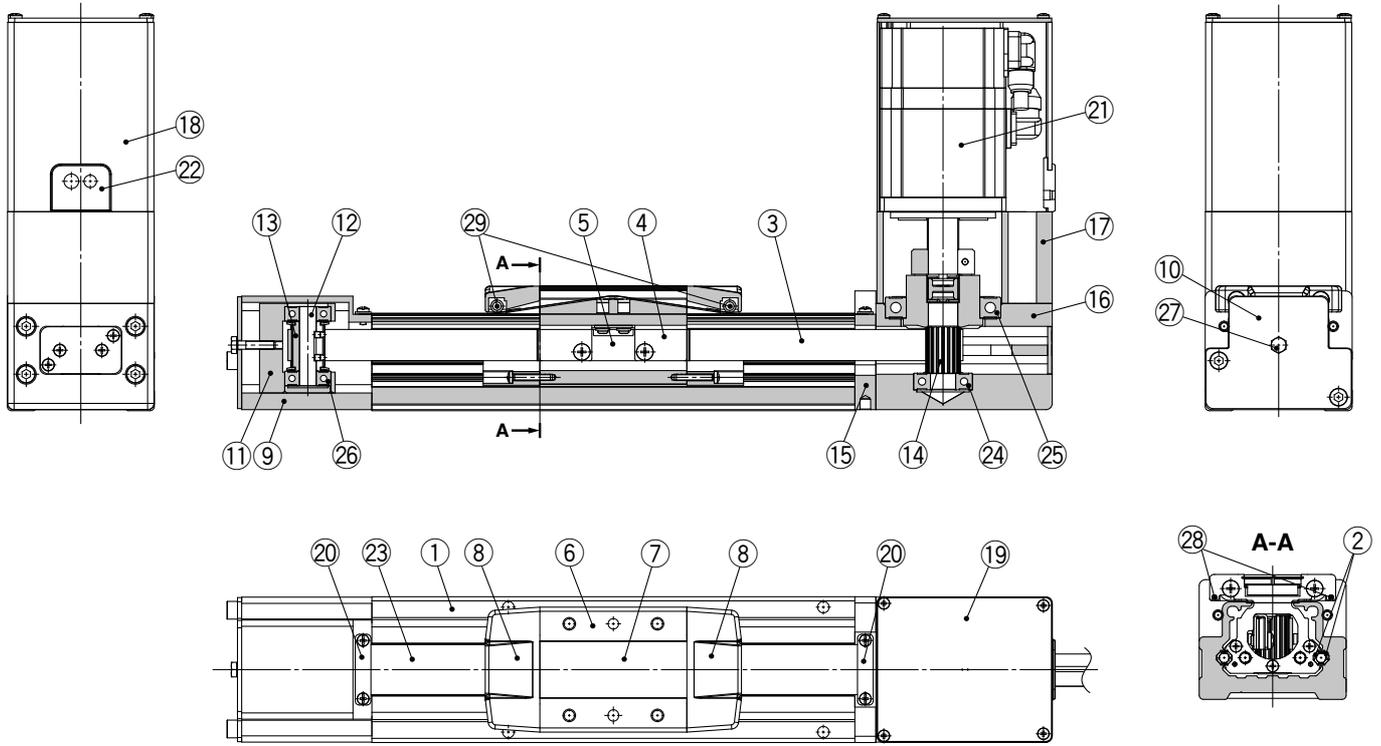

* Motor bottom mounting type is the same.

Component Parts

No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide		
3	Belt		
4	Belt holder	Carbon steel	Chromating
5	Belt stopper	Aluminium alloy	
6	Table	Aluminium alloy	Anodised
7	Blanking plate	Aluminium alloy	Anodised
8	Seal band holder	Synthetic resin	
9	End block	Aluminium alloy	Coating
10	End block cover		
11	Pulley holder	Aluminium alloy	
12	Pulley shaft	Stainless steel	
13	End pulley	Aluminium alloy	Anodised
14	Motor pulley	Aluminium alloy	Anodised
15	Return flange	Aluminium alloy	Coating
16	Housing	Aluminium alloy	Coating
17	Motor mount	Aluminium alloy	Coating

Component Parts


No.	Description	Material	Note
18	Motor cover	Aluminium alloy	Anodised
19	Motor end cover	Aluminium alloy	Anodised
20	Band stopper	Stainless steel	
21	Motor		
22	Rubber bushing	NBR	
23	Dust seal band	Stainless steel	
24	Bearing		
25	Bearing		
26	Bearing		
27	Tension adjustment bolt	Chromium molybdenum steel	Chromating
28	Magnet	—	With auto switch compatibility
29	Roller assembly	—	

Replacement Parts/Grease Pack

Applied portion	Order no.
Rail guide	GR-S-010 (10 g)
Dust seal band (Back side)	GR-S-020 (20 g)


Dimensions: Belt Drive

LEFB25/Motor top mounting type

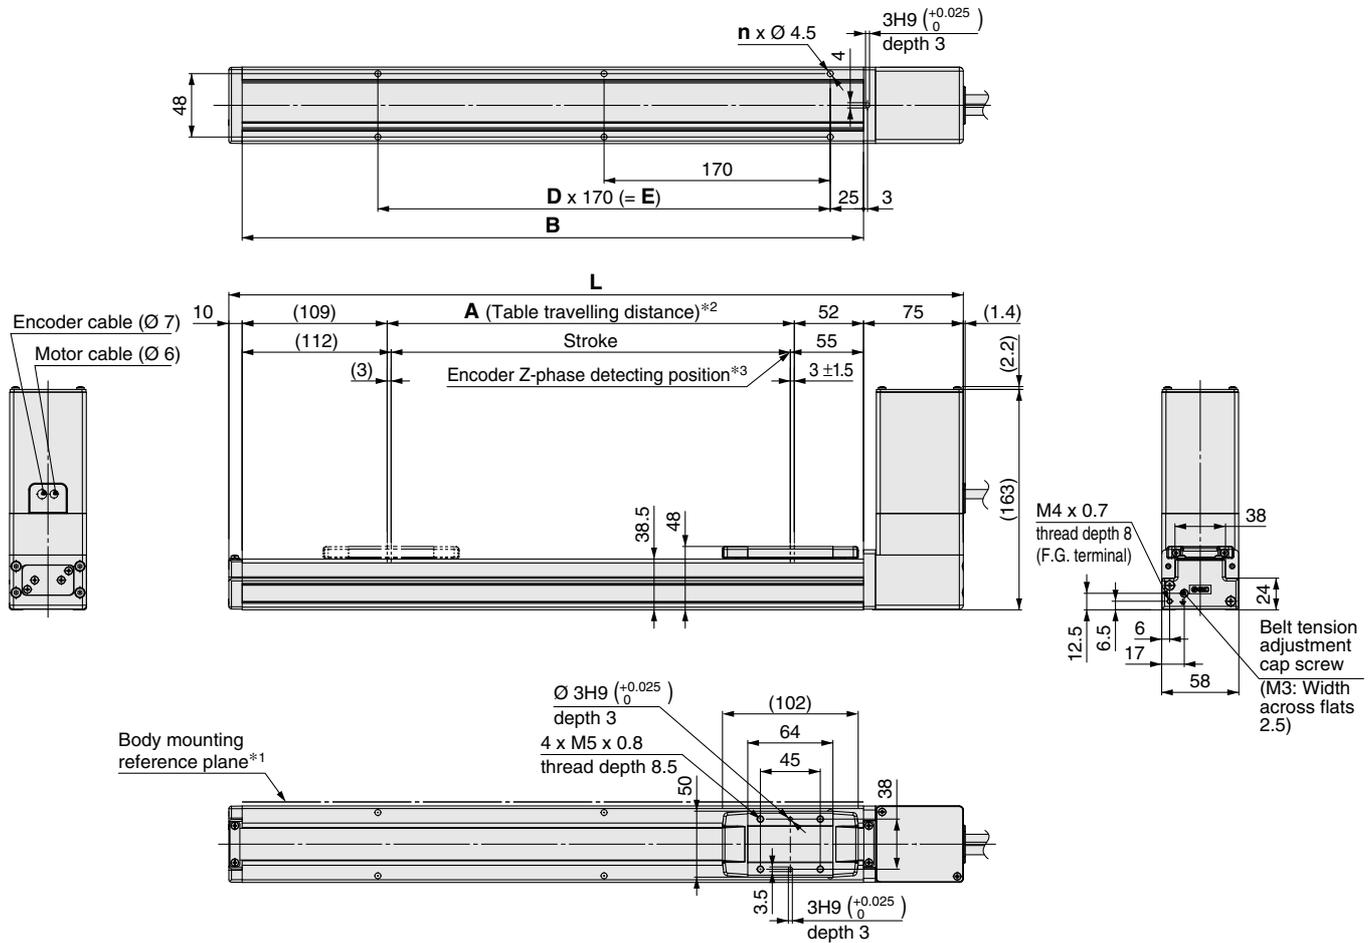

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Motor option: With lock

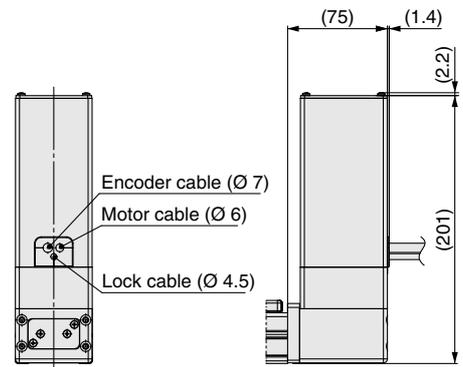

Dimensions

Model	L	A	B	n	D	E
LEFB25□S-300□	552	306	467	6	2	340
LEFB25□S-400□	652	406	567	8	3	510
LEFB25□S-500□	752	506	667	8	3	510
LEFB25□S-600□	852	606	767	10	4	680
LEFB25□S-700□	952	706	867	10	4	680
LEFB25□S-800□	1052	806	967	12	5	850
LEFB25□S-900□	1152	906	1067	14	6	1020
LEFB25□S-1000□	1252	1006	1167	14	6	1020
LEFB25□S-1100□	1352	1106	1267	16	7	1190
LEFB25□S-1200□	1452	1206	1367	16	7	1190
LEFB25□S-1300□	1552	1306	1467	18	8	1360
LEFB25□S-1400□	1652	1406	1567	20	9	1530
LEFB25□S-1500□	1752	1506	1667	20	9	1530
LEFB25□S-1600□	1852	1606	1767	22	10	1700
LEFB25□S-1700□	1952	1706	1867	22	10	1700
LEFB25□S-1800□	2052	1806	1967	24	11	1870
LEFB25□S-1900□	2152	1906	2067	24	11	1870
LEFB25□S-2000□	2252	2006	2167	26	12	2040


LEFB Series

AC Servo Motor

Dimensions: Belt Drive


LEFB25/Motor top mounting type

Positioning pin hole*1 (Option): Body bottom

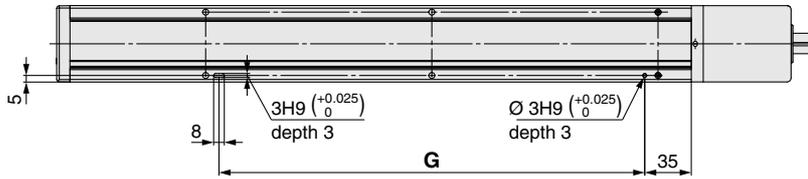

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

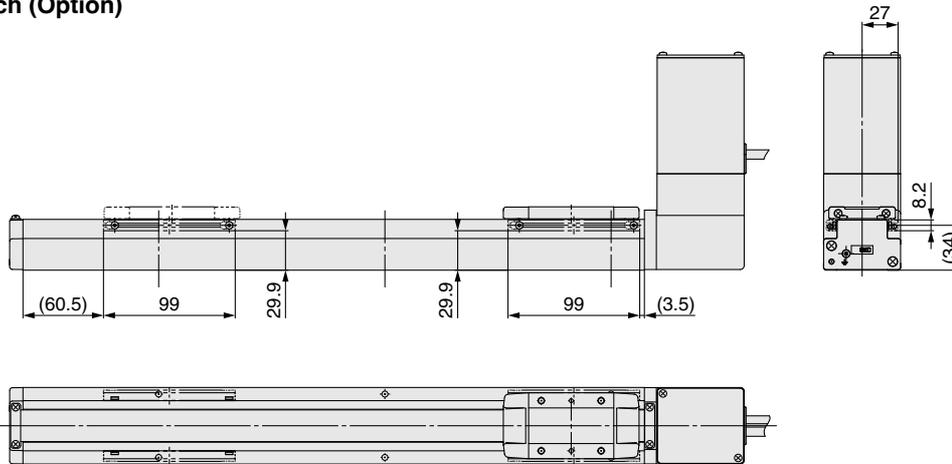


Dimensions [mm]

Model	G
LEFB25□S-300□	320
LEFB25□S-400□	490
LEFB25□S-500□	490
LEFB25□S-600□	660
LEFB25□S-700□	660
LEFB25□S-800□	830
LEFB25□S-900□	1000
LEFB25□S-1000□	1000
LEFB25□S-1100□	1170
LEFB25□S-1200□	1170
LEFB25□S-1300□	1340
LEFB25□S-1400□	1510
LEFB25□S-1500□	1510
LEFB25□S-1600□	1680
LEFB25□S-1700□	1680
LEFB25□S-1800□	1850
LEFB25□S-1900□	1850
LEFB25□S-2000□	2020

Dimensions: Belt Drive

LEFB25U/Motor bottom mounting type

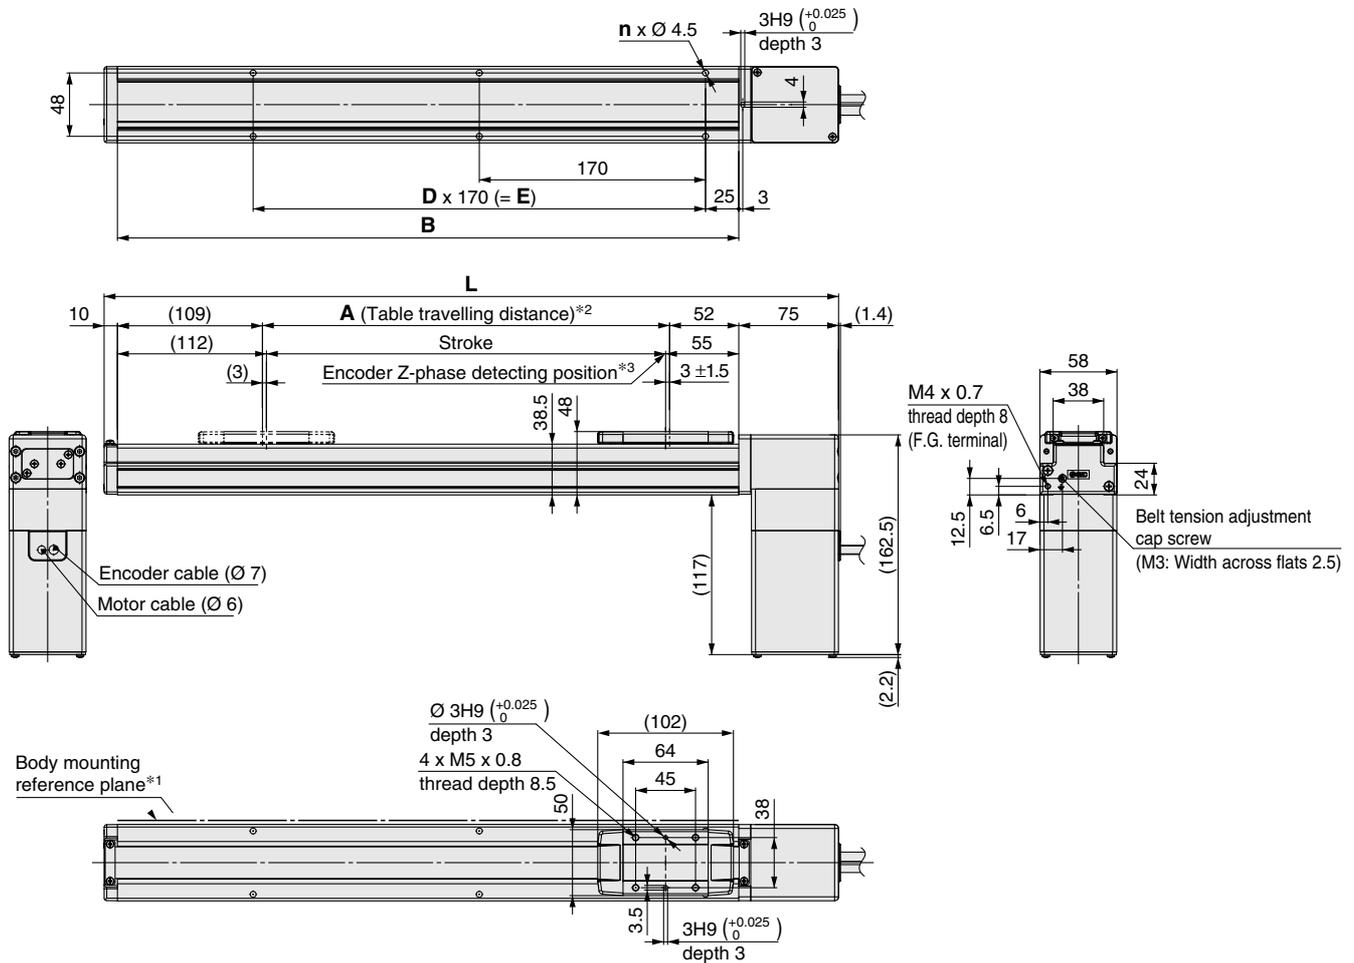


- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Dimensions

Model	L	A	B	n	D	E
LEFB25U□S-300□	552	306	467	6	2	340
LEFB25U□S-400□	652	406	567	8	3	510
LEFB25U□S-500□	752	506	667	8	3	510
LEFB25U□S-600□	852	606	767	10	4	680
LEFB25U□S-700□	952	706	867	10	4	680
LEFB25U□S-800□	1052	806	967	12	5	850
LEFB25U□S-900□	1152	906	1067	14	6	1020
LEFB25U□S-1000□	1252	1006	1167	14	6	1020
LEFB25U□S-1100□	1352	1106	1267	16	7	1190
LEFB25U□S-1200□	1452	1206	1367	16	7	1190
LEFB25U□S-1300□	1552	1306	1467	18	8	1360
LEFB25U□S-1400□	1652	1406	1567	20	9	1530
LEFB25U□S-1500□	1752	1506	1667	20	9	1530
LEFB25U□S-1600□	1852	1606	1767	22	10	1700
LEFB25U□S-1700□	1952	1706	1867	22	10	1700
LEFB25U□S-1800□	2052	1806	1967	24	11	1870
LEFB25U□S-1900□	2152	1906	2067	24	11	1870
LEFB25U□S-2000□	2252	2006	2167	26	12	2040

Motor option: With lock

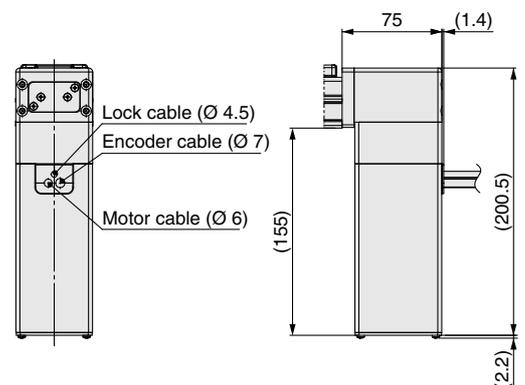


LEFB Series

AC Servo Motor

Dimensions: Belt Drive


LEFB25U/Motor bottom mounting type

Positioning pin hole*1 (Option): Body bottom

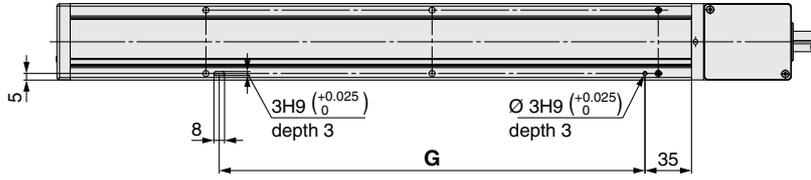

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

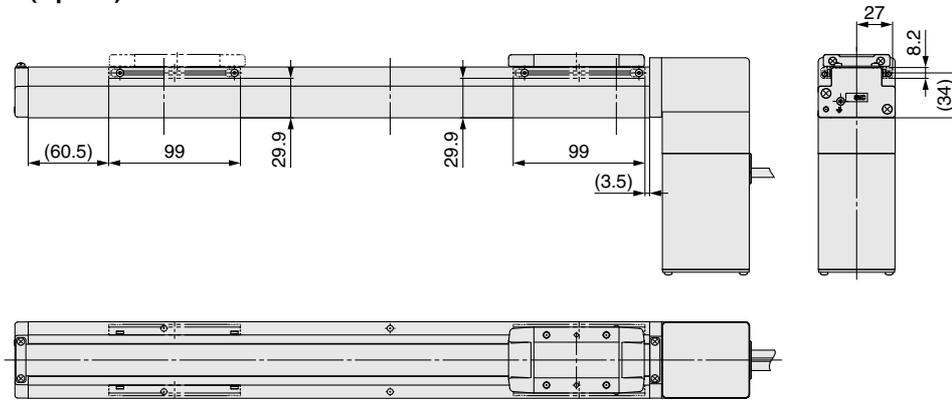


Dimensions [mm]

Model	G
LEFS25U□S-300□	320
LEFS25U□S-400□	490
LEFS25U□S-500□	490
LEFS25U□S-600□	660
LEFS25U□S-700□	660
LEFS25U□S-800□	830
LEFS25U□S-900□	1000
LEFS25U□S-1000□	1000
LEFS25U□S-1100□	1170
LEFS25U□S-1200□	1170
LEFS25U□S-1300□	1340
LEFS25U□S-1400□	1510
LEFS25U□S-1500□	1510
LEFS25U□S-1600□	1680
LEFS25U□S-1700□	1680
LEFS25U□S-1800□	1850
LEFS25U□S-1900□	1850
LEFS25U□S-2000□	2020

Dimensions: Belt Drive

LEFB32/Motor top mounting type

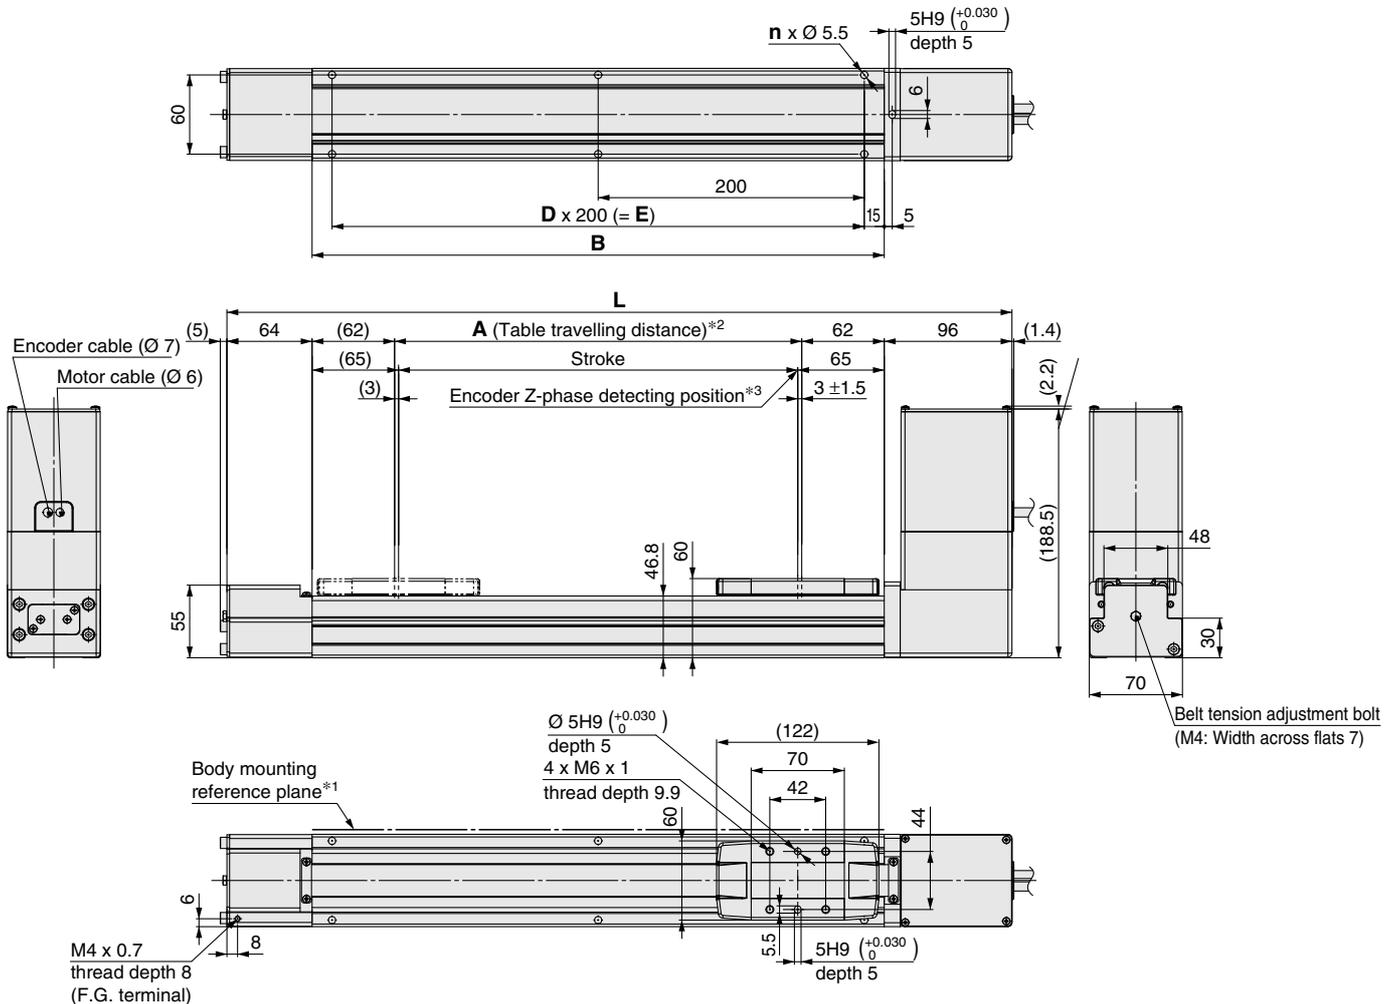


- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Dimensions [mm]

Model	L	A	B	n	D	E
LEFB32□S-300□	590	306	430	6	2	400
LEFB32□S-400□	690	406	530	6	2	400
LEFB32□S-500□	790	506	630	8	3	600
LEFB32□S-600□	890	606	730	8	3	600
LEFB32□S-700□	990	706	830	10	4	800
LEFB32□S-800□	1090	806	930	10	4	800
LEFB32□S-900□	1190	906	1030	12	5	1000
LEFB32□S-1000□	1290	1006	1130	12	5	1000
LEFB32□S-1100□	1390	1106	1230	14	6	1200
LEFB32□S-1200□	1490	1206	1330	14	6	1200
LEFB32□S-1300□	1590	1306	1430	16	7	1400
LEFB32□S-1400□	1690	1406	1530	16	7	1400
LEFB32□S-1500□	1790	1506	1630	18	8	1600
LEFB32□S-1600□	1890	1606	1730	18	8	1600
LEFB32□S-1700□	1990	1706	1830	20	9	1800
LEFB32□S-1800□	2090	1806	1930	20	9	1800
LEFB32□S-1900□	2190	1906	2030	22	10	2000
LEFB32□S-2000□	2290	2006	2130	22	10	2000
LEFB32□S-2500□	2790	2506	2630	28	13	2600

Motor option: With lock

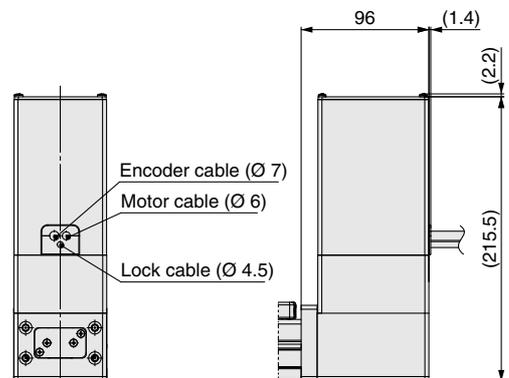


LEFB Series

AC Servo Motor

Dimensions: Belt Drive


LEFB32/Motor top mounting type

Positioning pin hole*1 (Option): Body bottom

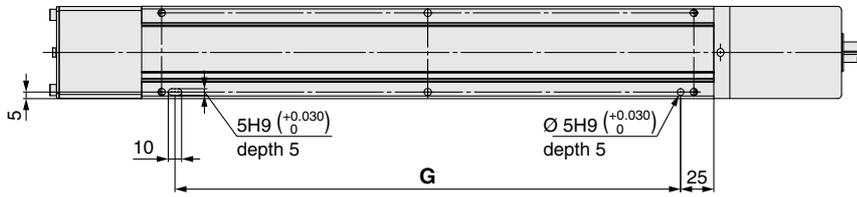

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

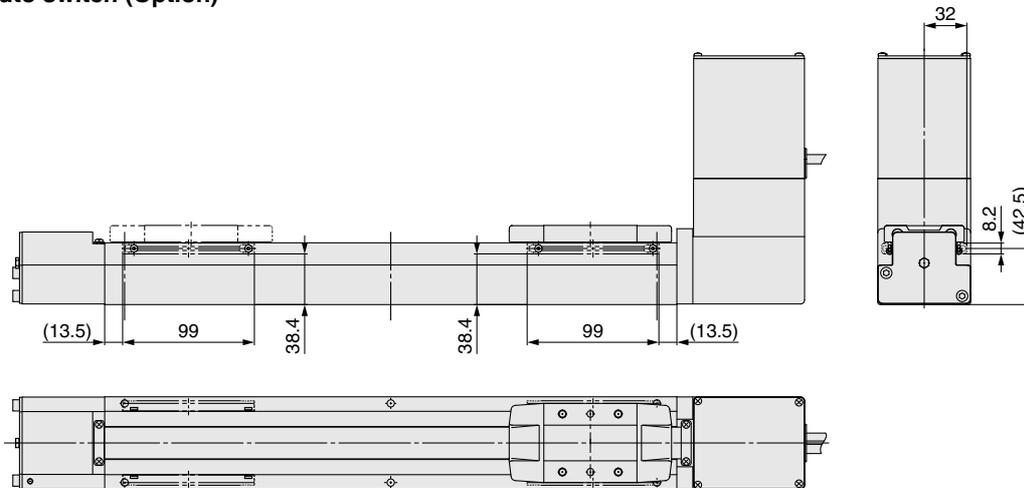


Dimensions [mm]

Model	G
LEFB32□S-300□	380
LEFB32□S-400□	380
LEFB32□S-500□	580
LEFB32□S-600□	580
LEFB32□S-700□	780
LEFB32□S-800□	780
LEFB32□S-900□	980
LEFB32□S-1000□	980
LEFB32□S-1100□	1180
LEFB32□S-1200□	1180
LEFB32□S-1300□	1380
LEFB32□S-1400□	1380
LEFB32□S-1500□	1580
LEFB32□S-1600□	1580
LEFB32□S-1700□	1780
LEFB32□S-1800□	1780
LEFB32□S-1900□	1980
LEFB32□S-2000□	1980
LEFB32□S-2500□	2580


Dimensions: Belt Drive

LEFB32U/Motor bottom mounting type

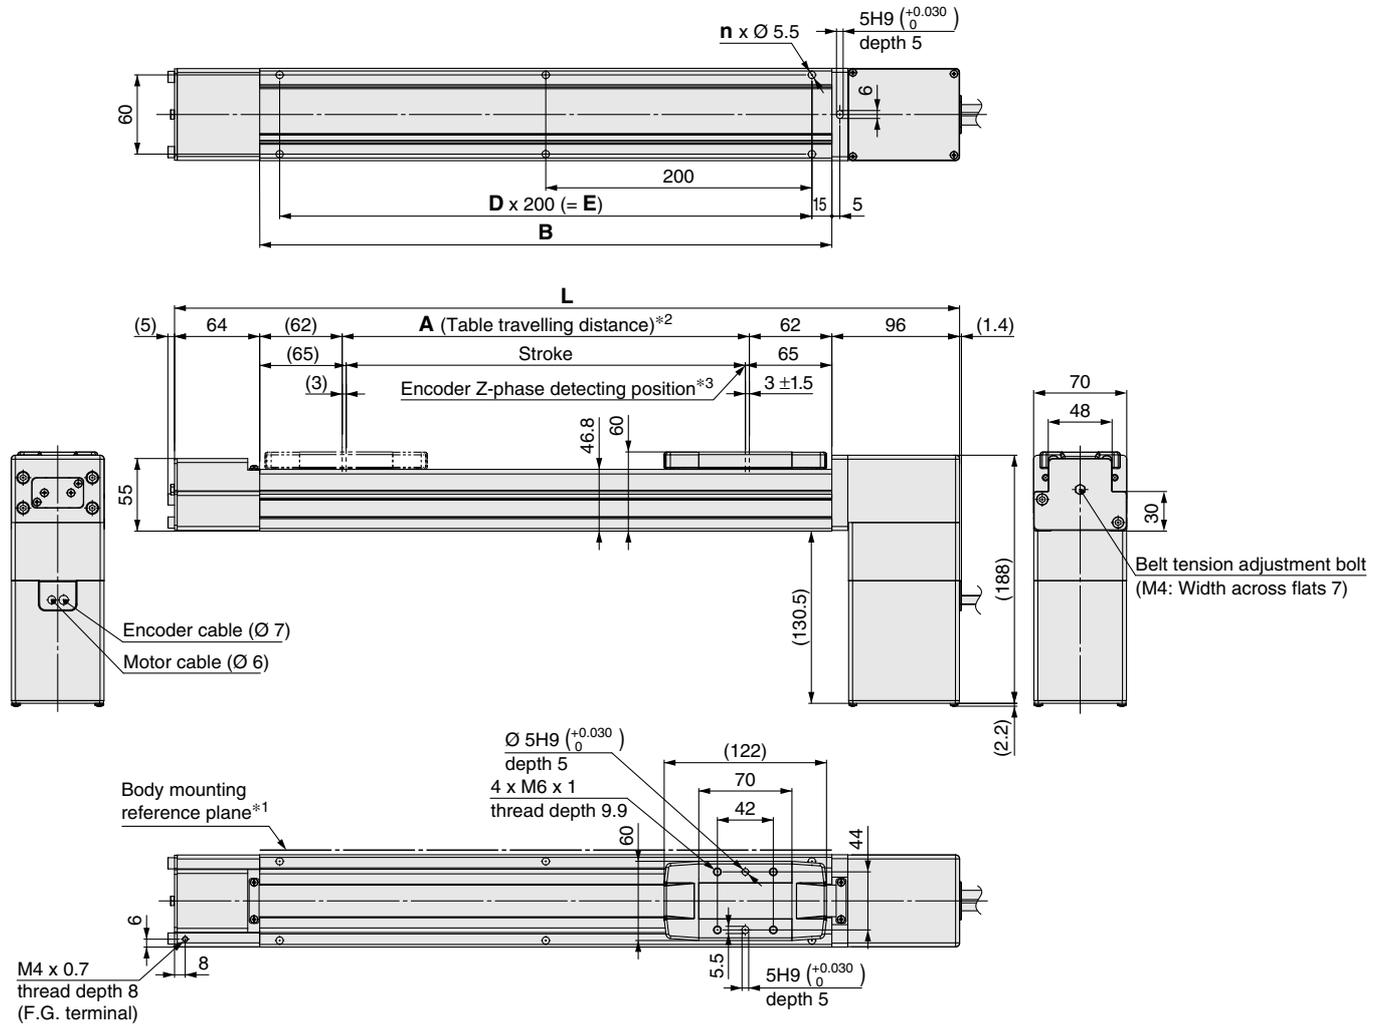

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Motor option: With lock

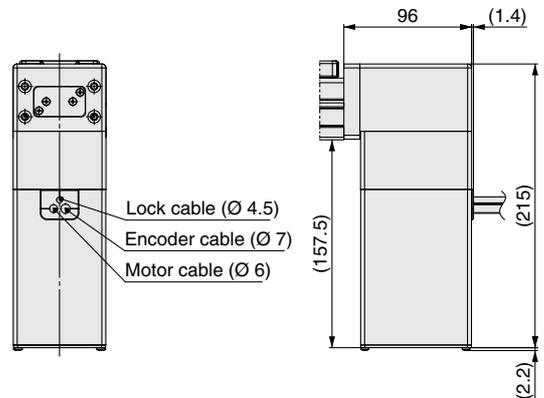


Dimensions

Model	L	A	B	n	D	E
LEFB32U□S-300□	590	306	430	6	2	400
LEFB32U□S-400□	690	406	530	6	2	400
LEFB32U□S-500□	790	506	630	8	3	600
LEFB32U□S-600□	890	606	730	8	3	600
LEFB32U□S-700□	990	706	830	10	4	800
LEFB32U□S-800□	1090	806	930	10	4	800
LEFB32U□S-900□	1190	906	1030	12	5	1000
LEFB32U□S-1000□	1290	1006	1130	12	5	1000
LEFB32U□S-1100□	1390	1106	1230	14	6	1200
LEFB32U□S-1200□	1490	1206	1330	14	6	1200
LEFB32U□S-1300□	1590	1306	1430	16	7	1400
LEFB32U□S-1400□	1690	1406	1530	16	7	1400
LEFB32U□S-1500□	1790	1506	1630	18	8	1600
LEFB32U□S-1600□	1890	1606	1730	18	8	1600
LEFB32U□S-1700□	1990	1706	1830	20	9	1800
LEFB32U□S-1800□	2090	1806	1930	20	9	1800
LEFB32U□S-1900□	2190	1906	2030	22	10	2000
LEFB32U□S-2000□	2290	2006	2130	22	10	2000
LEFB32U□S-2500□	2790	2506	2630	28	13	2600

Dimensions: Belt Drive


LEFB32U/Motor bottom mounting type

Positioning pin hole*1 (Option): Body bottom

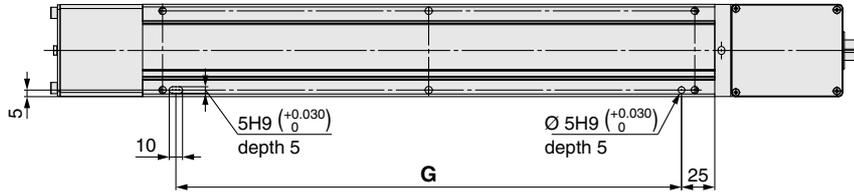

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

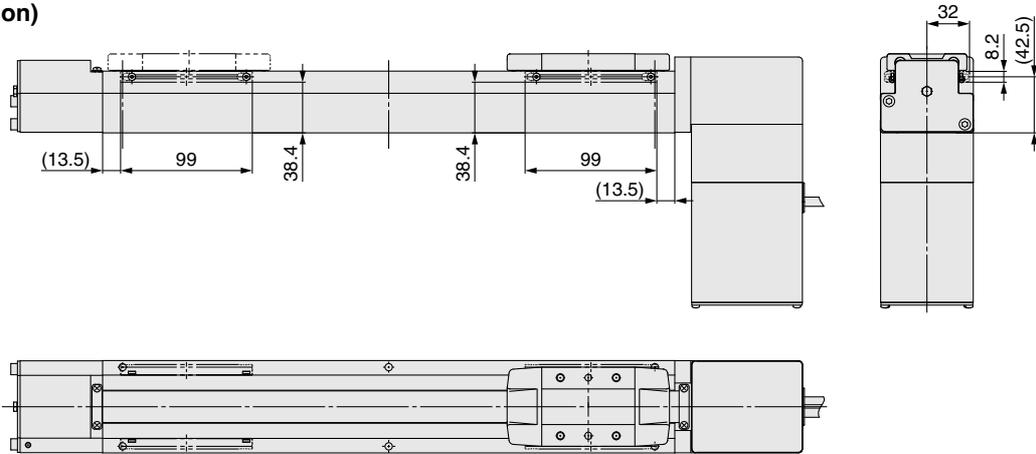


Dimensions

[mm]

Model	G
LEFB32U□S-300□	380
LEFB32U□S-400□	380
LEFB32U□S-500□	580
LEFB32U□S-600□	580
LEFB32U□S-700□	780
LEFB32U□S-800□	780
LEFB32U□S-900□	980
LEFB32U□S-1000□	980
LEFB32U□S-1100□	1180
LEFB32U□S-1200□	1180
LEFB32U□S-1300□	1380
LEFB32U□S-1400□	1380
LEFB32U□S-1500□	1580
LEFB32U□S-1600□	1580
LEFB32U□S-1700□	1780
LEFB32U□S-1800□	1780
LEFB32U□S-1900□	1980
LEFB32U□S-2000□	1980
LEFB32U□S-2500□	2580


Dimensions: Belt Drive

LEFB40/Motor top mounting type

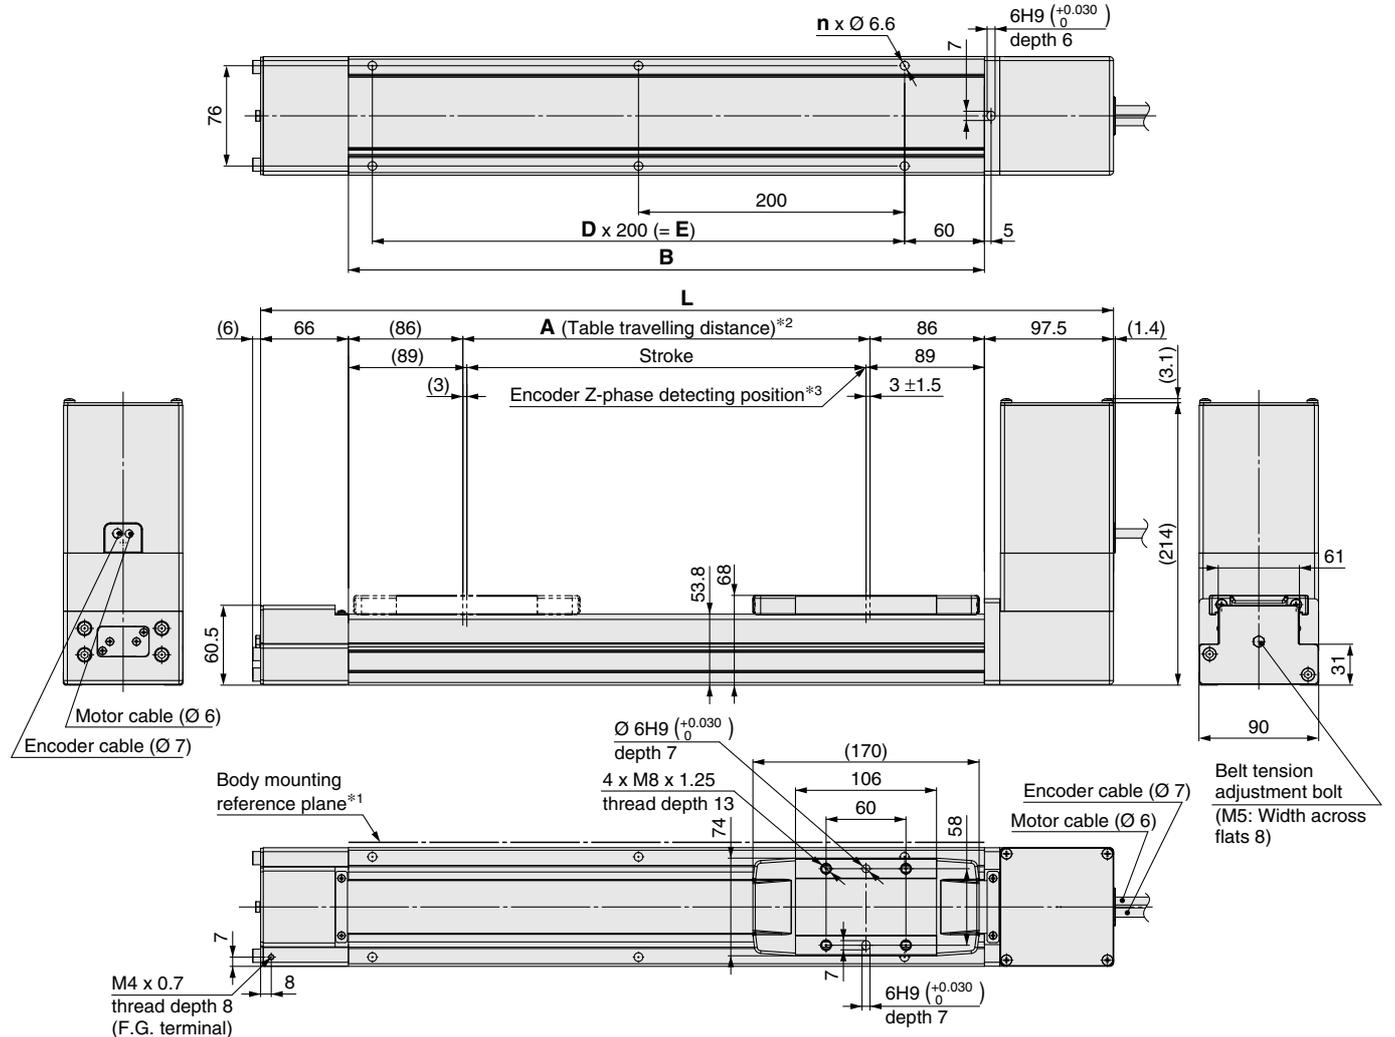

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Motor option: With lock

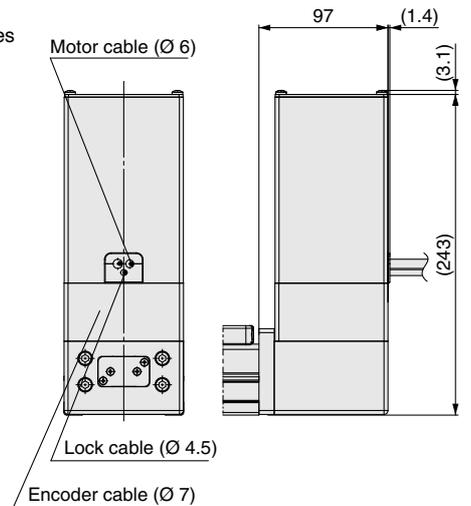

Dimensions

Model	L	A	B	n	D	E
LEFB40□S-300□	641.5	306	478	6	2	400
LEFB40□S-400□	741.5	406	578	6	2	400
LEFB40□S-500□	841.5	506	678	8	3	600
LEFB40□S-600□	941.5	606	778	8	3	600
LEFB40□S-700□	1041.5	706	878	10	4	800
LEFB40□S-800□	1141.5	806	978	10	4	800
LEFB40□S-900□	1241.5	906	1078	12	5	1000
LEFB40□S-1000□	1341.5	1006	1178	12	5	1000
LEFB40□S-1100□	1441.5	1106	1278	14	6	1200
LEFB40□S-1200□	1541.5	1206	1378	14	6	1200
LEFB40□S-1300□	1641.5	1306	1478	16	7	1400
LEFB40□S-1400□	1741.5	1406	1578	16	7	1400
LEFB40□S-1500□	1841.5	1506	1678	18	8	1600
LEFB40□S-1600□	1941.5	1606	1778	18	8	1600
LEFB40□S-1700□	2041.5	1706	1878	20	9	1800
LEFB40□S-1800□	2141.5	1806	1978	20	9	1800
LEFB40□S-1900□	2241.5	1906	2078	22	10	2000
LEFB40□S-2000□	2341.5	2006	2178	22	10	2000
LEFB40□S-2500□	2841.5	2506	2678	28	13	2600
LEFB40□S-3000□	3341.5	3006	3178	32	15	3000


LEFB Series

AC Servo Motor

Dimensions: Belt Drive


LEFB40/Motor top mounting type

Positioning pin hole*1 (Option): Body bottom

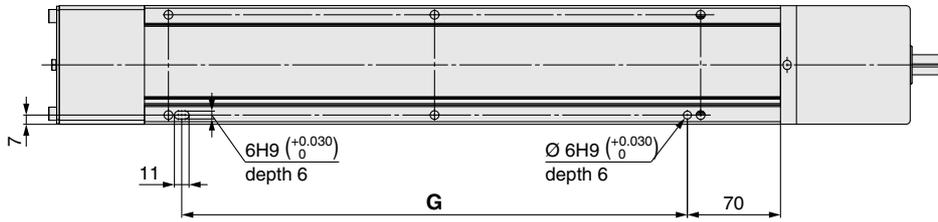

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

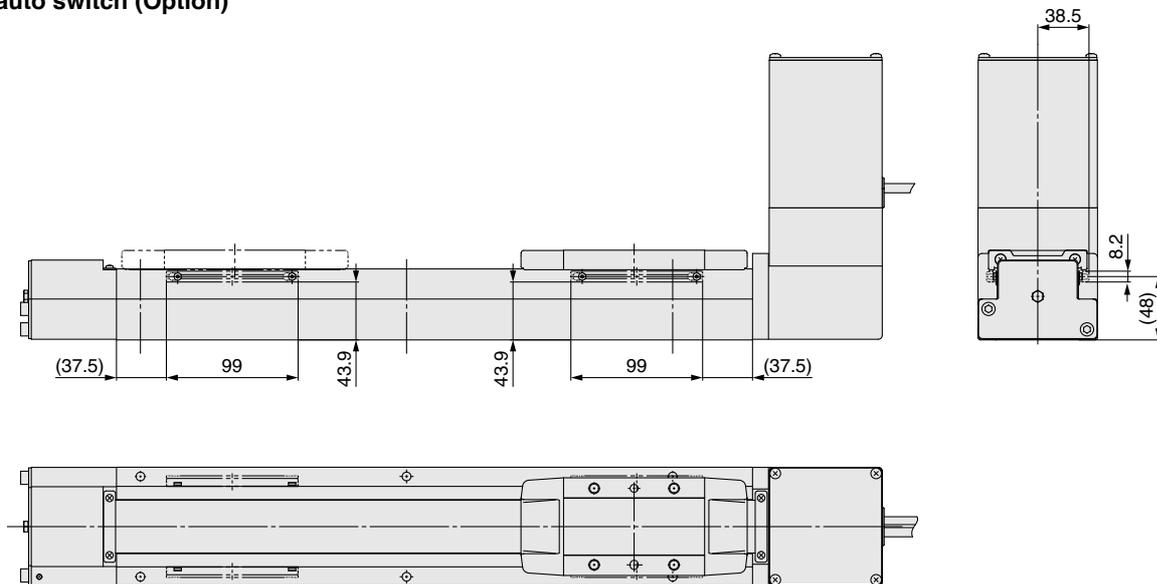


Dimensions [mm]

Model	G
LEFB40□S-300□	380
LEFB40□S-400□	380
LEFB40□S-500□	580
LEFB40□S-600□	580
LEFB40□S-700□	780
LEFB40□S-800□	780
LEFB40□S-900□	980
LEFB40□S-1000□	980
LEFB40□S-1100□	1180
LEFB40□S-1200□	1180
LEFB40□S-1300□	1380
LEFB40□S-1400□	1380
LEFB40□S-1500□	1580
LEFB40□S-1600□	1580
LEFB40□S-1700□	1780
LEFB40□S-1800□	1780
LEFB40□S-1900□	1980
LEFB40□S-2000□	1980
LEFB40□S-2500□	2580
LEFB40□S-3000□	2980

Dimensions: Belt Drive

LEFB40U/Motor bottom mounting type

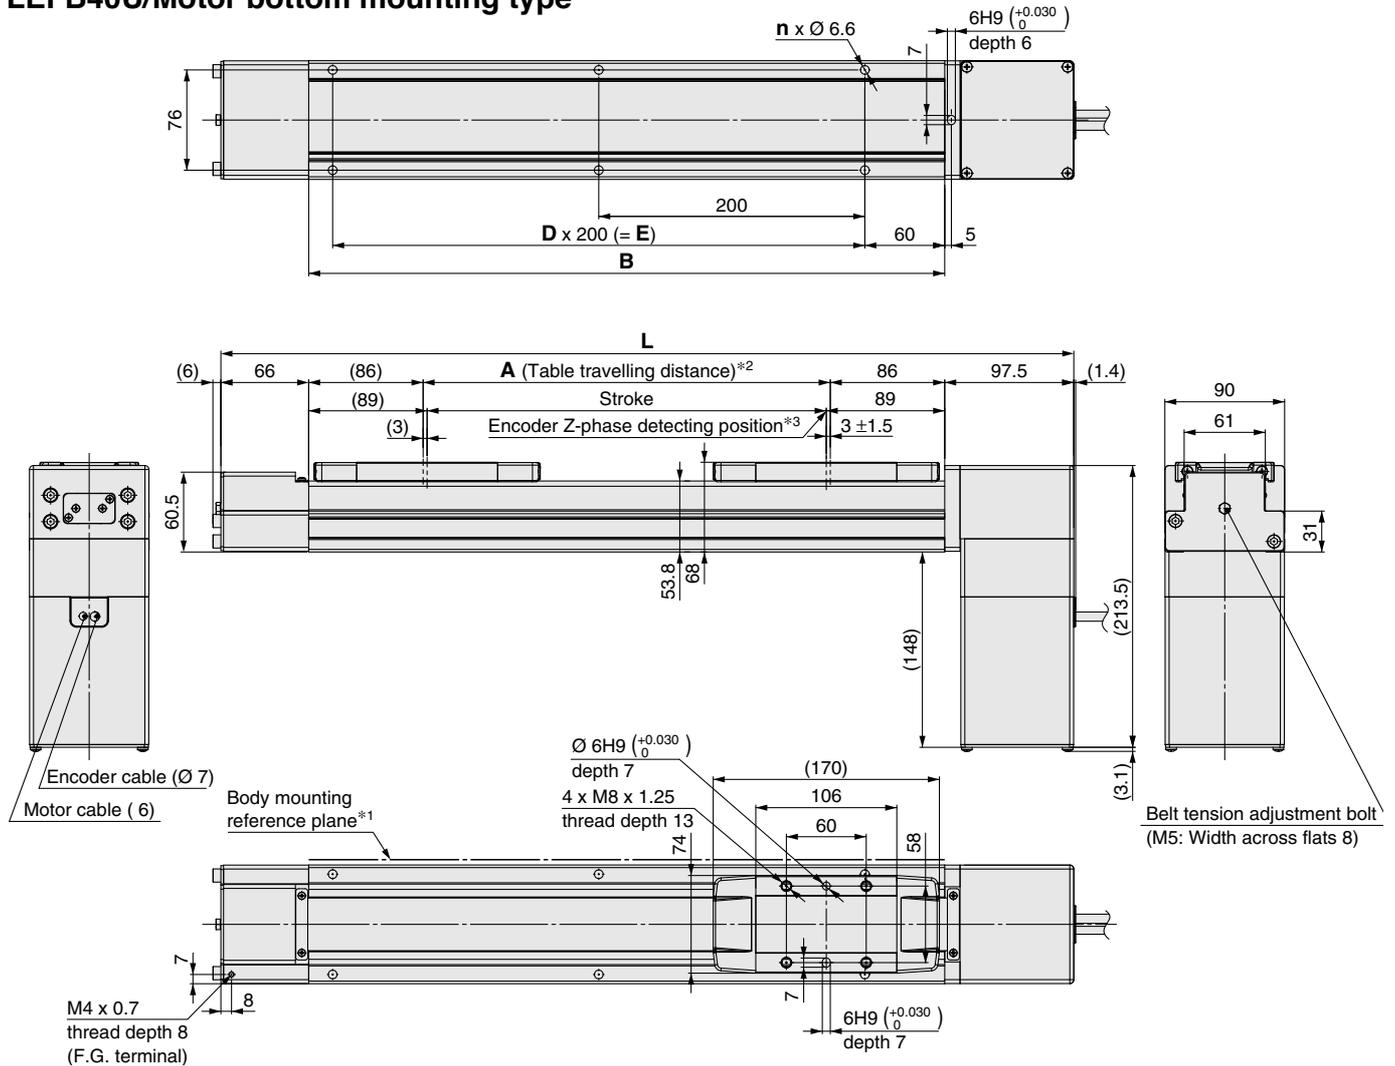


- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Dimensions [mm]

Model	L	A	B	n	D	E
LEFB40U□S-300□	641.5	306	478	6	2	400
LEFB40U□S-400□	741.5	406	578	6	2	400
LEFB40U□S-500□	841.5	506	678	8	3	600
LEFB40U□S-600□	941.5	606	778	8	3	600
LEFB40U□S-700□	1041.5	706	878	10	4	800
LEFB40U□S-800□	1141.5	806	978	10	4	800
LEFB40U□S-900□	1241.5	906	1078	12	5	1000
LEFB40U□S-1000□	1341.5	1006	1178	12	5	1000
LEFB40U□S-1100□	1441.5	1106	1278	14	6	1200
LEFB40U□S-1200□	1541.5	1206	1378	14	6	1200
LEFB40U□S-1300□	1641.5	1306	1478	16	7	1400
LEFB40U□S-1400□	1741.5	1406	1578	16	7	1400
LEFB40U□S-1500□	1841.5	1506	1678	18	8	1600
LEFB40U□S-1600□	1941.5	1606	1778	18	8	1600
LEFB40U□S-1700□	2041.5	1706	1878	20	9	1800
LEFB40U□S-1800□	2141.5	1806	1978	20	9	1800
LEFB40U□S-1900□	2241.5	1906	2078	22	10	2000
LEFB40U□S-2000□	2341.5	2006	2178	22	10	2000
LEFB40U□S-2500□	2841.5	2506	2678	28	13	2600
LEFB40U□S-3000□	3341.5	3006	3178	32	15	3000

Motor option: With lock

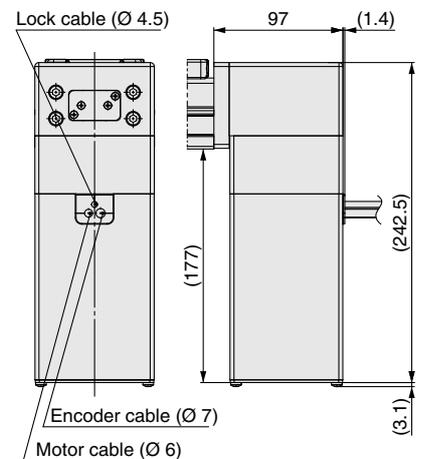


LEFB Series

AC Servo Motor

Dimensions: Belt Drive


LEFB40U/Motor bottom mounting type

Positioning pin hole*1 (Option): Body bottom

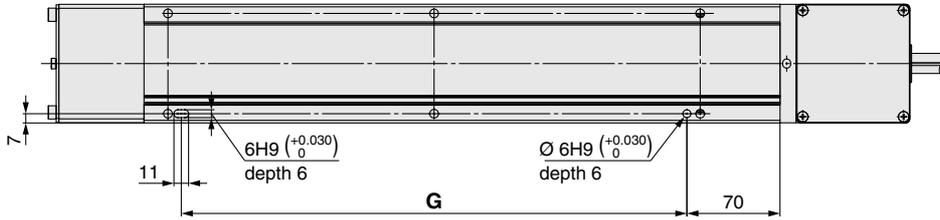

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

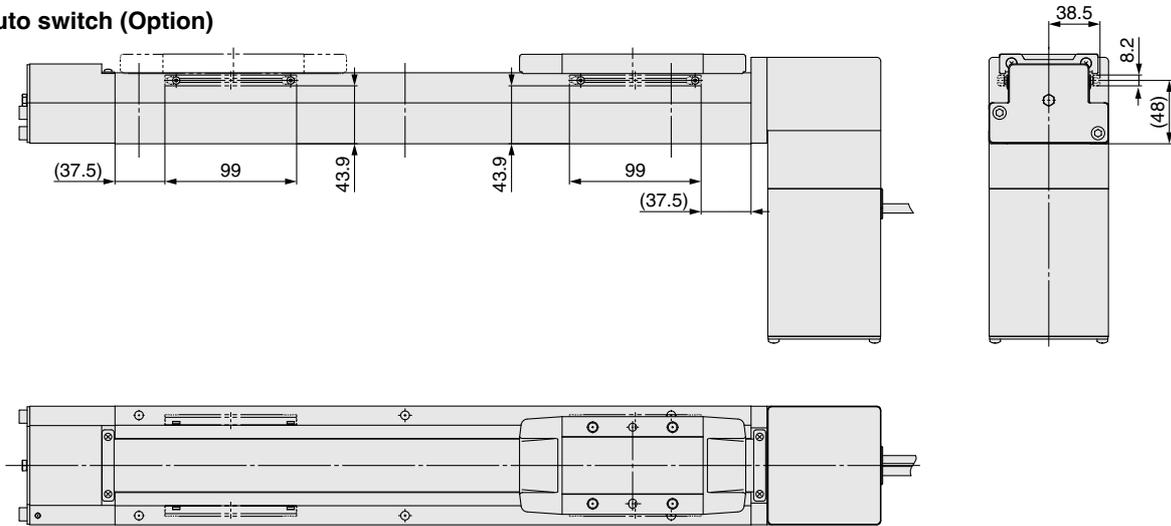

Dimensions [mm]


Model	G
LEFB40U□S-300□	380
LEFB40U□S-400□	380
LEFB40U□S-500□	580
LEFB40U□S-600□	580
LEFB40U□S-700□	780
LEFB40U□S-800□	780
LEFB40U□S-900□	980
LEFB40U□S-1000□	980
LEFB40U□S-1100□	1180
LEFB40U□S-1200□	1180
LEFB40U□S-1300□	1380
LEFB40U□S-1400□	1380
LEFB40U□S-1500□	1580
LEFB40U□S-1600□	1580
LEFB40U□S-1700□	1780
LEFB40U□S-1800□	1780
LEFB40U□S-1900□	1980
LEFB40U□S-2000□	1980
LEFB40U□S-2500□	2580
LEFB40U□S-3000□	2980

Slider Type Belt Drive

LEFB Series LEFB25, 32, 40



How to Order

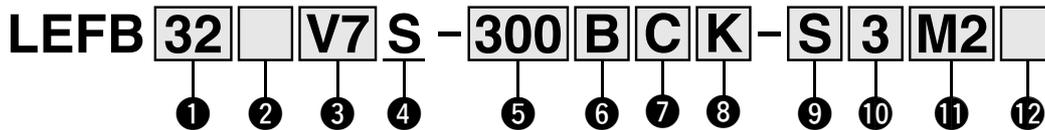

1 Size

25
32
40

2 Motor mounting position

—	Top mounting
U	Bottom mounting

3 Motor type

Symbol	Type	Output [W]	1 Size	11 Driver type	Compatible drivers
*1 V6	AC servo motor (Absolute encoder)	100	25	M2	LECYM2-V5
V7		200	32	U2	LECYU2-V5
V8		400	40	M2	LECYM2-V7
				U2	LECYU2-V7
				M2	LECYM2-V8
				U2	LECYU2-V8

*1 For motor type V6, the compatible driver part number suffix is V5.

4 Equivalent lead [mm]

S	54
---	----

5 Stroke [mm]

300	300
to	to
3000	3000

6 Motor option

—	Without option
B	With lock

7 Auto switch compatibility

—	None
C	With (Includes 1 mounting bracket)

- * If 2 or more are required, please order them separately. (Part no.: LEF-D-2-1 For details, refer to page 181.)
- * Order auto switches separately. (For details, refer to pages 182 to 184.)
- * When "—" is selected, the product will not come with a built-in magnet for an auto switch, and so a mounting bracket cannot be secured. Be sure to select an appropriate model initially as the product cannot be changed to have auto switch compatibility after purchase.

8 Positioning pin hole

—	Housing B bottom*1	
K	Body bottom 2 locations	

*1 Refer to the body mounting example on page 186 for the mounting method.

9 Cable type

—	Without cable
S	Standard cable
R	Robotic cable

12 I/O cable length [m]*1

—	Without cable
H	Without cable (Connector only)
1	1.5

*1 When "—: Without driver" is selected for the driver type, only "—: Without cable" can be selected. Refer to www.smc.eu if an I/O cable is required.

10 Actuator cable length [m]

—	Without cable
3	3
5	5
A	10
C	20

11 Driver type

	Compatible drivers	Power supply voltage [V]
—	Without driver	—
M2	LECYM2-V□	200 to 230
U2	LECYU2-V□	200 to 230

* When a driver type is selected, a cable is included. Select the cable type and cable length.

●: Standard/○: Produced upon receipt of order

Applicable Stroke Table

	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2500	3000	Manufacturable stroke range [mm]	
LEFB25	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	300 to 2000
LEFB32	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	300 to 2500
LEFB40	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	300 to 3000

* Please contact SMC for non-standard strokes as they are produced as special orders.

For auto switches, refer to pages 181 to 184.

Compatible Drivers

Driver type	MECHATROLINK-II type	MECHATROLINK-III type
Series	LECYM	LECYU
Applicable network	MECHATROLINK-II	MECHATROLINK-III
Control encoder	Absolute 20-bit encoder	
Communication device	USB communication, RS-422 communication	
Power supply voltage [V]	200 to 230 VAC (50/60 Hz)	

LEFB Series

AC Servo Motor

Specifications

AC Servo Motor

Model		LEFB25V6	LEFB32V7	LEFB40V8	
Actuator specifications	Stroke [mm]*1	300, 400, 500 600, 700, 800 900, 1000, (1100) 1200, (1300, 1400) 1500, (1600, 1700) (1800, 1900), 2000	300, 400, 500 600, 700, 800 900, 1000, (1100) 1200, (1300, 1400) 1500, (1600, 1700) (1800, 1900), 2000 2500	300, 400, 500 600, 700, 800 900, 1000, (1100) 1200, (1300, 1400) 1500, (1600, 1700) (1800, 1900), 2000 2500, 3000	
	Work load [kg]*2	Horizontal		5	
	Max. speed [mm/s]	2000		2000	
	Max. acceleration/deceleration [mm/s ²]	20000 (Refer to page 38 for limit according to work load and duty ratio.)*3			
	Positioning repeatability [mm]	±0.06			
	Lost motion [mm]*4	0.1 or less			
	Equivalent lead [mm]	54			
	Impact/Vibration resistance [m/s ²]*5	50/20			
	Actuation type	Belt			
	Guide type	Linear guide			
	Static allowable moment*6 [N·m]	Mep (Pitching)	27	46	110
		Mey (Yawing)	27	46	110
		Mer (Rolling)	52	101	207
	Operating temperature range [°C]	5 to 40			
Operating humidity range [%RH]	90 or less (No condensation)				
Enclosure	IP30				
Electric specifications	Motor output/Size	100 W/□40	200 W/□60	400 W/□60	
	Motor type	AC servo motor (200 VAC)			
	Encoder	Absolute 20-bit encoder (Resolution: 1048576 p/rev)			
	Power [W]*7	Max. power 445	Max. power 725	Max. power 1275	
Lock unit specifications	Type*8	Non-magnetising lock			
	Holding force [N]	27	54	110	
	Power consumption [W] at 20 °C	5.5	6.0	6.0	
	Rated voltage [V]	24 VDC ^{+10%} / ₀			

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 For details, refer to the "Speed-Work Load Graph (Guide)" on page 38.

*3 Maximum acceleration/deceleration changes according to the work load. Check the "Work Load-Acceleration/Deceleration Graph (Guide)" of the catalogue.

*4 A reference value for correcting errors in reciprocal operation

*5 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*6 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*7 Indicates the max. power during operation (including the driver)

When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.

*8 Only when motor option "With lock" is selected

Weight


Series	LEFB25																	
Stroke [mm]	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Product weight [kg]	3.06	3.31	3.56	3.81	4.06	4.31	4.56	4.81	5.06	5.31	5.56	5.81	6.06	6.31	6.56	6.81	7.06	7.31
Additional weight with lock [kg]	0.3																	

Series	LEFB32																		
Stroke [mm]	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2500
Product weight [kg]	4.90	5.25	5.60	5.95	6.30	6.65	7.00	7.35	7.70	8.05	8.40	8.75	9.10	9.45	9.80	10.15	10.50	10.85	12.60
Additional weight with lock [kg]	0.7																		

Series	LEFB40																			
Stroke [mm]	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2500	3000
Product weight [kg]	7.22	7.67	8.12	8.57	9.02	9.47	9.92	10.37	10.82	11.27	11.72	12.17	12.62	13.07	13.52	13.97	14.42	14.87	17.12	19.37
Additional weight with lock [kg]	0.7																			

Construction

LEFB25V6S

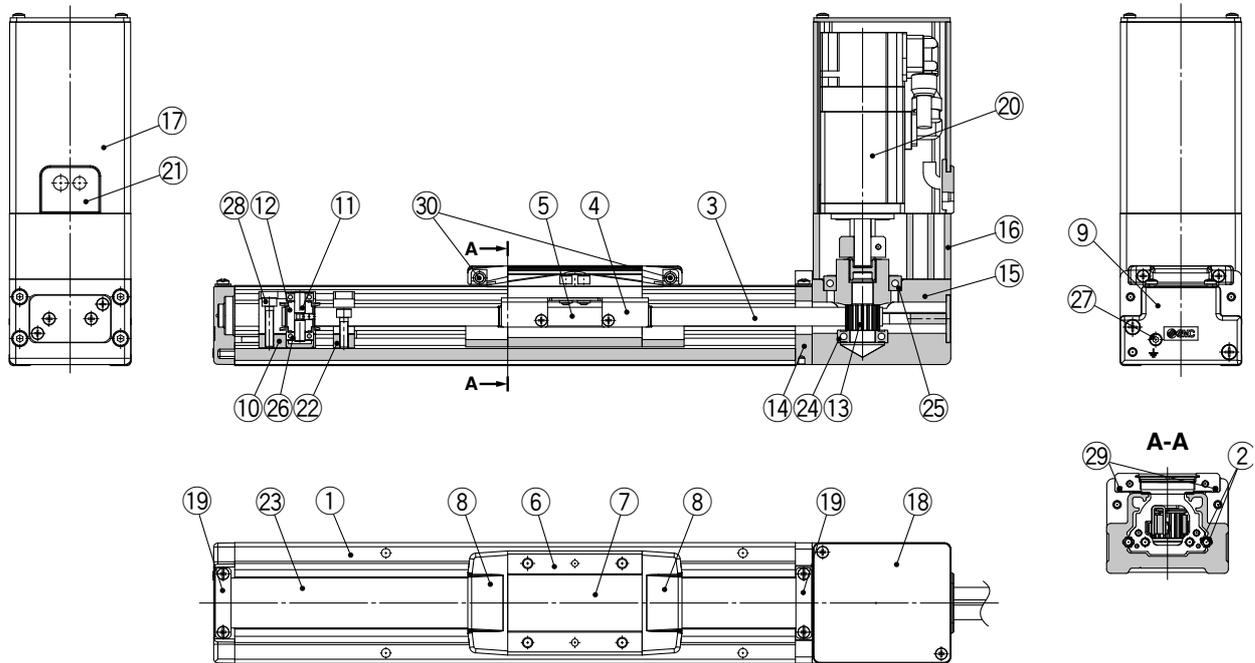

* Motor bottom mounting type is the same.

Component Parts

No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide		
3	Belt		
4	Belt holder	Carbon steel	Chromating
5	Belt stopper	Aluminium alloy	
6	Table	Aluminium alloy	Anodised
7	Blanking plate	Aluminium alloy	Anodised
8	Seal band holder	Synthetic resin	
9	Housing A	Aluminium die-cast	Coating
10	Pulley holder	Aluminium alloy	
11	Pulley shaft	Stainless steel	
12	End pulley	Aluminium alloy	Anodised
13	Motor pulley	Aluminium alloy	Anodised
14	Return flange	Aluminium alloy	Coating
15	Housing	Aluminium alloy	Coating
16	Motor mount	Aluminium alloy	Coating
17	Motor cover	Aluminium alloy	Anodised
18	Motor end cover	Aluminium alloy	Anodised

No.	Description	Material	Note
19	Band stopper	Stainless steel	
20	Motor		
21	Rubber bushing	NBR	
22	Stopper	Aluminium alloy	
23	Dust seal band	Stainless steel	
24	Bearing		
25	Bearing		
26	Spacer	Aluminium alloy	
27	Tension adjustment cap screw	Chromium molybdenum steel	Chromating
28	Pulley retaining screw	Chromium molybdenum steel	Chromating
29	Magnet	—	With auto switch compatibility
30	Roller assembly	—	

Replacement Parts/Grease Pack


Applied portion	Order no.
Rail guide	GR-S-010 (10 g)
Dust seal band (Back side)	GR-S-020 (20 g)

LEFB Series

AC Servo Motor

Construction

LEFB32/40V□S

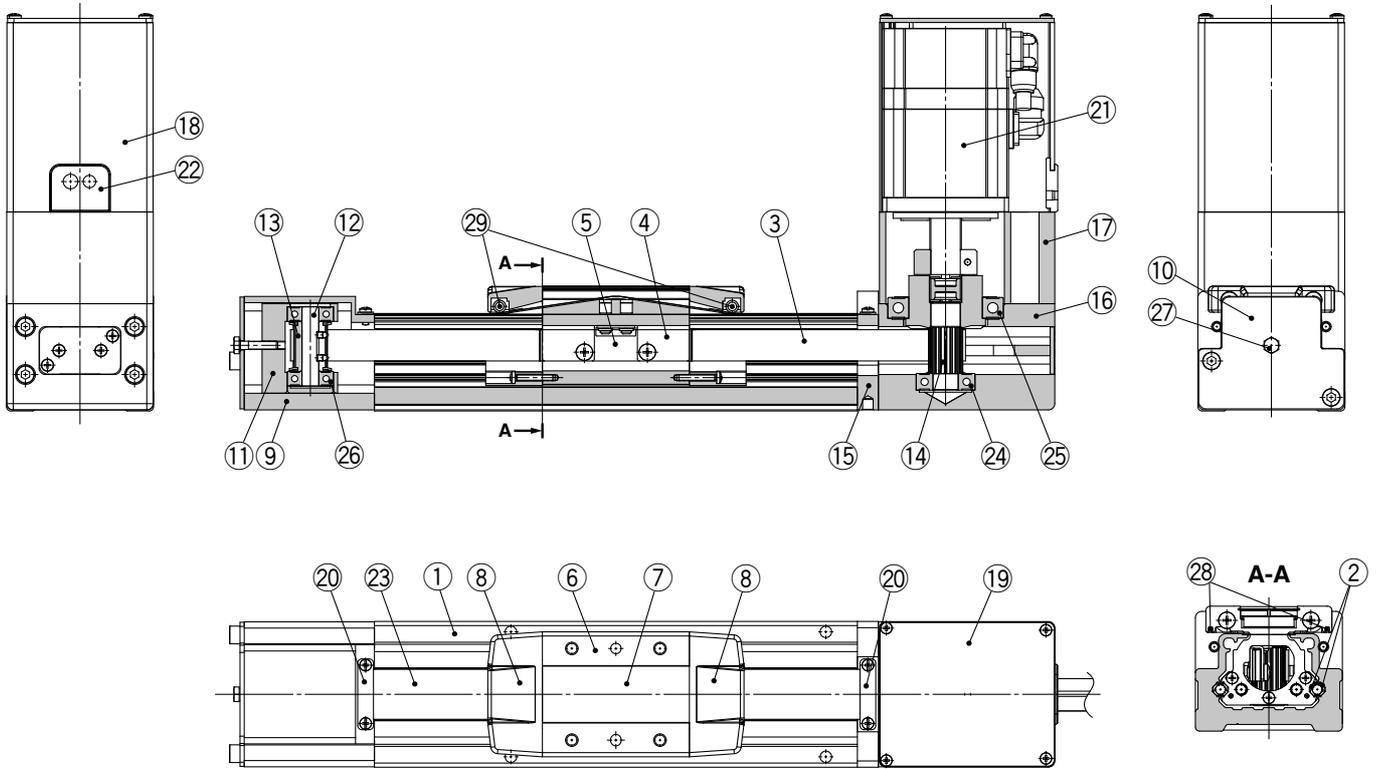

* Motor bottom mounting type is the same.

Component Parts

No.	Description	Material	Note
1	Body	Aluminium alloy	Anodised
2	Rail guide		
3	Belt		
4	Belt holder	Carbon steel	Chromating
5	Belt stopper	Aluminium alloy	
6	Table	Aluminium alloy	Anodised
7	Blanking plate	Aluminium alloy	Anodised
8	Seal band stopper	Synthetic resin	
9	End block	Aluminium alloy	Coating
10	End block cover		
11	Pulley holder	Aluminium alloy	
12	Pulley shaft	Stainless steel	
13	End pulley	Aluminium alloy	Anodised
14	Motor pulley	Aluminium alloy	Anodised
15	Return flange	Aluminium alloy	Coating
16	Housing	Aluminium alloy	Coating
17	Motor mount	Aluminium alloy	Coating


No.	Description	Material	Note
18	Motor cover	Aluminium alloy	Anodised
19	Motor end cover	Aluminium alloy	Anodised
20	Band stopper	Stainless steel	
21	Motor		
22	Rubber bushing	NBR	
23	Dust seal band	Stainless steel	
24	Bearing		
25	Bearing		
26	Bearing		
27	Tension adjustment bolt	Chromium molybdenum steel	Chromating
28	Magnet	—	With auto switch compatibility
29	Roller assembly	—	

Replacement Parts/Grease Pack

Applied portion	Order no.
Rail guide	GR-S-010 (10 g)
Dust seal band (Back side)	GR-S-020 (20 g)


Dimensions: Belt Drive

LEFB25/Motor top mounting type

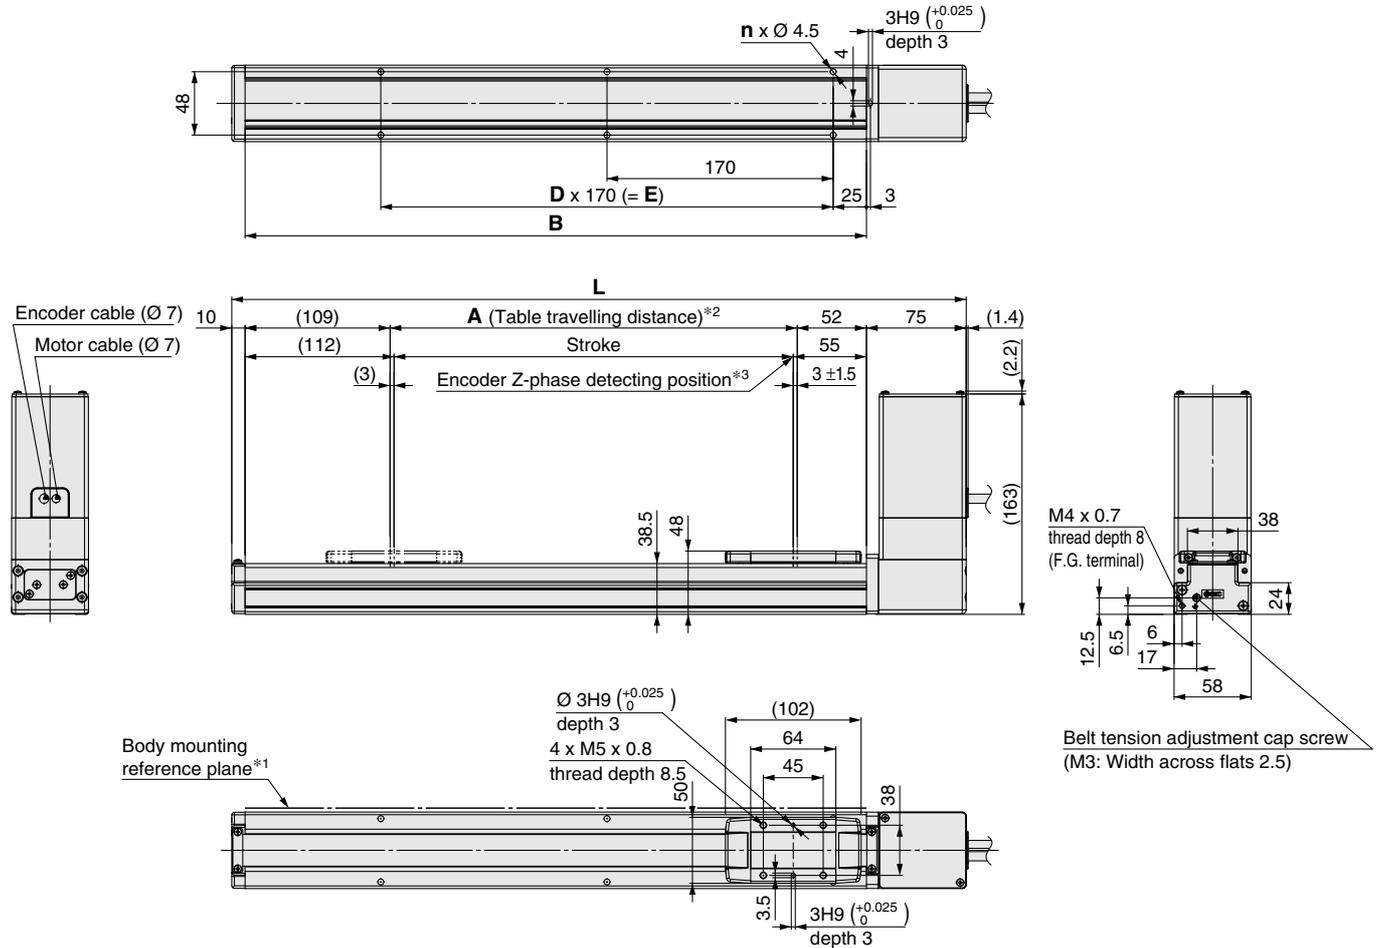

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Motor option: With lock

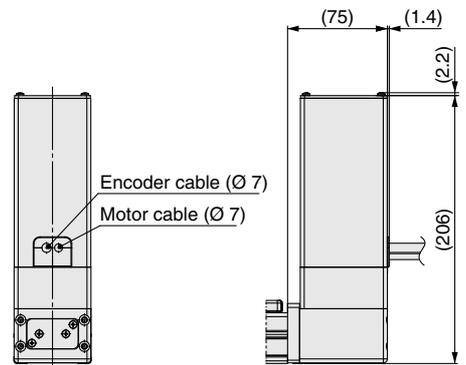

Dimensions

Model	L	A	B	n	D	E
LEFB25□S-300□	552	306	467	6	2	340
LEFB25□S-400□	652	406	567	8	3	510
LEFB25□S-500□	752	506	667	8	3	510
LEFB25□S-600□	852	606	767	10	4	680
LEFB25□S-700□	952	706	867	10	4	680
LEFB25□S-800□	1052	806	967	12	5	850
LEFB25□S-900□	1152	906	1067	14	6	1020
LEFB25□S-1000□	1252	1006	1167	14	6	1020
LEFB25□S-1100□	1352	1106	1267	16	7	1190
LEFB25□S-1200□	1452	1206	1367	16	7	1190
LEFB25□S-1300□	1552	1306	1467	18	8	1360
LEFB25□S-1400□	1652	1406	1567	20	9	1530
LEFB25□S-1500□	1752	1506	1667	20	9	1530
LEFB25□S-1600□	1852	1606	1767	22	10	1700
LEFB25□S-1700□	1952	1706	1867	22	10	1700
LEFB25□S-1800□	2052	1806	1967	24	11	1870
LEFB25□S-1900□	2152	1906	2067	24	11	1870
LEFB25□S-2000□	2252	2006	2167	26	12	2040


LEFB Series

AC Servo Motor

Dimensions: Belt Drive


LEFB25/Motor top mounting type

Positioning pin hole*1 (Option): Body bottom

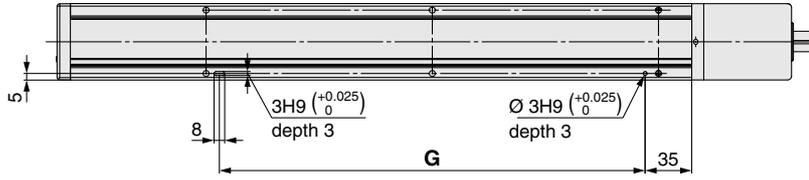

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

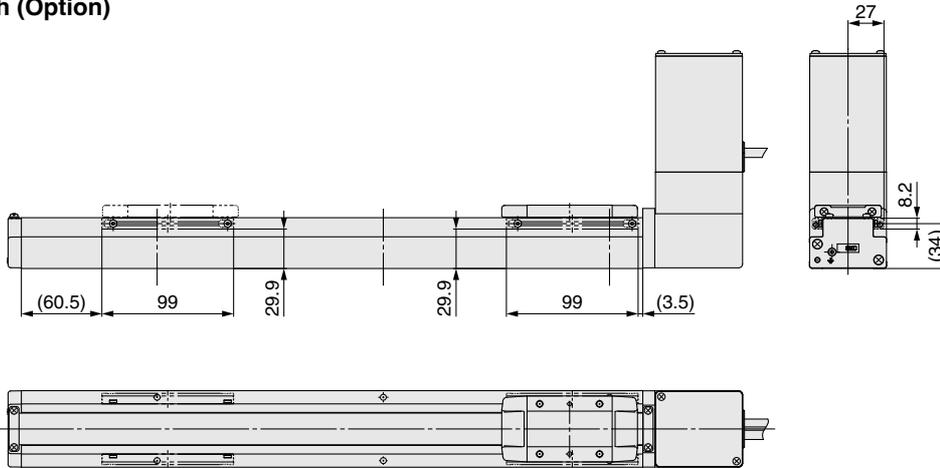


Dimensions [mm]

Model	G
LEFB25□S-300□	320
LEFB25□S-400□	490
LEFB25□S-500□	490
LEFB25□S-600□	660
LEFB25□S-700□	660
LEFB25□S-800□	830
LEFB25□S-900□	1000
LEFB25□S-1000□	1000
LEFB25□S-1100□	1170
LEFB25□S-1200□	1170
LEFB25□S-1300□	1340
LEFB25□S-1400□	1510
LEFB25□S-1500□	1510
LEFB25□S-1600□	1680
LEFB25□S-1700□	1680
LEFB25□S-1800□	1850
LEFB25□S-1900□	1850
LEFB25□S-2000□	2020

Dimensions: Belt Drive

LEFB25U/Motor bottom mounting type

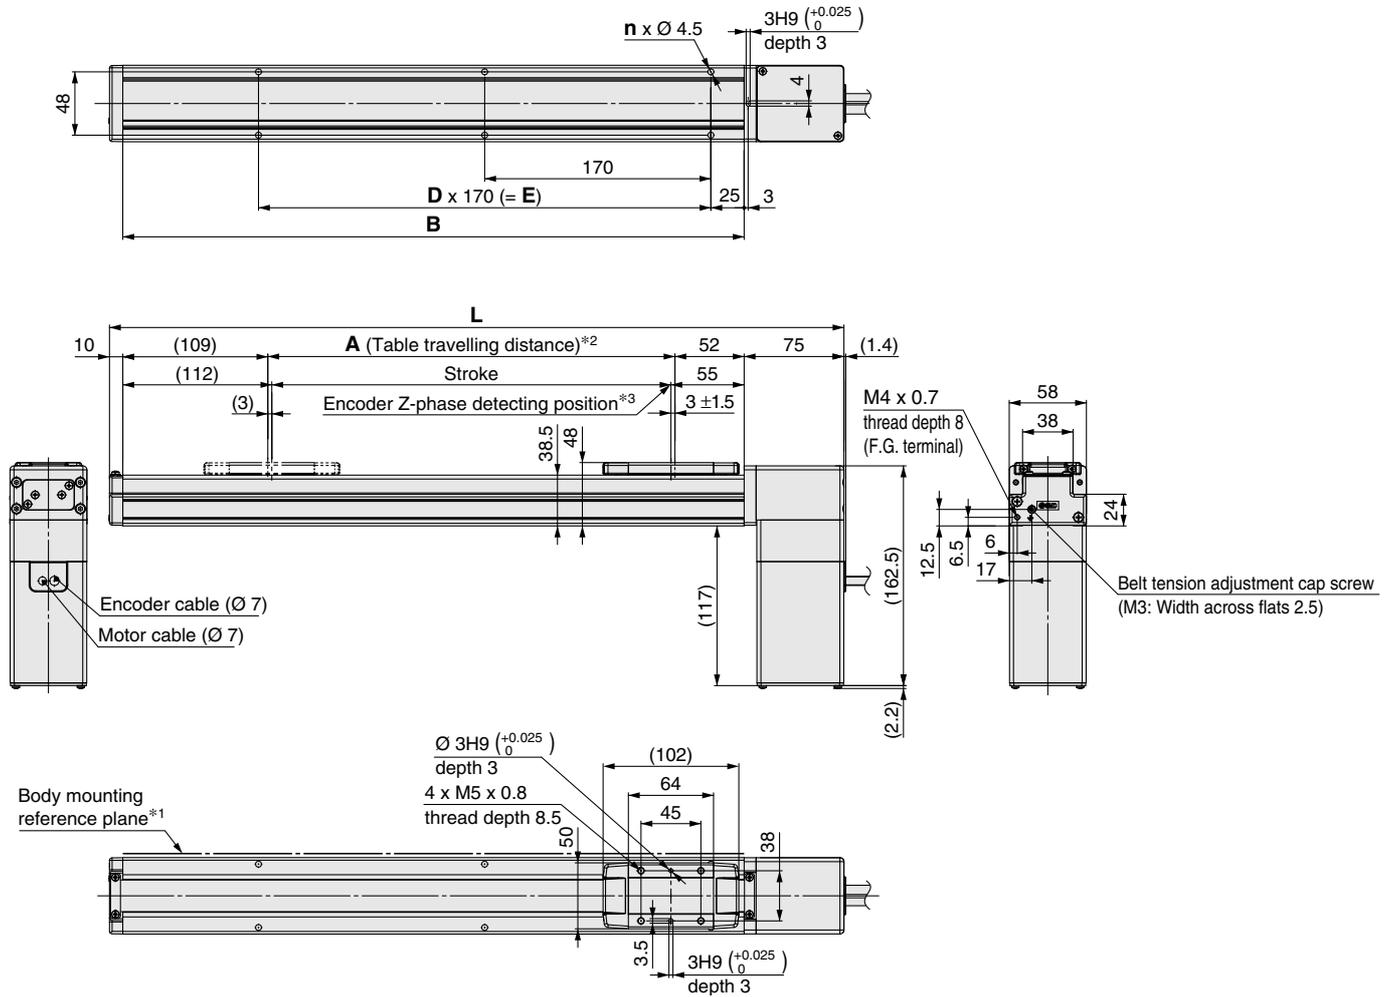


- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Dimensions

Model	L	A	B	n	D	E
LEFB25U□S-300□	552	306	467	6	2	340
LEFB25U□S-400□	652	406	567	8	3	510
LEFB25U□S-500□	752	506	667	8	3	510
LEFB25U□S-600□	852	606	767	10	4	680
LEFB25U□S-700□	952	706	867	10	4	680
LEFB25U□S-800□	1052	806	967	12	5	850
LEFB25U□S-900□	1152	906	1067	14	6	1020
LEFB25U□S-1000□	1252	1006	1167	14	6	1020
LEFB25U□S-1100□	1352	1106	1267	16	7	1190
LEFB25U□S-1200□	1452	1206	1367	16	7	1190
LEFB25U□S-1300□	1552	1306	1467	18	8	1360
LEFB25U□S-1400□	1652	1406	1567	20	9	1530
LEFB25U□S-1500□	1752	1506	1667	20	9	1530
LEFB25U□S-1600□	1852	1606	1767	22	10	1700
LEFB25U□S-1700□	1952	1706	1867	22	10	1700
LEFB25U□S-1800□	2052	1806	1967	24	11	1870
LEFB25U□S-1900□	2152	1906	2067	24	11	1870
LEFB25U□S-2000□	2252	2006	2167	26	12	2040

Motor option: With lock

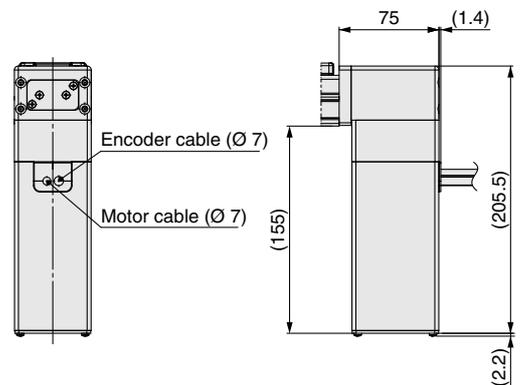


LEFB Series

AC Servo Motor

Dimensions: Belt Drive


LEFB25U/Motor bottom mounting type

Positioning pin hole*1 (Option): Body bottom

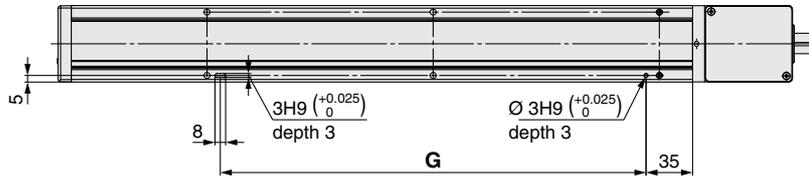

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

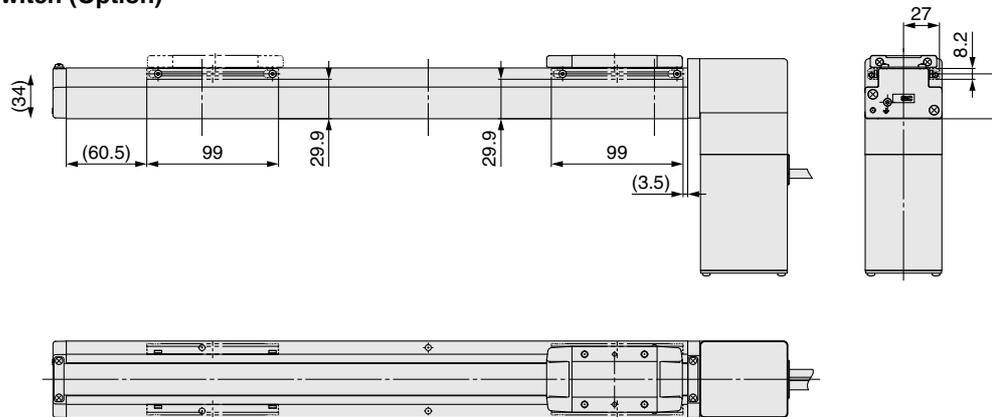

Dimensions

[mm]

Model	G
LEFB25U□S-300□	320
LEFB25U□S-400□	490
LEFB25U□S-500□	490
LEFB25U□S-600□	660
LEFB25U□S-700□	660
LEFB25U□S-800□	830
LEFB25U□S-900□	1000
LEFB25U□S-1000□	1000
LEFB25U□S-1100□	1170
LEFB25U□S-1200□	1170
LEFB25U□S-1300□	1340
LEFB25U□S-1400□	1510
LEFB25U□S-1500□	1510
LEFB25U□S-1600□	1680
LEFB25U□S-1700□	1680
LEFB25U□S-1800□	1850
LEFB25U□S-1900□	1850
LEFB25U□S-2000□	2020


LEFB Series

AC Servo Motor

Dimensions: Belt Drive


LEFB32/Motor top mounting type

Positioning pin hole*1 (Option): Body bottom

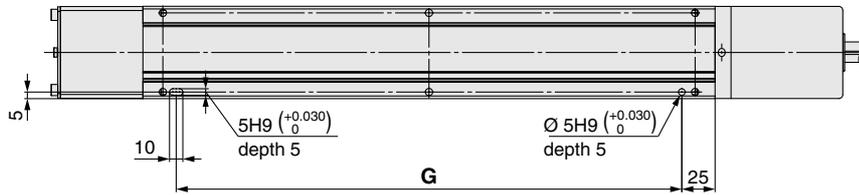

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

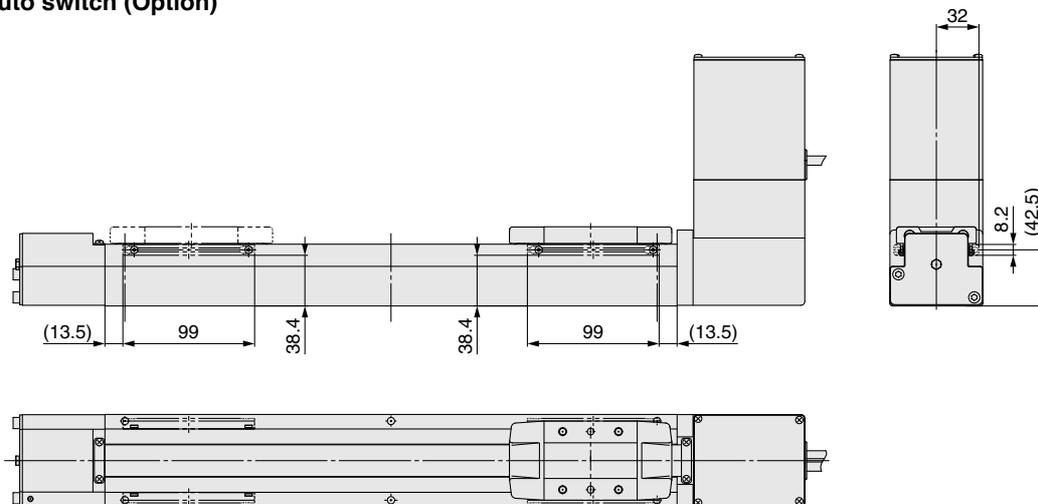


Dimensions [mm]

Model	G
LEFB32□S-300□	380
LEFB32□S-400□	380
LEFB32□S-500□	580
LEFB32□S-600□	580
LEFB32□S-700□	780
LEFB32□S-800□	780
LEFB32□S-900□	980
LEFB32□S-1000□	980
LEFB32□S-1100□	1180
LEFB32□S-1200□	1180
LEFB32□S-1300□	1380
LEFB32□S-1400□	1380
LEFB32□S-1500□	1580
LEFB32□S-1600□	1580
LEFB32□S-1700□	1780
LEFB32□S-1800□	1780
LEFB32□S-1900□	1980
LEFB32□S-2000□	1980
LEFB32□S-2500□	2580

Dimensions: Belt Drive

LEFB32U/Motor bottom mounting type

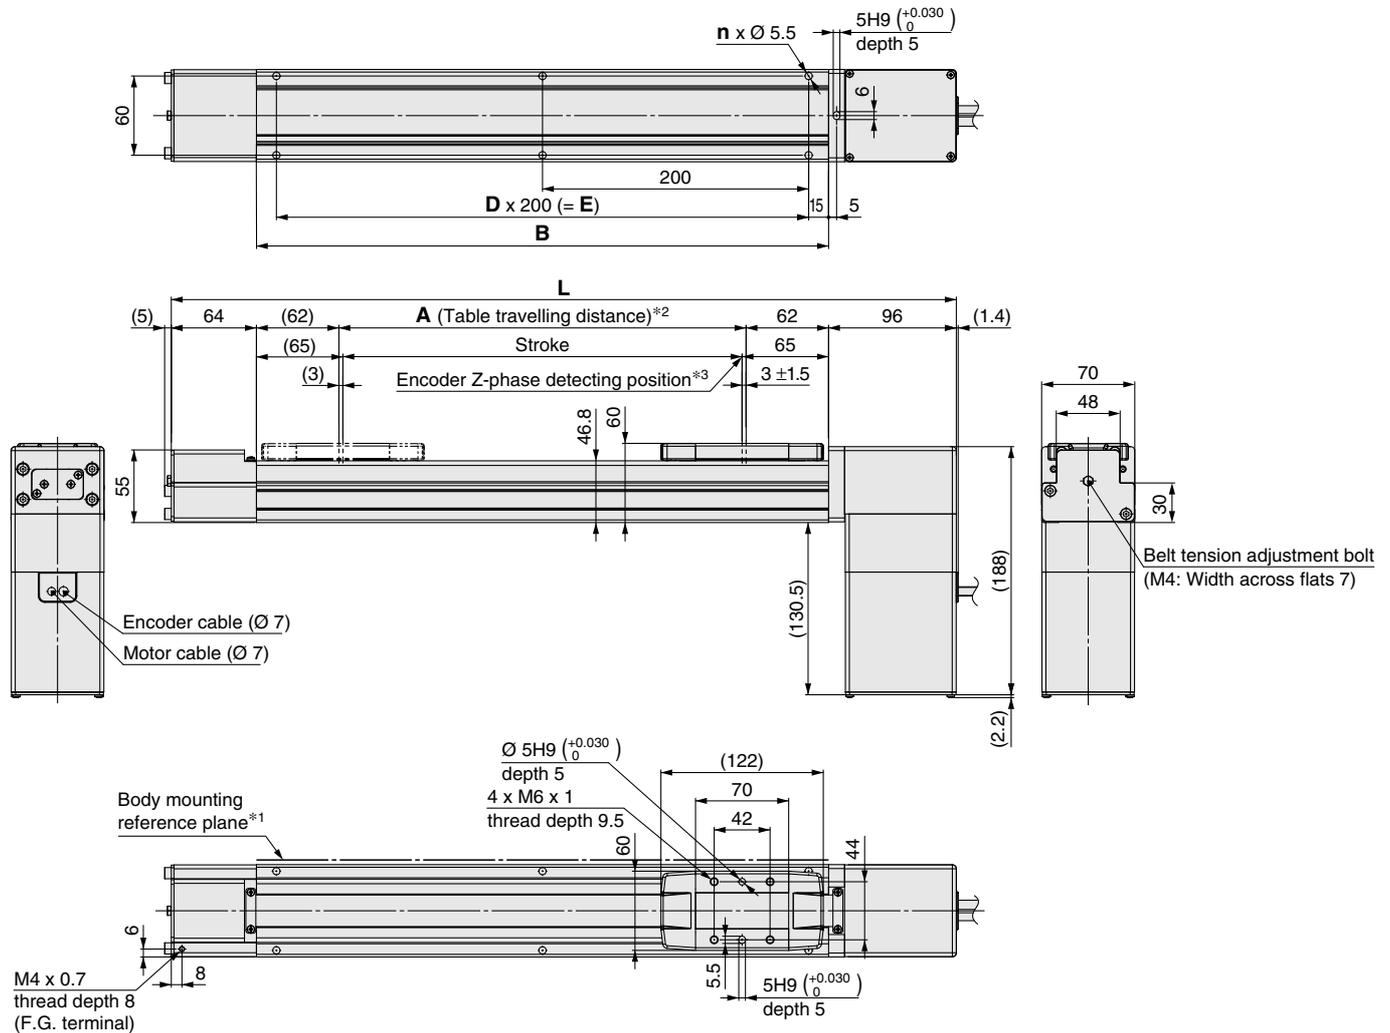


- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Dimensions [mm]

Model	L	A	B	n	D	E
LEFB32U□S-300□	590	306	430	6	2	400
LEFB32U□S-400□	690	406	530	6	2	400
LEFB32U□S-500□	790	506	630	8	3	600
LEFB32U□S-600□	890	606	730	8	3	600
LEFB32U□S-700□	990	706	830	10	4	800
LEFB32U□S-800□	1090	806	930	10	4	800
LEFB32U□S-900□	1190	906	1030	12	5	1000
LEFB32U□S-1000□	1290	1006	1130	12	5	1000
LEFB32U□S-1100□	1390	1106	1230	14	6	1200
LEFB32U□S-1200□	1490	1206	1330	14	6	1200
LEFB32U□S-1300□	1590	1306	1430	16	7	1400
LEFB32U□S-1400□	1690	1406	1530	16	7	1400
LEFB32U□S-1500□	1790	1506	1630	18	8	1600
LEFB32U□S-1600□	1890	1606	1730	18	8	1600
LEFB32U□S-1700□	1990	1706	1830	20	9	1800
LEFB32U□S-1800□	2090	1806	1930	20	9	1800
LEFB32U□S-1900□	2190	1906	2030	22	10	2000
LEFB32U□S-2000□	2290	2006	2130	22	10	2000
LEFB32U□S-2500□	2790	2506	2630	28	13	2600

Motor option: With lock

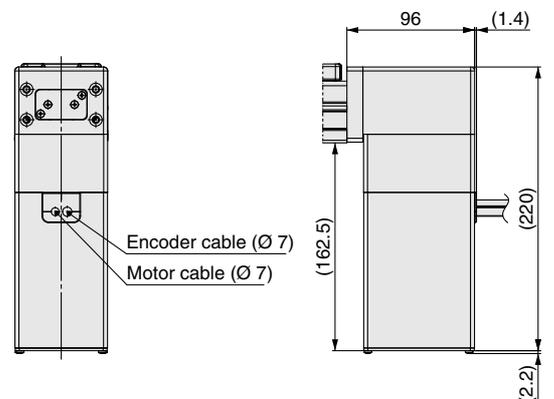


LEFB Series

AC Servo Motor

Dimensions: Belt Drive


LEFB32U/Motor bottom mounting type

Positioning pin hole*1 (Option): Body bottom

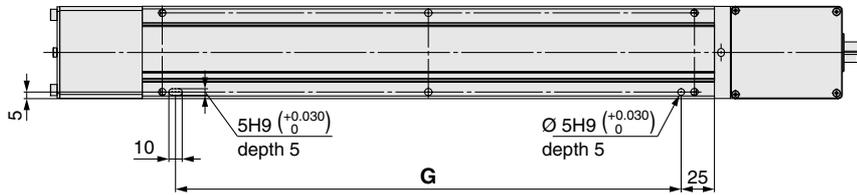

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

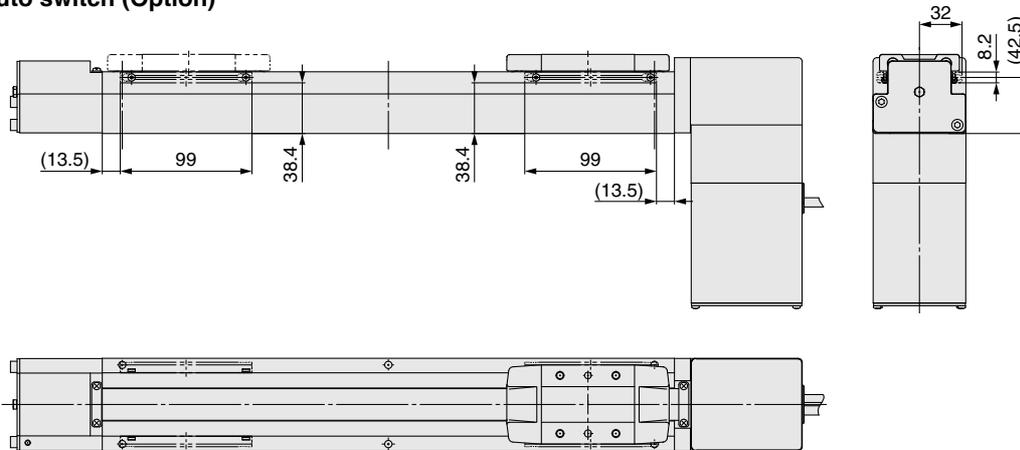


Dimensions

[mm]

Model	G
LEFB32U□S-300□	380
LEFB32U□S-400□	380
LEFB32U□S-500□	580
LEFB32U□S-600□	580
LEFB32U□S-700□	780
LEFB32U□S-800□	780
LEFB32U□S-900□	980
LEFB32U□S-1000□	980
LEFB32U□S-1100□	1180
LEFB32U□S-1200□	1180
LEFB32U□S-1300□	1380
LEFB32U□S-1400□	1380
LEFB32U□S-1500□	1580
LEFB32U□S-1600□	1580
LEFB32U□S-1700□	1780
LEFB32U□S-1800□	1780
LEFB32U□S-1900□	1980
LEFB32U□S-2000□	1980
LEFB32U□S-2500□	2580


Dimensions: Belt Drive

LEFB40/Motor top mounting type

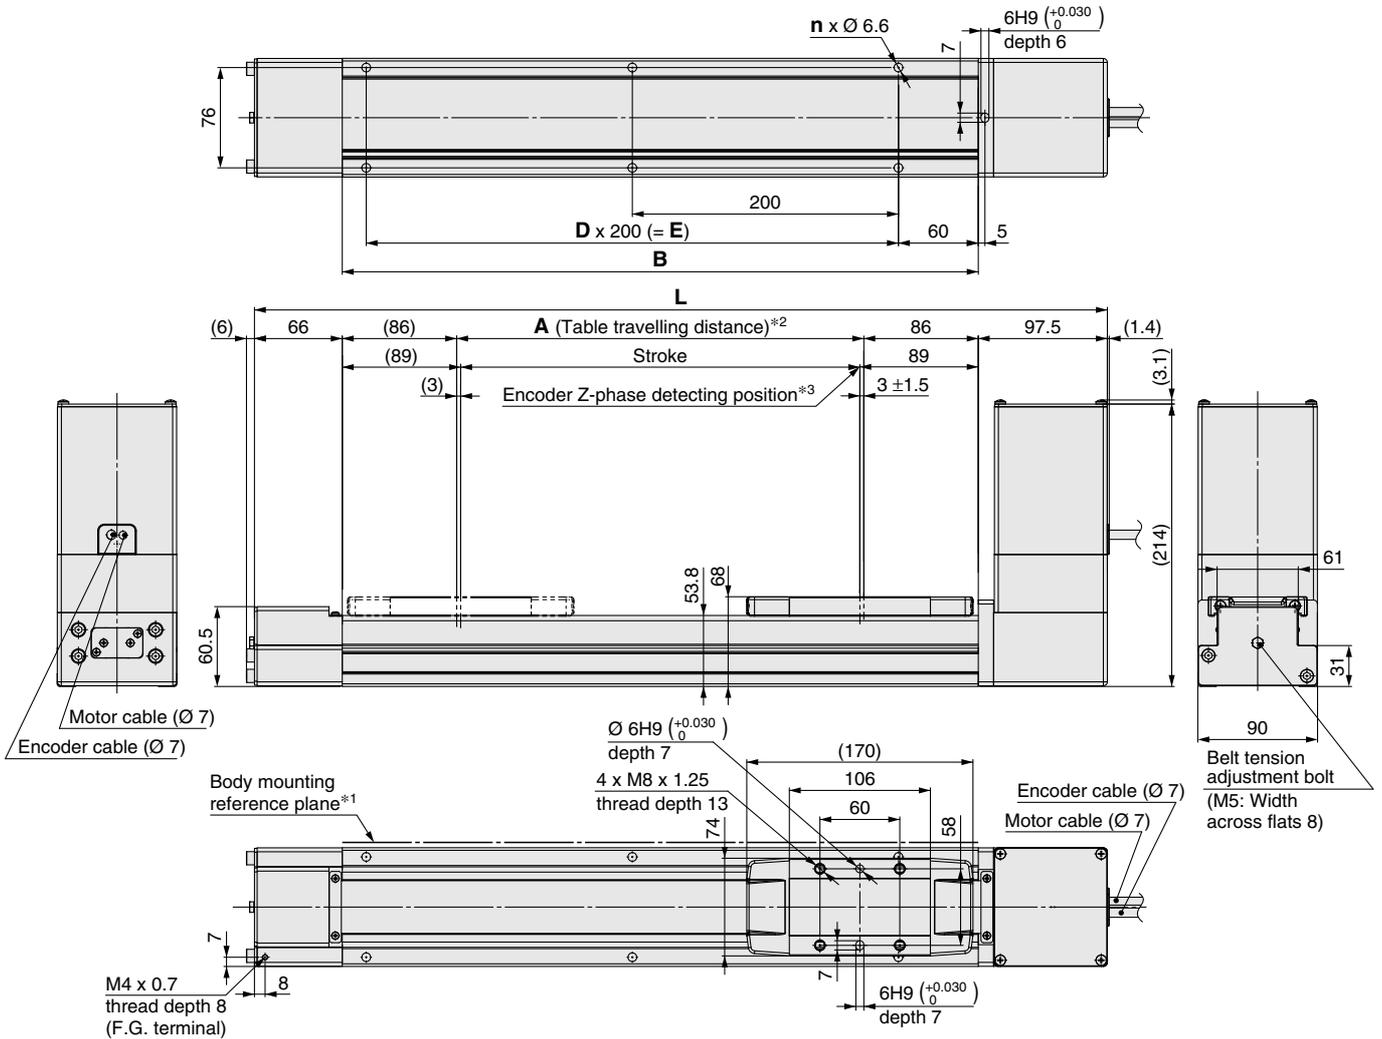

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Motor option: With lock

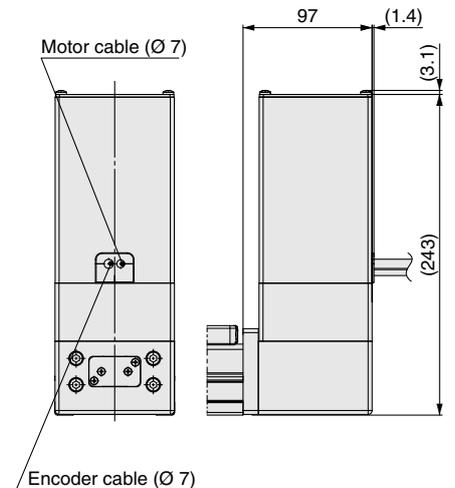

Dimensions

Model	L	A	B	n	D	E
LEFB40□S-300□	641.5	306	478	6	2	400
LEFB40□S-400□	741.5	406	578	6	2	400
LEFB40□S-500□	841.5	506	678	8	3	600
LEFB40□S-600□	941.5	606	778	8	3	600
LEFB40□S-700□	1041.5	706	878	10	4	800
LEFB40□S-800□	1141.5	806	978	10	4	800
LEFB40□S-900□	1241.5	906	1078	12	5	1000
LEFB40□S-1000□	1341.5	1006	1178	12	5	1000
LEFB40□S-1100□	1441.5	1106	1278	14	6	1200
LEFB40□S-1200□	1541.5	1206	1378	14	6	1200
LEFB40□S-1300□	1641.5	1306	1478	16	7	1400
LEFB40□S-1400□	1741.5	1406	1578	16	7	1400
LEFB40□S-1500□	1841.5	1506	1678	18	8	1600
LEFB40□S-1600□	1941.5	1606	1778	18	8	1600
LEFB40□S-1700□	2041.5	1706	1878	20	9	1800
LEFB40□S-1800□	2141.5	1806	1978	20	9	1800
LEFB40□S-1900□	2241.5	1906	2078	22	10	2000
LEFB40□S-2000□	2341.5	2006	2178	22	10	2000
LEFB40□S-2500□	2841.5	2506	2678	28	13	2600
LEFB40□S-3000□	3341.5	3006	3178	32	15	3000


LEFB Series

AC Servo Motor

Dimensions: Belt Drive


LEFB40/Motor top mounting type

Positioning pin hole*1 (Option): Body bottom

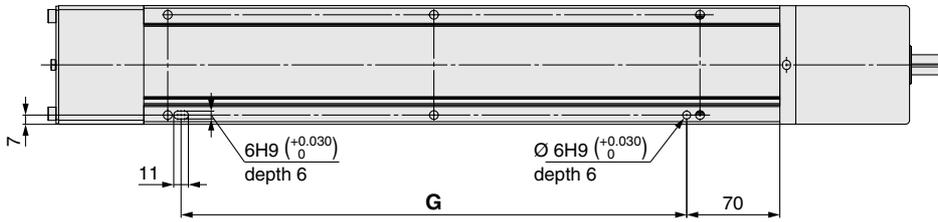

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

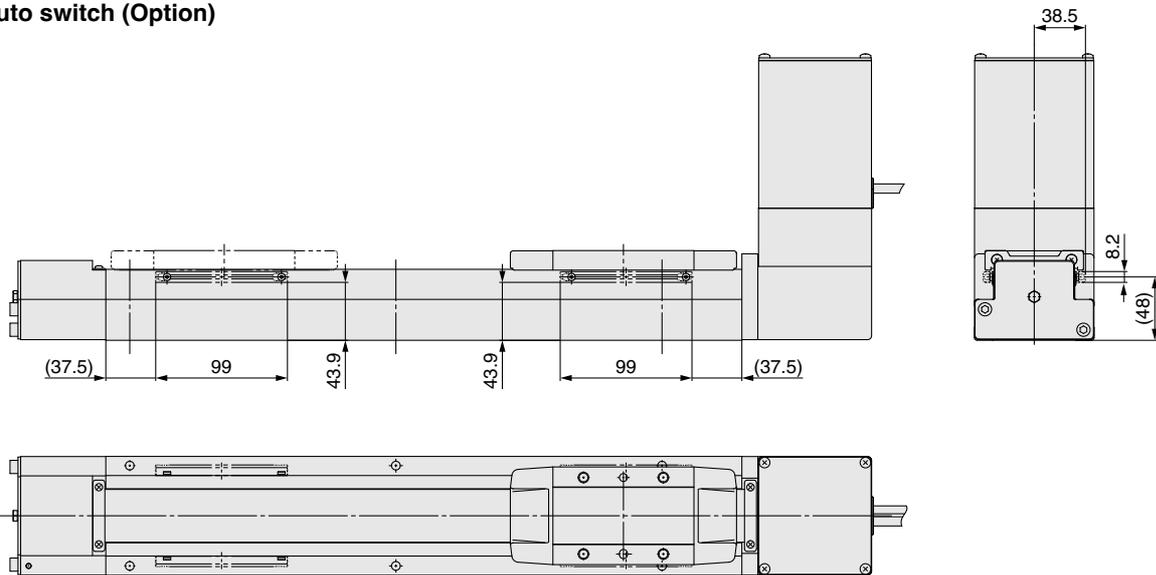


Dimensions

[mm]

Model	G
LEFB40□S-300□	380
LEFB40□S-400□	380
LEFB40□S-500□	580
LEFB40□S-600□	580
LEFB40□S-700□	780
LEFB40□S-800□	780
LEFB40□S-900□	980
LEFB40□S-1000□	980
LEFB40□S-1100□	1180
LEFB40□S-1200□	1180
LEFB40□S-1300□	1380
LEFB40□S-1400□	1380
LEFB40□S-1500□	1580
LEFB40□S-1600□	1580
LEFB40□S-1700□	1780
LEFB40□S-1800□	1780
LEFB40□S-1900□	1980
LEFB40□S-2000□	1980
LEFB40□S-2500□	2580
LEFB40□S-3000□	2980


Dimensions: Belt Drive

LEFB40U/Motor bottom mounting type

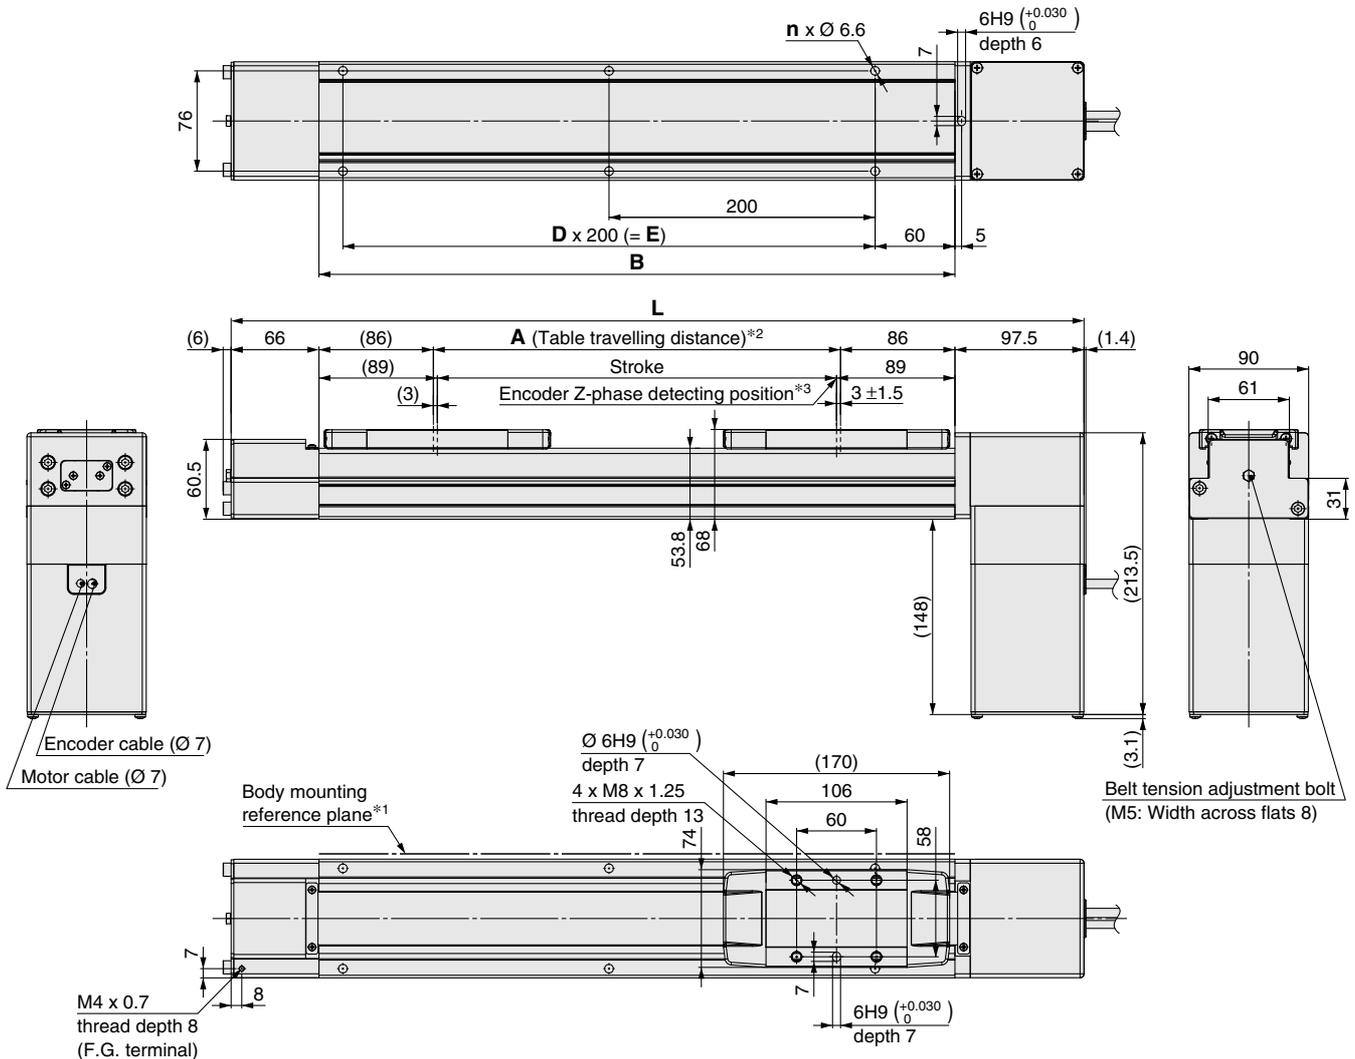

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side

Motor option: With lock

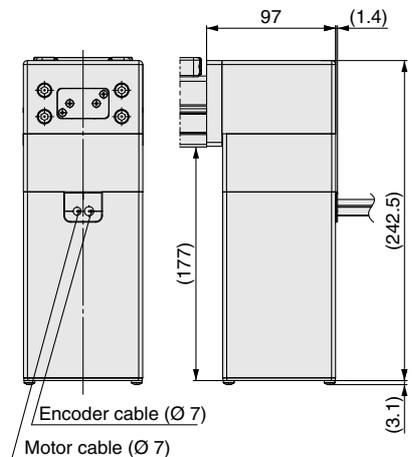

Dimensions [mm]

Model	L	A	B	n	D	E
LEFB40U□S-300□	641.5	306	478	6	2	400
LEFB40U□S-400□	741.5	406	578	6	2	400
LEFB40U□S-500□	841.5	506	678	8	3	600
LEFB40U□S-600□	941.5	606	778	8	3	600
LEFB40U□S-700□	1041.5	706	878	10	4	800
LEFB40U□S-800□	1141.5	806	978	10	4	800
LEFB40U□S-900□	1241.5	906	1078	12	5	1000
LEFB40U□S-1000□	1341.5	1006	1178	12	5	1000
LEFB40U□S-1100□	1441.5	1106	1278	14	6	1200
LEFB40U□S-1200□	1541.5	1206	1378	14	6	1200
LEFB40U□S-1300□	1641.5	1306	1478	16	7	1400
LEFB40U□S-1400□	1741.5	1406	1578	16	7	1400
LEFB40U□S-1500□	1841.5	1506	1678	18	8	1600
LEFB40U□S-1600□	1941.5	1606	1778	18	8	1600
LEFB40U□S-1700□	2041.5	1706	1878	20	9	1800
LEFB40U□S-1800□	2141.5	1806	1978	20	9	1800
LEFB40U□S-1900□	2241.5	1906	2078	22	10	2000
LEFB40U□S-2000□	2341.5	2006	2178	22	10	2000
LEFB40U□S-2500□	2841.5	2506	2678	28	13	2600
LEFB40U□S-3000□	3341.5	3006	3178	32	15	3000


LEFB Series

AC Servo Motor

Dimensions: Belt Drive


LEFB40U/Motor bottom mounting type

Positioning pin hole*1 (Option): Body bottom

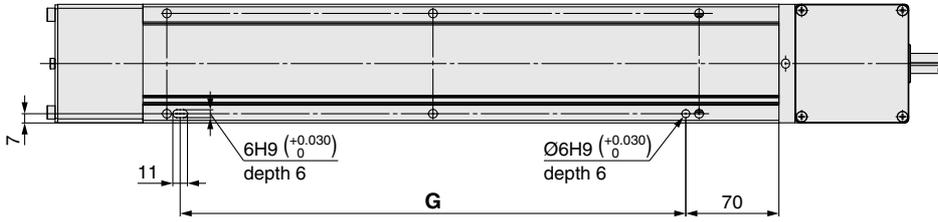

*1 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

With auto switch (Option)

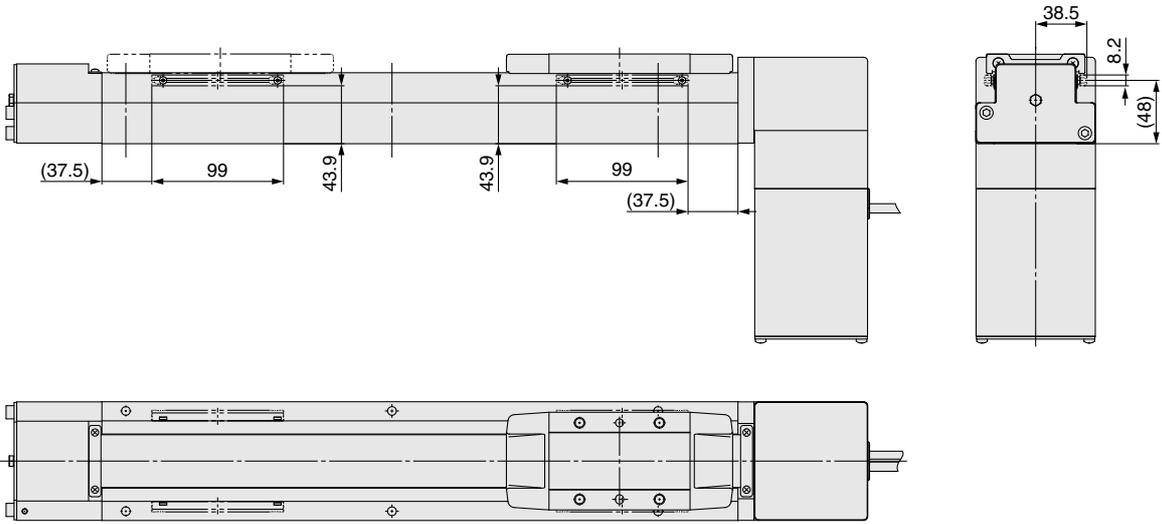

Dimensions [mm]


Model	G
LEFB40U□S-300□	380
LEFB40U□S-400□	380
LEFB40U□S-500□	580
LEFB40U□S-600□	580
LEFB40U□S-700□	780
LEFB40U□S-800□	780
LEFB40U□S-900□	980
LEFB40U□S-1000□	980
LEFB40U□S-1100□	1180
LEFB40U□S-1200□	1180
LEFB40U□S-1300□	1380
LEFB40U□S-1400□	1380
LEFB40U□S-1500□	1580
LEFB40U□S-1600□	1580
LEFB40U□S-1700□	1780
LEFB40U□S-1800□	1780
LEFB40U□S-1900□	1980
LEFB40U□S-2000□	1980
LEFB40U□S-2500□	2580
LEFB40U□S-3000□	2980

Support Guide for Belt Drive Actuator

LEFG Series LEFG16, 25, 32, 40

RoHS


Application example

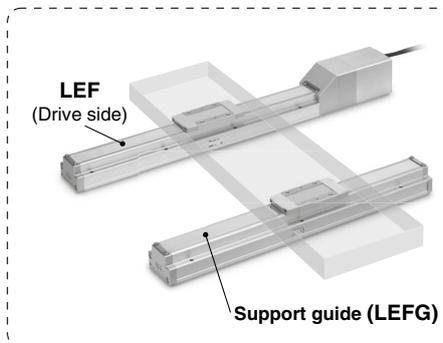

The support guide was designed to support workpieces with significant overhang.

- As the dimensions are the same as the LEF series body, installation is simple and contributes to a reduction in installation and assembly labour.
- The standard-equipped seal bands prevent grease from splashing and external foreign matter from entering.

How to Order

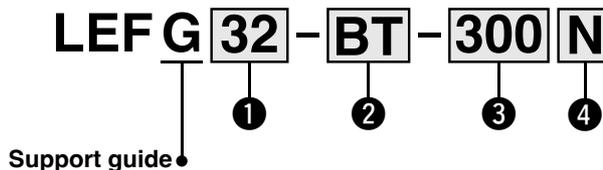

① Size

16
25
32
40

② Type of mounting pitch

Symbol	LEFG16	LEFG25	LEFG32	LEFG40	Applicable model	
BT	●	●	●	—	For belt drive	Step motor 24 VDC (Incremental, Battery-less absolute), Servo motor 24 VDC
BS	—	●	●	●		AC servo motor, Motorless

③ Stroke [mm]

300	300
to	to
3000	3000

④ Grease application (Seal band part)

—	With
N*1	Without (Roller specification)

*1 Only the mounting pitch type "BT" is applicable. All "BS" are roller specifications.

Applicable Stroke Table For Belt Drive/BT

Model \ Stroke [mm]	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
LEFG16-BT	●	—	—	—	●	—	●	—	●	—	●	—	●	—	●
LEFG25-BT	●	—	—	—	●	—	●	—	●	—	●	—	●	—	●
LEFG32-BT	●	—	—	—	●	—	●	—	●	—	●	—	●	—	●

Model \ Stroke [mm]	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
LEFG16-BT	—	—	—	—	—	—	—	—	—	—
LEFG25-BT	—	●	—	—	●	—	—	●	—	●
LEFG32-BT	—	●	—	—	●	—	—	●	—	●


For Belt Drive/BS

Model \ Stroke [mm]	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
LEFG25-BS	●	—	●	—	●	—	●	—	●	—	●	—	●	—	●
LEFG32-BS	●	—	●	—	●	—	●	—	●	—	●	—	●	—	●
LEFG40-BS	●	—	●	—	●	—	●	—	●	—	●	—	●	—	●

Model \ Stroke [mm]	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2500	3000
LEFG25-BS	●	●	●	●	●	●	●	●	●	●	—	—
LEFG32-BS	●	●	●	●	●	●	●	●	●	●	—	—
LEFG40-BS	●	●	●	●	●	●	●	●	●	●	—	—

Dimensions: For Belt Drive


LEFG25-BT

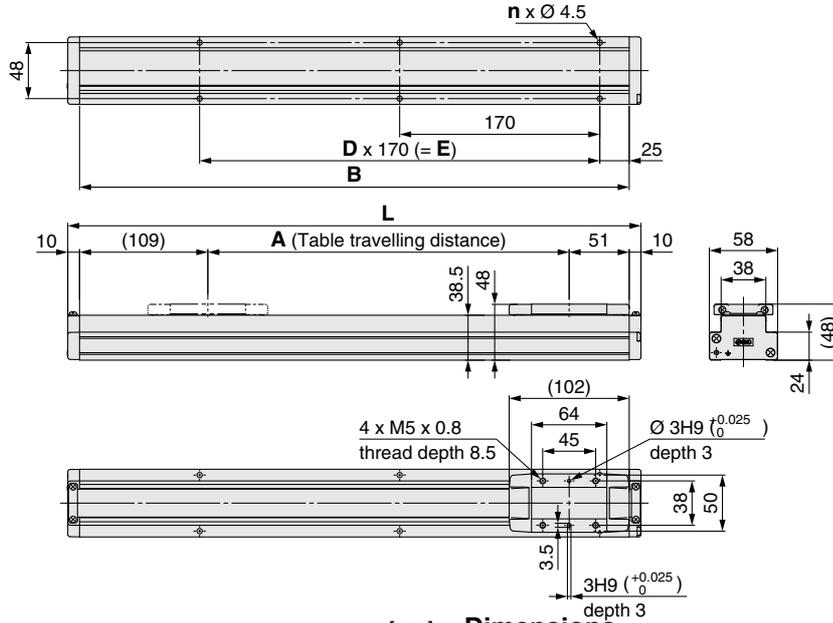

Dimensions [mm]						
Model	L	A	B	n	D	E
LEFG25-BT-300	487	307	467	6	2	340
LEFG25-BT-500	687	507	667	8	3	510
LEFG25-BT-600	787	607	767	10	4	680
LEFG25-BT-700	887	707	867			
LEFG25-BT-800	987	807	967	12	5	850
LEFG25-BT-900	1087	907	1067	14	6	1020
LEFG25-BT-1000	1187	1007	1167			

Dimensions [mm]						
Model	L	A	B	n	D	E
LEFG25-BT-1200	1387	1207	1367	16	7	1190
LEFG25-BT-1500	1687	1507	1667	20	9	1530
LEFG25-BT-1800	1987	1807	1967	24	11	1870
LEFG25-BT-2000	2187	2007	2167	26	12	2040

LEFG25-BS

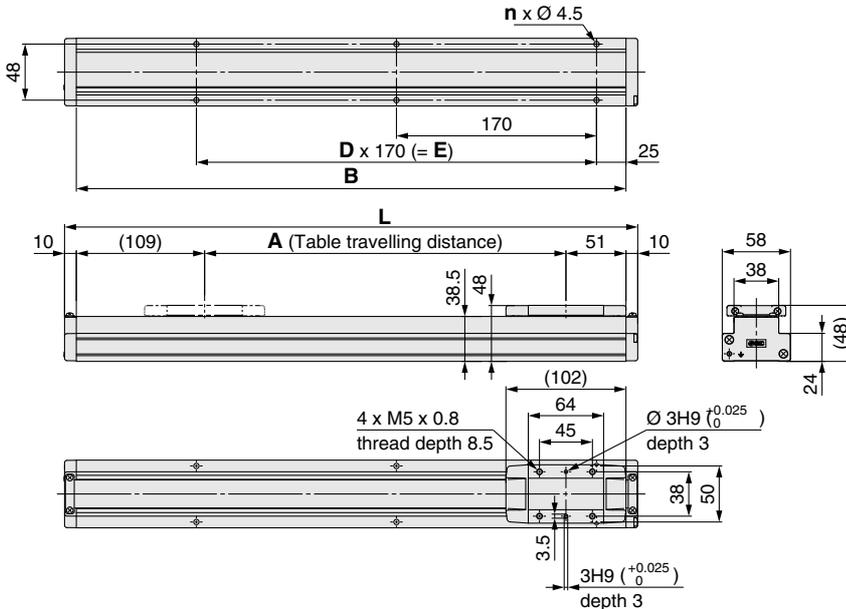


Dimensions [mm]						
Model	L	A	B	n	D	E
LEFG25-BS-300	487	307	467	6	2	340
LEFG25-BS-400	587	407	567	8	3	510
LEFG25-BS-500	687	507	667			
LEFG25-BS-600	787	607	767	10	4	680
LEFG25-BS-700	887	707	867			
LEFG25-BS-800	987	807	967	12	5	850
LEFG25-BS-900	1087	907	1067	14	6	1020
LEFG25-BS-1000	1187	1007	1167			
LEFG25-BS-1100	1287	1107	1267	16	7	1190
LEFG25-BS-1200	1387	1207	1367			

Dimensions [mm]						
Model	L	A	B	n	D	E
LEFG25-BS-1300	1487	1307	1467	18	8	1360
LEFG25-BS-1400	1587	1407	1567	20	9	1530
LEFG25-BS-1500	1687	1507	1667			
LEFG25-BS-1600	1787	1607	1767	22	10	1700
LEFG25-BS-1700	1887	1707	1867			
LEFG25-BS-1800	1987	1807	1967	24	11	1870
LEFG25-BS-1900	2087	1907	2067			
LEFG25-BS-2000	2187	2007	2167	26	12	2040

LEFG Series

Dimensions: For Belt Drive


LEFG32-BT

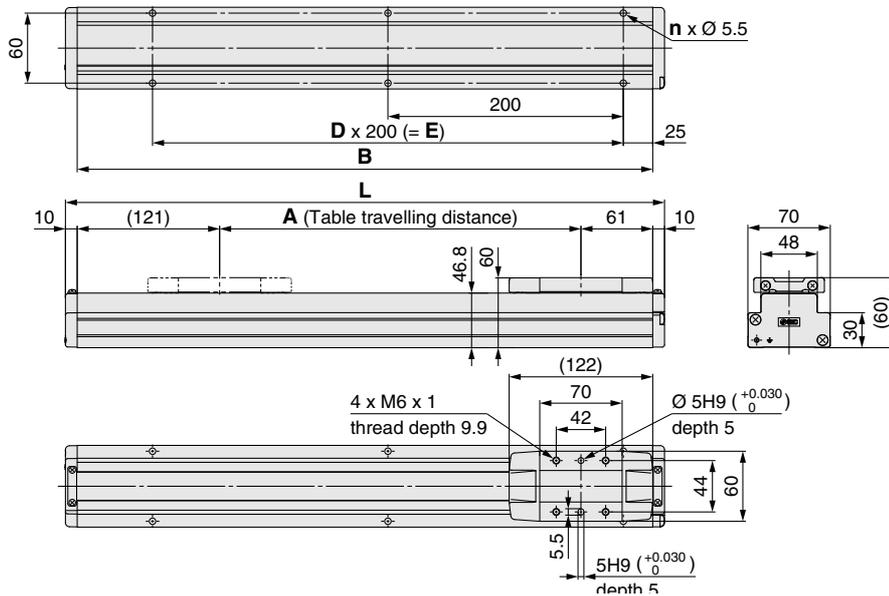

Model	L	A	B	n	D	E
LEFG32-BT-300	509	307	489	6	2	400
LEFG32-BT-500	709	507	689	8	3	600
LEFG32-BT-600	809	607	789	10	4	800
LEFG32-BT-700	909	707	889	12	5	1000
LEFG32-BT-800	1009	807	989			
LEFG32-BT-900	1109	907	1089			
LEFG32-BT-1000	1209	1007	1189			

Model	L	A	B	n	D	E
LEFG32-BT-1200	1409	1207	1389	14	6	1200
LEFG32-BT-1500	1709	1507	1689	18	8	1600
LEFG32-BT-1800	2009	1807	1989	20	9	1800
LEFG32-BT-2000	2209	2007	2189	22	10	2000

LEFG32-BS

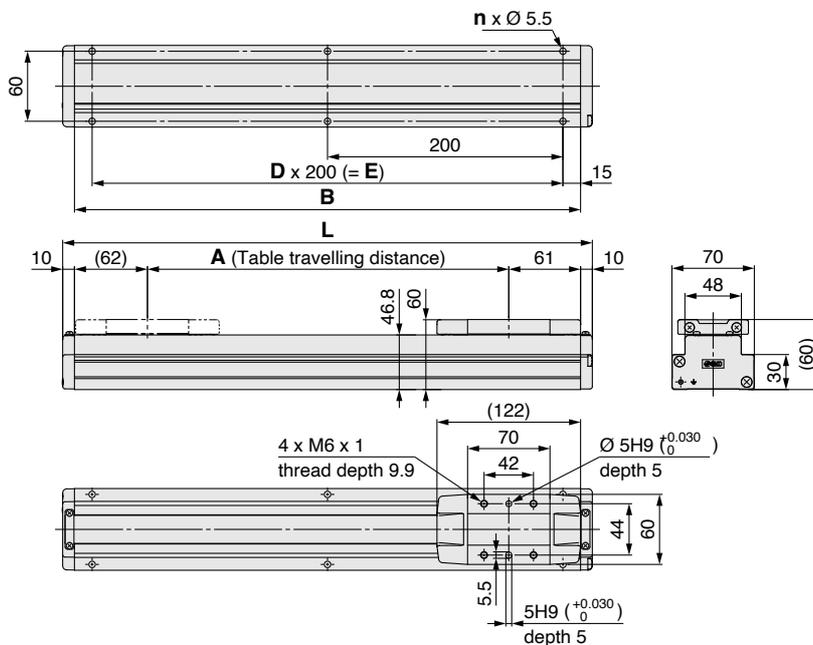


Model	L	A	B	n	D	E
LEFG32-BS-300	450	307	430	6	2	400
LEFG32-BS-400	550	407	530	8	3	600
LEFG32-BS-500	650	507	630	10	4	800
LEFG32-BS-600	750	607	730	12	5	1000
LEFG32-BS-700	850	707	830	14	6	1200
LEFG32-BS-800	950	807	930	16	7	1400
LEFG32-BS-900	1050	907	1030	18	8	1600
LEFG32-BS-1000	1150	1007	1130	20	9	1800
LEFG32-BS-1100	1250	1107	1230	22	10	2000
LEFG32-BS-1200	1350	1207	1330	28	13	2600

Model	L	A	B	n	D	E
LEFG32-BS-1300	1450	1307	1430	16	7	1400
LEFG32-BS-1400	1550	1407	1530	18	8	1600
LEFG32-BS-1500	1650	1507	1630	20	9	1800
LEFG32-BS-1600	1750	1607	1730	22	10	2000
LEFG32-BS-1700	1850	1707	1830	24	11	2200
LEFG32-BS-1800	1950	1807	1930	26	12	2400
LEFG32-BS-1900	2050	1907	2030	28	13	2600
LEFG32-BS-2000	2150	2007	2130			
LEFG32-BS-2500	2650	2507	2630			

Dimensions: For Belt Drive

LEFG40-BS

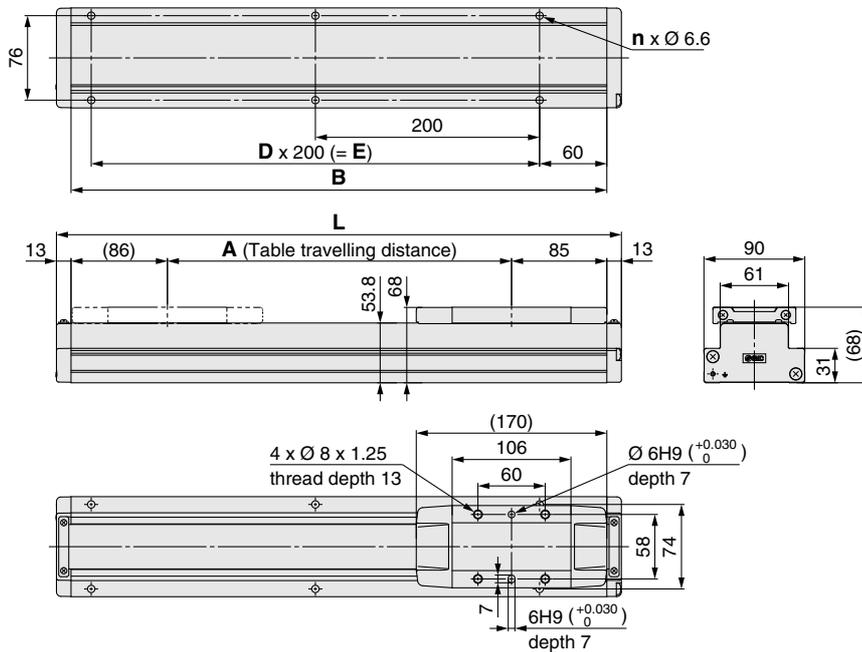


Dimensions							[mm]
Model	L	A	B	n	D	E	
LEFG40-BS-300	504	307	478	6	2	400	
LEFG40-BS-400	604	407	578	6	2	400	
LEFG40-BS-500	704	507	678	8	3	600	
LEFG40-BS-600	804	607	778	8	3	600	
LEFG40-BS-700	904	707	878	10	4	800	
LEFG40-BS-800	1004	807	978	10	4	800	
LEFG40-BS-900	1104	907	1078	12	5	1000	
LEFG40-BS-1000	1204	1007	1178	12	5	1000	
LEFG40-BS-1100	1304	1107	1278	14	6	1200	
LEFG40-BS-1200	1404	1207	1378	14	6	1200	

Dimensions							[mm]
Model	L	A	B	n	D	E	
LEFG40-BS-1300	1504	1307	1478	16	7	1400	
LEFG40-BS-1400	1604	1407	1578	16	7	1400	
LEFG40-BS-1500	1704	1507	1678	18	8	1600	
LEFG40-BS-1600	1804	1607	1778	18	8	1600	
LEFG40-BS-1700	1904	1707	1878	20	9	1800	
LEFG40-BS-1800	2004	1807	1978	20	9	1800	
LEFG40-BS-1900	2104	1907	2078	22	10	2000	
LEFG40-BS-2000	2204	2007	2178	22	10	2000	
LEFG40-BS-2500	2704	2507	2678	28	13	2600	
LEFG40-BS-3000	3204	3007	3178	32	15	3000	

LEF□/□E/□F Series Auto Switch Mounting

Auto Switch Mounting Position

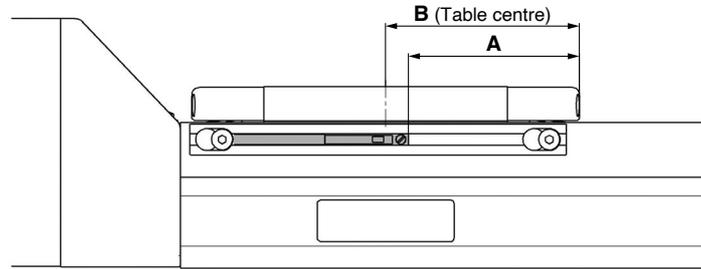


Model	Size	A	B	Operating range
LEFS LEFB	25	45	51	4.9
	32	55	61	3.9
	40	79	85	5.3

- * The applicable auto switch is D-M9 (N/P/B) (W) (M/L/Z).
- * The operating range is a guideline including hysteresis, not meant to be guaranteed. There may be large variations depending on the ambient environment.
- * Adjust the auto switch after confirming the operating conditions in the actual setting.

Auto Switch Mounting

Rotate the bolts for auto switch mounting bracket three to four times to loosen them (Removing them is not required), and slide and remove the auto switch mounting bracket. Then, insert a switch into the groove on the mounting bracket.

As the mounting bolts for installing the product body interfere with the auto switch mounting bracket, mount the auto switch mounting bracket after installing the product body. After installing product body, tighten the bolts for the auto switch mounting bracket.

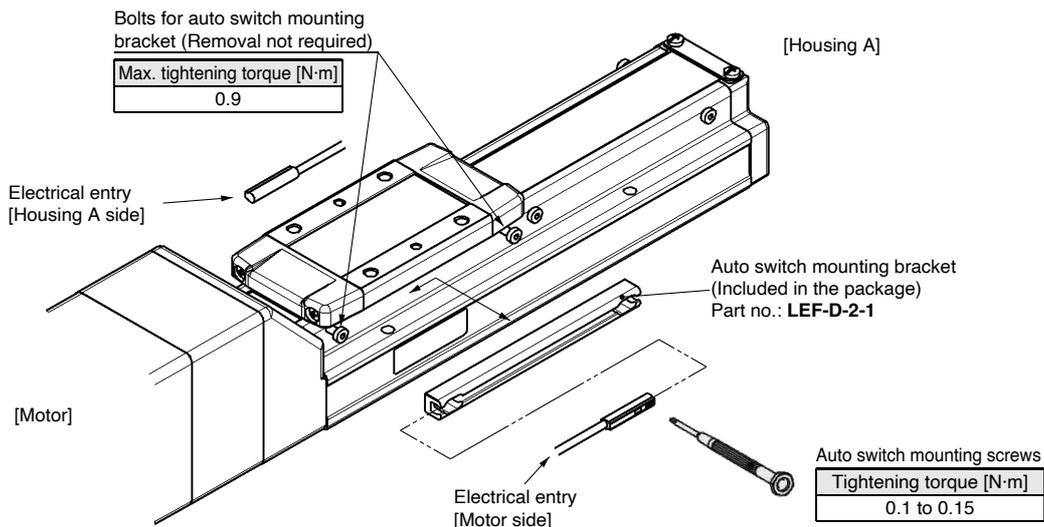

- * The applicable auto switch is D-M9 (N/P/B) (W) (M/L/Z).
- * The direction of the lead wire entry is specified. If it is mounted in the opposite direction, the auto switch may malfunction.
- * Tighten the auto switch mounting screws (provided together with the auto switch), using a precision screwdriver with a handle diameter of approximately 5 to 6 mm.
- * If more than two auto switch mounting brackets are required, please order them separately. All eight bolts for attaching the auto switch mounting bracket at the stroke end are tightened into the body when the product is shipped.
For 50-mm stroke type, only four bolts are tightened on the motor side.

Solid State Auto Switch Direct Mounting Type D-M9N/D-M9P/D-M9B



Refer to the SMC website for details on products that are compliant with international standards.

Grommet

- 2-wire load current is reduced (2.5 to 40 mA).
- Using flexible cable as standard spec.



Caution

Precautions

Fix the auto switch with the existing screw installed on the auto switch body. The auto switch may be damaged if a screw other than the one supplied is used.

Auto Switch Specifications

PLC: Programmable Logic Controller

D-M9□ (With indicator light)			
Auto switch model	D-M9N	D-M9P	D-M9B
Electrical entry direction	In-line		
Wiring type	3-wire		2-wire
Output type	NPN	PNP	—
Applicable load	IC circuit, Relay, PLC		24 VDC relay, PLC
Power supply voltage	5, 12, 24 VDC (4.5 to 28 V)		—
Current consumption	10 mA or less		—
Load voltage	28 VDC or less	—	24 VDC (10 to 28 VDC)
Load current	40 mA or less		2.5 to 40 mA
Internal voltage drop	0.8 V or less at 10 mA (2 V or less at 40 mA)		4 V or less
Leakage current	100 μA or less at 24 VDC		0.8 mA or less
Indicator light	Red LED illuminates when turned ON.		
Standard	CE/UKCA marking		

Oilproof Flexible Heavy-duty Lead Wire Specifications

Auto switch model		D-M9N	D-M9P	D-M9B
Sheath	Outside diameter [mm]	Ø 2.6		
Insulator	Number of cores	3 cores (Brown/Blue/Black)		2 cores (Brown/Blue)
	Outside diameter [mm]	Ø 0.88		
Conductor	Effective area [mm ²]	0.15		
	Strand diameter [mm]	Ø 0.05		
Min. bending radius [mm] (Reference values)		17		

* Refer to www.smc.eu for solid state auto switch common specifications.

* Refer to www.smc.eu for lead wire lengths.

Weight


[g]

Auto switch model		D-M9N	D-M9P	D-M9B
Lead wire length	0.5 m (—)	8	—	7
	1 m (M)	14	—	13
	3 m (L)	41	—	38
	5 m (Z)	68	—	63

Dimensions

[mm]

D-M9□

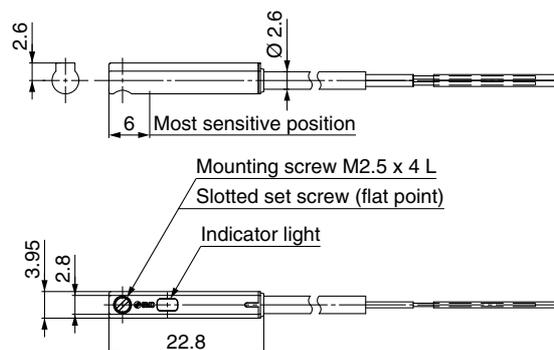

Normally Closed Solid State Auto Switch Direct Mounting Type D-M9NE(V)/D-M9PE(V)/D-M9BE(V)



Refer to the SMC website for details on products that are compliant with international standards.


Auto Switch Specifications

PLC: Programmable Logic Controller

D-M9□E, D-M9□EV (With indicator light)						
Auto switch model	D-M9NE	D-M9NEV	D-M9PE	D-M9PEV	D-M9BE	D-M9BEV
Electrical entry direction	In-line	Perpendicular	In-line	Perpendicular	In-line	Perpendicular
Wiring type	3-wire				2-wire	
Output type	NPN		PNP		—	
Applicable load	IC circuit, Relay, PLC				24 VDC relay, PLC	
Power supply voltage	5, 12, 24 VDC (4.5 to 28 V)				—	
Current consumption	10 mA or less				—	
Load voltage	28 VDC or less		—		24 VDC (10 to 28 VDC)	
Load current	40 mA or less				2.5 to 40 mA	
Internal voltage drop	0.8 V or less at 10 mA (2 V or less at 40 mA)				4 V or less	
Leakage current	100 μA or less at 24 VDC				0.8 mA or less	
Indicator light	Red LED illuminates when turned ON.					
Standard	CE/UKCA marking					

Grommet

- Output signal turns on when no magnetic force is detected.
- Can be used for the actuator adopted by the solid state auto switch D-M9 series (excluding special order products)

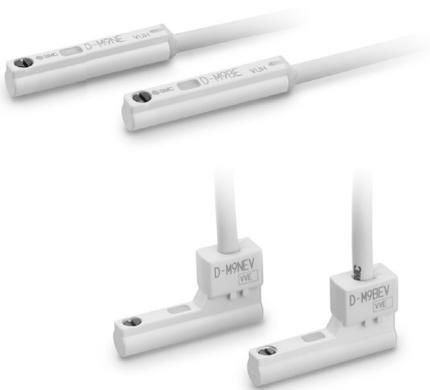

Oilproof Flexible Heavy-duty Lead Wire Specifications

Auto switch model	D-M9NE(V)	D-M9PE(V)	D-M9BE(V)
Sheath	Outside diameter [mm] \varnothing 2.6		
Insulator	Number of cores		2 cores (Brown/Blue)
	Outside diameter [mm]		\varnothing 0.88
Conductor	Effective area [mm ²]		0.15
	Strand diameter [mm]		\varnothing 0.05
Min. bending radius [mm] (Reference values)			
17			

- * Refer to www.smc.eu for solid state auto switch common specifications.
- * Refer to www.smc.eu for lead wire lengths.

Caution

Precautions

Fix the auto switch with the existing screw installed on the auto switch body. The auto switch may be damaged if a screw other than the one supplied is used.

Weight

[g]


Auto switch model	D-M9NE(V)	D-M9PE(V)	D-M9BE(V)
Lead wire length	0.5 m (—)	8	7
	1 m (M)*1	14	13
	3 m (L)	41	38
	5 m (Z)*1	68	63

*1 The 1 m and 5 m options are produced upon receipt of order.


Dimensions

[mm]

D-M9□E

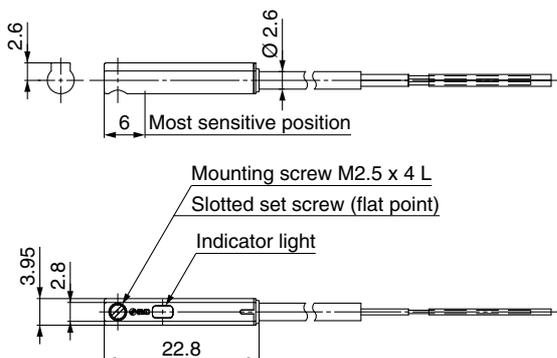

D-M9□EV

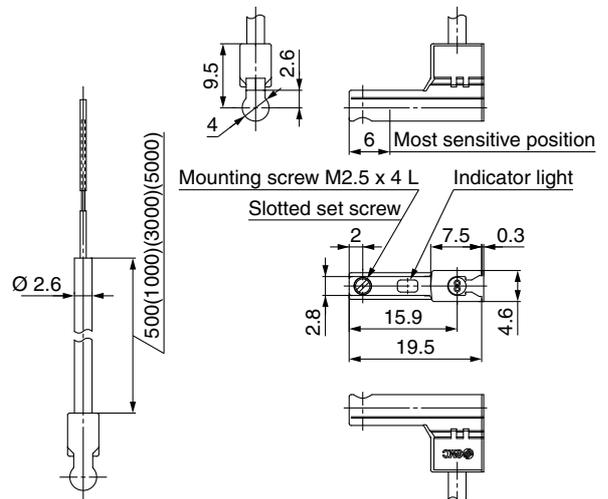

2-Colour Indicator Solid State Auto Switch Direct Mounting Type D-M9NW/D-M9PW/D-M9BW



Refer to the SMC website for details on products that are compliant with international standards.

PLC: Programmable Logic Controller

Grommet

- 2-wire load current is reduced (2.5 to 40 mA).
- Using flexible cable as standard spec.
- The proper operating range can be determined by the colour of the light. (Red → Green ← Red)



Caution

Precautions

Fix the auto switch with the existing screw installed on the auto switch body. The auto switch may be damaged if a screw other than the one supplied is used.

Auto Switch Specifications

D-M9□W (With indicator light)			
Auto switch model	D-M9NW	D-M9PW	D-M9BW
Electrical entry direction	In-line		
Wiring type	3-wire		2-wire
Output type	NPN	PNP	—
Applicable load	IC circuit, Relay, PLC		24 VDC relay, PLC
Power supply voltage	5, 12, 24 VDC (4.5 to 28 V)		—
Current consumption	10 mA or less		
Load voltage	28 VDC or less	—	24 VDC (10 to 28 VDC)
Load current	40 mA or less		2.5 to 40 mA
Internal voltage drop	0.8 V or less at 10 mA (2 V or less at 40 mA)		4 V or less
Leakage current	100 μA or less at 24 VDC		0.8 mA or less
Indicator light	Operating range Red LED illuminates. Proper operating range Green LED illuminates.		
Standard	CE/UKCA marking		

Oilproof Flexible Heavy-duty Lead Wire Specifications

Auto switch model		D-M9NW	D-M9PW	D-M9BW
Sheath	Outside diameter [mm]	Ø 2.6		
Insulator	Number of cores	3 cores (Brown/Blue/Black)		2 cores (Brown/Blue)
	Outside diameter [mm]	Ø 0.88		
Conductor	Effective area [mm ²]	0.15		
	Strand diameter [mm]	Ø 0.05		
Min. bending radius [mm] (Reference values)		17		

- * Refer to www.smc.eu for solid state auto switch common specifications.
- * Refer to www.smc.eu for lead wire lengths.

Weight


[g]

Auto switch model		D-M9NW	D-M9PW	D-M9BW
Lead wire length	0.5 m (—)	8	7	7
	1 m (M)	14	13	13
	3 m (L)	41	38	38
	5 m (Z)	68	63	63

Dimensions

[mm]

D-M9□W

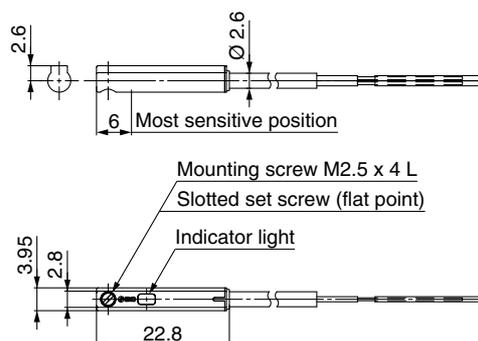



LEF Series Specific Product Precautions 1

Be sure to read this before handling the products.

Design

⚠ Caution

- 1. Do not apply a load in excess of the specification limits.**
Select a suitable actuator by work load and allowable moment. If a load in excess of the specification limits is applied to the guide, adverse effects such as the generation of play in the guide, reduced accuracy, or reduced service life of the product may occur.
- 2. Do not use the product in applications where excessive external force or impact force is applied to it.**
This can cause a malfunction.


Selection

⚠ Warning

- 1. Do not increase the speed in excess of the specification limits.**
Select a suitable actuator by the relationship between the allowable work load and speed, and the allowable speed of each stroke. If the product is used outside of the specification limits, adverse effects such as the generation of noise, reduced accuracy, or reduced service life of the product may occur.
- 2. Do not use the product in applications where excessive external force or impact force is applied to it.**
This can cause a malfunction.
- 3. When the product repeatedly cycles with partial strokes (see the table below), operate it at a full stroke at least once every few dozen cycles.**
Failure to do so may result in the product running out of lubrication.

Model	Partial stroke
LEF□16	40 mm or less
LEF□25	65 mm or less
LEF□32	70 mm or less
LEF□40	105 mm or less

- 4. When external force is to be applied to the table, it is necessary to add the external force to the work load as the total carried load when selecting a size.**
When a cable duct or flexible moving tube is attached to the actuator, the sliding resistance of the table will increase, which may lead to the malfunction of the product.
- 5. When the stroke exceeds 2000 mm, a joint needs to be added to the guide rail for extension. When passing over the joint, slight vibration may occur.**



Size	Stroke	A
32	2500	370
	3000	820
40	2500	320
	3000	820

Handling


⚠ Caution

- 1. Set the [In position] in the step data to at least 0.5 (at least 1 for the belt type).**
If it is set any lower, the completion signal of the [In position] may not be properly output.

Handling

⚠ Caution

- 2. INP output signal**
 - 1) Positioning operation**
When the product comes within the set range of the step data [In position], the INP output signal will turn ON.
Initial value: Set to [0.50] or higher.
- 3. Never allow the table to collide with the stroke end except during return to origin.**
When incorrect instructions are inputted, such as those which cause the product to operate outside of the specification limits or outside of the actual stroke through changes in the controller/driver settings and/or origin position, the table may collide with the stroke end of the actuator. Be sure to check these points before use.
If the table collides with the stroke end of the actuator, the guide, belt, or internal stopper may break. This can result in abnormal operation.



Handle the actuator with care when it is used in the vertical direction as the workpiece will fall freely from its own weight.

- 4. The moving force should be the initial value.**
If the moving force is set below the initial value, it may cause the generation of an alarm.
- 5. The actual speed of this actuator is affected by the work load and stroke.**
Check the model selection section of the catalogue.
- 6. Do not apply a load, impact, or resistance in addition to the transferred load during return to origin.**
Additional force will cause the displacement of the origin position since it is based on the detected motor torque.
- 7. Do not dent, scratch, or cause other damage to the body or table mounting surfaces.**
Doing so may cause unevenness in the mounting surface, play in the guide, or an increase in the sliding resistance.
- 8. Do not apply strong impact or an excessive moment while mounting a workpiece.**
If an external force over the allowable moment is applied, it may cause play in the guide or an increase in the sliding resistance.
- 9. Keep the flatness of the mounting surface within 0.1 mm/500 mm.**
If a workpiece or base does not sit evenly on the body of the product, play in the guide or an increase in the sliding resistance may occur.
- 10. When mounting the product, secure a bending diameter of 40 mm or longer for the cable.**
- 11. Do not allow a workpiece to collide with the table during the positioning operation or within the positioning range.**
- 12. For the model where grease is applied to the dust seal band for sliding, when wiping off the grease to remove foreign matter, etc., be sure to reapply grease afterward.**
- 13. When bottom mounted, the dust seal band may become warped.**



LEF Series Specific Product Precautions 2

Be sure to read this before handling the products.


Handling

Caution

14. When mounting the product, use screws of adequate length and tighten them with adequate torque.

Tightening the screws with a higher torque than recommended may result in a malfunction and/or decrease in guide accuracy, while tightening with a lower torque can result in the displacement of the mounting position or, in extreme conditions, the actuator could become detached from its mounting position.


Body fixed

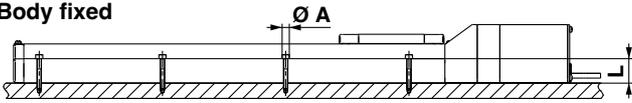

Model	Screw size	Max. tightening torque [N·m]	Ø A [mm]	L [mm]
LEF□16	M3	0.6	3.5	20
LEF□25	M4	1.5	4.5	24
LEF□32	M5	3.0	5.5	30
LEF□40	M6	5.2	6.6	31


Body mounting

For housing B bottom

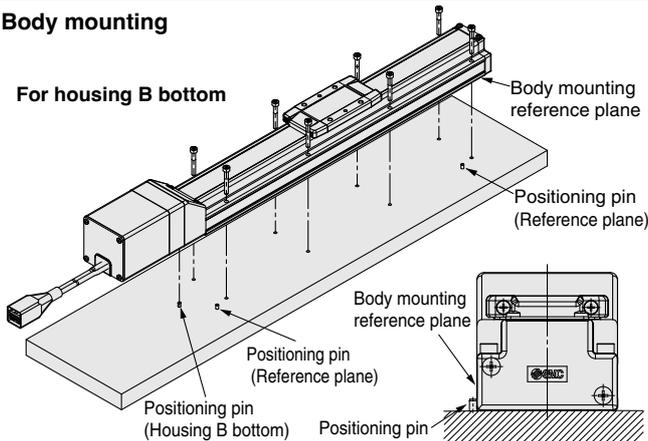


The travelling parallelism is the reference plane for the body mounting reference plane. If the travelling parallelism for a table is required, set the reference plane against parallel pins, etc.

For body bottom

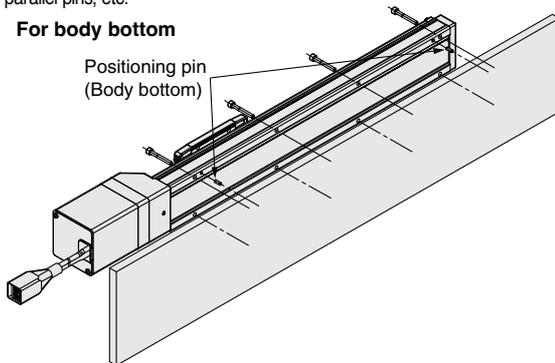

Workpiece fixed



Model	Screw size	Max. tightening torque [N·m]	L (Max. screw-in depth) [mm]
LEF□16	M4 x 0.7	1.5	6
LEF□25	M5 x 0.8	3.0	8
LEF□32	M6 x 1	5.2	9
LEFS40	M8 x 1.25	12.5	13

To prevent the workpiece retaining screws from touching the body, use screws that are 0.5 mm or shorter than the maximum screw-in depth. If long screws are used, they may touch the body and cause a malfunction.

15. Do not operate by fixing the table and moving the actuator body.

16. The belt drive actuator cannot be used for vertical applications.

17. Check the specifications for the minimum speed of each actuator.

Failure to do so may result in unexpected malfunctions such as knocking.

18. In the case of the belt drive actuator, vibration may occur during operation at speeds within the actuator specifications due to the operating conditions. Change the speed setting to a speed that does not cause vibration.

19. When fluctuations in the load are caused during operation, malfunction, noise, or alarm generation may occur. (In the case of the AC servo motor)

The gain tuning may not be suitable for fluctuating loads. Adjust the gain properly by following the instructions in the driver manual.

Maintenance

Warning

Maintenance frequency

Perform maintenance according to the table below.

Frequency	Appearance check	Internal check	Belt check
Inspection before daily operation	○	—	—
Inspection every 6 months/1000 km/5 million cycles*1	○	○	○

*1 Select whichever comes first.

• Items for visual appearance check

1. Loose set screws, Abnormal amount of dirt, etc.
2. Check for visible damage, Check of cable joint
3. Vibration, Noise

• Items for internal check

1. Lubricant condition on moving parts
2. Loose or mechanical play in fixed parts or fixing screws

• Items for belt check

Stop operation immediately and replace the belt when any of the following occur. In addition, ensure your operating environment and conditions satisfy the requirements specified for the product.

a. Tooth shape canvas is worn out

Canvas fibre becomes fuzzy, Rubber is coming off and the fibre has become whitish, Lines of fibres have become unclear

b. Peeling off or wearing of the side of the belt

Belt corner has become rounded and frayed threads stick out

c. Belt is partially cut

Belt is partially cut, Foreign matter caught in the teeth of other parts is causing damage

d. A vertical line on belt teeth is visible

Damage which is made when the belt runs on the flange

e. Rubber back of the belt is softened and sticky

f. Cracks on the back of the belt are visible



LEF Series

Battery-less Absolute Encoder Type Specific Product Precautions

Be sure to read this before handling the products.

Handling

Caution

1. Absolute encoder ID mismatch error at the first connection

In the following cases, an "ID mismatch error" alarm occurs after the power is turned ON. Perform a return to origin operation after resetting the alarm before use.


- When an electric actuator is connected and the power is turned ON for the first time after purchase*1
- When the actuator or motor is replaced
- When the controller is replaced

*1 If you have purchased an electric actuator and controller with the set part number, the pairing may have already been completed and the alarm may not be generated.

"ID mismatch error"

Operation is enabled by matching the encoder ID on the electric actuator side with the ID registered in the controller. This alarm occurs when the encoder ID is different from the registered contents of the controller. By resetting this alarm, the encoder ID is registered (paired) to the controller again.

When a controller is changed after pairing is completed				
	Encoder ID no. (* Numbers below are examples.)			
Actuator	17623	17623	17623	17623
Controller	17623	17699	17699	17623
ID mismatch error occurred?	No	Yes	Error reset ⇒ No	

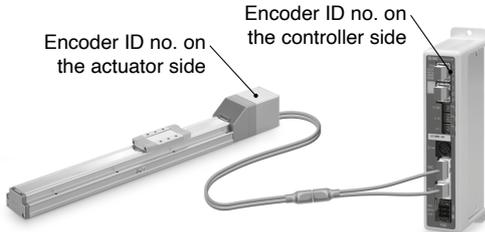


The ID number is automatically checked when the control power supply is turned ON. An error is output if the ID number does not match.

2. In environments where strong magnetic fields are present, use may be limited.

A magnetic sensor is used in the encoder. Therefore, if the actuator motor is used in an environment where strong magnetic fields are present, malfunction or failure may occur. Do not expose the actuator motor to magnetic fields with a magnetic flux density of 1 mT or more.

When installing an electric actuator and an air cylinder with an auto switch (ex. CDQ 2 series) or multiple electric actuators side by side, maintain a space of 40 mm or more around the motor. Refer to the construction drawing of the actuator motor.


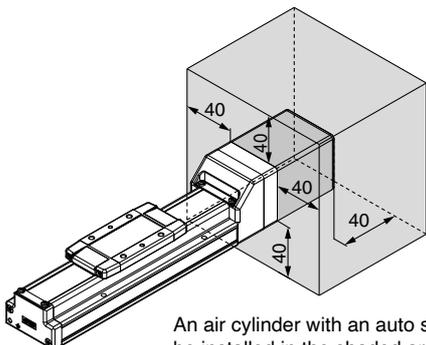


An air cylinder with an auto switch cannot be installed in the shaded area.



• When lining up actuators

SMC actuators can be used with their motors adjacent to each other. However, maintain a space of 40 mm or more between the motors and the position where the magnet passes. The magnet is in the middle of the table.

○ Can be used with their motors adjacent to each other

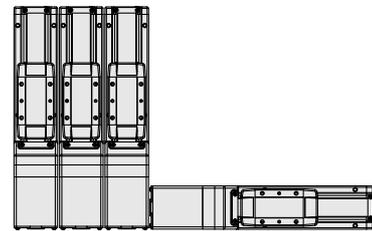


✗ Do not allow the motors to be in close proximity to the position where the magnet passes.

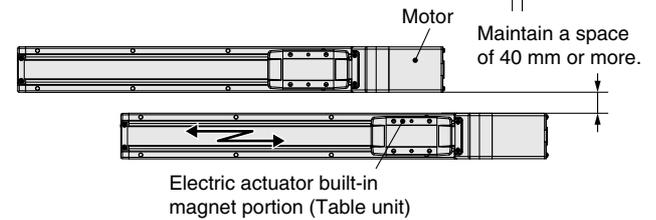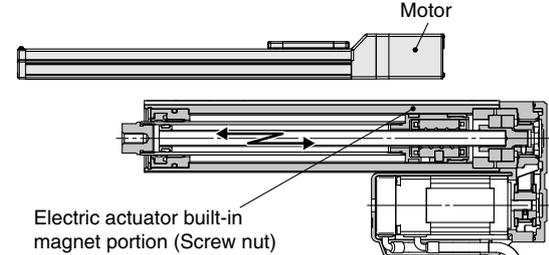

3. The connector size of the motor cable is different from that of the electric actuator with an incremental encoder.

The motor cable connector of an electric actuator with a battery-less absolute encoder is different from that of an electric actuator with an incremental encoder. As the connector cover dimensions are different, take the dimensions below into consideration during the design process.

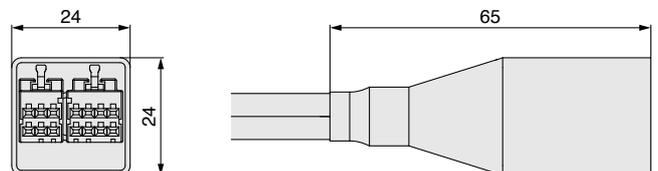

Battery-less absolute encoder connector cover dimensions

Environment

Clean Room Specification

● ISO Class 4*¹ (ISO 14644-1)

- Built-in vacuum piping
- It is possible to mount the main body without removing the external cover, etc.
- Body-integrated linear guide specification


*1 Changes depending on the suction flow rate

Slider Type

Ball Screw Drive/11-LEFS Series

Step Motor (Servo/24 VDC) Servo Motor (24 VDC) Type

AC Servo Motor Type

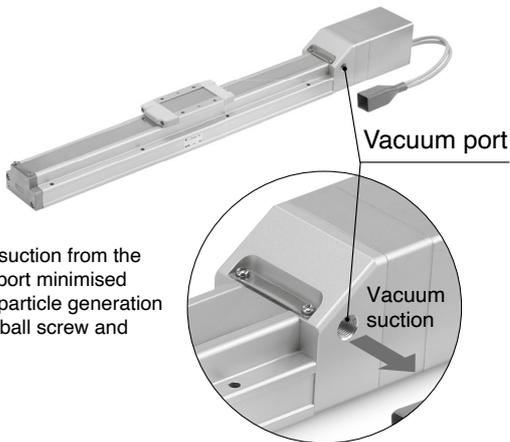

Vacuum suction from the vacuum port minimised external particle generation from the ball screw and guide.

Support Guide/11-LEFG Series


The support guide was designed to support workpieces with significant overhang.

- As the dimensions are the same as the LEF series body, installation is simple and contributes to a reduction in installation and assembly labour.
- The standard-equipped seal bands prevent grease from splashing and external foreign matter from entering.

Application example

LEF (Drive side)

Support guide

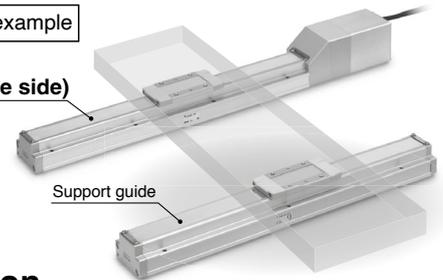

⚠ Caution

After installing the actuator on the drive side, align it with the support guide. If the mounting flatness exceeds 0.1, install a floating mechanism separately on the workpiece installation surface (table).

Secondary Battery Compatible

● Copper (Cu) and zinc (Zn) free*¹

*1 Excludes motors, cables, controllers/drivers

● Compatible with dew points as low as -70 °C


Uses grease compatible with low dew points

Slider Type

Ball Screw Drive/25A-LEFS

Step Motor (Servo/24 VDC) Servo Motor (24 VDC) Type

Bolts
Material:
Stainless steel

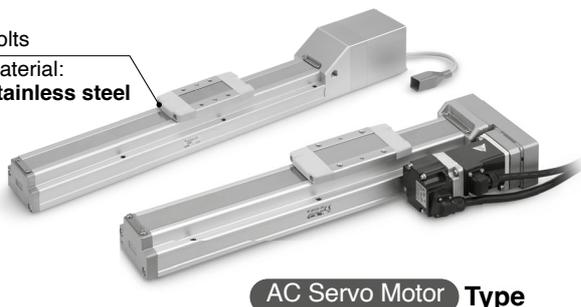

Size	16	25	32	40
Motor type				
Step motor (Servo/24 VDC)	●	●	●	●
Servo motor (24 VDC)	●	●		
AC servo motor		●	●	●

* Copper and zinc materials are used for the motors, cables, controllers/drivers.

Slider Type

Ball Screw Drive/11-LEFS Series

Clean Room Specification

Particle Generation Characteristics

Particle Generation Measuring Method


The particle generation data for SMC Clean Series are measured in the following test method.

■ Test Method (Example)

Operate the specimen that is placed in an ISO Class 5 equivalent clean bench, and measure the changes of the particle concentration over time until the number of cycles reaches the specified point.

■ Measuring Conditions

Measuring instrument	Description	Laser dust monitor (Automatic particle counter using the light scattering method)
	Minimum measurable particle diameter	0.1 μm
	Suction flow rate	28.3 l/min (ANR)
Setting conditions	Sampling time	5 min
	Interval time	55 min
	Sampling air flow	141.5 L (ANR)

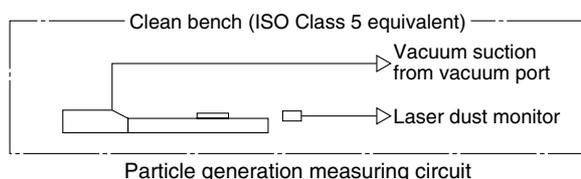

■ Evaluation Method

To obtain the measured values of particle concentration, the accumulated value*¹ of particles captured every 5 minutes, by the laser dust monitor, is converted into the particle concentration in every 1 m³.

When determining particle generation grades, the 95 % upper confidence limit of the average particle concentration (average value), when each specimen is operated at a specified number of cycles*² is considered.

The plots in the graphs indicate the 95 % upper confidence limit of the average particle concentration of particles with a diameter within the horizontal axis range.

*1 Sampling air flow rate: Number of particles contained in 141.5 L (ANR) of air

*2 Actuator: 1 million cycles


* The particle generation characteristics (pages 940 and 941) provide a guide for selection but is not guaranteed.

* When the suction flow rate is 0 l/min, the particle concentration is measured during operation without suction.


Particle Generation Characteristics

Step Motor (Servo/24 VDC), Servo Motor (24 VDC)


11-LEFS16 Speed 500 mm/s

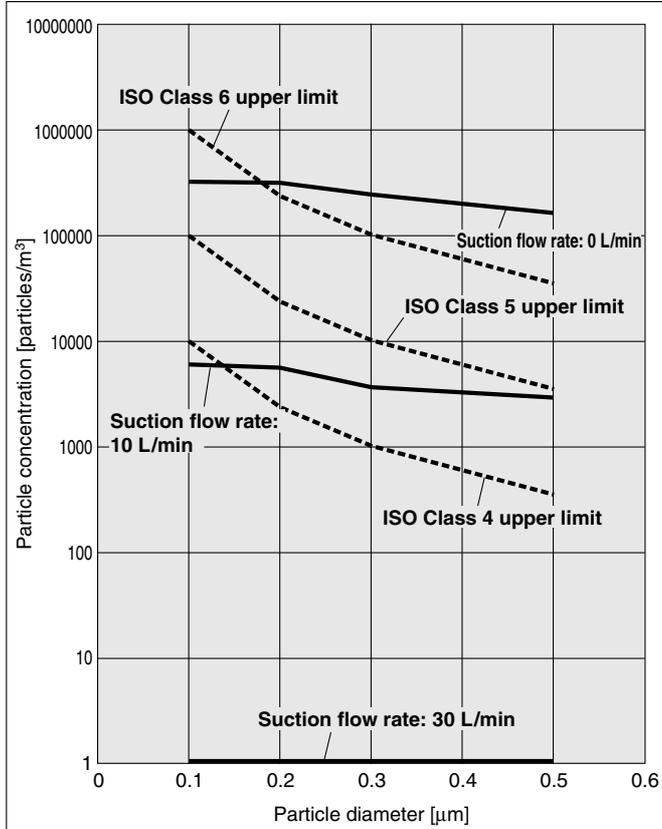


11-LEFS25 Speed 500 mm/s

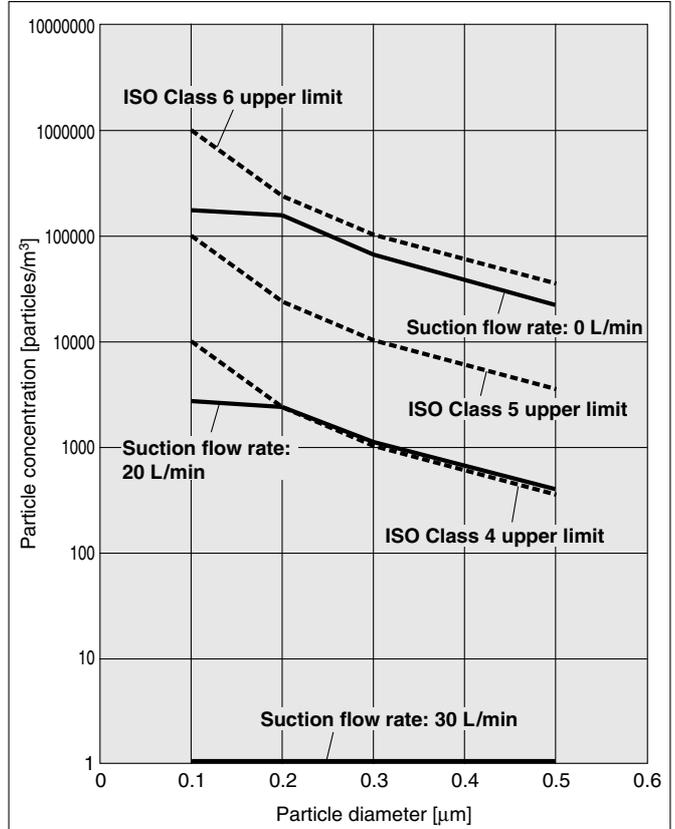

11-LEFS32 Speed 500 mm/s

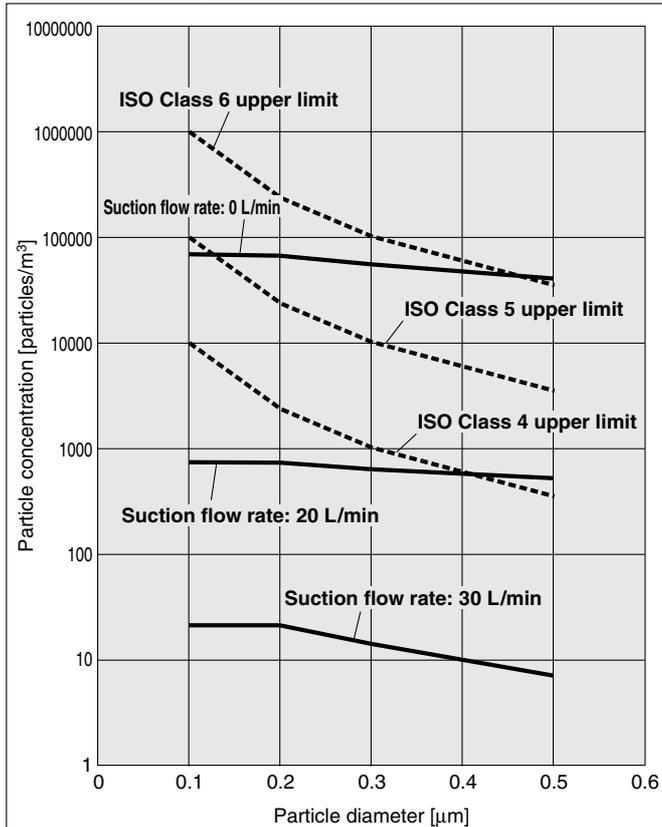

11-LEFS40 Speed 500 mm/s

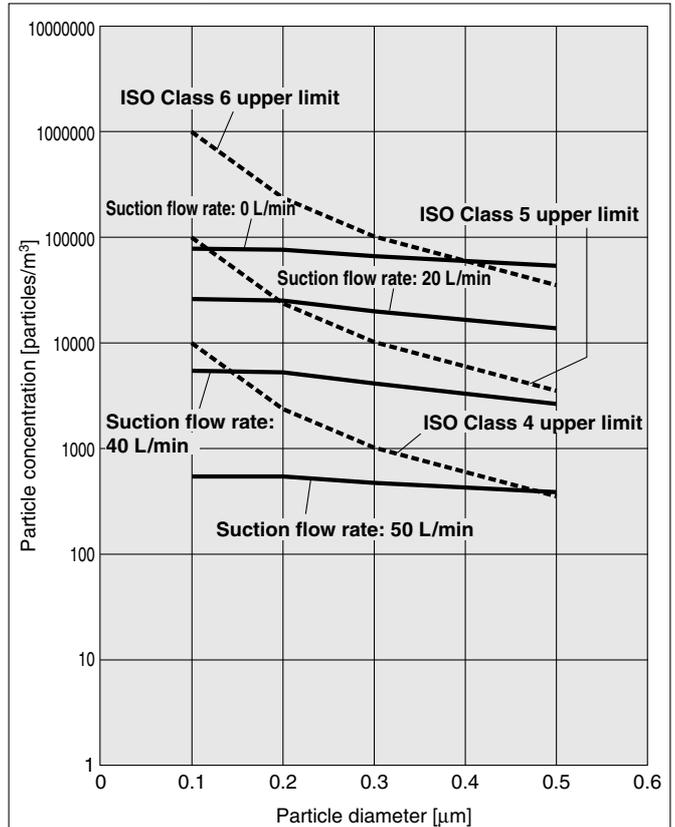

11-LEFS Series


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)


Clean Room Specification

Particle Generation Characteristics AC Servo Motor (100/200/400 W)


11-LEFS25 Speed 900 mm/s

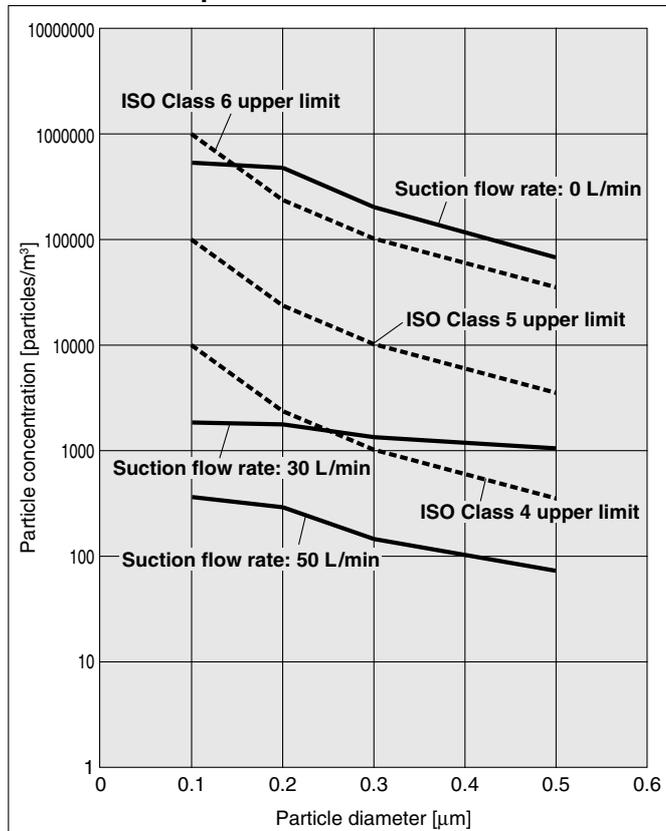

11-LEFS32 Speed 1000 mm/s

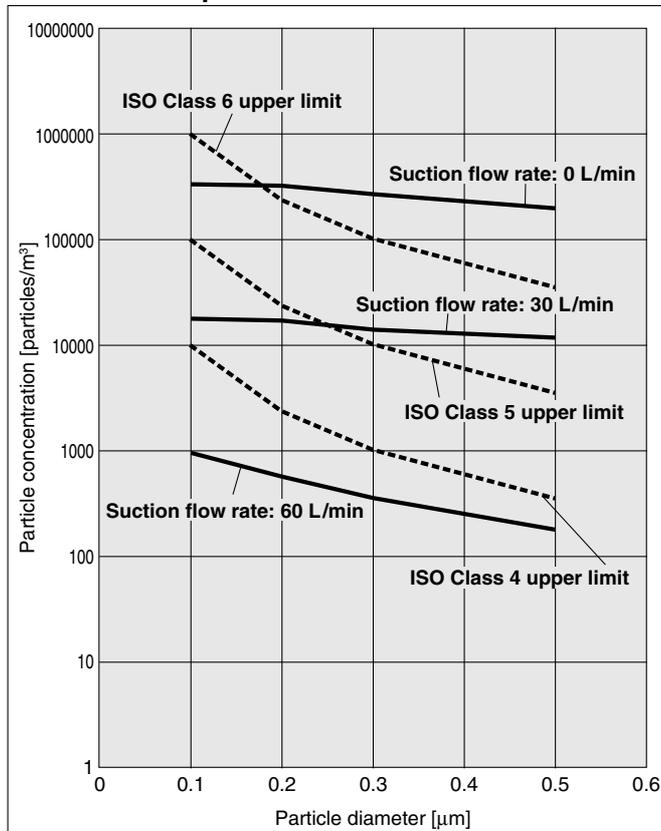

11-LEFS40 Speed 1000 mm/s

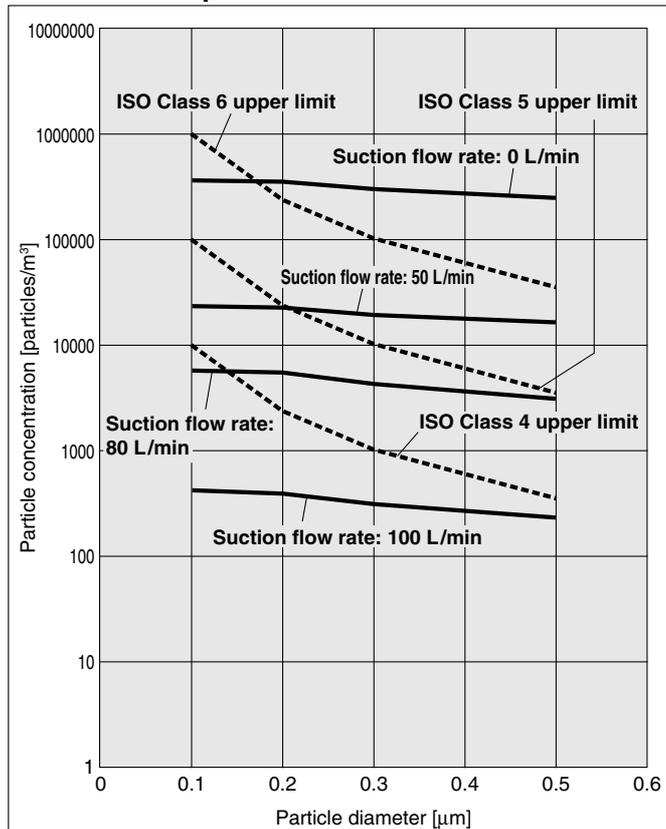

Slider Type Ball Screw Drive

Clean Room Specification





* For details, refer to www.smc.eu and onward.

11-LEFS Series LEFS16, 25, 32, 40

RoHS

Refer to page 19 for model selection and page 189 for particle generation characteristics.

How to Order

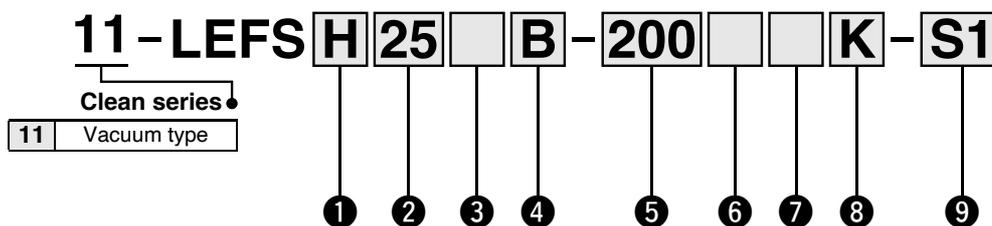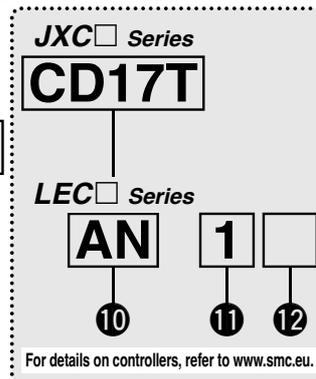

① Accuracy

—	Basic type
H	High-precision type

② Size

16
25
32
40

③ Motor type

Symbol	Type	Applicable size				Compatible controllers/drivers
		LEFS16	LEFS25	LEFS32	LEFS40	
—	Step motor (Servo/24 VDC)	●	●	●	●	JXC51 JXCEF JXC61 JXC9F JXCE1 JXCPF JXC91 JXCLF JXCP1 JXCD1 JXCL1 LECPA JXCM1
A	Servo motor (24 VDC)	●	●	—	—	LECA6

④ Lead [mm]

Symbol	11-LEFS16	11-LEFS25	11-LEFS32	11-LEFS40
A	10	12	16	20
B	5	6	8	10

⑥ Motor option


—	Without option
B	With lock

⑤ Stroke*1 [mm]

Stroke	Size	Note
		Applicable stroke
50 to 500	16	50, 100, 150, 200, 250, 300, 350, 400, 450, 500
50 to 600	25	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600
50 to 800	32	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800
150 to 1000	40	150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000

⑦ Vacuum port*2

—	Left
R	Right

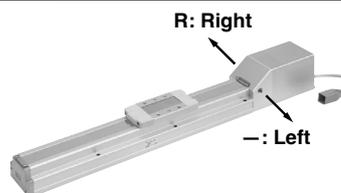

⑧ Positioning pin hole

—	Housing B bottom*3	
K	Body bottom 2 locations	

⑨ Actuator cable type/length*5

Standard cable [m]		Robotic cable [m]	
—	None	R1	1.5
S1	1.5*7	RA	10*4
S3	3*7	R3	3
S5	5*7	RB	15*4
		R5	5
		RC	20*4
		R8	8*4

Support Guide/11-LEFG Series

The support guide was designed to support workpieces with significant overhang.



Slider Type Ball Screw Drive **11-LEFS Series**

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Clean Room Specification

JXC Series

10 Controller

—	Without controller
C□1□□	With controller

C D 1 7 T

Interface (Communication protocol/Input/Output)

Symbol	Type	Number of axes, Special specification	
		Standard	With STO sub-function
5	Parallel input (NPN)	●	
6	Parallel input (PNP)	●	
E	EtherCAT	●	●
9	EtherNet/IP™	●	●
P	PROFINET	●	●
D	DeviceNet®	●	
L	IO-Link	●	●
M	CC-Link	●	

Mounting

7	Screw mounting
8*11	DIN rail

Number of axes, Special specification

Symbol	Number of axes	Specification
1	Single axis	Standard
F	Single axis	With STO sub-function

Communication plug connector, I/O cable*12

Symbol	Type	Applicable interface
—	Without accessory	—
S	Straight type communication plug connector	DeviceNet®
T	T-branch type communication plug connector	CC-Link Ver. 1.10
1	I/O cable (1.5 m)	Parallel input (NPN) Parallel input (PNP)
3	I/O cable (3 m)	
5	I/O cable (5 m)	



LEC Series

AN 1 □

⑩ ⑪ ⑫

10 Controller/Driver type*6

—	Without controller/driver	
6N	LECA6 (Step data input type)	NPN
6P		PNP
AN	LECPA*7 *8 (Pulse input type)	NPN
AP		PNP

11 I/O cable length*9

—	Without cable (Without communication plug connector)	
1	1.5 m	
3	3 m*10	
5	5 m*10	

12 Controller/Driver mounting

—	Screw mounting
D	DIN rail*11



- *1 Please contact SMC for non-standard strokes as they are produced as special orders.
- *2 Vacuum piping is only built in on the vacuum port side selected at the time of purchase.
Note that after purchase, if suction is used on the port on the opposite side, the particle generation characteristics stated in the catalogue may not apply.
To make any changes after purchase, be sure to contact SMC.
- *3 Refer to the body mounting example on page 186 for the mounting method.
- *4 Produced upon receipt of order (Robotic cable only)
- *5 The standard cable should only be used on fixed parts.
For use on moving parts, select the robotic cable.
Refer to the www.smc.eu if only the actuator cable is required.
- *6 For details on controllers/drivers and compatible motors, refer to the

- compatible controllers/drivers on the next page.
- *7 Only available for the motor type "Step motor"
- *8 When pulse signals are open collector, order the current limiting resistor (LEC-PA-R-□) separately.
- *9 When "Without controller/driver" is selected for controller/driver types, I/O cable cannot be selected. If an I/O cable is required, refer to the cable for the LECA6 (www.smc.eu) or LECPA (www.smc.eu).
- *10 When "Pulse input type" is selected for controller/driver types, pulse input usable only with differential. Only 1.5 m cables usable with open collector
- *11 The DIN rail is not included. It must be ordered separately.
- *12 Select "—" for anything other than DeviceNet®, CC-Link, or parallel input. Select "—," "S," or "T" for DeviceNet® or CC-Link. Select "—," "1," "3," or "5" for parallel input.

⚠ Caution

[CE/UKCA-compliant products]

- ① EMC compliance was tested by combining the electric actuator LEF series and the controller LEC/JXC series.
The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, compliance with the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify compliance with the EMC directive for the machinery and equipment as a whole.
- ② For the incremental (servo motor 24 VDC) specification, EMC compliance was tested by installing a noise filter set (LEC-NFA). Refer to the LECA series Operation Manual for installation.

[UL-compliant products (For the LEC series)]

When compliance with UL is required, the electric actuator and controller/driver should be used with a UL1310 Class 2 power supply.

The actuator and controller/driver are sold as a package.

Confirm that the combination of the controller/driver and actuator is correct.

<Check the following before use.>

- ① Check the actuator label for the model number. This number should match that of the controller/driver.
- ② Check that the Parallel I/O configuration matches (NPN or PNP).

LEFS16A-400

NPN

①

②



* Refer to the Operation Manual for using the products. Please download it via our website: <https://www.smc.eu>

11-LEFS Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Clean Room Specification

Compatible Controllers/Drivers

Type	Step data input type	Step data input type	Pulse input type
			
Series	JXC51 JXC61	LECA6	LECPA
Features	Parallel I/O	Parallel I/O	Operation by pulse signals
Compatible motor	Step motor (Servo/24 VDC)	Servo motor (24 VDC)	Step motor (Servo/24 VDC)
Max. number of step data	64 points		—
Power supply voltage	24 VDC		

Type	EtherCAT direct input type	EtherCAT direct input type with STO sub-function	EtherNet/IP™ direct input type	EtherNet/IP™ direct input type with STO sub-function	PROFINET direct input type	PROFINET direct input type with STO sub-function	DeviceNet® direct input type	IO-Link direct input type	IO-Link direct input type with STO sub-function	CC-Link direct input type
										
Series	JXCE1	JXCEF	JXC91	JXC9F	JXCP1	JXCPF	JXCD1	JXCL1	JXCLF	JXCM1
Features	EtherCAT direct input	EtherCAT direct input with STO sub-function	EtherNet/IP™ direct input	EtherNet/IP™ direct input with STO sub-function	PROFINET direct input	PROFINET direct input with STO sub-function	DeviceNet® direct input	IO-Link direct input	IO-Link direct input with STO sub-function	CC-Link direct input
Compatible motor	Step motor (Servo/24 VDC)									
Max. number of step data	64 points									
Power supply voltage	24 VDC									

Specifications

Step Motor (Servo/24 VDC)

Model		11-LEFS16		11-LEFS25		11-LEFS32		11-LEFS40			
Actuator specifications	Stroke [mm]*1	50 to 500		50 to 600		50 to 800		150 to 1000			
	Work load [kg]	Horizontal	JXC□1/JXC□F	14	15	25	30	45	50	55	65
			LECPA/JXC□ ₃ ²	9	10	20	20	40	45	50	60
		Vertical	2	4	7.5	15	10	20	2	23	
	Speed [mm/s]*2	10 to 500	5 to 250	12 to 500	6 to 250	16 to 500	8 to 250	20 to 500	10 to 250		
	Max. acceleration/deceleration [mm/s ²]	3000									
	Positioning repeatability [mm]	Basic type		±0.02							
		High-precision type		±0.015							
	Lost motion*3 [mm]	Basic type		0.1 or less							
		High-precision type		0.05 or less							
	Lead [mm]	10	5	12	6	16	8	20	10		
	Impact/Vibration resistance [m/s ²]*4	50/20									
	Actuation type	Ball screw									
	Guide type	Linear guide									
	Static allowable moment*5 [N·m]	Mep (Pitching)		10		27		46		110	
Mey (Yawing)		10		27		46		110			
Mer (Rolling)		20		52		101		207			
Operating temperature range [°C]	5 to 40										
Operating humidity range [%RH]	90 or less (No condensation)										
Cleanliness class*6	ISO Class 4 (ISO 14644-1)										
Grease	Ball screw /Linear guide portion		Low particle generation grease								
Motor size	□28		□42		□56.4						
Motor type	Step motor (Servo/24 VDC)										
Encoder	Incremental										
Power supply voltage [V]	24 VDC ±10 %										
Power [W]*7 *9	Max. power 51		Max. power 57		Max. power 123		Max. power 141				
Type*8	Non-magnetizing lock										
Holding force [N]	20	39	78	157	108	216	113	225			
Power [W]*9	2.9		5		5		5				
Rated voltage [V]	24 VDC ±10 %										

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 Speed changes according to the controller/driver type and work load. Check the "Speed-Work Load Graph (Guide)" on pages 20 and 21. Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10 % for each 5 m.

*3 A reference value for correcting errors in reciprocal operation

*4 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*5 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*6 The amount of particle generation changes according to the operating conditions and suction flow rate. Refer to the particle generation characteristics for details.

*7 Indicates the max. power during operation (including the controller)

This value can be used for the selection of the power supply.

*8 With lock only

*9 For an actuator with lock, add the power for the lock.

11-LEFS Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Clean Room Specification

Specifications

Servo Motor (24 VDC)

Model		11-LEFS16A		11-LEFS25A		
Actuator specifications	Stroke [mm] ^{*1}	50 to 500		50 to 600		
	Work load ^{*2} [kg]	Horizontal	7	10	11	18
		Vertical	2	4	2.5	5
	Speed [mm/s] ^{*2}	1 to 500	1 to 250	2 to 500	1 to 250	
	Max. acceleration/deceleration [mm/s ²]	3000				
	Positioning repeatability [mm]	Basic type	±0.02			
		High-precision type	±0.015			
	Lost motion ^{*3} [mm]	Basic type	0.1 or less			
		High-precision type	0.05 or less			
	Lead [mm]	10	5	12	6	
	Impact/Vibration resistance [m/s ²] ^{*4}	50/20				
	Actuation type	Ball screw				
	Guide type	Linear guide				
	Static allowable moment ^{*5} [N·m]	Mep (Pitching)	10		27	
		Mey (Yawing)	10		27	
Mer (Rolling)		20		52		
Operating temperature range [°C]	5 to 40					
Operating humidity range [%RH]	90 or less (No condensation)					
Cleanliness class ^{*6}	ISO Class 4 (ISO 14644-1)					
Grease Ball screw / Linear guide portion	Low particle generation grease					
Electric specifications	Motor size	□28		□42		
	Motor output [W]	30		36		
	Motor type	Servo motor (24 VDC)				
	Encoder	Incremental				
	Power supply voltage [V]	24 VDC ±10 %				
Lock unit specifications	Power [W] ^{*7 *9}	Max. power 70		Max. power 113		
	Type ^{*8}	Non-magnetizing lock				
Lock unit specifications	Holding force [N]	20	39	78	157	
	Power [W] ^{*9}	2.9		5		
	Rated voltage [V]	24 VDC ±10 %				

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 Check the "Speed-Work Load Graph (Guide)" on page 23 for details. Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10 % for each 5 m.

*3 A reference value for correcting errors in reciprocal operation

*4 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*5 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*6 The amount of particle generation changes according to the operating conditions and suction flow rate. Refer to the particle generation characteristics for details.

*7 Indicates the max. power during operation (including the controller)

This value can be used for the selection of the power supply.

*8 With lock only

*9 For an actuator with lock, add the power for the lock.

Weight

Series	11-LEFS16									
Stroke [mm]	50	100	150	200	250	300	350	400	450	500
Product weight [kg]	0.83	0.90	0.98	1.05	1.13	1.20	1.28	1.35	1.43	1.50
Additional weight with lock [kg]	0.12									

Series	11-LEFS25											
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600
Product weight [kg]	1.70	1.84	1.98	2.12	2.26	2.40	2.54	2.68	2.82	2.96	3.10	3.24
Additional weight with lock [kg]	0.26											

Series	11-LEFS32															
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
Product weight [kg]	3.15	3.35	3.55	3.75	3.95	4.15	4.35	4.55	4.75	4.95	5.15	5.35	5.55	5.75	5.95	6.15
Additional weight with lock [kg]	0.53															

Series	11-LEFS40																	
Stroke [mm]	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
Product weight [kg]	5.37	5.65	5.93	6.21	6.49	6.77	7.15	7.33	7.61	7.89	8.17	8.45	8.75	9.01	9.29	9.57	9.85	10.13
Additional weight with lock [kg]	0.53																	

11-LEFS Series


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)


Clean Room Specification

Dimensions: Ball Screw Drive

11-LEFS25

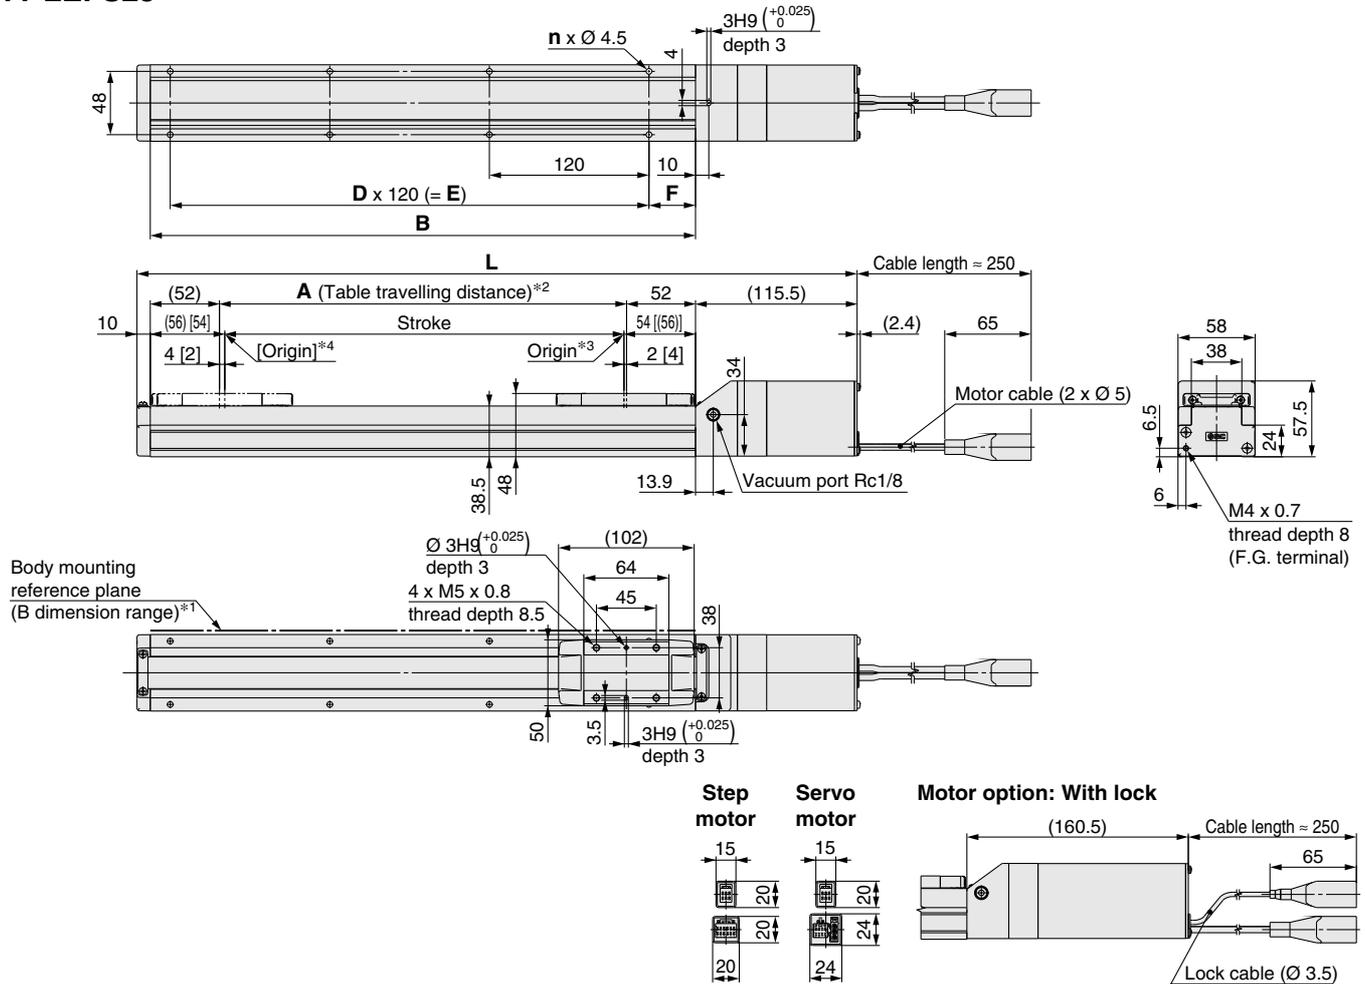

Positioning pin hole*5 (Option): Body bottom

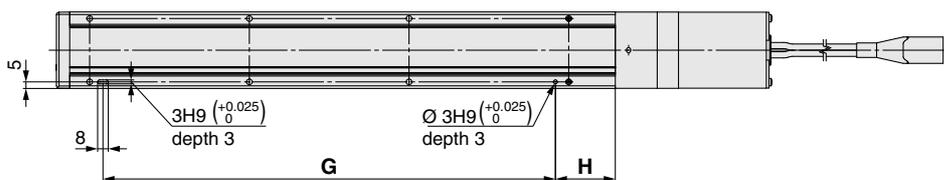


- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed
- *5 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions


Model	L		A	B	n	D	E	F	G	H
	Without lock	With lock								
11-LEFS□25□-50□	285.5	330.5	56	160	4	—	—	20	100	30
11-LEFS□25□-100□	335.5	380.5	106	210	4	—	—	35	100	45
11-LEFS□25□-150□	385.5	430.5	156	260	4	—	—		100	45
11-LEFS□25□-200□	435.5	480.5	206	310	6	2	240		220	45
11-LEFS□25□-250□	485.5	530.5	256	360	6	2	240		220	45
11-LEFS□25□-300□	535.5	580.5	306	410	8	3	360		340	45
11-LEFS□25□-350□	585.5	630.5	356	460	8	3	360		340	45
11-LEFS□25□-400□	635.5	680.5	406	510	8	3	360		340	45
11-LEFS□25□-450□	685.5	730.5	456	560	10	4	480		460	45
11-LEFS□25□-500□	735.5	780.5	506	610	10	4	480		460	45
11-LEFS□25□-550□	785.5	830.5	556	660	12	5	600		580	45
11-LEFS□25□-600□	835.5	880.5	606	710	12	5	600		580	45

Dimensions: Ball Screw Drive

11-LEFS32

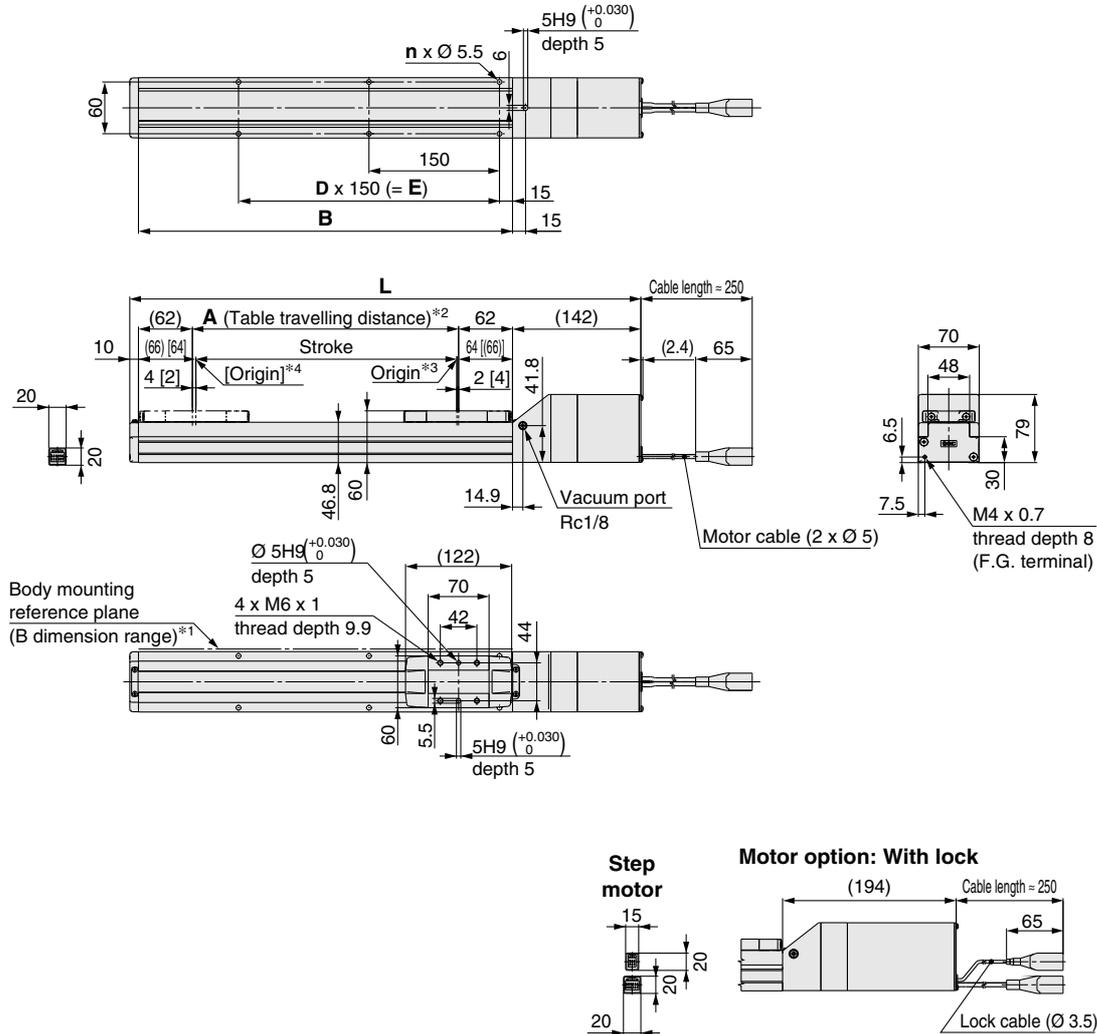

Positioning pin hole*5 (Option): Body bottom

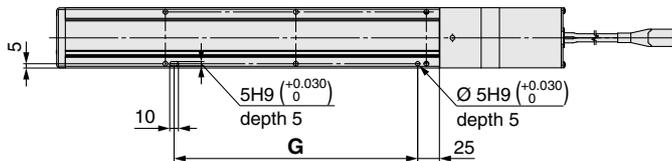

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed
- *5 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions

[mm]

Model	L		A	B	n	D	E	G
	Without lock	With lock						
11-LEFS□32□-50□	332	384	56	180	4	—	—	130
11-LEFS□32□-100□	382	434	106	230	4	—	—	130
11-LEFS□32□-150□	432	484	156	280	4	—	—	130
11-LEFS□32□-200□	482	534	206	330	6	2	300	280
11-LEFS□32□-250□	532	584	256	380	6	2	300	280
11-LEFS□32□-300□	582	634	306	430	6	2	300	280
11-LEFS□32□-350□	632	684	356	480	8	3	450	430
11-LEFS□32□-400□	682	734	406	530	8	3	450	430
11-LEFS□32□-450□	732	784	456	580	8	3	450	430
11-LEFS□32□-500□	782	834	506	630	10	4	600	580
11-LEFS□32□-550□	832	884	556	680	10	4	600	580
11-LEFS□32□-600□	882	934	606	730	10	4	600	580
11-LEFS□32□-650□	932	984	656	780	12	5	750	730
11-LEFS□32□-700□	982	1034	706	830	12	5	750	730
11-LEFS□32□-750□	1032	1084	756	880	12	5	750	730
11-LEFS□32□-800□	1082	1134	806	930	14	6	900	880

11-LEFS Series


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)


Clean Room Specification

Dimensions: Ball Screw Drive

11-LEFS40

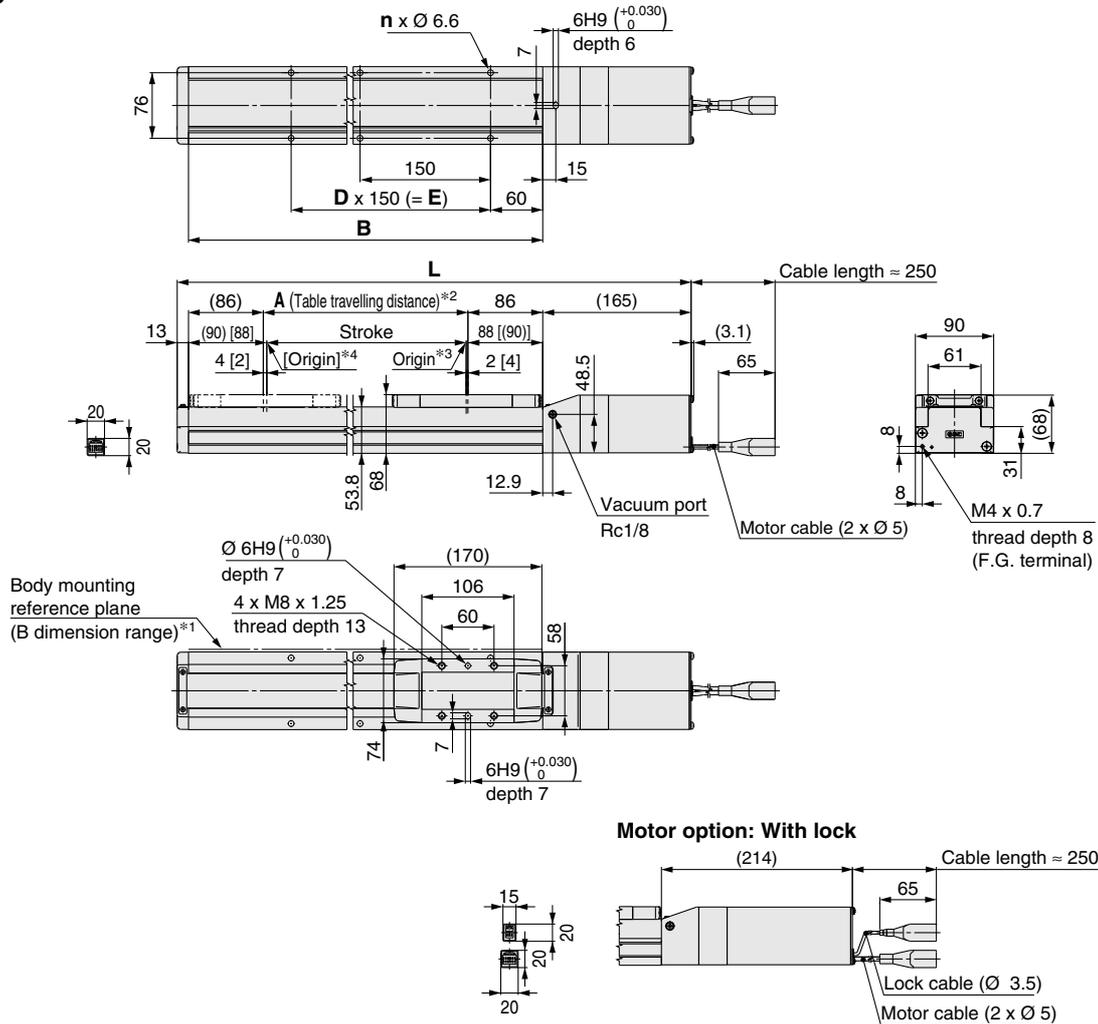

Positioning pin hole*5 (Option): Body bottom

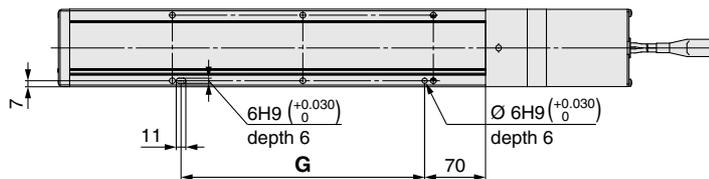

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 Position after returning to origin
- *4 [] for when the direction of return to origin has changed
- *5 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions

[mm]

Model	L		A	B	n	D	E	G
	Without lock	With lock						
11-LEFS□40□-150□	506	555	156	328	4	—	150	130
11-LEFS□40□-200□	556	605	206	378	6	2	300	280
11-LEFS□40□-250□	606	655	256	428	6	2	300	280
11-LEFS□40□-300□	656	705	306	478	6	2	300	280
11-LEFS□40□-350□	706	755	356	528	8	3	450	430
11-LEFS□40□-400□	756	805	406	578	8	3	450	430
11-LEFS□40□-450□	806	855	456	628	8	3	450	430
11-LEFS□40□-500□	856	905	506	678	10	4	600	580
11-LEFS□40□-550□	906	955	556	728	10	4	600	580
11-LEFS□40□-600□	956	1005	606	778	10	4	600	580
11-LEFS□40□-650□	1006	1055	656	828	12	5	750	730
11-LEFS□40□-700□	1056	1105	706	878	12	5	750	730
11-LEFS□40□-750□	1106	1155	756	928	12	5	750	730
11-LEFS□40□-800□	1156	1205	806	978	14	6	900	880
11-LEFS□40□-850□	1206	1255	856	1028	14	6	900	880
11-LEFS□40□-900□	1256	1305	906	1078	14	6	900	880
11-LEFS□40□-950□	1306	1355	956	1128	16	7	1050	1030
11-LEFS□40□-1000□	1356	1405	1006	1178	16	7	1050	1030

Slider Type Ball Screw Drive

Clean Room Specification

11-LEFS Series LEFS25, 32, 40



Refer to page 27 for model selection and page 189 for particle generation characteristics.



How to Order

* For details, refer to www.smc.eu and onward.

11-LEFS H 25 S2 B - 100 [] [] K - S 2 A2 []

↓ Clean series

11 Vacuum type

1 Accuracy

—	Basic type
H	High-precision type

2 Size

25
32
40

4 Lead [mm]

Symbol	11-LEFS25	11-LEFS32	11-LEFS40
A	12	16	20
B	6	8	10

5 Stroke [mm]*3

50	50
to	to
1000	1000

*3 For details, refer to the applicable stroke table below.

6 Motor option

—	Without option
B	With lock

3 Motor type

Symbol	Type	Output [W]	2 Size	1 Driver type	Compatible drivers		
S2*1	AC servo motor (Incremental encoder)	100	25	A1/A2	LECSA□-S1		
S3		200	32	A1/A2	LECSA□-S3		
S4		400	40	A2	LECSA2-S4		
T6*2	AC servo motor (Absolute encoder)	100	25	B2	LECSB2-T5		
T7				200	32	C2	LECS2-T5
						N2/E2/92/P2	LECSN2-T5-□
						S2	LECSS2-T5
T8				400	40	B2	LECSB2-T7
	C2	LECS2-T7					
T8	400	40	ND2/ED2/9D2/PD2	LECSND2-T7-□			
			S2	LECSS2-T7			
			B2	LECSB2-T8			
T8	400	40	C2	LECS2-T8			
			ND2/ED2/9D2/PD2	LECSND2-T8-□			
			S2	LECSS2-T8			

*1 For motor type S2, the compatible driver part number suffix is S1.

*2 For motor type T6, the compatible driver part number is LECS□2-T5.

9 Cable type*8, *9

—	Without cable
S	Standard cable
R	Robotic cable

*8 A motor cable and encoder cable are included with the product. (A lock cable is also included if motor option "B: With lock" is selected.)

*9 Standard cable entry direction is "(B) Counter axis side."

10 Cable length [m]*10

—	Without cable
2	2 m
5	5 m
A	10 m

*10 The length of the encoder, motor, and lock cables are the same.

8 Positioning pin hole

—	Housing B bottom*7	
K	Body bottom 2 locations	

*7 Refer to the body mounting example on page 186 for the mounting method.

11 Driver type*11

	Compatible drivers	Power supply voltage [V]	Size		
			25	32	40
—	Without driver	—	●	●	●
A1	LECSA1-S□	100 to 120	●	●	—
A2	LECSA2-S□	200 to 230	●	●	●
B2	LECSB2-T□	200 to 240	●	●	●
C2	LECS2-T□	200 to 230	●	●	●
S2	LECS2-T□	200 to 240	●	●	●
N2	LECSN2-T5	200 to 240	●	—	—
E2	LECSN2-T5-E	200 to 240	●	—	—
92	LECSN2-T5-9	200 to 240	●	—	—
P2	LECSN2-T5-P	200 to 240	●	—	—
ND2	LECSND2-T□	200 to 240	—	●	●
ED2	LECSND2-T□-E	200 to 240	—	●	●
9D2	LECSND2-T□-9	200 to 240	—	●	●
PD2	LECSND2-T□-P	200 to 240	—	●	●

*11 When a driver type is selected, a cable is included. Select the cable type and cable length. Example) S2S2: Standard cable (2 m) + Driver (LECS2) S2: Standard cable (2 m) —: Without cable and driver

* When selecting "T 6" for the motor type, select one of the following LECSN□-T series drivers: "N2," "E2," "92," or "P2."

Applicable Stroke Table*4

Model	Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	
11-LEFS25	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—
11-LEFS32	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—
11-LEFS40	—	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●


●: Standard *4 Please contact SMC for non-standard strokes as they are produced as special orders.

7 Vacuum port*5, *6

—	Left
R	Right
D	Both left and right

*5 Select "D" for the vacuum port for suction of 50 l/min (ANR) or more.

*6 Vacuum piping is only built in on the vacuum port side selected at the time of purchase. Note that after purchase, if suction is used on the port on the opposite side, the particle generation characteristics stated in the catalogue may not apply. To make any changes after purchase, be sure to contact SMC.

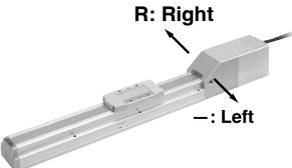

12 I/O cable length [m]*12

—	Without cable
H	Without cable (Connector only)
1	1.5

*12 When "—: Without driver" is selected for the driver type, only "—: Without cable" can be selected. Refer to www.smc.eu if an I/O cable is required.

Support Guide/11-LEFG Series

The support guide was designed to support workpieces with significant overhang.



Compatible Drivers

Driver type	Pulse input type/ Positioning type	Pulse input type	CC-Link direct input type	SSCNET III/H type	Network card type
Series	LECSA	LECSB-T	LECS2-T	LECSS-T	LECSN□-T
Number of point tables*13	Up to 7	Up to 255	Up to 255 (2 stations occupied)	—	Up to 255
Pulse input	○	○	—	—	—
Applicable network	—	—	CC-Link	SSCNET III/H	PROFINET, EtherCAT, EtherNet/IP™
Control encoder	Incremental 17-bit encoder	Absolute 22-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder	Absolute 22-bit encoder
Communication function	USB communication	USB communication, RS422 communication	USB communication, RS422 communication	USB communication	USB communication
Power supply voltage [V]	100 to 120 VAC (50/60 Hz) 200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)

*13 The LECSN□-T point table mode is only available for PROFINET and EtherCAT.

Specifications

11-LEFS25, 32, 40 AC Servo Motor

Model		11-LEFS25S2/T6		11-LEFS32S3/T7		11-LEFS40S4/T8			
Actuator specifications	Stroke [mm] ^{*1}	50 to 600		50 to 800		150 to 1000			
	Work load [kg] ^{*2}	Horizontal	20	20	40	45	50	60	
		Vertical	8	15	10	20	15	30	
	Max. speed [mm/s] ^{*3}	Stroke range	Up to 400	900	450	1000	500	1000	500
			401 to 500	720	360	1000	500	1000	500
			501 to 600	540	270	800	400	1000	500
			601 to 700	—	—	620	310	940	470
			701 to 800	—	—	500	250	760	380
			801 to 900	—	—	—	—	620	310
			901 to 1000	—	—	—	—	520	260
	Max. acceleration/deceleration [mm/s ²]	5000 (Refer to pages 123 to 125 for limit according to work load and duty ratio.)							
	Positioning repeatability [mm]	Basic type	±0.02						
		High-precision type	±0.01						
	Lost motion [mm] ^{*4}	Basic type	0.1 or less						
		High-precision type	0.05 or less						
Lead [mm]		12	6	16	8	20	10		
Impact/Vibration resistance [m/s ²] ^{*5}		50/20							
Actuation type		Ball screw							
Guide type		Linear guide							
Static allowable moment ^{*6} [N·m]	Mep (Pitching)	27		46		110			
	Mey (Yawing)	27		46		110			
	Mer (Rolling)	52		101		207			
Operating temperature range [°C]		5 to 40							
Operating humidity range [%RH]		90 or less (No condensation)							
Cleanliness class ^{*7}		ISO Class 4 (ISO 14644-1) Class 10 (Fed.Std.209E)							
Grease	Ball screw /Linear guide portion	Low particle generation grease							
Motor output/Size		100 W/□40		200 W/□60		400 W/□60			
Motor type		AC servo motor (100/200 VAC)							
Encoder ^{*10}		Motor type S2, S3, S4: Incremental 17-bit encoder (Resolution: 131072 p/rev) Motor type T6, T7, T8: Absolute 22-bit encoder (Resolution: 4194304 p/rev) (For LECSSB2-T□, LECSS2-T□) Motor type T6, T7, T8: Absolute 18-bit encoder (Resolution: 262144 p/rev) (For LECSC2-T□)							
Power [W] ^{*8}		Max. power 445		Max. power 725		Max. power 1275			
Type ^{*9}		Non-magnetizing lock							
Holding force [N]		131	255	197	385	330	660		
Power [W] at 20°C		6.3		7.9		7.9			
Rated voltage [V]		24 VDC ⁰ _{-10%}							

*1 Please contact SMC for non-standard strokes as they are produced as special orders.

*2 For details, refer to the "Speed-Work Load Graph (Guide)" on page 122.

*3 The allowable speed changes according to the stroke.

*4 A reference value for correcting errors in reciprocal operation

*5 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*6 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*7 The amount of particle generation changes according to the operating conditions and suction flow rate. Refer to the particle generation characteristics for details.

*8 Indicates the max. power during operation (including the driver) When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.

*9 Only when motor option "With lock" is selected

*10 For motor type T6, T7, and T8, the resolution will change depending on the driver type.

Weight

Series	11-LEFS25S□												
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	
Motor type	S2	2.00	2.14	2.28	2.44	2.56	2.69	2.84	2.99	3.12	3.24	3.40	3.54
	T6	2.04	2.18	2.32	2.48	2.60	2.73	2.88	3.03	3.16	3.28	3.44	3.58
Additional weight with lock [kg]	S2: 0.2/T6: 0.3												

Series	11-LEFS32S□																
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	
Motor type	S3	3.40	3.60	3.80	4.00	4.20	4.40	4.60	4.80	5.00	5.20	5.40	5.60	5.80	6.00	6.20	6.40
	T7	3.31	3.51	3.71	3.91	4.11	4.31	4.51	4.71	4.91	5.11	5.31	5.51	5.71	5.91	6.11	6.31
Additional weight with lock [kg]	S3: 0.4/T7: 0.5																

Series	11-LEFS40S□																		
Stroke [mm]	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	
Motor type	S4	5.82	6.10	6.38	6.65	6.95	7.25	7.51	7.80	8.07	8.25	8.63	8.90	9.20	9.45	9.76	10.05	10.32	10.60
	T8	5.91	6.19	6.47	6.74	7.04	7.34	7.60	7.89	8.16	8.34	8.72	8.99	9.29	9.54	9.85	10.14	10.41	10.69
Additional weight with lock [kg]	S4: 0.5/T8: 0.5																		

Slider Type Ball Screw Drive

Clean Room Specification


11-LEFS Series LEFS25, 32, 40



* For details, refer to www.smc.eu and onward.

Refer to page 35 for model selection and page 189 for particle generation characteristics.

How to Order

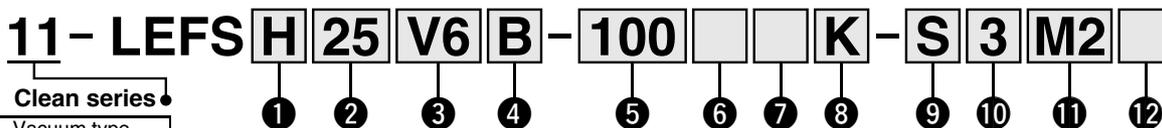

① Accuracy

—	Basic type
H	High-precision type

② Size

25
32
40

④ Lead [mm]

Symbol	11-LEFS25	11-LEFS32	11-LEFS40
A	12	16	20
B	6	8	10

⑤ Stroke [mm]*2

50 to 1000	50 to 1000
------------	------------

⑥ Motor option

—	Without option
B	With lock

⑦ Vacuum port*4, *5

—	Left
R	Right
D	Both left and right

③ Motor type

Symbol	Type	Output [W]	② Size	① Driver type	Compatible drivers
V6*1	AC servo motor	100	25	M2	LECYM2-V5
				U2	LECYU2-V5
V7	(Absolute encoder)	200	32	M2	LECYM2-V7
				U2	LECYU2-V7
V8		400	40	M2	LECYM2-V8
				U2	LECYU2-V8

*1 For motor type V6, the compatible driver part number suffix is V5.

*2 For details, refer to the applicable stroke table below.

⑧ Positioning pin hole

—	Housing B bottom*6	
K	Body bottom 2 locations	

*6 Refer to the body mounting example on page 186 for the mounting method.

*4 Select "D" for the vacuum port for suction of 50 l/min (ANR) or more.

*5 Vacuum piping is only built in on the vacuum port side selected at the time of purchase. Note that after purchase, if suction is used on the port on the opposite side, the particle generation characteristics stated in the catalogue may not apply. To make any changes after purchase, be sure to contact SMC.

⑨ Cable type*7, *8

—	Without cable
S	Standard cable
R	Robotic cable

*7 A motor cable and encoder cable are included with the product. (A lock cable is also included if motor option "B: With lock" is selected.)

*8 Standard cable entry direction is "(B) Counter axis side."


⑩ Actuator cable length [m]

—	Without cable
3	3
5	5
A	10
C	20

⑫ I/O cable length [m]*10

—	Without cable
H	Without cable (Connector only)
1	1.5

*10 When "—: Without driver" is selected for the driver type, only "—: Without cable" can be selected. Refer to www.smc.eu if an I/O cable is required.

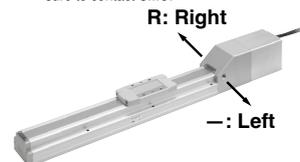

⑪ Driver type*9

	Compatible drivers	Power supply voltage [V]
—	Without driver	—
M2	LECYM2-V□	200 to 230
U2	LECYU2-V□	200 to 230

*9 When a driver type is selected, a cable is included. Select the cable type and cable length.

Applicable Stroke Table*3

Model	Stroke [mm]																			
	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
11-LEFS25	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—	—
11-LEFS32	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—
11-LEFS40	—	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

*3 Please contact SMC for non-standard strokes as they are produced as special orders.

Compatible Drivers

Driver type	MECHATROLINK-II type	MECHATROLINK-III type
Series	LECYM	LECYU
Applicable network	MECHATROLINK-II	MECHATROLINK-III
Control encoder	Absolute 20-bit encoder	
Communication device	USB communication, RS-422 communication	
Power supply voltage [V]	200 to 230 VAC (50/60 Hz)	

Support Guide/11-LEFG Series

The support guide was designed to support workpieces with significant overhang.



Specifications

AC Servo Motor

Model			11-LEFS25□V6				11-LEFS32□V7				11-LEFS40□V8							
Actuator specifications	Stroke [mm] ^{*1}		50 to 600								50 to 800				150 to 1000			
	Work load [kg] ^{*2}		Horizontal		20		20		40		45		50		60			
			Vertical		8		15		10		20		15		30			
	Max. speed [mm/s] ^{*3}	Stroke range	Up to 400		900		450		1000		500		1000		500			
			401 to 500		720		360		1000		500		1000		500			
			501 to 600		540		270		800		400		1000		500			
			601 to 700		—		—		620		310		940		470			
			701 to 800		—		—		500		250		760		380			
			801 to 900		—		—		—		—		620		310			
	901 to 1000		—		—		—		—		—		520		260			
	Max. acceleration/deceleration [mm/s ²]			5000 (Refer to pages 29 to 31 for limit according to work load and duty ratio.)														
	Positioning repeatability [mm]		Basic type		±0.02													
			High-precision type		±0.01													
	Lost motion [mm] ^{*4}		Basic type		0.1 or less													
			High-precision type		0.05 or less													
	Lead [mm]			12		6		16		8		20		10				
	Impact/Vibration resistance [m/s ²] ^{*5}			50/20														
	Actuation type			Ball screw (LEFS□), Ball screw + Belt (LEFS□ [†])														
Guide type			Linear guide															
Static allowable moment ^{*6} [N·m]		Mep (Pitching)		27				46				110						
		Mey (Yawing)		27				46				110						
		Mer (Rolling)		52				101				207						
Operating temperature range [°C]			5 to 40															
Operating humidity range [%RH]			90 or less (No condensation)															
Cleanliness class ^{*7}			ISO Class 4 (ISO 14644-1) Class 10 (Fed.Std.209E)															
Grease	Ball screw /Linear guide portion		Low particle generation grease															
Motor output/Size			100 W/□40				200 W/□60				400 W/□60							
Motor type			AC servo motor (200 VAC)															
Encoder			Absolute 20-bit encoder (Resolution: 1048576 p/rev)															
Power [W] ^{*8}			Max. power 445				Max. power 725				Max. power 1275							
Type ^{*9}			Non-magnetizing lock															
Lock unit specifications		Holding force [N]		131		255		197		385		330		660				
		Power [W] at 20°C		5.5				6				6						
		Rated voltage [V]		24 VDC ^{+10%} ₀														

- *1 Please contact SMC for non-standard strokes as they are produced as special orders.
 *2 For details, refer to the "Speed-Work Load Graph (Guide)" on page 28.
 *3 The allowable speed changes according to the stroke.
 *4 A reference value for correcting errors in reciprocal operation
 *5 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)
 Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

- *6 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.
 If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.
 *7 The amount of particle generation changes according to the operating conditions and suction flow rate. Refer to the particle generation characteristics for details.
 *8 Indicates the max. power during operation (including the driver)
 When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.
 *9 Only when motor option "With lock" is selected

Weight

Series	11-LEFS25□V6											
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600
Product weight [kg]	2.06	2.20	2.34	2.50	2.62	2.75	2.90	3.05	3.18	3.30	3.46	3.60
Additional weight with lock [kg]	0.3											

Series	11-LEFS32□V7															
Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
Product weight [kg]	3.40	3.60	3.80	4.00	4.20	4.40	4.60	4.80	5.00	5.20	5.40	5.60	5.80	6.00	6.20	6.40
Additional weight with lock [kg]	0.7															

Series	11-LEFS40□V8																		
Stroke [mm]	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	
Product weight [kg]	5.92	6.20	6.48	6.75	7.05	7.35	7.61	7.90	8.17	8.35	8.73	9.00	9.30	9.55	9.86	10.15	10.42	10.70	
Additional weight with lock [kg]	0.7																		


11-LEFS Series

AC Servo Motor


Clean Room Specification

Dimensions: Ball Screw Drive

11-LEFS25

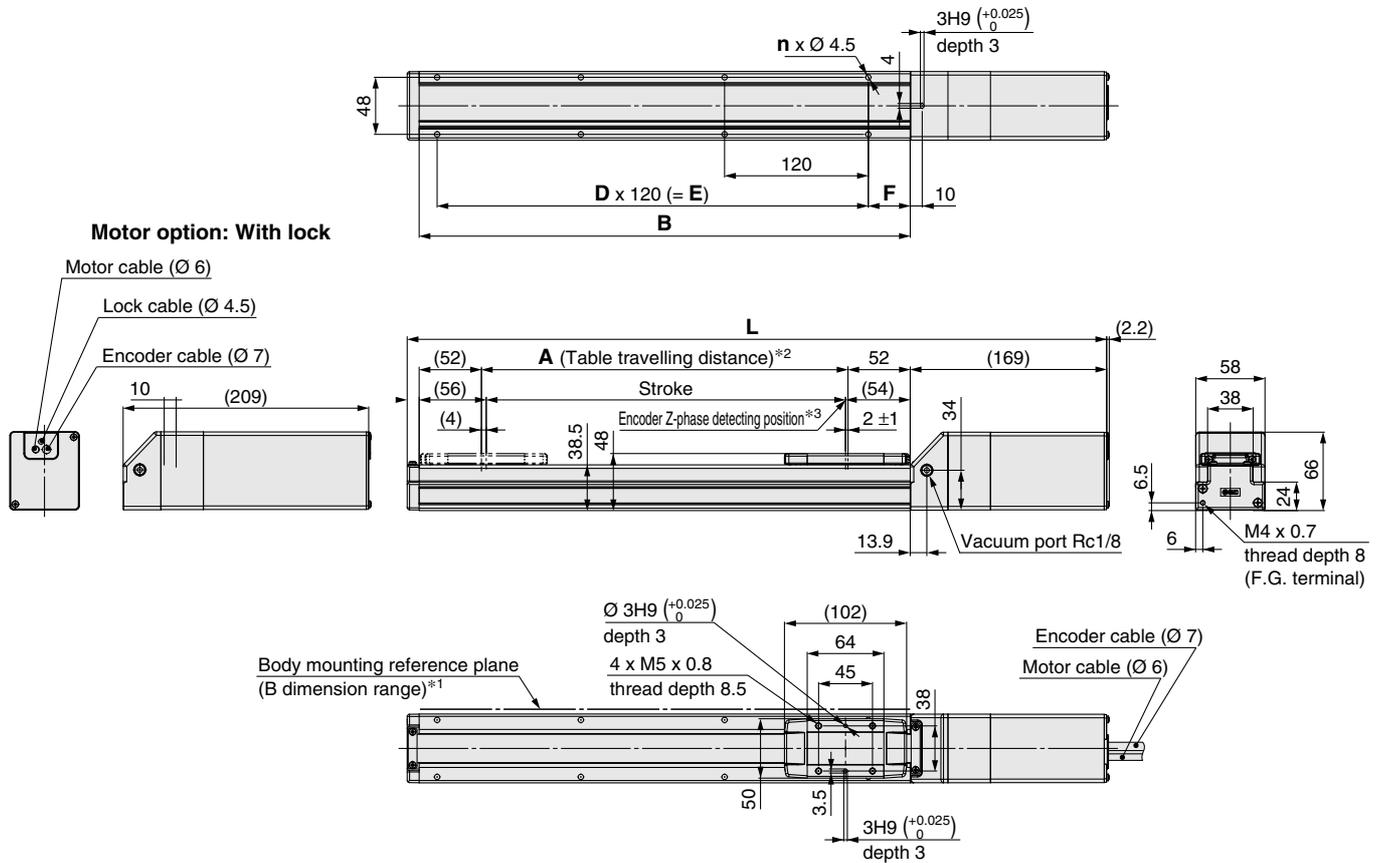

Positioning pin hole*4 (Option): Body bottom

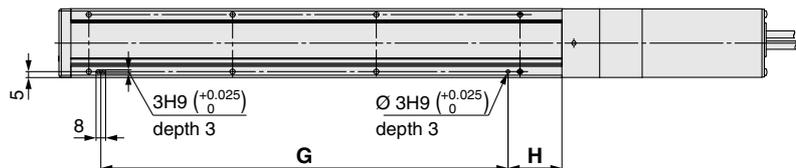

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin.
Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side
- *4 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.


Dimensions

[mm]


Model	L		A	B	n	D	E	F	G	H
	Without lock	With lock								
11-LEFS□25□□-50□	339	379	56	160	4	—	—	20	100	30
11-LEFS□25□□-100□	389	429	106	210	4	—	—	35	100	45
11-LEFS□25□□-150□	439	479	156	260	4	—	—		100	45
11-LEFS□25□□-200□	489	529	206	310	6	2	240		220	45
11-LEFS□25□□-250□	539	579	256	360	6	2	240		220	45
11-LEFS□25□□-300□	589	629	306	410	8	3	360		340	45
11-LEFS□25□□-350□	639	679	356	460	8	3	360		340	45
11-LEFS□25□□-400□	689	729	406	510	8	3	360		340	45
11-LEFS□25□□-450□	739	779	456	560	10	4	480		460	45
11-LEFS□25□□-500□	789	829	506	610	10	4	480		460	45
11-LEFS□25□□-550□	839	879	556	660	12	5	600		580	45
11-LEFS□25□□-600□	889	929	606	710	12	5	600		580	45

Dimensions: Ball Screw Drive


11-LEFS32

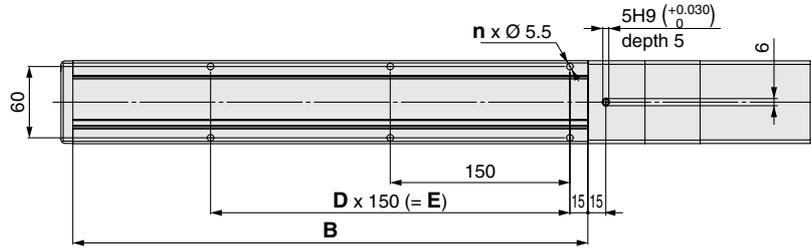

Motor option: With lock

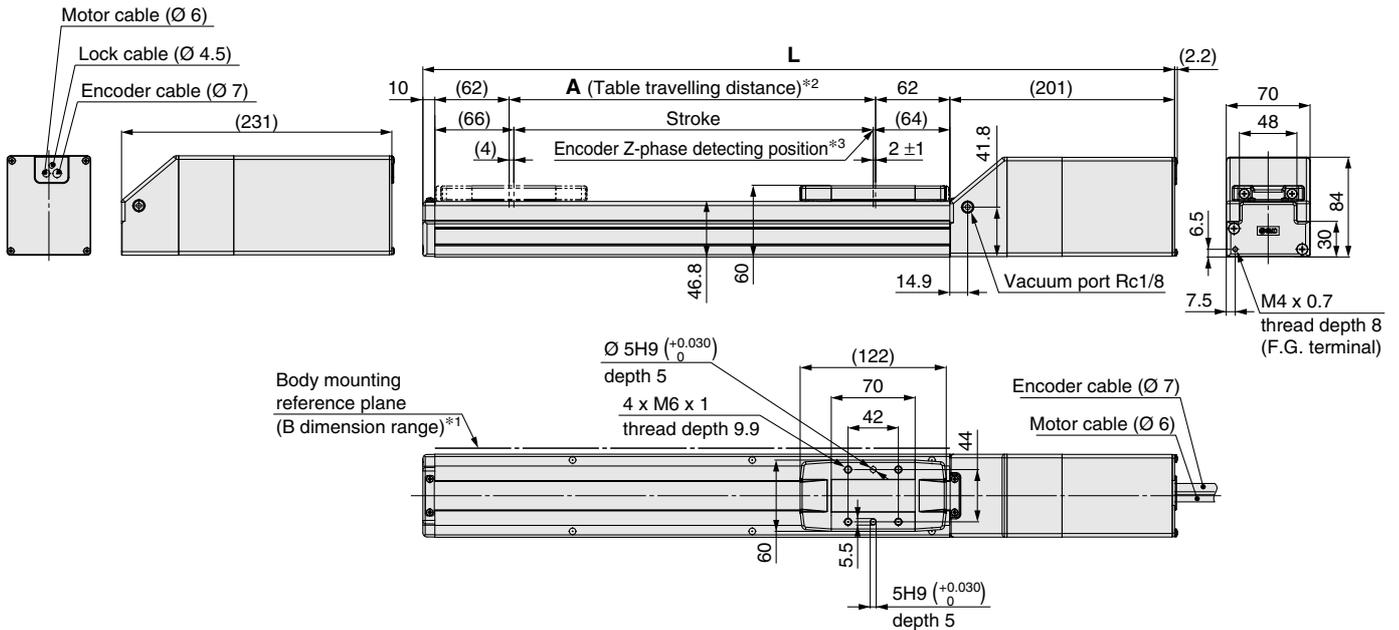

Positioning pin hole*4 (Option): Body bottom

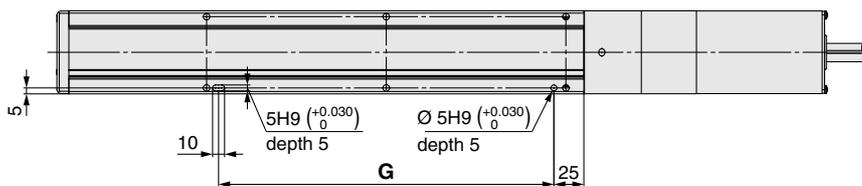

- *1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering. (Recommended height: 5 mm)
In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.
- *2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.
- *3 The Z-phase first detecting position from the stroke end of the motor side
- *4 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions

[mm]

Model	L		A	B	n	D	E	G
	Without lock	With lock						
11-LEFS□32□□-50□	391	421	56	180	4	—	—	130
11-LEFS□32□□-100□	441	471	106	230	4	—	—	130
11-LEFS□32□□-150□	491	521	156	280	4	—	—	130
11-LEFS□32□□-200□	541	571	206	330	6	2	300	280
11-LEFS□32□□-250□	591	621	256	380	6	2	300	280
11-LEFS□32□□-300□	641	671	306	430	6	2	300	280
11-LEFS□32□□-350□	691	721	356	480	8	3	450	430
11-LEFS□32□□-400□	741	771	406	530	8	3	450	430
11-LEFS□32□□-450□	791	821	456	580	8	3	450	430
11-LEFS□32□□-500□	841	871	506	630	10	4	600	580
11-LEFS□32□□-550□	891	921	556	680	10	4	600	580
11-LEFS□32□□-600□	941	971	606	730	10	4	600	580
11-LEFS□32□□-650□	991	1021	656	780	12	5	750	730
11-LEFS□32□□-700□	1041	1071	706	830	12	5	750	730
11-LEFS□32□□-750□	1091	1121	756	880	12	5	750	730
11-LEFS□32□□-800□	1141	1171	806	930	14	6	900	880


11-LEFS Series

AC Servo Motor


Clean Room Specification

Dimensions: Ball Screw Drive

11-LEFS40

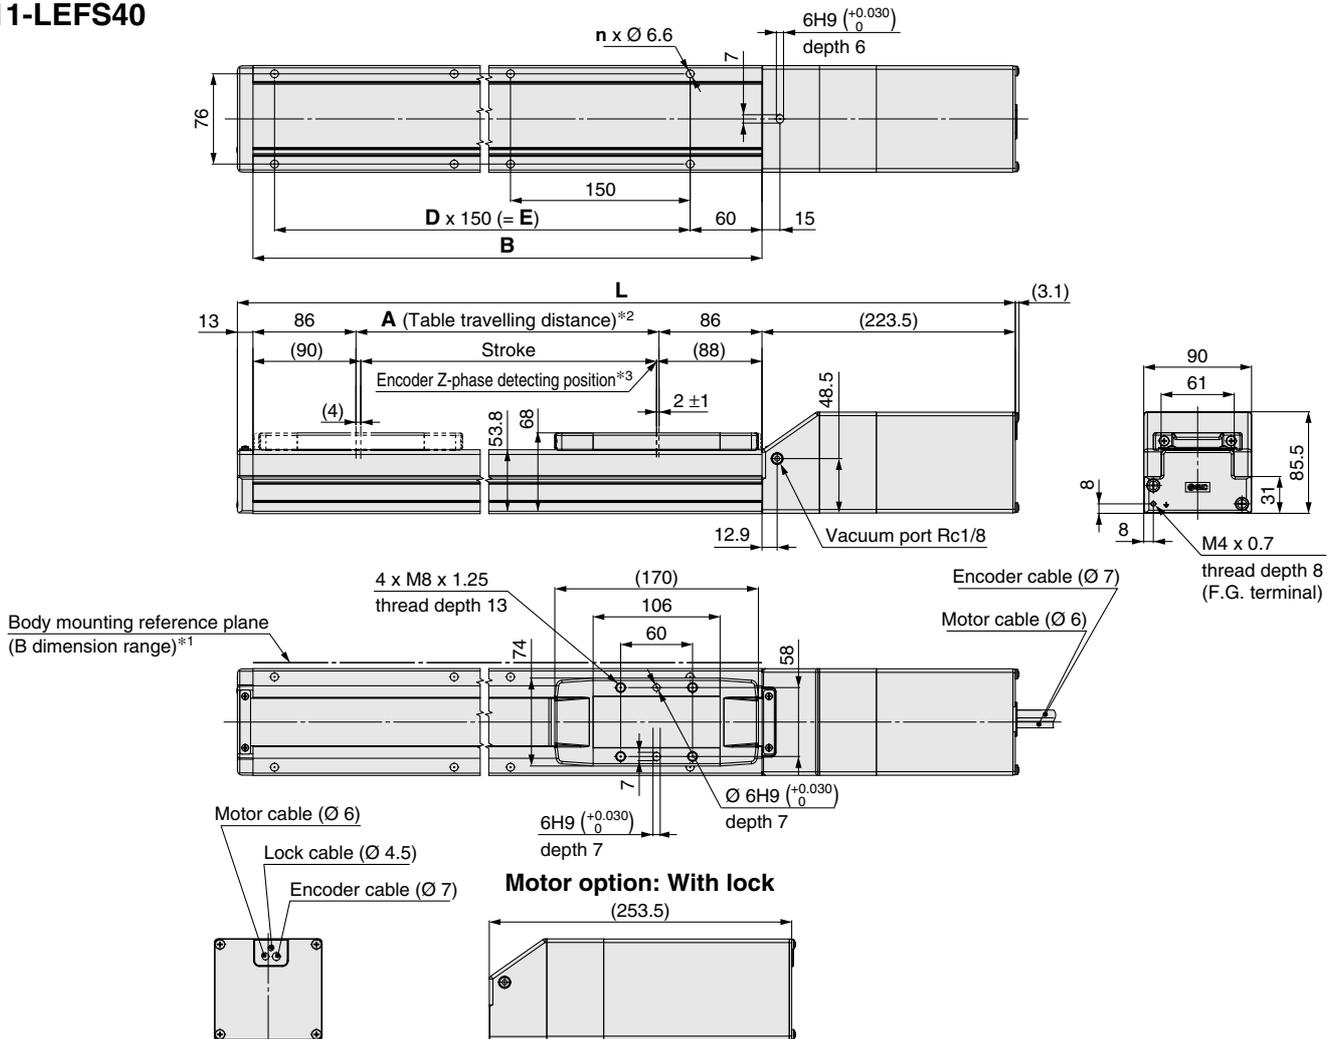

Positioning pin hole*4 (Option): Body bottom

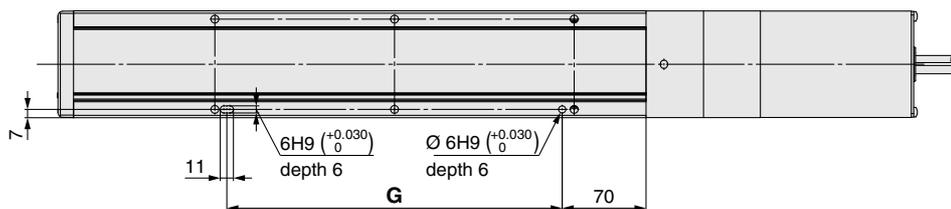

*1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 3 mm or more because of round chamfering.
(Recommended height: 5 mm)

In addition, be aware that surfaces other than the body mounting reference plane (B dimension range) may slightly protrude from the body mounting reference plane. Be sure to provide a clearance of 1 mm or more to avoid interference with workpieces, facilities, etc.

*2 This is the distance within which the table can move when it returns to origin. Make sure that workpieces mounted on the table do not interfere with other workpieces or the facilities around the table.

*3 The Z-phase first detecting position from the stroke end of the motor side

*4 When using the body bottom positioning pin holes, do not simultaneously use the housing B bottom pin hole.

Dimensions

[mm]

Model	L		A	B	n	D	E	G
	Without lock	With lock						
11-LEFS□40□□-150□	564.5	594.5	156	328	4	—	150	130
11-LEFS□40□□-200□	614.5	644.5	206	378	6	2	300	280
11-LEFS□40□□-250□	664.5	694.5	256	428	6	2	300	280
11-LEFS□40□□-300□	714.5	744.5	306	478	6	2	300	280
11-LEFS□40□□-350□	764.5	794.5	356	528	8	3	450	430
11-LEFS□40□□-400□	814.5	844.5	406	578	8	3	450	430
11-LEFS□40□□-450□	864.5	894.5	456	628	8	3	450	430
11-LEFS□40□□-500□	914.5	944.5	506	678	10	4	600	580
11-LEFS□40□□-550□	964.5	994.5	556	728	10	4	600	580
11-LEFS□40□□-600□	1014.5	1044.5	606	778	10	4	600	580
11-LEFS□40□□-650□	1064.5	1094.5	656	828	12	5	750	730
11-LEFS□40□□-700□	1114.5	1144.5	706	878	12	5	750	730
11-LEFS□40□□-750□	1164.5	1194.5	756	928	12	5	750	730
11-LEFS□40□□-800□	1214.5	1244.5	806	978	14	6	900	880
11-LEFS□40□□-850□	1264.5	1294.5	856	1028	14	6	900	880
11-LEFS□40□□-900□	1314.5	1344.5	906	1078	14	6	900	880
11-LEFS□40□□-950□	1364.5	1394.5	956	1128	16	7	1050	1030
11-LEFS□40□□-1000□	1414.5	1444.5	1006	1178	16	7	1050	1030

Support Guide for Ball Screw Drive Actuator


11-LEFG Series 11-LEFG16, 25, 32, 40

RoHS


Application example

The support guide was designed to support workpieces with significant overhang.

- As the dimensions are the same as the 11-LEF series body, installation is simple and contributes to a reduction in installation and assembly labour.
- The standard-equipped seal bands prevent grease from splashing and external foreign matter from entering.

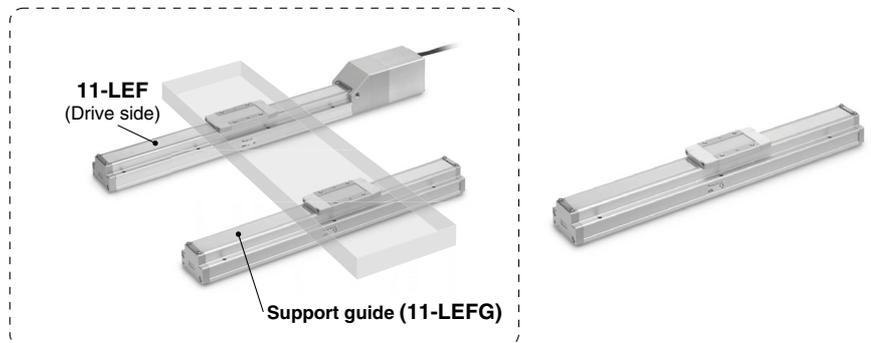

How to Order

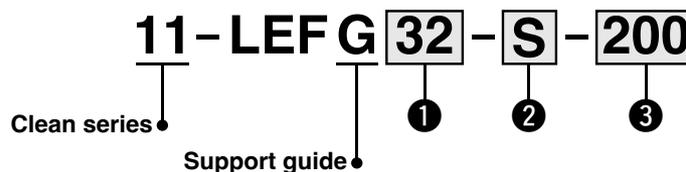

① Size

16
25
32
40

② Type of mounting pitch

Symbol	11-LEFG16	11-LEFG25	11-LEFG32	11-LEFG40	Applicable model	
S	●	●	●	●	For ball screw drive	Step motor 24 VDC (Incremental), Servo motor 24 VDC, AC servo motor

③ Stroke [mm]

50	50
to	to
1000	1000

Applicable Stroke Table For Ball Screw Drive: S

Model \ Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
11-LEFG16-S	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—
11-LEFG25-S	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—
11-LEFG32-S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—
11-LEFG40-S	—	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Weight


For Ball Screw Drive: S

Model \ Stroke [mm]	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
11-LEFG16-S	0.25	0.31	0.37	0.43	0.49	0.55	0.61	0.67	0.73	0.79	—	—	—	—	—	—	—	—	—	—
11-LEFG25-S	0.56	0.67	0.78	0.89	1.00	1.11	1.22	1.33	1.44	1.55	1.66	1.77	—	—	—	—	—	—	—	—
11-LEFG32-S	0.92	1.08	1.23	1.4	1.56	1.72	1.88	2.04	2.20	2.36	2.52	2.88	2.84	3.00	3.16	3.22	—	—	—	—
11-LEFG40-S	—	—	2.07	2.29	2.51	2.72	2.94	3.15	3.37	3.58	3.80	4.01	4.23	4.44	4.66	4.87	5.09	5.30	5.52	5.73

11-LEFG Series

Dimensions: For Ball Screw Drive

11-LEFG32-S

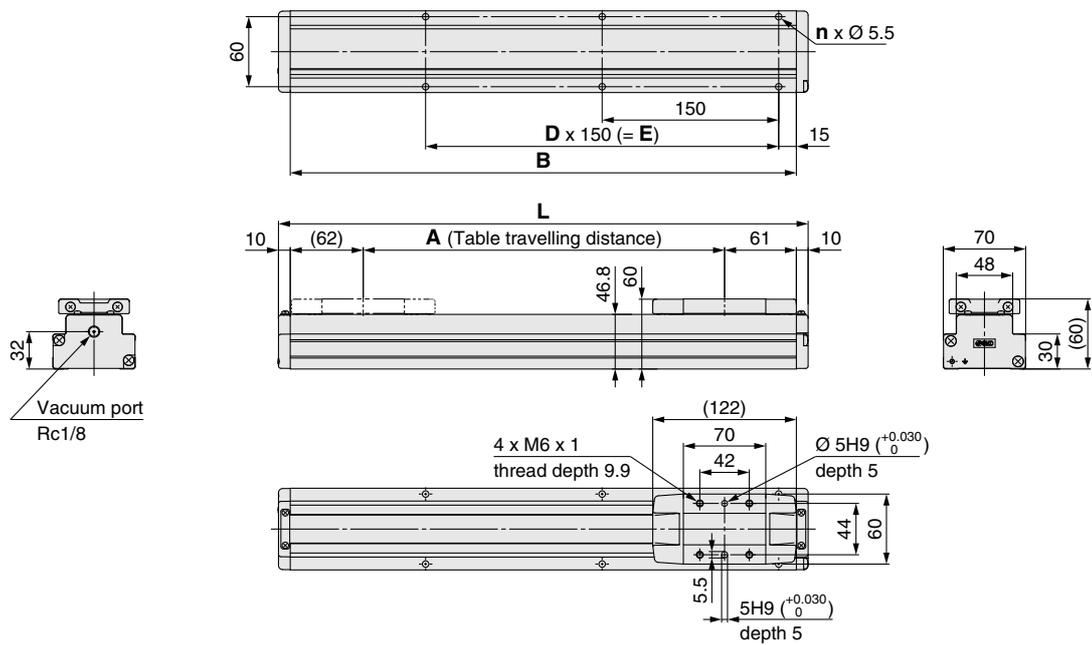

Dimensions


Model	L	A	B	n	D	E
11-LEFG32-S-50	200	57	180	4	—	—
11-LEFG32-S-100	250	107	230			
11-LEFG32-S-150	300	157	280			
11-LEFG32-S-200	350	207	330	6	2	300
11-LEFG32-S-250	400	257	380			
11-LEFG32-S-300	450	307	430			
11-LEFG32-S-350	500	357	480	8	3	450
11-LEFG32-S-400	550	407	530			
11-LEFG32-S-450	600	457	580			

Dimensions

Model	L	A	B	n	D	E
11-LEFG32-S-500	650	507	630	10	4	600
11-LEFG32-S-550	700	557	680			
11-LEFG32-S-600	750	607	730			
11-LEFG32-S-650	800	657	780	12	5	750
11-LEFG32-S-700	850	707	830			
11-LEFG32-S-750	900	757	880			
11-LEFG32-S-800	950	807	930	14	6	900

Dimensions: For Ball Screw Drive

11-LEFG40-S

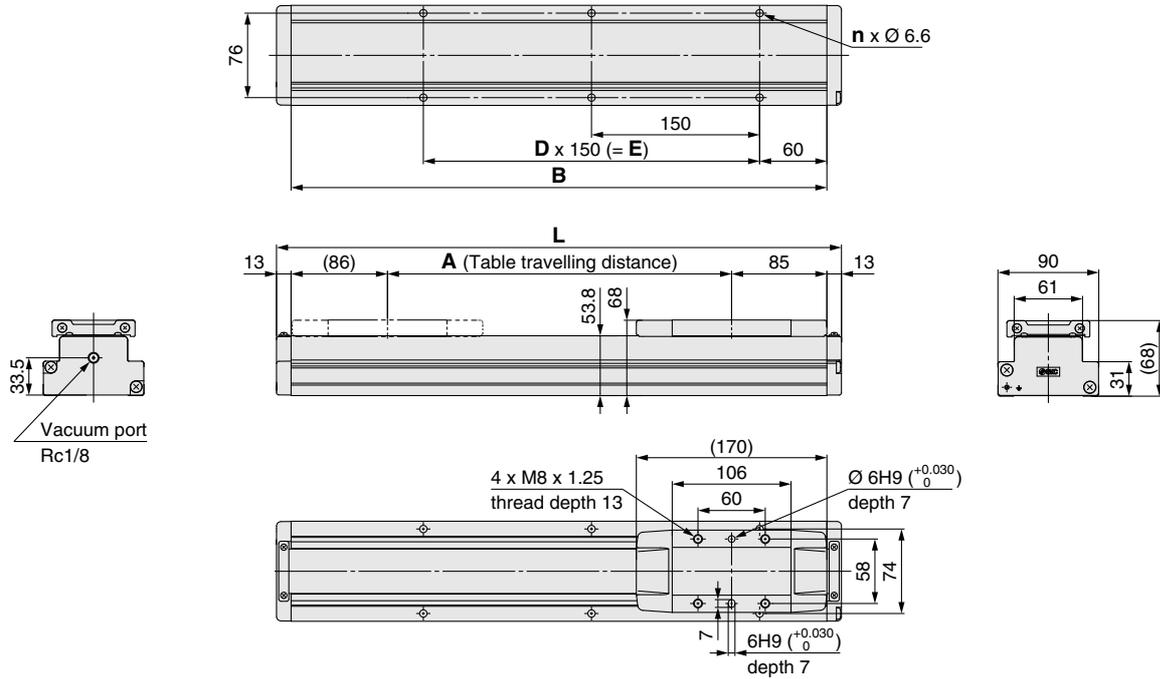

Dimensions

Model	L	A	B	n	D	E
11-LEFG40-S-150	354	157	328	4	—	150
11-LEFG40-S-200	404	207	378	6	2	300
11-LEFG40-S-250	454	257	428			
11-LEFG40-S-300	504	307	478			
11-LEFG40-S-350	554	357	528	8	3	450
11-LEFG40-S-400	604	407	578			
11-LEFG40-S-450	654	457	628			
11-LEFG40-S-500	704	507	678	10	4	600
11-LEFG40-S-550	754	557	728			
11-LEFG40-S-600	804	607	778			

Dimensions

Model	L	A	B	n	D	E
11-LEFG40-S-650	854	657	828	12	5	750
11-LEFG40-S-700	904	707	878			
11-LEFG40-S-750	954	757	928			
11-LEFG40-S-800	1004	807	978	14	6	900
11-LEFG40-S-850	1054	857	1028			
11-LEFG40-S-900	1104	907	1078			
11-LEFG40-S-950	1154	957	1128	16	7	1050
11-LEFG40-S-1000	1204	1007	1178			

Electric Actuator/Slider Type Ball Screw Drive

Secondary Battery Compatible





Refer to the "CE/UKCA/UL-compliance List" in the www.smc.eu.

25A-LEFS Series LEFS16, 25, 32, 40

RoHS



How to Order

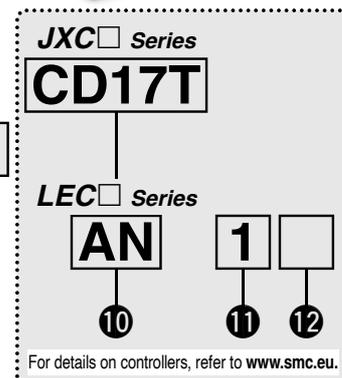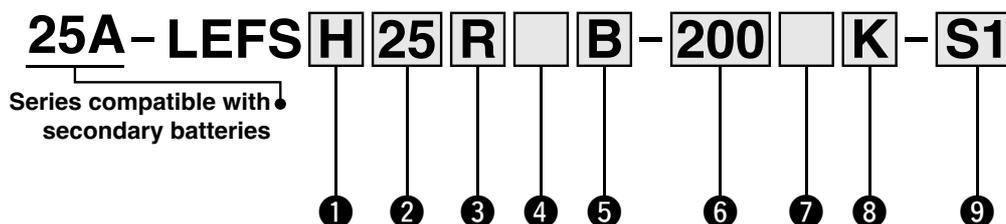

1 Accuracy

—	Basic type
H	High-precision type

2 Size

16
25
32
40

3 Motor mounting position

—	In-line
R	Right side parallel
L	Left side parallel

4 Motor type

Symbol	Type	Applicable size				Compatible controller/driver
		LEFS16	LEFS25	LEFS32	LEFS40	
—	Step motor (Servo/24 VDC)	●	●	●	●	LECP1 JXCE1 LECPA JXC91 JXCP1 JXCD1 JXCL1
A	Servo motor (24 VDC)	●	●	—	—	LECA6

5 Lead [mm]

Symbol	LEFS16	LEFS25	LEFS32	LEFS40
A	10	12	16	20
B	5	6	8	10

6 Stroke*1 [mm]

Stroke	Size	Note
		Applicable stroke
50 to 500	16	50, 100, 150, 200, 250, 300, 350, 400, 450, 500
50 to 600	25	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600
50 to 800	32	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800
150 to 1000	40	150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000

7 Motor option

—	Without option
B	With lock

8 Positioning pin hole

—	Housing B bottom*2	
K	Body bottom 2 locations	

9 Actuator cable type/length*4

Standard cable [m]		Robotic cable [m]			
—	None	R1	1.5	RA	10*3
S1	1.5*6	R3	3	RB	15*3
S3	3*6	R5	5	RC	20*3
S5	5*6	R8	8*3		

Replacement Parts/Grease Pack

Applied portion	Order no.
Ball screw	GR-D-005 (5 g)
Rail guide	GR-D-010 (10 g)

* Copper and zinc materials are used for the motors, cables, controllers/drivers.
* The 25A-series specifications and dimensions are the same as those of the standard model.

For details, refer to the www.smc.eu.

Electric Actuator/Slider Type Ball Screw Drive **25A-LEFS Series**

Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)

Secondary Battery Compatible

JXC Series

⑩ Controller

—	Without controller
C□1□□	With controller

C D 1 7 T

Interface (Communication protocol/Input/Output)

Symbol	Type	Number of axes, Special specification	
		Standard	With STO sub-function
5	Parallel input (NPN)	●	
6	Parallel input (PNP)	●	
E	EtherCAT	●	●
9	EtherNet/IP™	●	●
P	PROFINET	●	●
D	DeviceNet®	●	
L	IO-Link	●	●
M	CC-Link	●	

Mounting

7	Screw mounting
8*10	DIN rail

Number of axes, Special specification

Symbol	Number of axes	Specification
1	Single axis	Standard
F	Single axis	With STO sub-function

Communication plug connector, I/O cable*11

Symbol	Type	Applicable interface
—	Without accessory	—
S	Straight type communication plug connector	DeviceNet®
T	T-branch type communication plug connector	CC-Link Ver. 1.10
1	I/O cable (1.5 m)	Parallel input (NPN) Parallel input (PNP)
3	I/O cable (3 m)	
5	I/O cable (5 m)	



LEC Series

AN 1 □

⑩ ⑪ ⑫

⑩ Controller/Driver type*5

—	Without controller/driver	
6N	LECA6 (Step data input type)	NPN
6P		PNP
AN	LECPA*6 *7 (Pulse input type)	NPN
AP		PNP

⑪ I/O cable length*8

—	Without cable (Without communication plug connector)	
1	1.5 m	
3	3 m*9	
5	5 m*9	

⑫ Controller/Driver mounting

—	Screw mounting
D	DIN rail*10



- *1 Please contact SMC for non-standard strokes as they are produced as special orders.
- *2 Refer to the body mounting example in the www.smc.eu for the mounting method.
- *3 Produced upon receipt of order (Robotic cable only)
- *4 The standard cable should only be used on fixed parts.
For use on moving parts, select the robotic cable.
Refer to the www.smc.eu if only the actuator cable is required.
- *5 For details on controllers/drivers and compatible motors, refer to the compatible controllers/drivers on the next page.
- *6 Only available for the motor type "Step motor"
- *7 When pulse signals are open collector, order the current limiting resistor (LEC-PA-R-□) separately. (Refer to the www.smc.eu.)

- *8 When "Without controller/driver" is selected for controller/driver types, I/O cable cannot be selected. If an I/O cable is required, order the cable separately for each series. (For details, refer to the www.smc.eu.)
- *9 When "Pulse input type" is selected for controller/driver types, pulse input usable only with differential. Only 1.5 m cables usable with open collector
- *10 The DIN rail is not included. It must be ordered separately.
- *11 Select "—" for anything other than DeviceNet®, CC-Link, or parallel input.
Select "—," "S," or "T" for DeviceNet® or CC-Link.
Select "—," "1," "3," or "5" for parallel input.

⚠ Caution

[CE/UKCA-compliant products]

① EMC compliance was tested by combining the electric actuator LEF series and the controller LEC/JXC series.

The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, compliance with the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify compliance with the EMC directive for the machinery and equipment as a whole.

② For the servo motor (24 VDC) specification, EMC compliance was tested by installing a noise filter set (LEC-NFA). Refer to the www.smc.eu for the noise filter set. Refer to the LECA series Operation Manual for installation.

[UL-compliant products (For the LEC series)]



When compliance with UL is required, the electric actuator and controller/driver should be used with a UL1310 Class 2 power supply.

The actuator and controller/driver are sold as a package.

Confirm that the combination of the controller/driver and actuator is correct.

<Check the following before use.>

- ① Check the actuator label for the model number (after "25A-"). This number should match that of the controller/driver.
- ② Check that the Parallel I/O configuration matches (NPN or PNP).

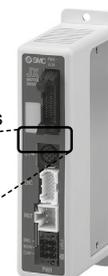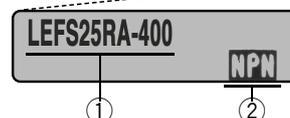

* Refer to the Operation Manual for using the products. Please download it via our website: <https://www.smc.eu>

25A-LEFS Series

Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)

Secondary Battery Compatible

Compatible Controllers/Drivers

Type	Step data input type	Step data input type	Pulse input type
			
Series	JXC51 JXC61	LECA6	LECPA
Features	Parallel I/O	Parallel I/O	Operation by pulse signals
Compatible motor	Step motor (Servo/24 VDC)	Servo motor (24 VDC)	Step motor (Servo/24 VDC)
Max. number of step data	64 points		—
Power supply voltage	24 VDC		

Type	EtherCAT direct input type	EtherCAT direct input type with STO sub-function	EtherNet/IP™ direct input type	EtherNet/IP™ direct input type with STO sub-function	PROFINET direct input type	PROFINET direct input type with STO sub-function	DeviceNet® direct input type	IO-Link direct input type	IO-Link direct input type with STO sub-function	CC-Link direct input type
										
Series	JXCE1	JXCEF	JXC91	JXC9F	JXCP1	JXCPF	JXCD1	JXCL1	JXCLF	JXCM1
Features	EtherCAT direct input	EtherCAT direct input with STO sub-function	EtherNet/IP™ direct input	EtherNet/IP™ direct input with STO sub-function	PROFINET direct input	PROFINET direct input with STO sub-function	DeviceNet® direct input	IO-Link direct input	IO-Link direct input with STO sub-function	CC-Link direct input
Compatible motor	Step motor (Servo/24 VDC)									
Max. number of step data	64 points									
Power supply voltage	24 VDC									

Electric Actuator/Slider Type Ball Screw Drive

Secondary Battery Compatible

25A-LEFS Series LEFS25, 32, 40



How to Order

Refer to the "CE/UKCA/UL-compliance List" in the www.smc.eu.

25A-LEFS H 32 R S3 B - 200 K - S 2 A2

Series compatible with secondary batteries

1 Accuracy

—	Basic type
H	High-precision type

2 Size

25
32
40

3 Motor mounting position

—	In-line
R	Right side parallel
L	Left side parallel

5 Lead [mm]

Symbol	25A-LEFS25	25A-LEFS32	25A-LEFS40
H	20	24	30
A	12	16	20
B	6	8	10

6 Stroke [mm]

50 to 1200	50 to 1200
------------	------------

7 Motor option

—	Without option
B	With lock

* For details, refer to the applicable stroke table below.

4 Motor type

Symbol	Type	Output [W]	2 Size	1 Driver type	Compatible drivers
S2*1	AC servo motor	100	25	A1/A2	LECSA□-S1
S3	Incremental encoder	200	32	A1/A2	LECSA□-S3
S4		400	40	A2	LECSA2-S4
T6*2	AC servo motor (Absolute encoder)	100	25	B2	LECSB2-T5
T7				C2	LECSB2-T5
				S2	LECSS2-T5
				B2	LECSB2-T7
				C2	LECSB2-T7
T8	S2	LECSS2-T7			
	B2	LECSB2-T8			
	C2	LECSB2-T8			
T8	S2	LECSS2-T8			

*1 For motor type S2, the compatible driver part number suffix is S1.

*2 For motor type T6, the compatible driver part number is LECS□2-T5.

8 Positioning pin hole

—	Housing B bottom*1	
K	Body bottom 2 locations	

*1 Refer to the body mounting example for the mounting method. (Refer to the www.smc.eu.)

9 Cable type*1 *2

—	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

*1 A motor cable and encoder cable are included with the product. (A lock cable is also included if motor option "B: With lock" is selected.)

*2 Standard cable entry direction is

- Parallel: (A) Axis side
- In-line: (B) Counter axis side

10 Cable length*1 [m]

—	Without cable
2	2
5	5
A	10

*1 The length of the encoder, motor, and lock cables are the same.

11 Driver type

	Compatible drivers	Power supply voltage [V]	Size		
			25	32	40
—	Without driver	—	●	●	●
A1	LECSA1-S□	100 to 120	●	●	—
A2	LECSA2-S□	200 to 230	●	●	●
B2	LECSB2-T□	200 to 240	●	●	●
C2	LECSB2-T□	200 to 230	●	●	●
S2	LECSS2-T□	200 to 240	●	●	●

* When a driver type is selected, a cable is included. Select the cable type and cable length.

Example) S2S2: Standard cable (2 m) + Driver (LECSS2)
S2: Standard cable (2 m)
—: Without cable and driver

12 I/O cable length [m]*3

—	Without cable
H	Without cable (Connector only)
1	1.5

*3 When "—: Without driver" is selected for the driver type, only "—: Without cable" can be selected. If an I/O cable is required, refer to the "Options" page in the www.smc.eu.

Applicable Stroke Table

Model	Stroke [mm]																							
	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200		
25A-LEFS25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—		
25A-LEFS32	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—		
25A-LEFS40	—	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		

* Please contact SMC for non-standard strokes as they are produced as special orders.

Compatible Drivers*1

* The 25A-series specifications and dimensions are the same as those of the standard model. For details, refer to the www.smc.eu.

Driver type	Pulse input type/ Positioning type	Pulse input type	CC-Link direct input type	SSCNET III/H type
Series	LECSA	LECSB-T	LECSB-T	LECSS-T
Number of point tables	Up to 7	Up to 255	Up to 255 (2 stations occupied)	—
Pulse input	○	○	—	—
Applicable network	—	—	CC-Link	SSCNET III/H
Control encoder	Incremental 17-bit encoder	Absolute 22-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder
Communication function	USB communication	USB communication, RS422 communication	USB communication, RS422 communication	USB communication
Power supply voltage [V]	100 to 120 VAC (50/60 Hz) 200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)

Replacement Parts/Grease Pack

Applied portion	Order no.
Ball screw	GR-D-005 (5 g)
Rail guide	GR-D-010 (10 g)

*1 Copper and zinc materials are used for the motors, cables, controllers/drivers.

Electric Actuator/Slider Type Ball Screw Drive

Secondary Battery Compatible



25A-LEFS Series LEFS25, 32, 40



Refer to the "CE/UKCA/
UL-compliance List" in
the www.smc.eu.

How to Order

25A-LEFS H 32 R V7 B - 200 □ K - S 2 M2 □

Series compatible with secondary batteries

1 Accuracy	2 Size	3 Motor mounting position	5 Lead [mm]	6 Stroke [mm]	7 Motor option																																							
<table border="1"> <tr><td>—</td><td>Basic type</td></tr> <tr><td>H</td><td>High-precision type</td></tr> </table>	—	Basic type	H	High-precision type	<table border="1"> <tr><td>25</td></tr> <tr><td>32</td></tr> <tr><td>40</td></tr> </table>	25	32	40	<table border="1"> <tr><td>—</td><td>In-line</td></tr> <tr><td>R</td><td>Right side parallel</td></tr> <tr><td>L</td><td>Left side parallel</td></tr> </table>	—	In-line	R	Right side parallel	L	Left side parallel	<table border="1"> <tr><th>Symbol</th><th>25A-LEFS25</th><th>25A-LEFS32</th><th>25A-LEFS40</th></tr> <tr><td>H</td><td>20</td><td>24</td><td>30</td></tr> <tr><td>A</td><td>12</td><td>16</td><td>20</td></tr> <tr><td>B</td><td>6</td><td>8</td><td>10</td></tr> </table>	Symbol	25A-LEFS25	25A-LEFS32	25A-LEFS40	H	20	24	30	A	12	16	20	B	6	8	10	<table border="1"> <tr><td>50</td><td>50</td></tr> <tr><td>to</td><td>to</td></tr> <tr><td>1200</td><td>1200</td></tr> </table>	50	50	to	to	1200	1200	<table border="1"> <tr><td>—</td><td>Without option</td></tr> <tr><td>B</td><td>With lock</td></tr> </table>	—	Without option	B	With lock
—	Basic type																																											
H	High-precision type																																											
25																																												
32																																												
40																																												
—	In-line																																											
R	Right side parallel																																											
L	Left side parallel																																											
Symbol	25A-LEFS25	25A-LEFS32	25A-LEFS40																																									
H	20	24	30																																									
A	12	16	20																																									
B	6	8	10																																									
50	50																																											
to	to																																											
1200	1200																																											
—	Without option																																											
B	With lock																																											

* Refer to the applicable stroke table.

4 Motor type

Symbol	Type	Output [W]	2 Size	1 Driver type	Compatible drivers
V6*1	AC servo motor (Absolute encoder)	100	25	M2	LECYM2-V5
V7		200	32	M2	LECYM2-V7
V8		400	40	M2	LECYM2-V8
				U2	LECYU2-V5
				U2	LECYU2-V7
				U2	LECYU2-V8

*1 For motor type V6, the compatible driver part number suffix is V5.

8 Positioning pin hole

—	Housing B bottom*1	
K	Body bottom 2 locations	

*1 Refer to the body mounting example in the www.smc.eu for the mounting method.

9 Cable type*1 *2

—	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

*1 A motor cable and encoder cable are included with the product. (A lock cable is also included if motor option "B: With lock" is selected.)

*2 Standard cable entry direction is
· Parallel: (A) Axis side
· In-line: (B) Counter axis side

10 Cable length*1 [m]

—	Without cable
3	3
5	5
A	10
C	20

*1 The length of the encoder, motor, and lock cables are the same.

11 Driver type

	Compatible drivers	Power supply voltage [V]
—	Without driver	—
M2	LECYM2-V□	200 to 230
U2	LECYU2-V□	200 to 230

12 I/O cable length [m]*3

—	Without cable
H	Without cable (Connector only)
1	1.5

*3 When "—: Without driver" is selected for the driver type, only "—: Without cable" can be selected. Refer to the www.smc.eu if an I/O cable is required.

Applicable Stroke Table

Model	Stroke [mm]																						
	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200	
25A-LEFS25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—
25A-LEFS32	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—
25A-LEFS40	—	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

* Please contact SMC for non-standard strokes as they are produced as special orders.

Compatible Drivers

Driver type	MECHATROLINK-II type	MECHATROLINK-III type
Series	LECYM	LECYU
Applicable network	MECHATROLINK-II	MECHATROLINK-III
Control encoder	Absolute 20-bit encoder	
Communication device	USB communication, RS-422 communication	
Power supply voltage [V]	200 to 230 VAC (50/60 Hz)	

* Copper and zinc materials are used for the motors, cables, controllers/drivers.

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the www.smc.eu.

Replacement Parts/Grease Pack

Applied portion	Order no.
Ball screw	GR-D-005 (5 g)
Rail guide	GR-D-010 (10 g)

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “Caution,” “Warning” or “Danger.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)¹⁾, and other safety regulations.

-  **Danger:** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.
-  **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.
-  **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

- 1) ISO 4414: Pneumatic fluid power – General rules and safety requirements for systems and their components.
- ISO 4413: Hydraulic fluid power – General rules and safety requirements for systems and their components.
- IEC 60204-1: Safety of machinery – Electrical equipment of machines. (Part 1: General requirements)
- ISO 10218-1: Robots and robotic devices - Safety requirements for industrial robots - Part 1: Robots.
- etc.

Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalogue information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

4. SMC products cannot be used beyond their specifications. They are not developed, designed, and manufactured to be used under the following conditions or environments.

Use under such conditions or environments is not allowed.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Use for nuclear power, railways, aviation, space equipment, ships, vehicles, military application, equipment affecting human life, body, and property, combustion equipment, entertainment equipment, emergency shut-off circuits, press clutches, brake circuits, safety equipment, etc., and use for applications that do not conform to standard specifications such as catalogues and operation manuals.
3. Use for interlock circuits, except for use with double interlock such as installing a mechanical protection function in case of failure. Please periodically inspect the product to confirm that the product is operating properly.

Caution

SMC develops, designs, and manufactures products to be used for automatic control equipment, and provides them for peaceful use in manufacturing industries. Use in non-manufacturing industries is not allowed.

Products SMC manufactures and sells cannot be used for the purpose of transactions or certification specified in the Measurement Act of each country.

The new Measurement Act prohibits use of any unit other than SI units in Japan.

Limited warranty and Disclaimer/Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”. Read and accept them before using the product.

Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.²⁾ Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalogue for the particular products.

2) Suction cups (Vacuum pads) are excluded from this 1 year warranty.

A suction cup (vacuum pad) is a consumable part, so it is warranted for a year after it is delivered. Also, even within the warranty period, the wear of a product due to the use of the suction cup (vacuum pad) or failure due to the deterioration of rubber material are not allowed by the limited warranty.

Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Safety Instructions

Be sure to read the “Handling Precautions for SMC Products” (M-E03-3) and “Operation Manual” before use.

SMC Corporation (Europe)

Austria	+43 (0)2262622800	www.smc.at	office.at@smc.com
Belgium	+32 (0)33551464	www.smc.be	info@smc.be
Bulgaria	+359 (0)2807670	www.smc.bg	sales.bg@smc.com
Croatia	+385 (0)13707288	www.smc.hr	sales.hr@smc.com
Czech Republic	+420 541424611	www.smc.cz	office.at@smc.com
Denmark	+45 70252900	www.smc.dk	smc.dk@smc.com
Estonia	+372 651 0370	www.smc.ee	info.ee@smc.com
Finland	+358 207513513	www.smc.fi	smc.fi@smc.com
France	+33 (0)164761000	www.smc-france.fr	supportclient.fr@smc.com
Germany	+49 (0)61034020	www.smc.de	info.de@smc.com
Greece	+30 210 2717265	www.smc.hellas.gr	sales@smchellas.gr
Hungary	+36 23513000	www.smc.hu	office.hu@smc.com
Ireland	+353 (0)14039000	www.smcautomation.ie	technical.ie@smc.com
Italy	+39 03990691	www.smcitalia.it	mailbox.it@smc.com
Latvia	+371 67817700	www.smc.lv	info.lv@smc.com

Lithuania	+370 5 2308118	www.smc.lt	info.lt@smc.com
Netherlands	+31 (0)205318888	www.smc.nl	info@smc.nl
Norway	+47 67129020	www.smc-norge.no	post.no@smc.com
Poland	+48 22 344 40 00	www.smc.pl	office.pl@smc.com
Portugal	+351 214724500	www.smc.eu	apoiocliente.pt@smc.com
Romania	+40 213205111	www.smcromania.ro	office.ro@smc.com
Russia	+7 (812)3036600	www.smc.eu	sales@smcru.com
Slovakia	+421 (0)413213212	www.smc.sk	sales.sk@smc.com
Slovenia	+386 (0)73885412	www.smc.si	office.si@smc.com
Spain	+34 945184100	www.smc.eu	post.es@smc.com
Sweden	+46 (0)86031240	www.smc.nu	order.se@smc.com
Switzerland	+41 (0)523963131	www.smc.ch	helpcentre.ch@smc.com
Turkey	+90 212 489 0 440	www.smcturkey.com.tr	satis.tr@smc.com
UK	+44 (0)845 121 5122	www.smc.uk	sales.gb@smc.com
South Africa	+27 10 900 1233	www.smcza.co.za	Sales.za@smc.com