

Electric Actuator

LEJ Series



High Rigidity Slider Type

Low-profile/Low center of gravity

Height dimension: **58 mm**



LEJS40



AC Servo Motor

Ball Screw Drive *LEJS Series*

Size: 40, 63 ▶ p. 175, 186

Work load: **85 kg**

Positioning repeatability: ± 0.01 mm (High-precision type)

Max. speed: **1800 mm/s**

Max. acceleration/deceleration: **20000 mm/s²**

*1 ISO14644-1

*2 The particle generation characteristics change depending on the suction flow rate.



Clean Room Specification ▶ p. 175, 186

11-LEFS

ISO Class 4^{+1,2}


Belt Drive *LEJB Series*

Size: 40, 63 ▶ p. 175, 186

Max. stroke: **3000 mm**

Max. speed: **3000 mm/s**

Max. acceleration/deceleration: **20000 mm/s²**

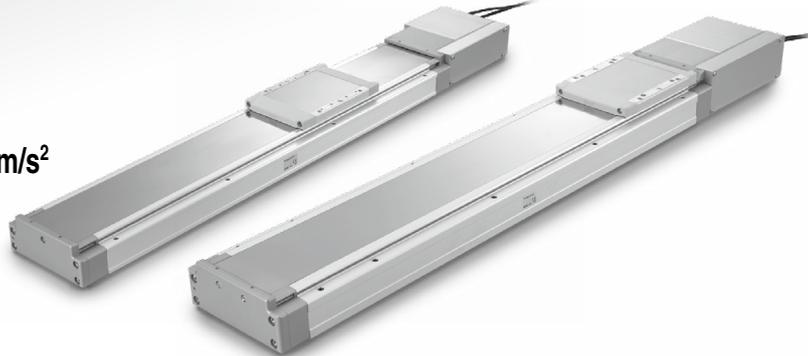

AC Servo Motor Drivers ▶ p. 764

▶ For incremental encoders

- Pulse input type/
Positioning type
LECSA Series



▶ For absolute encoders

- Pulse input type
LECSB(-T) Series
- CC-Link direct input type
LECS(-T) Series
- SSCNET III type
LECSS Series
- SSCNET III/H type
LECSS-T Series
- Network card type
LECSN-T Series
- MECHATROLINK type
LECY□ Series




The LECSB-S, LECS(-S), and LECS(-S) electric actuator drivers are to be discontinued. Please select one of the substitute drivers ending with a "-T" instead: the LECSB-T, LECS(-T), and LECS(-T).

- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEH
- LEY-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC□
- LEC□
- JXC□
- LECS□
- LECS□-T
- LECY□
- Motorless
- LAT3

High Rigidity Slider Type *LEJ Series*

●High precision/High rigidity



Double axis linear guide reduces deflection



Linear guide (Double axis)


Table displacement

* LEJ□63: L = 64.5 mm

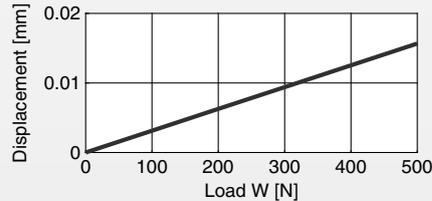

●Reduction in installation labor

It is possible to mount the main body without removing the external cover, etc.

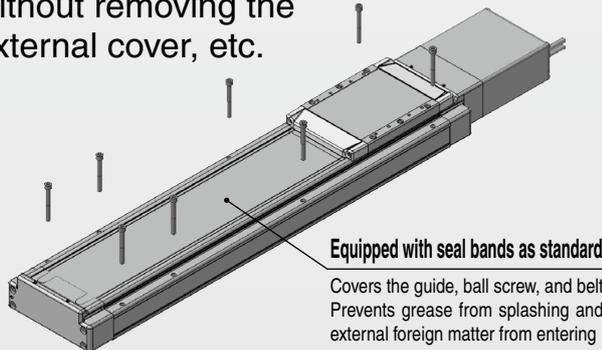


Equipped with seal bands as standard

Covers the guide, ball screw, and belt
Prevents grease from splashing and external foreign matter from entering

●Workpiece does not interfere with the motor.


Table height > Motor height

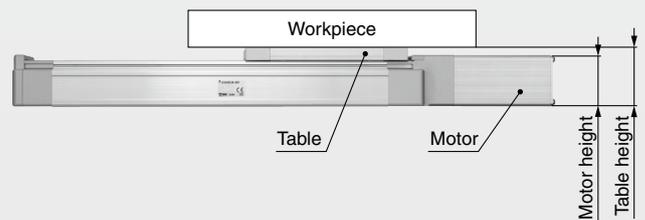

●Solid state auto switch can be mounted.

(For checking the limit and the intermediate signal)


- Switch wiring can be placed in the body
- A contact and B contact types available
- D-M9□W (2-color indicator), D-M9□, D-M9□E (B contact type)



2-color indicator solid state auto switch


Appropriate setting of the mounting position can be performed without mistakes.

A green light lights up at the optimum operating range.

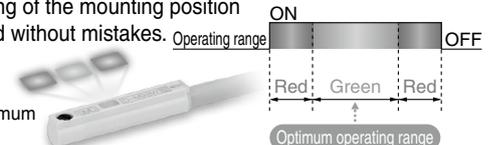


Application Examples

For pick and place operations

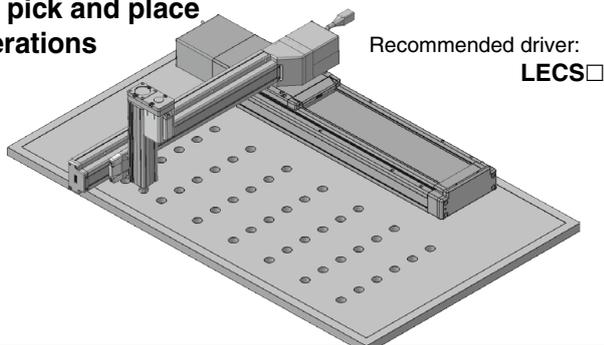

Recommended driver:
LECS □


For glue dispensing/High speed trajectory is available

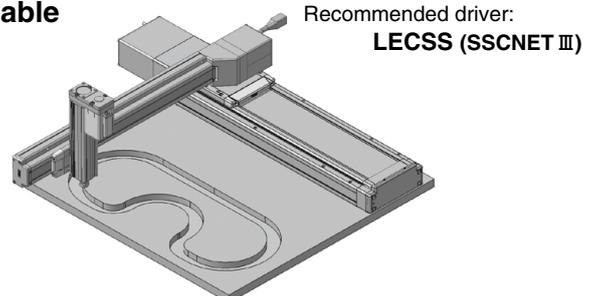

Recommended driver:
LECSS (SSCNET III)

Ball Screw Drive/*LEJS* Series


Model	Lead [mm]			Max. speed [mm/s]
LEJS40	24	16	8	1800 (Lead 24)
LEJS63	30	20	10	1800 (Lead 30)

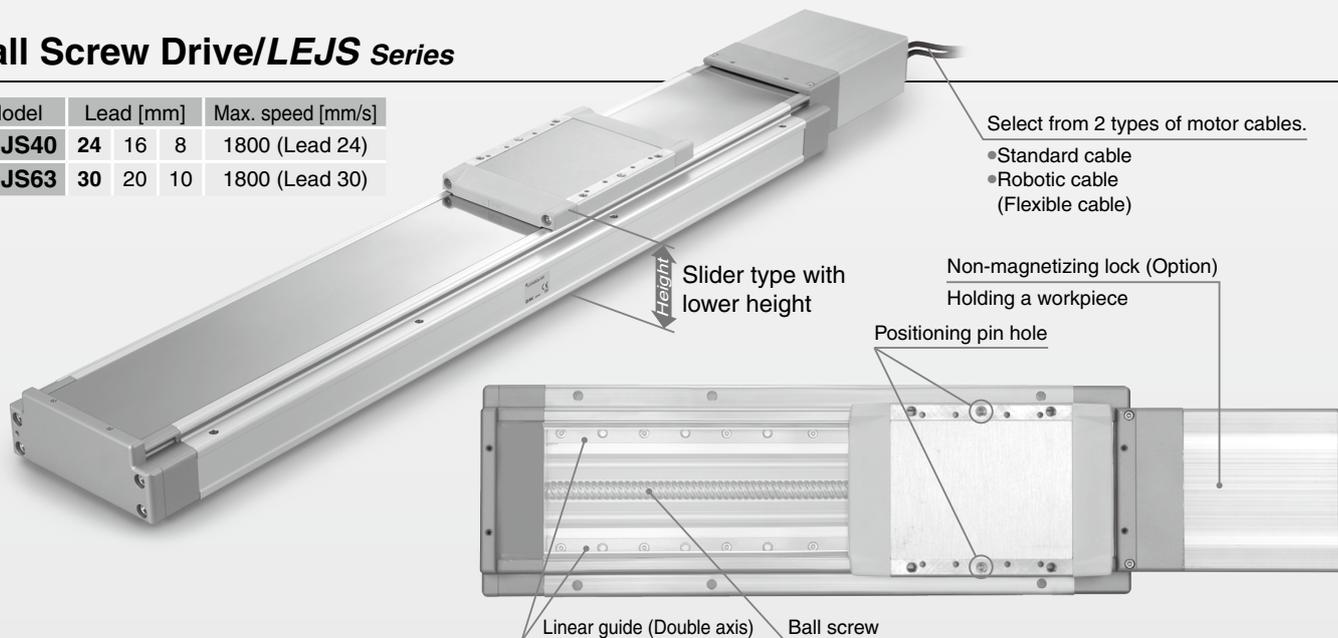


Built-in Intermediate Supports Type

Ball Screw Drive *LEJS63*□-□*M* Series

A maximum speed of 1800 mm/s* has been achieved throughout the entire stroke

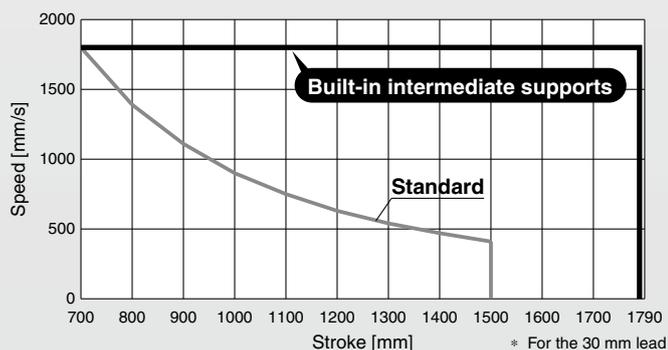

The use of intermediate supports results in reduced deflection of the ball screw when a long stroke is used.

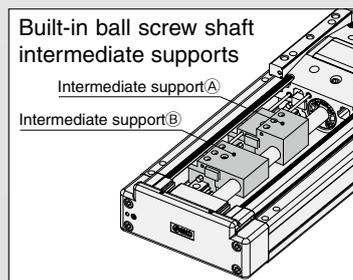


Clean Room Specification

Ball Screw Drive *11-LEJS* Series Size: 40, 63

ISO Class 4*1*2


- Built-in vacuum piping
- It is possible to mount the main body without removing the external cover, etc.

*1 ISO14644-1
*2 The particle generation characteristics change depending on the suction flow rate. Refer to page 656 for details.

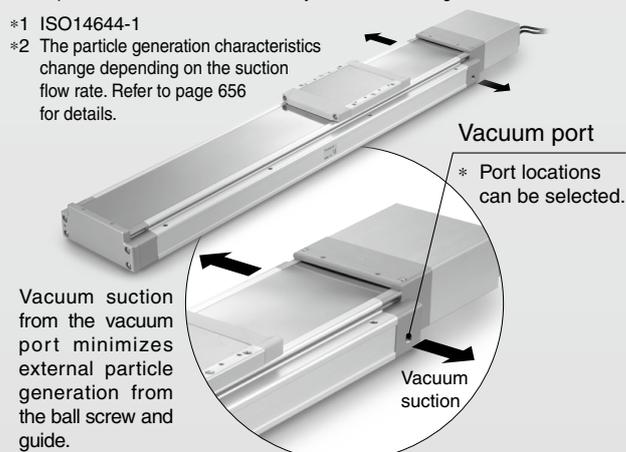

Vacuum suction from the vacuum port minimizes external particle generation from the ball screw and guide.


Belt Drive/*LEJB* Series

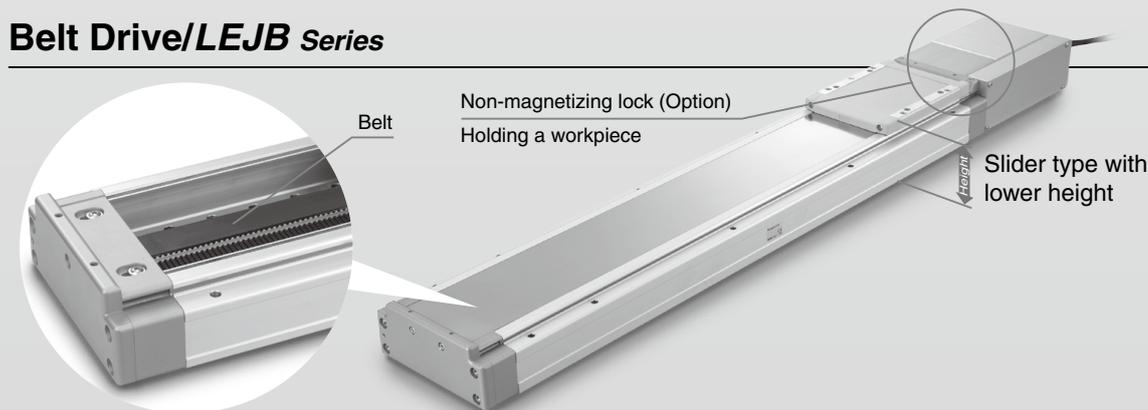

- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEH-X5
- LEJ-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC□
- JXC□
- LECS□
- LECS□-T
- LECY□
- Motorless
- LAT3

High Rigidity Slider Type *LEJ Series*

Series Variations

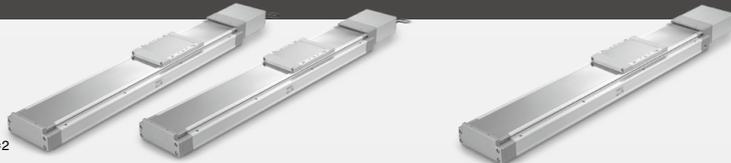

Ball Screw Drive/*LEJS Series* Clean room compatible *2

Size	Lead [mm]	Stroke [mm]*1	Work load: Horizontal [kg]									Work load: Vertical [kg]			Speed [mm/s]									Page
			10	20	30	40	50	60	70	80	90	10	20	30	200	400	600	800	1000	1200	1400	1600	1800	
40	8	200, 300, 400 500, 600, 700 800, 900 1000, 1200	[Bar chart showing horizontal work load capacity]									[Bar chart showing vertical work load capacity]			[Bar chart showing speed capacity]									175, 186
	16		[Bar chart showing horizontal work load capacity]									[Bar chart showing vertical work load capacity]			[Bar chart showing speed capacity]									
	24		[Bar chart showing horizontal work load capacity]									[Bar chart showing vertical work load capacity]			[Bar chart showing speed capacity]									
63	10	300, 400, 500 600, 700, 800 900, 1000 1200, 1500	[Bar chart showing horizontal work load capacity]									[Bar chart showing vertical work load capacity]			[Bar chart showing speed capacity]									175, 186
	20		[Bar chart showing horizontal work load capacity]									[Bar chart showing vertical work load capacity]			[Bar chart showing speed capacity]									
	30		[Bar chart showing horizontal work load capacity]									[Bar chart showing vertical work load capacity]			[Bar chart showing speed capacity]									

*1 Please consult with SMC for non-standard strokes as they are produced as special orders.

*2 Excludes 24 and 30 mm leads



Built-in Intermediate Supports Type

Ball Screw Drive/*LEJS-M Series*

Size	Lead [mm]	Stroke [mm]*1	Work load: Horizontal [kg]									Work load: Vertical [kg]			Speed [mm/s]									Page
			10	20	30	40	50	60	70	80	90	10	20	30	200	400	600	800	1000	1200	1400	1600	1800	
63	10	790, 890, 990 1190, 1490, 1790	[Bar chart showing horizontal work load capacity]									[Bar chart showing vertical work load capacity]			[Bar chart showing speed capacity]									175, 186
	20		[Bar chart showing horizontal work load capacity]									[Bar chart showing vertical work load capacity]			[Bar chart showing speed capacity]									
	30		[Bar chart showing horizontal work load capacity]									[Bar chart showing vertical work load capacity]			[Bar chart showing speed capacity]									

*1 Please consult with SMC for non-standard strokes as they are produced as special orders.



Belt Drive/*LEJB Series*

Size	Equivalent lead [mm]	Stroke [mm]*1	Work load: Horizontal [kg]*2						Speed [mm/s]						Page
			5	10	15	20	25	30	500	1000	1500	2000	2500	3000	
40	27	200, 300, 400, 500, 600, 700, 800 900, 1000, 1200, 1500, 2000	[Bar chart showing horizontal work load capacity]						[Bar chart showing speed capacity]						175, 186
63	42	300, 400, 500, 600, 700, 800 900, 1000, 1200, 1500, 2000, 3000	[Bar chart showing horizontal work load capacity]						[Bar chart showing speed capacity]						

*1 Please consult with SMC for non-standard strokes as they are produced as special orders.

*2 The belt drive actuator cannot be used for vertical applications.

- LAT3
- Motorless
- LECY
- LECS JXC LEC
- LECS T
- 11-LEJS
- 11-LEFS
- LEY-X5
- LEH
- LER
- LEPY
LEPS
- LES
LESH
- LEY
LEYG
- LEM
- LEL
- LEJS
LEJB
- LEFS
LEFB

Electric Actuator/High Rigidity Slider Type Ball Screw Drive LEJS Series



AC Servo Motor

LEJS/LECS□ Series

Model Selection	p. 175
How to Order	p. 188
Specifications	p. 189
Construction	p. 190
Dimensions	p. 191

LEJS-M (Built-in Intermediate Supports Type)/LECS□ Series

Model Selection	p. 175
How to Order	p. 193
Specifications	p. 194
Construction	p. 194
Dimensions	p. 195

LEJS/LECY□ Series

Model Selection	p. 186
How to Order	p. 196
Specifications	p. 197
Construction	p. 190
Dimensions	p. 198

LEJS-M (Built-in Intermediate Supports Type)/LECY□ Series

Model Selection	p. 186
How to Order	p. 200
Specifications	p. 197
Construction	p. 190
Dimensions	p. 198

Environment



AC Servo Motor

Ball Screw Drive 11-LEJS Series

Clean Room Specification

Model Selection	p. 175, 186
Particle Generation Characteristics	p. 655
How to Order	p. 657, 659
Specifications	p. 658, 660
Dimensions	p. 661

Ball Screw Drive 25A-LEJS Series

Secondary Battery Compatible

Model Selection	p. 175, 186
How to Order	p. 671, 672

Electric Actuator/High Rigidity Slider Type Belt Drive LEJB Series



AC Servo Motor

LECS□ Series

Model Selection	p. 175
How to Order	p. 201
Specifications	p. 202
Construction	p. 203
Dimensions	p. 204

LECY□ Series

Model Selection	p. 186
How to Order	p. 206
Specifications	p. 207
Construction	p. 203
Dimensions	p. 208

Auto Switch Mounting	p. 210
Specific Product Precautions	p. 214

AC Servo Motor Driver



LECSA/LECSB/LECSB/LECSS Series	p. 777
LECSB-T/LECSB-T/LECSS-T Series	p. 777
LECSN-T Series	20-E763
LECYM/LECYU Series	p. 801

High Rigidity Slider Type

Ball Screw Drive *LEJS Series*

AC Servo Motor


LEJS Series p. 188, 196

LEJS-M Series p. 193, 200



Clean Room Specification

11-LEJS Series
p. 657, 659

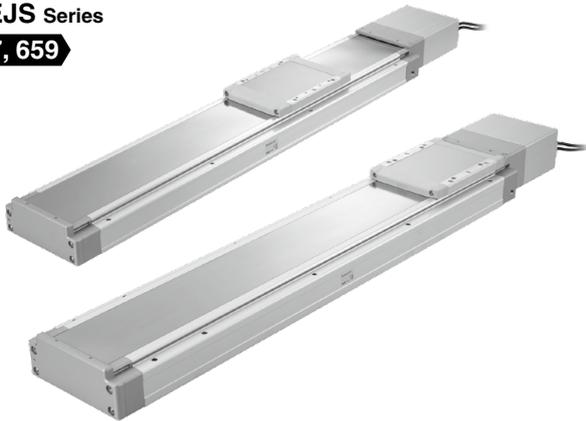

Secondary Battery Compatible

25A-LEJS Series
p. 671, 672



Belt Drive *LEJB Series*

AC Servo Motor

p. 201, 206



AC Servo Motor Driver p. 764

LEFS
LEFB

LEJS
LEJB

LEL

LEM

LEY
LEYG

LES
LESH

LEPY
LEPS

LER

LEH

LEY-X5

11-LEFS

11-LEJS

25A-

LEC

JXC

LECS
LECS-T

LECY

Motorless

LAT3

Model Selection



LEJS Series ▶ p. 188 **LEJS-M Series ▶ p. 193** **LEJB Series ▶ p. 201**
11-LEJS Series ▶ p. 657 **25A-LEJS Series ▶ p. 671**


Selection Procedure



Selection Example

Operating conditions

- Workpiece mass: 60 [kg]
 - Speed: 300 [mm/s]
 - Acceleration/Deceleration: 3000 [mm/s²]
 - Stroke: 300 [mm]
 - Mounting orientation: Horizontal
 - Motor type: Incremental encoder
 - External force: 10 [N]
- Workpiece mounting condition:
-

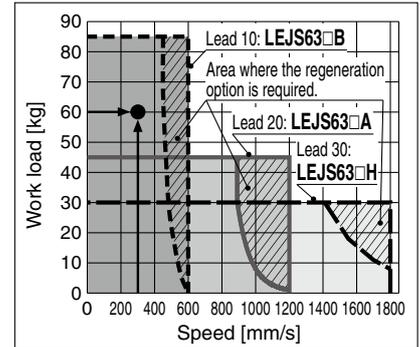

<Speed-Work load graph> (LEJS63)

Step 1 Check the work load-speed. <Speed-Work load graph> (Page 176)
 Select a model based on the workpiece mass and speed while referencing the speed-work load graph. Selection example) The **LEJS63S3B-300** can be temporarily selected as a possible candidate based on the graph shown on the right side.

The regeneration option may be necessary. Refer to page 176 for “Required Conditions for Regeneration Option.”

Step 2 Check the cycle time.
 Refer to method 1 for a rough estimate, and method 2 for a more precise value.

Method 1: Check the cycle time graph (Pages 177, 178)
 The graph is based on the maximum speed of each size.

Method 2: Calculation

Cycle time:

T can be found from the following equation.

$$T = T1 + T2 + T3 + T4 \text{ [s]}$$

- T1 and T3 can be found by the following equation.

$$T1 = V/a1 \text{ [s]} \quad T3 = V/a2 \text{ [s]}$$

The acceleration and deceleration values have upper limits depending on the workpiece mass and the duty ratio.

Check that they do not exceed the upper limit, by referring to “Work Load-Acceleration/Deceleration Graph (Guide)” (Pages 179 to 181).

For the ball screw type, there is an upper limit of the speed depending on the stroke. Check that it does not exceed the upper limit, by referring to the specifications (Page 189).

- T2 can be found from the following equation.

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \text{ [s]}$$

- T4 varies depending on the motor type and load. The value below is recommended.

$$T4 = 0.05 \text{ [s]}$$

Calculation example)

T1 to T4 can be calculated as follows.

$$T1 = V/a1 = 300/3000 = 0.1 \text{ [s]}$$


$$T3 = V/a2 = 300/3000 = 0.1 \text{ [s]}$$

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} = \frac{300 - 0.5 \cdot 300 \cdot (0.1 + 0.1)}{300} = 0.90 \text{ [s]}$$

$$T4 = 0.05 \text{ [s]}$$

The cycle time can be found as follows.

$$T = T1 + T2 + T3 + T4 = 0.1 + 0.90 + 0.1 + 0.05 = 1.15 \text{ [s]}$$

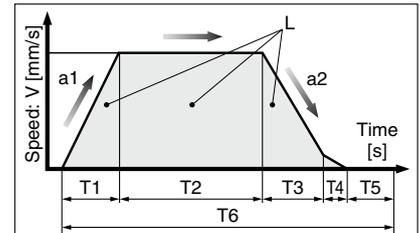

- L : Stroke [mm]
- V : Speed [mm/s]
- a1 : Acceleration [mm/s²]
- a2 : Deceleration [mm/s²]
- T1 : Acceleration time [s]
Time until reaching the set speed
- T2 : Constant speed time [s]
Time while the actuator is operating at a constant speed
- T3 : Deceleration time [s]
Time from the beginning of the constant speed operation to stop
- T4 : Settling time [s]
Time until positioning is completed
- T5 : Resting time [s]
Time the product is not running
- T6 : Total time [s]
Total time from T1 to T5


$$\text{Duty ratio: Ratio of } T \text{ to } T6 \\ T \div T6 \times 100$$

Step 3 Check the allowable moment. <Static allowable moment> (page 181)
<Dynamic allowable moment> (page 182)

Confirm the moment that applies to the actuator is within the allowable range for both static and dynamic conditions.



Selection example)
 Select the **LEJS63S3B-300** from the graph on the right side. Confirm that the external force is 20 [N] or less. (The external force is the resistance due to cable duct, flexible trunking or air tubing.)

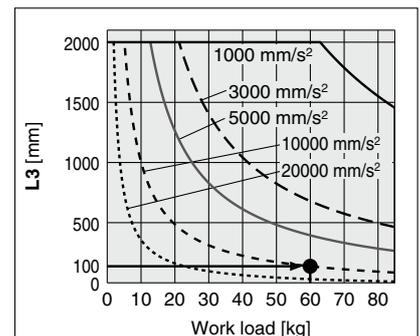


<Dynamic allowable moment> (LEJS63)


Speed-Work Load Graph/Required Conditions for “Regeneration Option”(Guide)

LEJS40/Ball Screw Drive

Horizontal

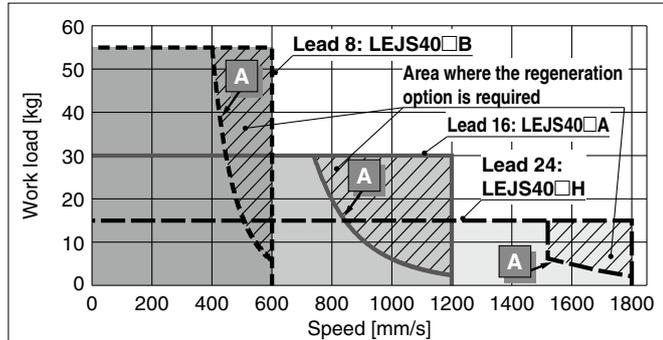


Vertical

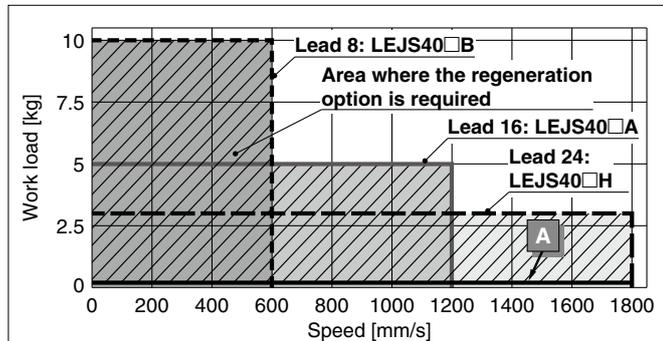

LEJB40/Belt Drive

Horizontal

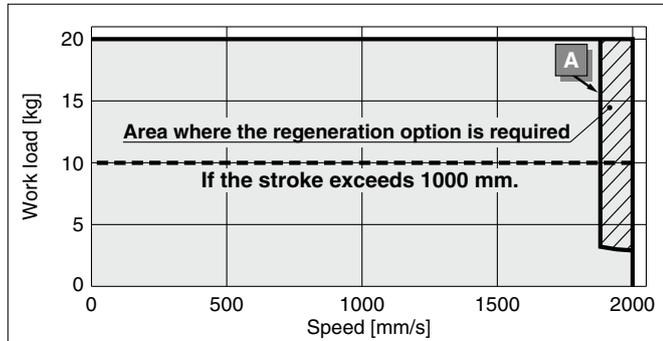

* When the stroke of the LEJB40 series exceeds 1000 mm, the work load is 10 kg.

Required conditions for “Regeneration option”

* Regeneration option is required when using the product above the regeneration line in the graph.
 (It must be ordered separately.)

“Regeneration Option” Models

Operating condition	Regenerative condition	Regeneration option
A	Duty ratio	LEC-MR-RB-032
B	100%	LEC-MR-RB-12

Allowable Stroke Speed


Model	AC servo motor	Lead		Stroke [mm]															
		Symbol	[mm]	Up to 200	Up to 300	Up to 400	Up to 500	Up to 600	Up to 700	Up to 800	Up to 900	Up to 1000	Up to 1100	Up to 1200	Up to 1300	Up to 1400	Up to 1500		
LEJS40	100 W/ □40	H	24					1800		1580	1170	910	720	580	480	410	—	—	—
		A	16					1200		1050	780	600	480	390	320	270	—	—	—
		B	8					600		520	390	300	240	190	160	130	—	—	—
		(Motor rotation speed)							(4500 rpm)		(3938 rpm)	(2925 rpm)	(2250 rpm)	(1800 rpm)	(1463 rpm)	(1200 rpm)	(1013 rpm)	—	—
LEJS63	200 W/ □60	H	30	—				1800				1390	1110	900	750	630	540	470	410
		A	20	—				1200				930	740	600	500	420	360	310	270
		B	10	—				600				460	370	300	250	210	180	150	130
		(Motor rotation speed)							(3600 rpm)				(2790 rpm)	(2220 rpm)	(1800 rpm)	(1500 rpm)	(1260 rpm)	(1080 rpm)	(930 rpm)

LEFS
LEJB
LEL
LEM
LEY
LESH
LEPS
LER
LEH
LEY-X5
11-LEFS
11-LEJS
25A-
LEC
JXC
LECS
LECS-T
LECY
Motorless
LAT3


Cycle Time Graph (Guide)

LEJS40/Ball Screw Drive


LEJS40□H

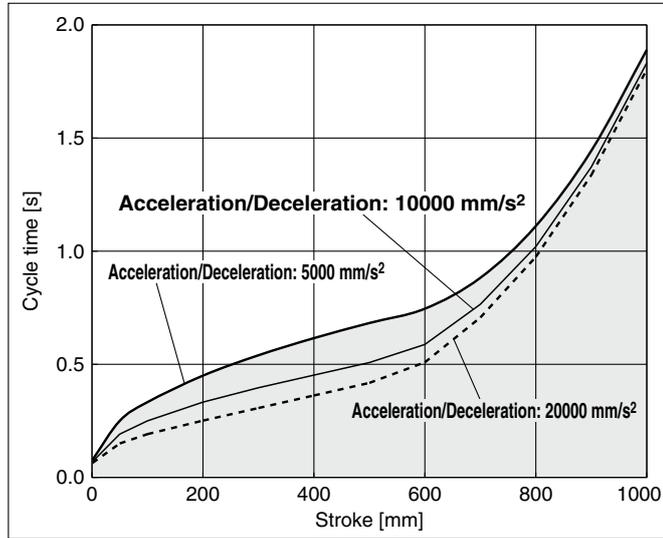

LEJS40□A

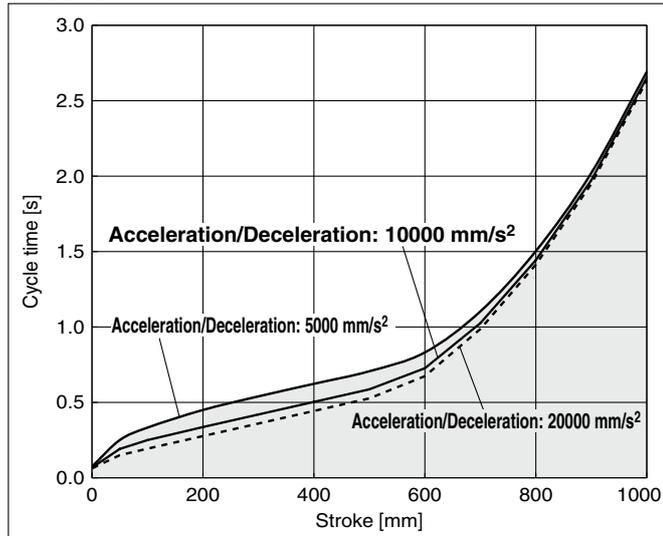


LEJS40□B

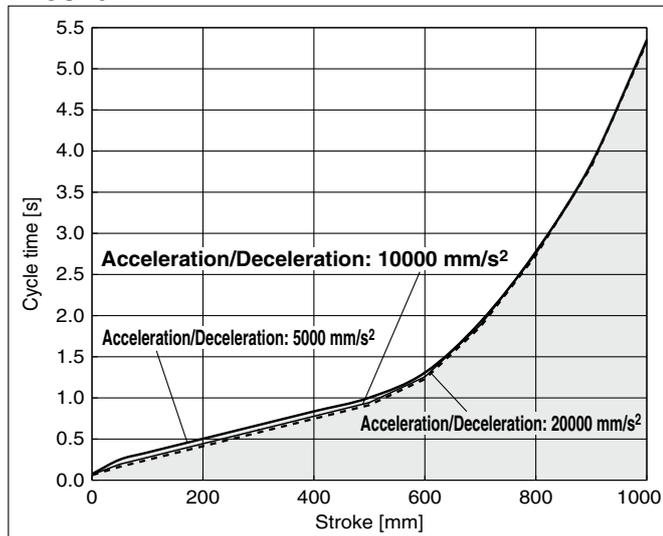


LEJS63/Ball Screw Drive


LEJS63□H

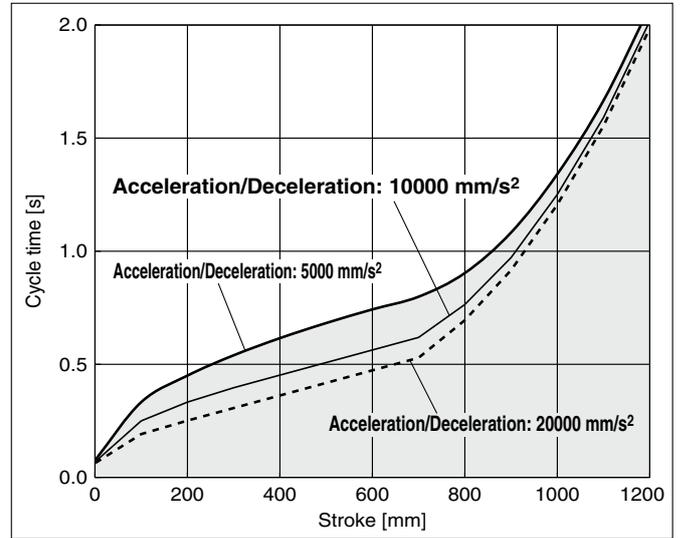

LEJS63□A

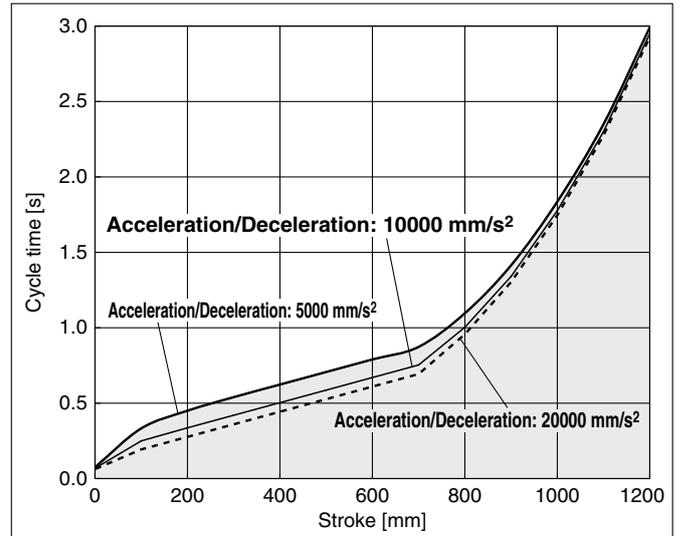


LEJS63□B

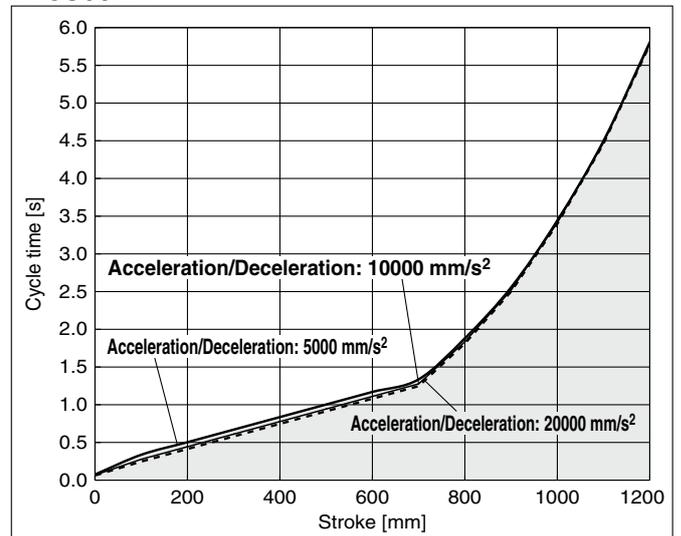

* Maximum speed/acceleration/deceleration values graph for each stroke


Cycle Time Graph (Guide)

LEJB40/Belt Drive

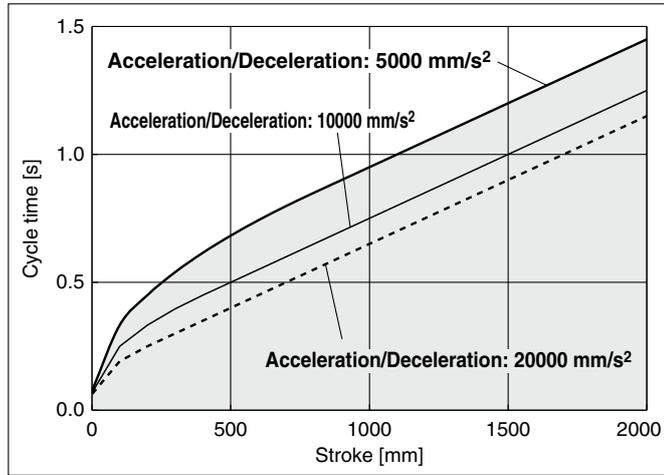

* Maximum speed/acceleration/deceleration values graph for each stroke

LEJB63/Belt Drive

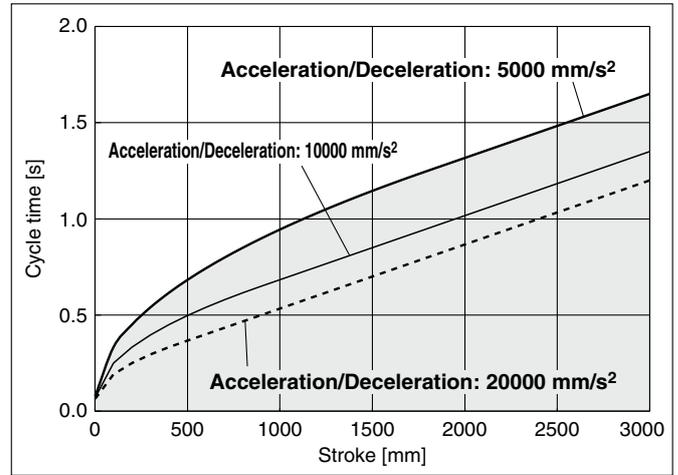


- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEY-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC
- JXC
- LECS
- LECS-T
- LECY
- Motorless
- LAT3

Work Load–Acceleration/Deceleration Graph (Guide)


LEJS40/Ball Screw Drive: Horizontal

LEJS40□H

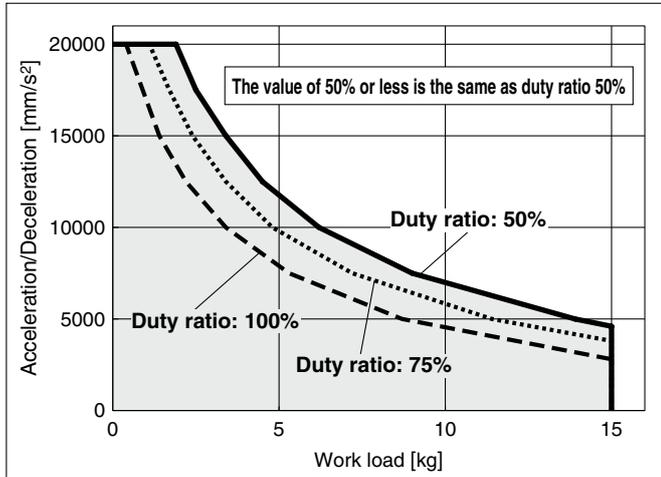


LEJS63/Ball Screw Drive: Horizontal


LEJS63□H

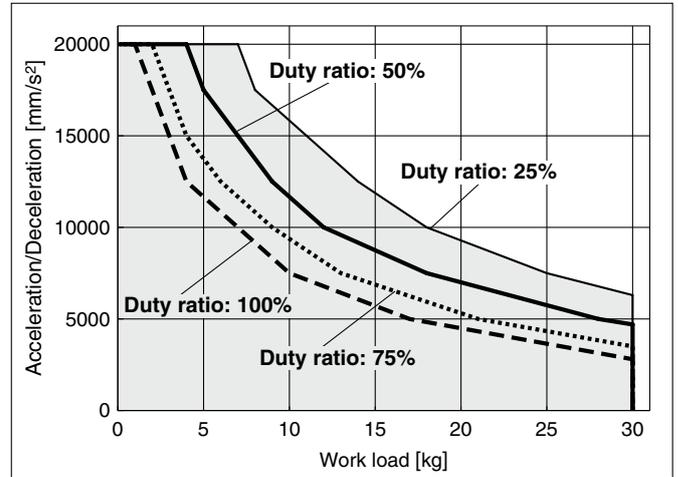


LEJS40□A

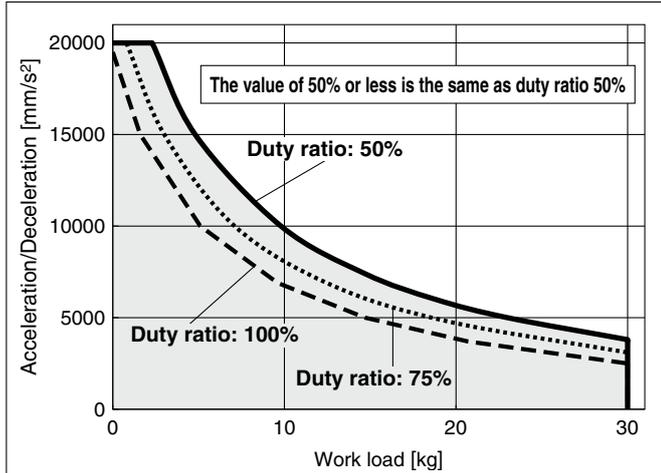


LEJS63□A

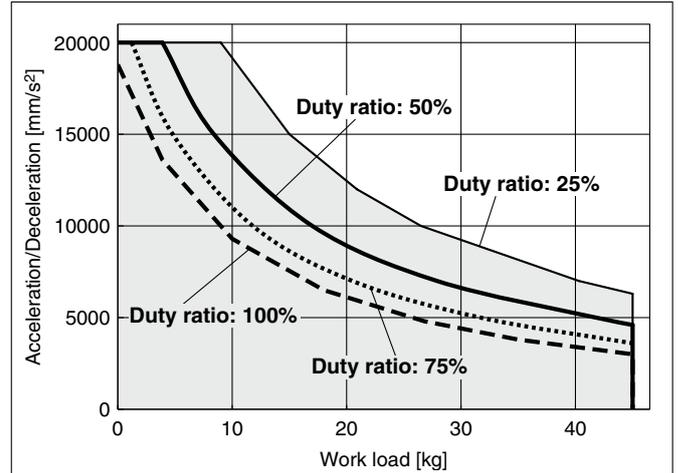

LEJS40□B

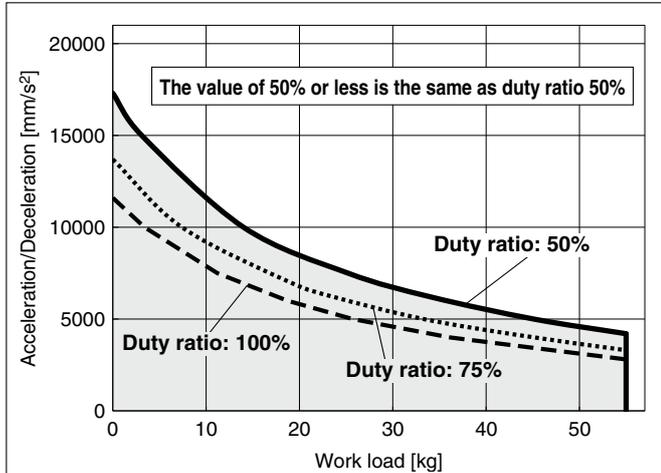


LEJS63□B

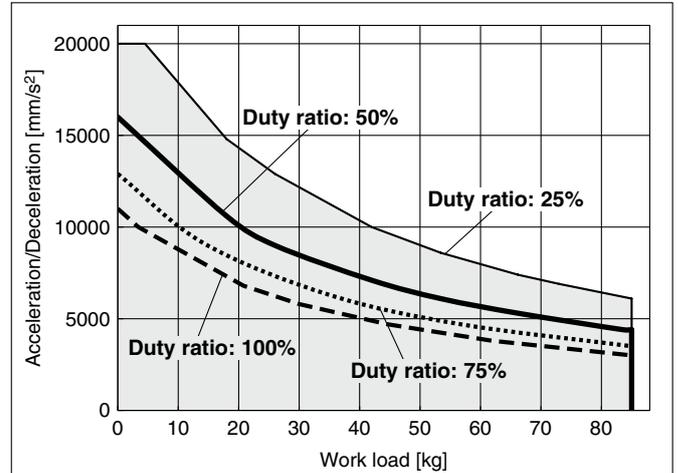

Work Load–Acceleration/Deceleration Graph (Guide)


LEJS40/Ball Screw Drive: Vertical

LEJS40□H

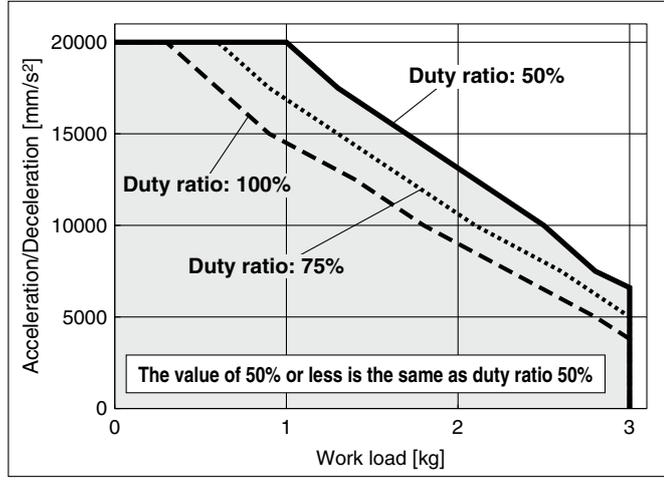


LEJS63/Ball Screw Drive: Vertical


LEJS63□H

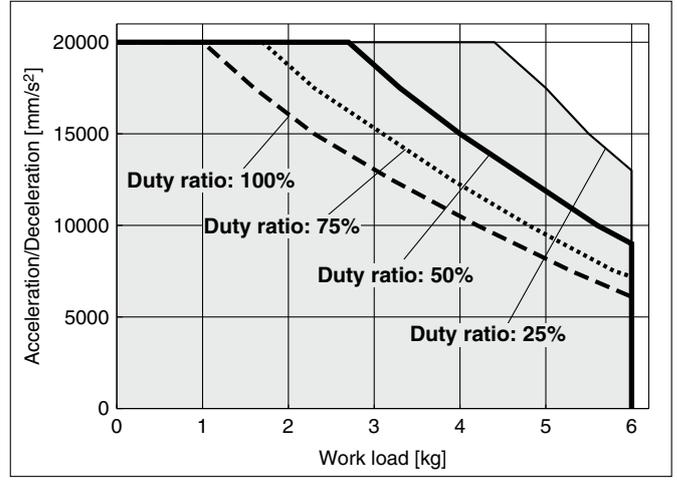


LEJS40□A

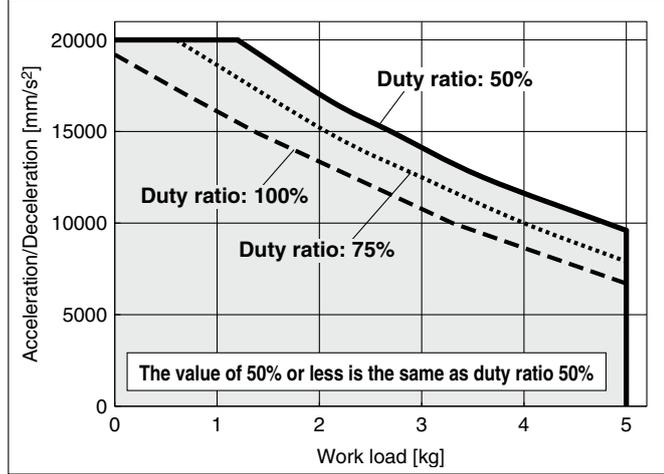


LEJS63□A

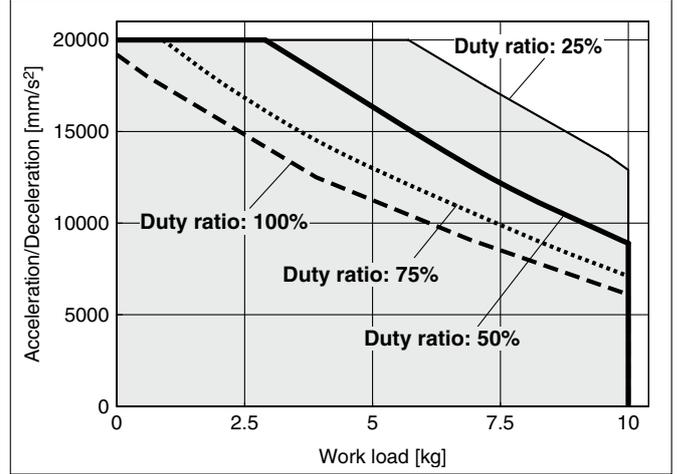

LEJS40□B

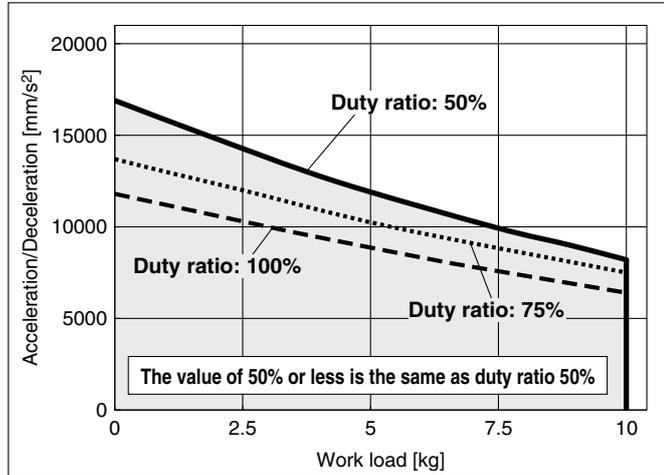


LEJS63□B

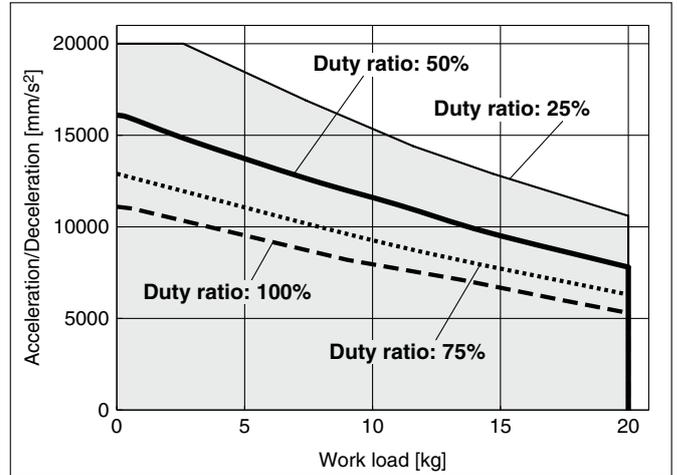


- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEH
- LEY-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC
- JXC
- LECS
- LECS-T
- LECY
- Motorless
- LAT3

Work Load–Acceleration/Deceleration Graph (Guide)

LEJB40/Belt Drive: Horizontal

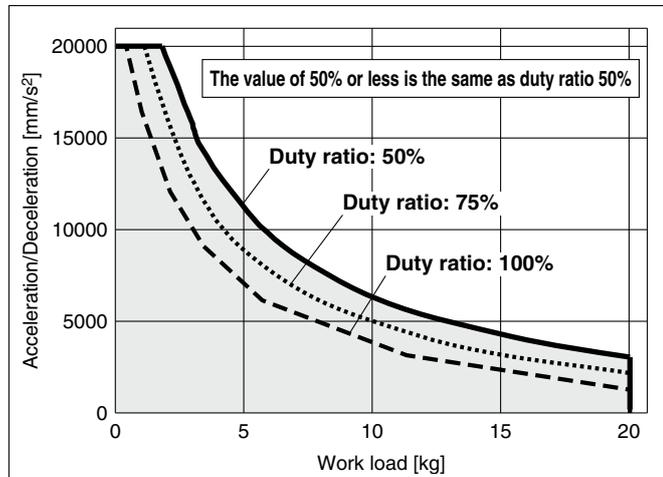

LEJB63/Belt Drive: Horizontal

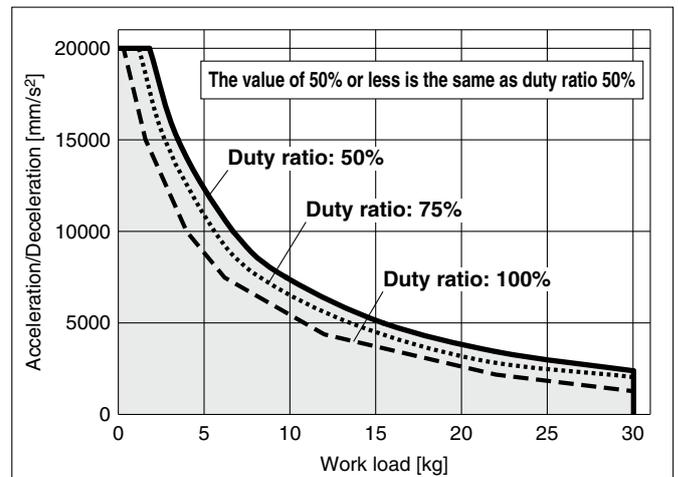

Static Allowable Moment*1

[N·m]


Model	Size	Pitching	Yawing	Rolling
LEJS	40	83.9	88.2	88.2
	63	121.5	135.1	135.1
LEJB	40	83.9	88.2	88.2
	63	121.5	135.1	135.1

*1 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

Dynamic Allowable Moment

* This graph shows the amount of allowable overhang (guide unit) when the center of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to the "Calculation of Guide Load Factor" or the Electric Actuator Model Selection Software for confirmation: <https://www.smcworld.com>





















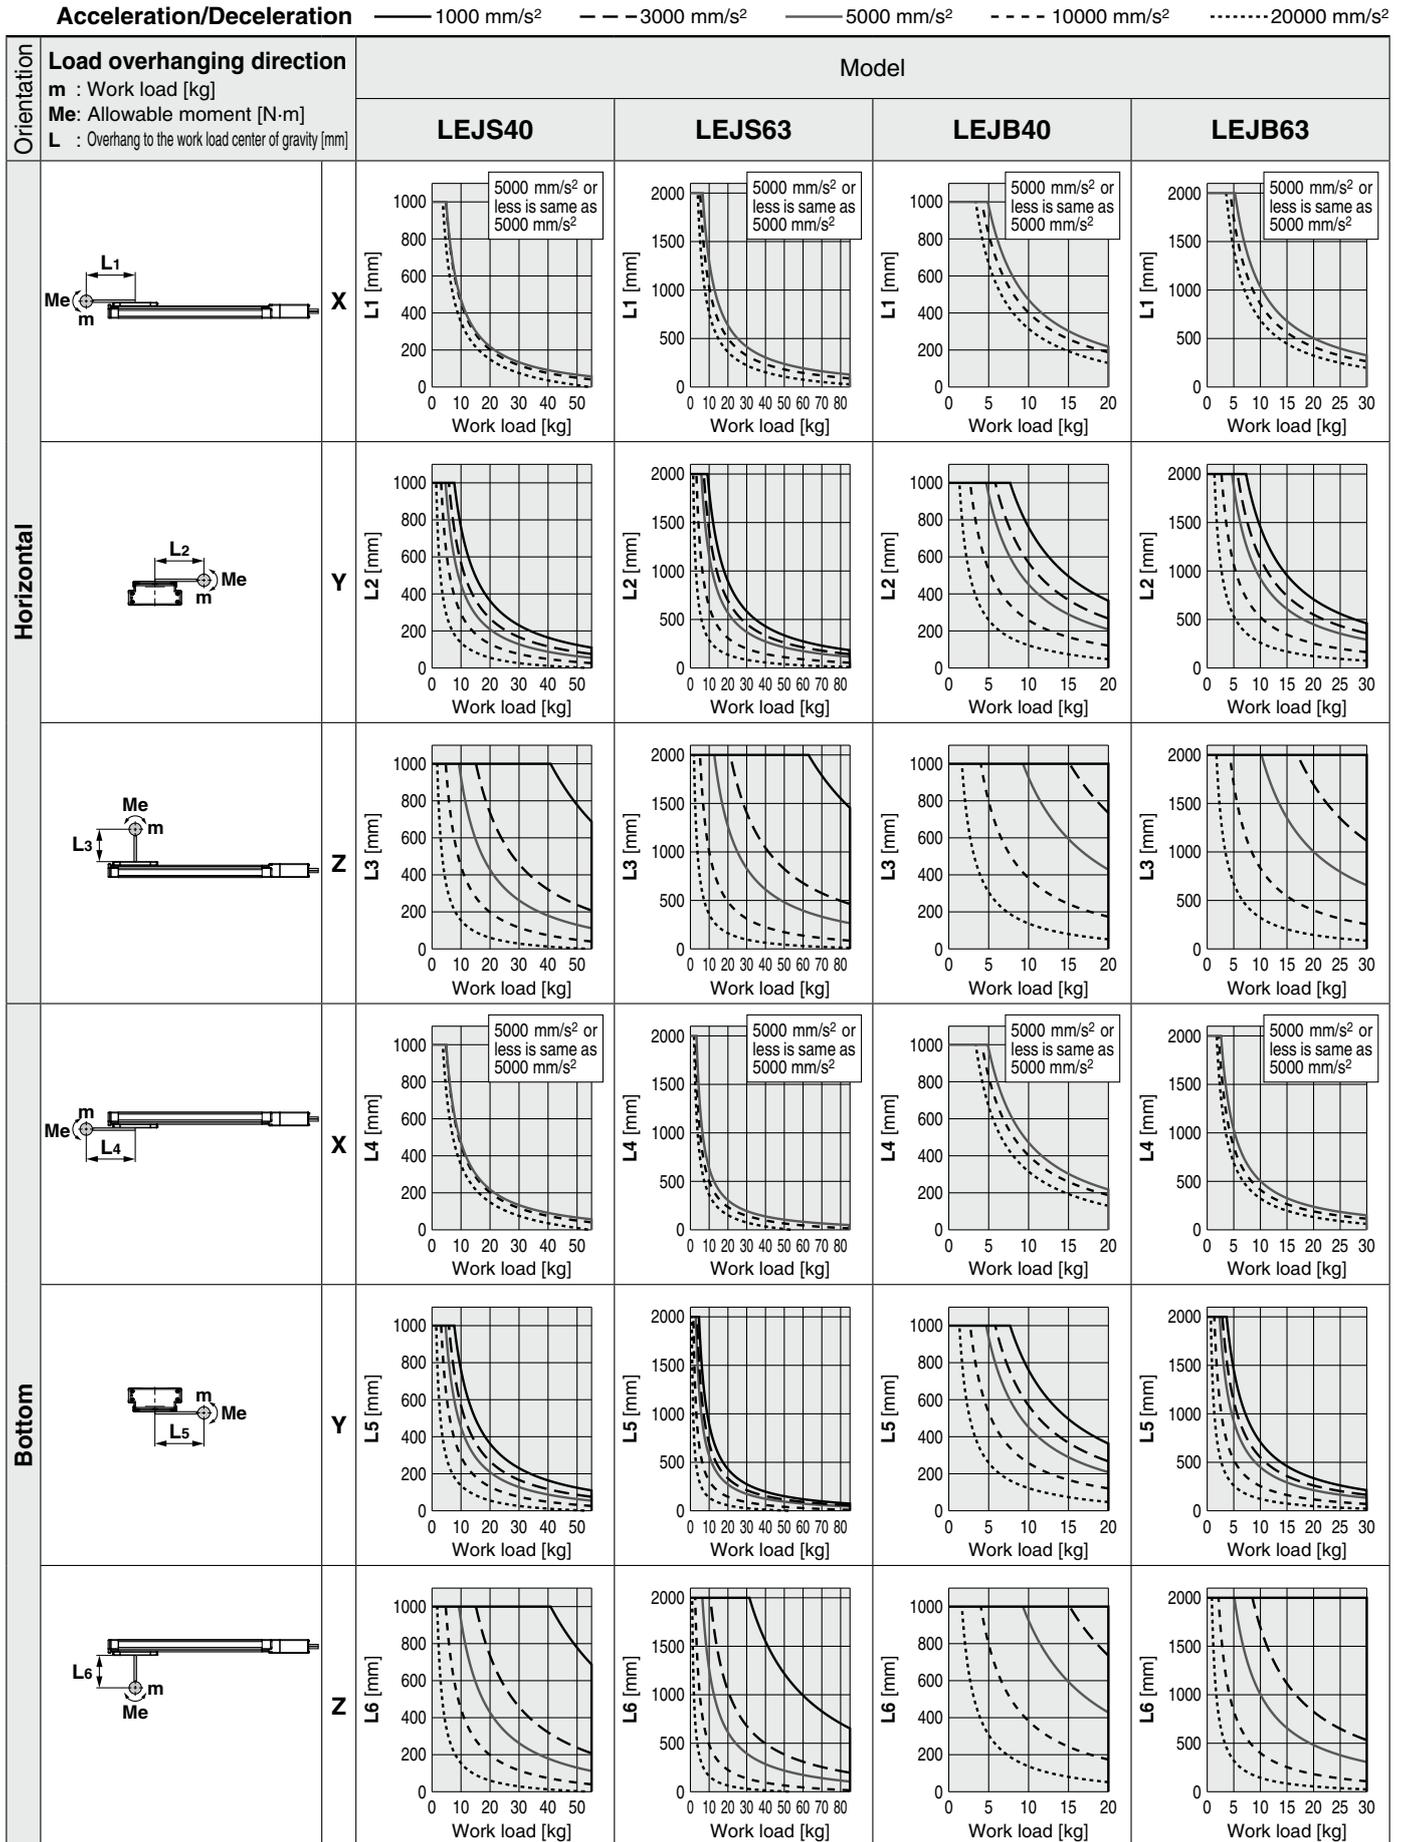


- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEY-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC
- JXC
- LECS
- LECS-T
- LECY
- Motorless
- LAT3

* This graph shows the amount of allowable overhang (guide unit) when the center of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to the "Calculation of Guide Load Factor" or the Electric Actuator Model Selection Software for confirmation: <https://www.smcworld.com>


Dynamic Allowable Moment

Acceleration/Deceleration ——— 1000 mm/s² - - - 3000 mm/s² ——— 5000 mm/s² - - - - 10000 mm/s² ······ 20000 mm/s²

Orientation	Load overhanging direction m : Work load [kg] Me: Allowable moment [N·m] L : Overhang to the work load center of gravity [mm]	Model			
		LEJS40	LEJS63	LEJB40	LEJB63
Wall	X 				
	Y 				
	Z 				
Vertical	Y 				
	Z 				

Calculation of Guide Load Factor




- Decide operating conditions.
 Model: LEJS/LEJB
 Size: 40/63
 Mounting orientation: Horizontal/Bottom/Wall/Vertical
 Acceleration [mm/s²]: **a**
 Work load [kg]: **m**
 Work load center position [mm]: **Xc/Yc/Zc**
- Select the target graph while referencing the model, size, and mounting orientation.
- Based on the acceleration and work load, find the overhang [mm]: **Lx/Ly/Lz** from the graph.
- Calculate the load factor for each direction.
 $\alpha_x = Xc/Lx$, $\alpha_y = Yc/Ly$, $\alpha_z = Zc/Lz$
- Confirm the total of α_x , α_y , and α_z is 1 or less.
 $\alpha_x + \alpha_y + \alpha_z \leq 1$
 When 1 is exceeded, please consider a reduction of acceleration and work load, or a change of the work load center position and series.

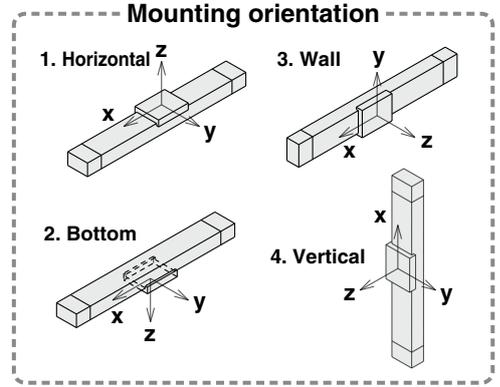

Example

- Operating conditions
 Model: LEJS
 Size: 40
 Mounting orientation: Horizontal
 Acceleration [mm/s²]: 5000
 Work load [kg]: 20
 Work load center position [mm]: **Xc = 0, Yc = 50, Zc = 200**
- Select the graph on page 182, top and left side first row.

- Lx = 220 mm, Ly = 210 mm, Lz = 430 mm**
- The load factor for each direction can be found as follows.
 $\alpha_x = 0/220 = 0$
 $\alpha_y = 50/210 = 0.24$
 $\alpha_z = 200/430 = 0.47$
- $\alpha_x + \alpha_y + \alpha_z = 0.71 \leq 1$**

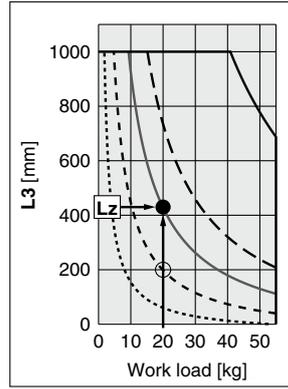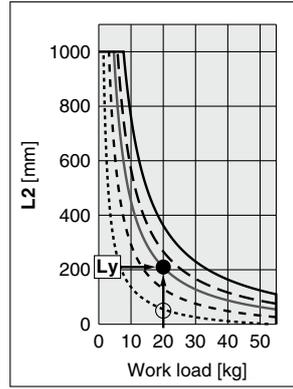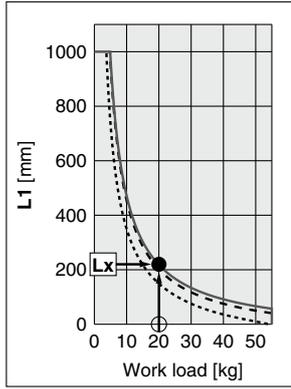


- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEY-X5
- LEJ-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC
- JXC
- LECS
- LECS-T
- LECY
- Motorless
- LAT3

LEJ Series

AC Servo Motor

Clean Room Specification



Table Accuracy (Reference Value)

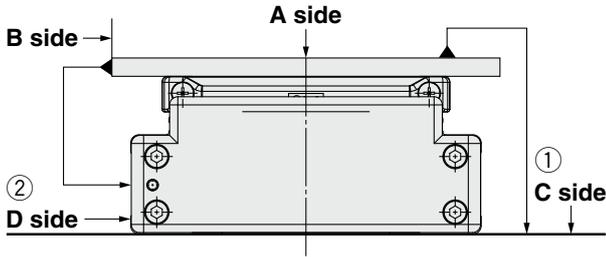

Model	Traveling parallelism [mm] (Every 300 mm)	
	① C side traveling parallelism to A side	② D side traveling parallelism to B side
LEJ□40	0.05	0.03
LEJ□63	0.05	0.03

* Traveling parallelism does not include the mounting surface accuracy.

Table Displacement (Reference Value)

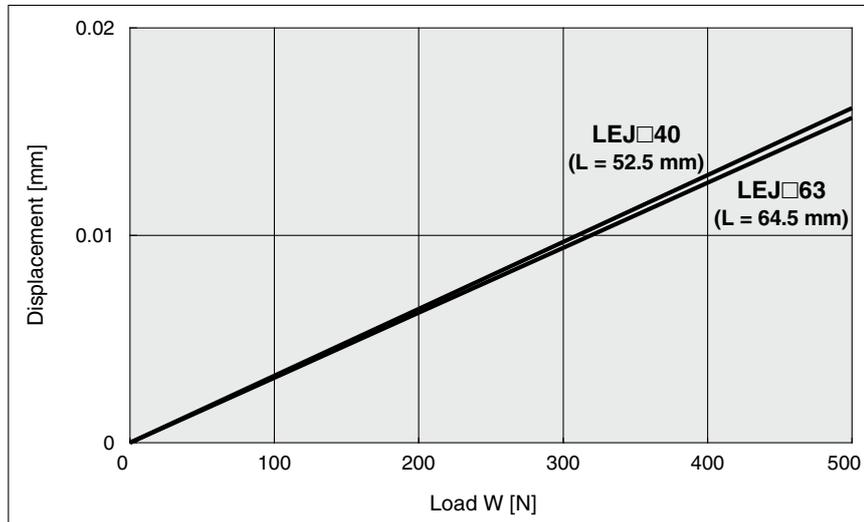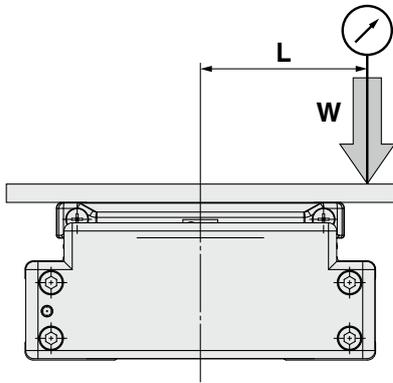

* This displacement is measured when a 15 mm aluminum plate is mounted and fixed on the table. (Table clearance is included.)



Model Selection

LEJS Series ▶ p. 196 LEJS-M Series ▶ p. 200 LEJB Series ▶ p. 206 11-LEJS Series ▶ p. 659 25A-LEJS Series ▶ p. 672

Selection Procedure

The Cycle Time Graph, Work Load–Acceleration/Deceleration Graph, Dynamic Allowable Moment, Calculation of Guide Load Factor, and Table Accuracy/Displacement are the same as those of the LECS AC servo motor. For details, refer to page 177 and onwards.





Selection Example

Operating conditions

- Workpiece mass: 60 [kg]
- Speed: 300 [mm/s]
- Acceleration/Deceleration: 3000 [mm/s²]
- Stroke: 300 [mm]
- Mounting orientation: Horizontal
- External force: 10 [N]

• Workpiece mounting condition:

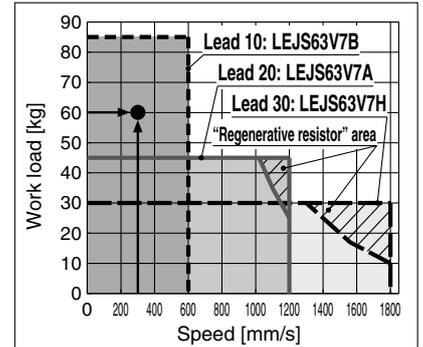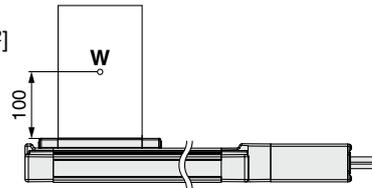

<Speed-Work load graph> (LEJS63)

Step 1 Check the work load-speed. <Speed-Work load graph> (Page 187)

Select a model based on the workpiece mass and speed while referencing the speed-work load graph. Selection example) The **LEJS63V7B-300** can be temporarily selected as a possible candidate based on the graph shown on the right side.

The regenerative resistor may be necessary. Refer to page 187 for “Conditions for Regenerative Resistor (Guide).”

Step 2 Check the cycle time.

Refer to method 1 for a rough estimate, and method 2 for a more precise value.

Method 1: Check the cycle time graph (Pages 177, 178)

The graph is based on the maximum speed of each size.

Method 2: Calculation

Cycle time:

T can be found from the following equation.

$$T = T1 + T2 + T3 + T4 \text{ [s]}$$

- T1 and T3 can be found by the following equation.

$$T1 = V/a1 \text{ [s]} \quad T3 = V/a2 \text{ [s]}$$

The acceleration and deceleration values have upper limits depending on the workpiece mass and the duty ratio. Check that they do not exceed the upper limit, by referring to “Work Load–Acceleration/Deceleration Graph (Guide)” (Pages 179 to 181).

For the ball screw type, there is an upper limit of the speed depending on the stroke. Check that it does not exceed the upper limit, by referring to the specifications (Page 197).

- T2 can be found from the following equation.

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} \text{ [s]}$$

- T4 varies depending on the motor type and load. The value below is recommended.

$$T4 = 0.05 \text{ [s]}$$

Calculation example)

T1 to T4 can be calculated as follows.

$$T1 = V/a1 = 300/3000 = 0.1 \text{ [s]}$$


$$T3 = V/a2 = 300/3000 = 0.1 \text{ [s]}$$

$$T2 = \frac{L - 0.5 \cdot V \cdot (T1 + T3)}{V} = \frac{300 - 0.5 \cdot 300 \cdot (0.1 + 0.1)}{300} = 0.90 \text{ [s]}$$

$$T4 = 0.05 \text{ [s]}$$

The cycle time can be found as follows.

$$T = T1 + T2 + T3 + T4 = 0.1 + 0.90 + 0.1 + 0.05 = 1.15 \text{ [s]}$$

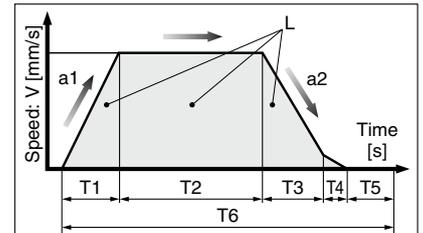

L : Stroke [mm]
 V : Speed [mm/s]
 a1 : Acceleration [mm/s²]
 a2 : Deceleration [mm/s²]

- T1: Acceleration time [s]
Time until reaching the set speed
- T2: Constant speed time [s]
Time while the actuator is operating at a constant speed
- T3: Deceleration time [s]
Time from the beginning of the constant speed operation to stop
- T4: Settling time [s]
Time until positioning is completed
- T5: Resting time [s]
Time the product is not running
- T6: Total time [s]
Total time from T1 to T5

$$\text{Duty ratio: Ratio of } T \text{ to } T6 \\ T \div T6 \times 100$$


Step 3 Check the allowable moment. <Static allowable moment> (page 181)

<Dynamic allowable moment> (page 182)

Confirm the moment that applies to the actuator is within the allowable range for both static and dynamic conditions.



Selection example)
 Select the **LEJS63V7B-300** from the graph on the right side. Confirm that the external force is 20 [N] or less. (The external force is the resistance due to cable duct, flexible trunking or air tubing.)

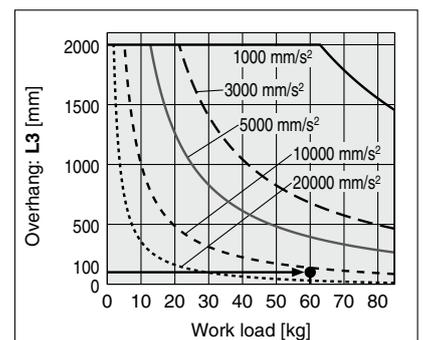


<Dynamic allowable moment> (LEJS63)

LEFS
LEFB
LEJS
LEJB
LEL
LEM
LEM
LEY
LEYG
LES
LESH
LEPY
LEPS
LER
LEH
LEH
LEY-X5
11-LEFS
11-LEJS
25A-
LEC
LEC
JXC
LECS
LECS-T
LECY
Motorless
LAT3


Speed-Work Load Graph/Conditions for "Regenerative Resistor" (Guide)

LEJS40V6□/Ball Screw Drive

Horizontal

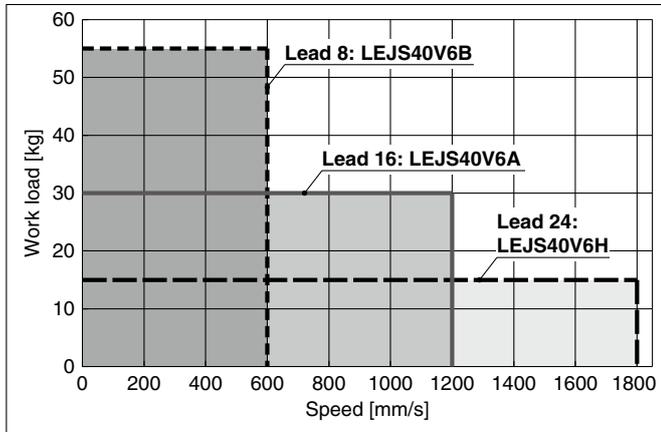


Vertical

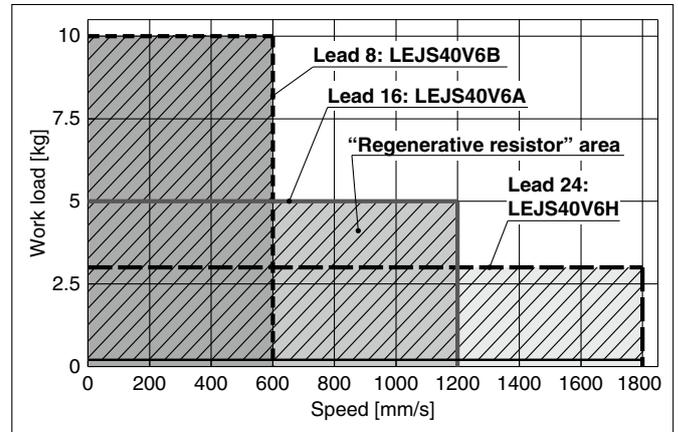


LEJS63V7□/Ball Screw Drive

Horizontal

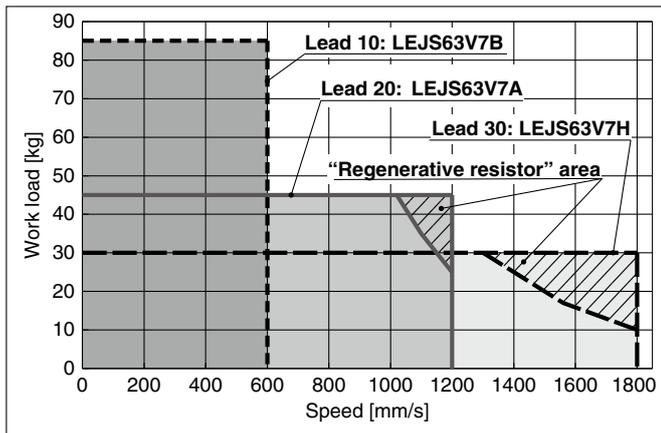


Vertical

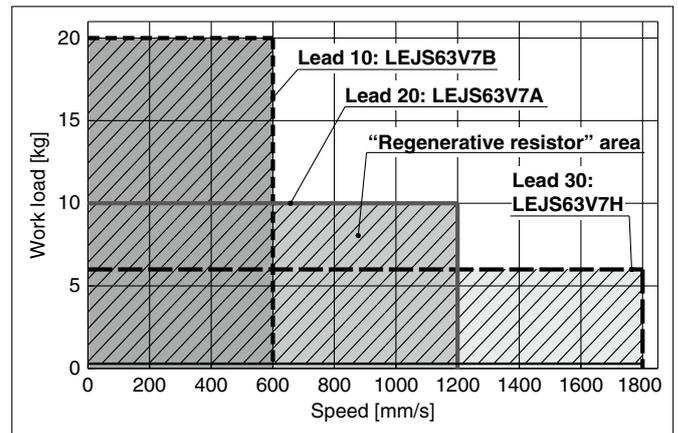

LEJB40V6T/Belt Drive

Horizontal

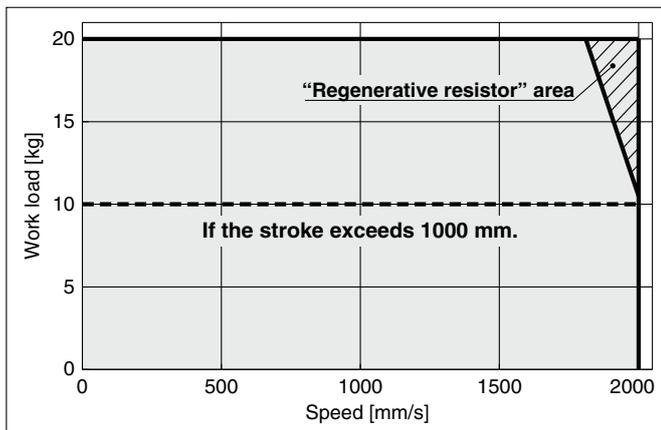

* When the stroke of the LEJB40 series exceeds 1000 mm, the work load is 10 kg.


"Regenerative resistor" area

* When using the actuator in the "Regenerative resistor" area, download the "AC servo capacity selection program/SigmaJunmaSize+" from the SMC website. Then, calculate the necessary regenerative resistor capacity to prepare an appropriate external regenerative resistor.

* Regenerative resistor should be provided by the customer.

LEJB63V7T/Belt Drive

Horizontal

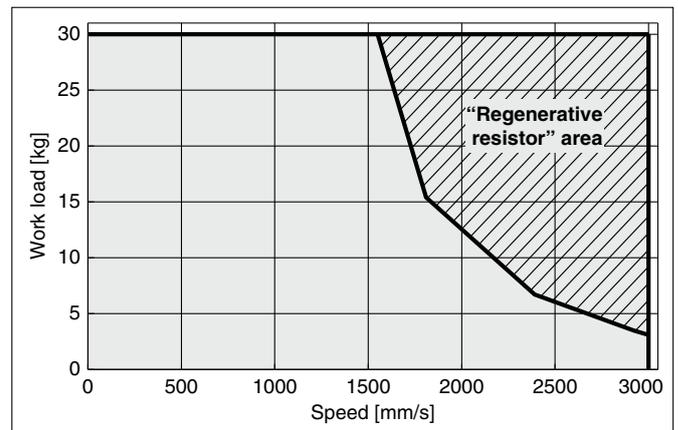

Applicable Motors/Drivers

Model	Applicable model	
	Motor	Servopack (SMC driver)
LEJ□40□	SGMJV-01A3A	SGDV-R90A11□ (LECYM2-V5)
		SGDV-R90A21□ (LECYU2-V5)
LEJ□63□	SGMJV-02A3A	SGDV-1R6A11□ (LECYM2-V7)
		SGDV-1R6A21□ (LECYU2-V7)

Electric Actuator/High Rigidity Slider Type Ball Screw Drive

LEJS Series


The LECSB-S, LECS-C-S, and LECS-S-S electric actuator drivers are to be discontinued. The LECSB-T, LECS-C-T, and LECS-S-T drivers are available as substitutes. In the product number, select T6 instead of S6, or T7 instead of S7 for the **Motor type**, and select B2 instead of B1, C2 instead of C1, or S2 instead of S1 for the **Driver type**.

Built-in Intermediate Supports Type ▶ p. 193 **LECY Series ▶ p. 196**

Clean Room Specification ▶ p. 657 **Secondary Battery Compatible ▶ p. 671** **Motorless Type ▶ p. 885** [Click here for details.](#) [Click here for details.](#)



How to Order

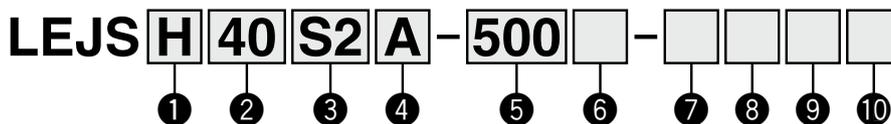

① Accuracy

Nil	Basic type
H	High-precision type

② Size

40
63

③ Motor type

Symbol	Type	Output [W]	Actuator size	Compatible ^{*3} drivers	UL-compliant
S2 ^{*1}	AC servo motor (Incremental encoder)	100	40	LECSA□-S1	●
S3	AC servo motor (Incremental encoder)	200	63	LECSA□-S3	●
S6 ^{*1}	AC servo motor (Absolute encoder)	100	40	LECSB□-S5 LECS-C□-S5 LECSS□-S5	—
S7	AC servo motor (Absolute encoder)	200	63	LECSB□-S7 LECS-C□-S7 LECSS□-S7	—
T6 ^{*2}	AC servo motor (Absolute encoder)	100	40	LECSB2-T5	—
				LECS-C2-T5	—
				LECSN2-T5-□	●
T7	AC servo motor (Absolute encoder)	200	63	LECSB2-T7	—
				LECS-C2-T7	—
				LECSN2-T7-□	●

*1 For motor type S2 and S6, the compatible driver part number suffixes are S1 and S5 respectively.

*2 For motor type T6, the compatible driver part number is LECS□2-T5.

Applicable Stroke Table^{*4}

Model	Stroke [mm]										
	200	300	400	500	600	700	800	900	1000	1200	1500
LEJS40	●	●	●	●	●	●	●	●	●	●	—
LEJS63	—	●	●	●	●	●	●	●	●	●	●

*4 Please consult with SMC for non-standard strokes as they are produced as special orders.

Compatible Drivers

Driver type	Pulse input type /Positioning type	Pulse input type	CC-Link direct input type	SSCNET III type	Pulse input type	CC-Link direct input type	SSCNET III/H type	Network card type
Series	LECSA	LECSB	LECS-C	LECSS	LECSB-T	LECS-C-T	LECSS-T	LECSN-T
Number of point tables ^{*10}	Up to 7	—	Up to 255	—	Up to 255	Up to 255 (2 stations occupied)	—	Up to 255
Pulse input	○	○	—	—	○	—	—	—
Applicable network	—	—	CC-Link	SSCNET III	—	CC-Link	SSCNET III/H	PROFINET EtherCAT [®] EtherNet/IP [™]
Control encoder	Incremental 17-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder	Absolute 22-bit encoder
Communication function	USB communication	USB communication, RS422 communication	—	USB communication	USB communication, RS422 communication	—	USB communication	—
Power supply voltage [V]	—	100 to 120 VAC (50/60 Hz) 200 to 230 VAC (50/60 Hz)	—	—	200 to 240 VAC (50/60 Hz)	200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)
Reference page	777							

*10 The LECSN-T only supports PROFINET and EtherCAT[®].

④ Lead [mm]

Symbol	LEJS40	LEJS63
H	24	30
A	16	20
B	8	10

⑤ Stroke [mm]^{*3}

200 to 1500	*3 Refer to the applicable stroke table for details.
-------------	--

⑥ Motor option

Nil	Without option
B	With lock

⑦ Cable type^{*5 *6 *7}

Nil	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

*6 The motor and encoder cables are included. (The lock cable is included when the motor with lock option is selected.)

*7 Standard cable entry direction is "(A) Axis side." (Refer to page 796 for details.)

⑧ Cable length [m]^{*5 *8}

Nil	Without cable
2	2
5	5
A	10

*8 The length of the motor, encoder, and lock cables are the same.

⑨ Driver type^{*5}

	Compatible drivers	Power supply voltage [V]
Nil	Without driver	—
A1	LECSA1-S□	100 to 120
A2	LECSA2-S□	200 to 230
B1	LECSB1-S□	100 to 120
	LECSB2-S□	200 to 230
B2	LECSB2-T□	200 to 240
	LECSB2-T□	200 to 240
C1	LECS-C1-S□	100 to 120
C2	LECS-C2-S□	200 to 230
	LECS-C2-T□	200 to 230
S1	LECSS1-S□	100 to 120
S2	LECSS2-S□	200 to 230
	LECSS2-T□	200 to 240
N2	LECSN2-T□	200 to 240
92	LECSN2-T□-9	200 to 240
E2	LECSN2-T□-E	200 to 240
P2	LECSN2-T□-P	200 to 240

⑩ I/O cable length^{*9}

Nil	Without cable
H	Without cable (Connector only)
1	1.5 [m]

*9 When "Without driver" is selected for driver type, only "Nil: Without cable" can be selected. Refer to page 797 if I/O cable is required. (Options are shown on page 797.)

*5 When a driver type is selected, a cable is included. Select the cable type and cable length.

Example)
S2S2: Standard cable (2 m) + Driver (LECSS2)
S2: Standard cable (2 m)
Nil: Without cable and driver

For auto switches, refer to pages 210 to 213.

Specifications

AC Servo Motor (100/200 W)

Model		LEJS40S ₆ /T6			LEJS63S ₇ /T7				
Actuator specifications	Stroke [mm]*1	200, 300, 400, 500, 600, 700, 800 900, 1000, 1200			300, 400, 500, 600, 700, 800, 900 1000, 1200, 1500				
	Work load [kg]*2	Horizontal	15	30	55	30	45	85	
		Vertical	3	5	10	6	10	20	
	Speed*3 [mm/s]	Stroke range	Up to 500	1800	1200	600	1800	1200	600
			501 to 600	1580	1050	520	1800	1200	600
			601 to 700	1170	780	390	1800	1200	600
			701 to 800	910	600	300	1390	930	460
			801 to 900	720	480	240	1110	740	370
			901 to 1000	580	390	190	900	600	300
			1001 to 1100	480	320	160	750	500	250
			1101 to 1200	410	270	130	630	420	210
			1201 to 1300	—	—	—	540	360	180
			1301 to 1400	—	—	—	470	310	150
	1401 to 1500	—	—	—	410	270	130		
	Max. acceleration/deceleration [mm/s ²]		20000 (Refer to pages 179 and 180 for limit according to work load and duty ratio.)						
Positioning repeatability [mm]	Basic type	±0.02							
	High-precision type	±0.01							
Lost motion [mm]*4	Basic type	0.1 or less							
	High-precision type	0.05 or less							
Lead [mm]		24	16	8	30	20	10		
Impact/Vibration resistance [m/s ²]*5		50/20							
Actuation type		Ball screw							
Guide type		Linear guide							
Static allowable moment*6 [N·m]	Mep (Pitching)	83.9			121.5				
	Mey (Yawing)	88.2			135.1				
	Mer (Rolling)	88.2			135.1				
Operating temperature range [°C]		5 to 40							
Operating humidity range [%RH]		90 or less (No condensation)							
Regeneration option		May be required depending on speed and work load. (Refer to page 176.)							
Motor output [W]/Size [mm]		100/□40			200/□60				
Motor type		AC servo motor (100/200 VAC)							
Encoder*7		Motor type S2, S3: Incremental 17-bit encoder (Resolution: 131072 p/rev) Motor type S6, S7: Absolute 18-bit encoder (Resolution: 262144 p/rev) Motor type T6, T7: Absolute 22-bit encoder (Resolution: 4194304 p/rev) (For LECSB-T□, LECSS-T□) Motor type T6, T7: Absolute 18-bit encoder (Resolution: 262144 p/rev) (For LECSC-T□)							
Power [W]*8		Max. power 445			Max. power 725				
Type*9		Non-magnetizing lock							
Holding force [N]		67	101	203	220	330	660		
Power consumption at 20°C [W]		6.3			7.9				
Rated voltage [V]		24 VDC ⁰ _{-10%}							

*1 Please consult with SMC for non-standard strokes as they are produced as special orders.

*2 For details, refer to the "Speed-Work Load Graph (Guide)" on page 176.

*3 The allowable speed changes according to the stroke.

*4 A reference value for correcting an error in reciprocal operation

*5 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*6 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*7 The resolution will change depending on the driver type.

*8 Indicates the max. power during operation (including the driver)

When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.

*9 Only when motor option "With lock" is selected

* Sensor magnet position is located in the table center. For detailed dimensions, refer to the "Auto Switch Mounting Position" on page 210.

* Do not allow collisions at either end of the table traveling distance. Additionally, when running the positioning operation, do not set within 2 mm of both ends.


* For the manufacture of intermediate strokes, please contact SMC. (LEJS40/Manufacturable stroke range: 200 to 1200 mm, LEJS63/Manufacturable stroke range: 300 to 1500 mm)

Weight

Model	LEJS40									
Stroke [mm]	200	300	400	500	600	700	800	900	1000	1200
Product weight [kg]	5.6	6.4	7.1	7.9	8.7	9.4	10.2	11.0	11.7	13.3
Additional weight with lock [kg]	S2: 0.2/S6: 0.3/T6: 0.2									

Model	LEJS63									
Stroke [mm]	300	400	500	600	700	800	900	1000	1200	1500
Product weight [kg]	11.4	12.7	13.9	15.2	16.4	17.7	18.9	20.1	22.6	26.4
Additional weight with lock [kg]	S3: 0.4/S7: 0.7/T7: 0.4									

Construction

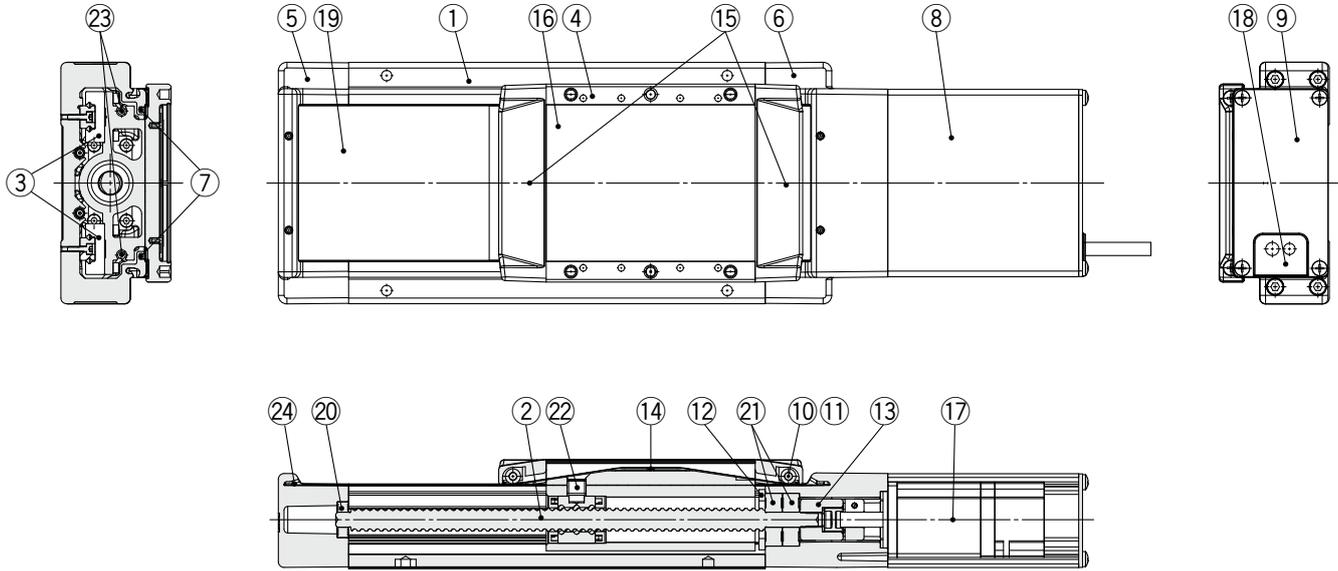

Component Parts

No	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Ball screw assembly	—	
3	Linear guide assembly	—	
4	Table	Aluminum alloy	Anodized
5	Housing A	Aluminum alloy	Coating
6	Housing B	Aluminum alloy	Coating
7	Seal magnet	—	
8	Motor cover	Aluminum alloy	Anodized
9	End cover A	Aluminum alloy	Anodized
10	Roller shaft	Stainless steel	
11	Roller	Synthetic resin	
12	Bearing stopper	Carbon steel	

No	Description	Material	Note
13	Coupling	—	
14	Table cap	Synthetic resin	
15	Seal band holder	Synthetic resin	
16	Blanking plate	Aluminum alloy	Anodized
17	Motor	—	
18	Grommet	NBR	
19	Dust seal band	Stainless steel	
20	Bearing	—	
21	Bearing	—	
22	Nut fixing pin	Carbon steel	
23	Magnet	—	
24	Seal band stopper	Stainless steel	


- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEY-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC
- JXC
- LECS
- LECS-T
- LECY
- Motorless
- LAT3

LEJS Series

AC Servo Motor

Dimensions: Ball Screw Drive

LEJS40

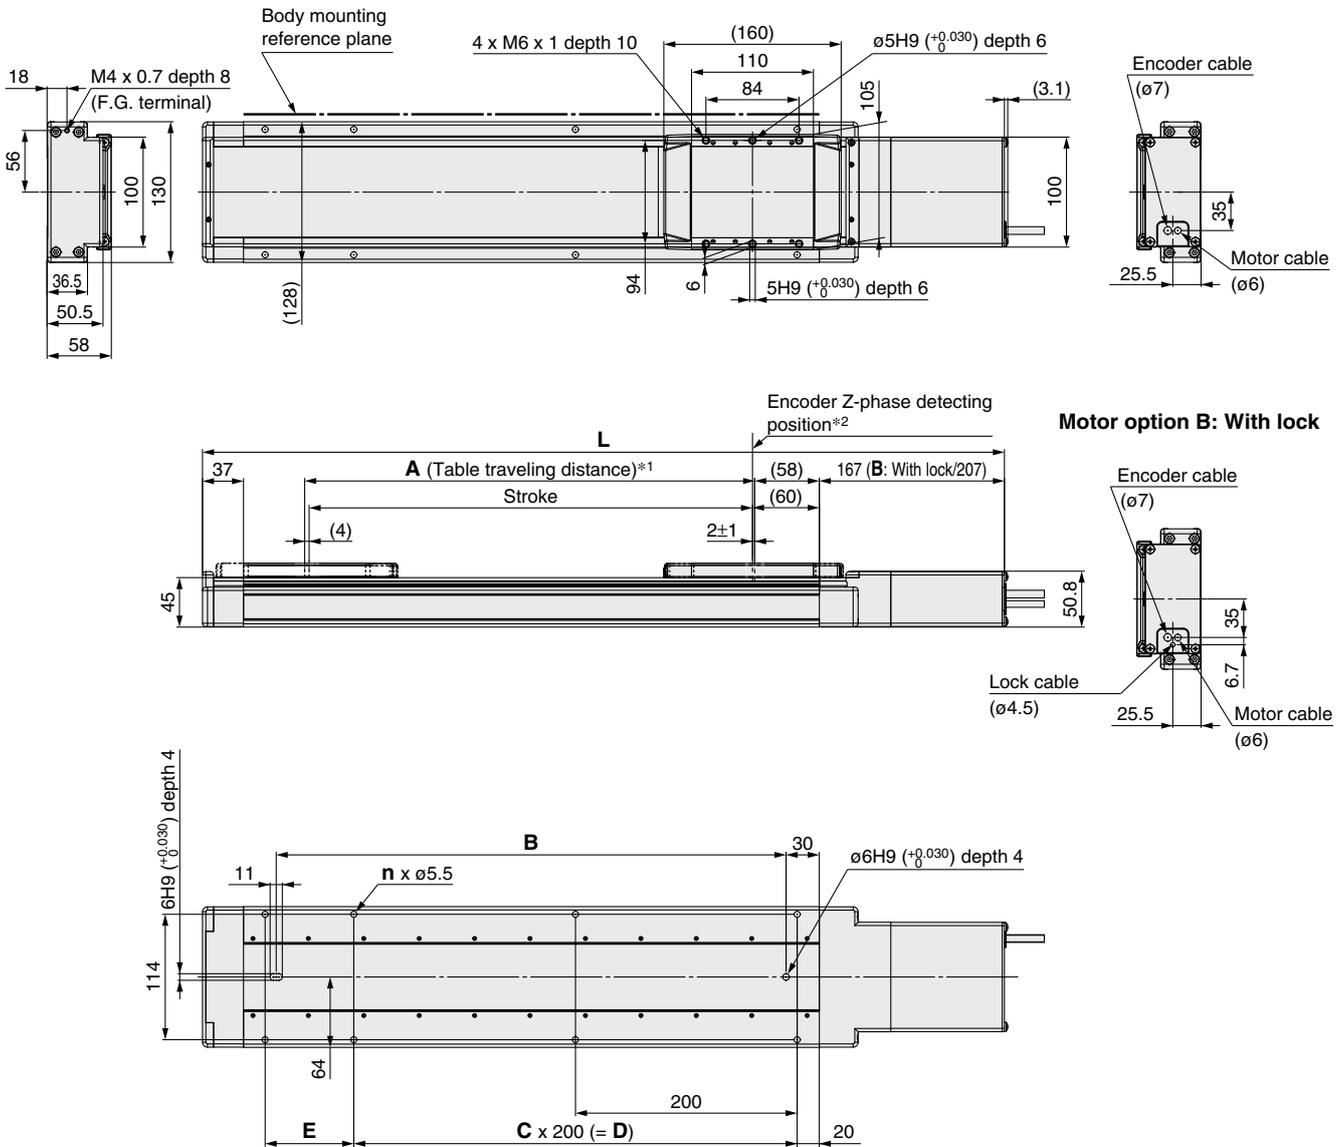

*1 This is the distance within which the table can move when it returns to origin. Make sure workpieces mounted on the table do not interfere with the workpieces and facilities around the table.


*2 The Z-phase first detecting position from the stroke end of the motor side

* The auto switch magnet is located in the table center.

Model	L		A	B	n	C	D	E
	Without lock	With lock						
LEJS40□□□-200□-□□□□	523.5	563.5	206	260	6	1	200	80
LEJS40□□□-300□-□□□□	623.5	663.5	306	360	6	1	200	180
LEJS40□□□-400□-□□□□	723.5	763.5	406	460	8	2	400	80
LEJS40□□□-500□-□□□□	823.5	863.5	506	560	8	2	400	180
LEJS40□□□-600□-□□□□	923.5	963.5	606	660	10	3	600	80
LEJS40□□□-700□-□□□□	1023.5	1063.5	706	760	10	3	600	180
LEJS40□□□-800□-□□□□	1123.5	1163.5	806	860	12	4	800	80
LEJS40□□□-900□-□□□□	1223.5	1263.5	906	960	12	4	800	180
LEJS40□□□-1000□-□□□□	1323.5	1363.5	1006	1060	14	5	1000	80
LEJS40□□□-1200□-□□□□	1523.5	1563.5	1206	1260	16	6	1200	80

Dimensions: Ball Screw Drive

LEJS63

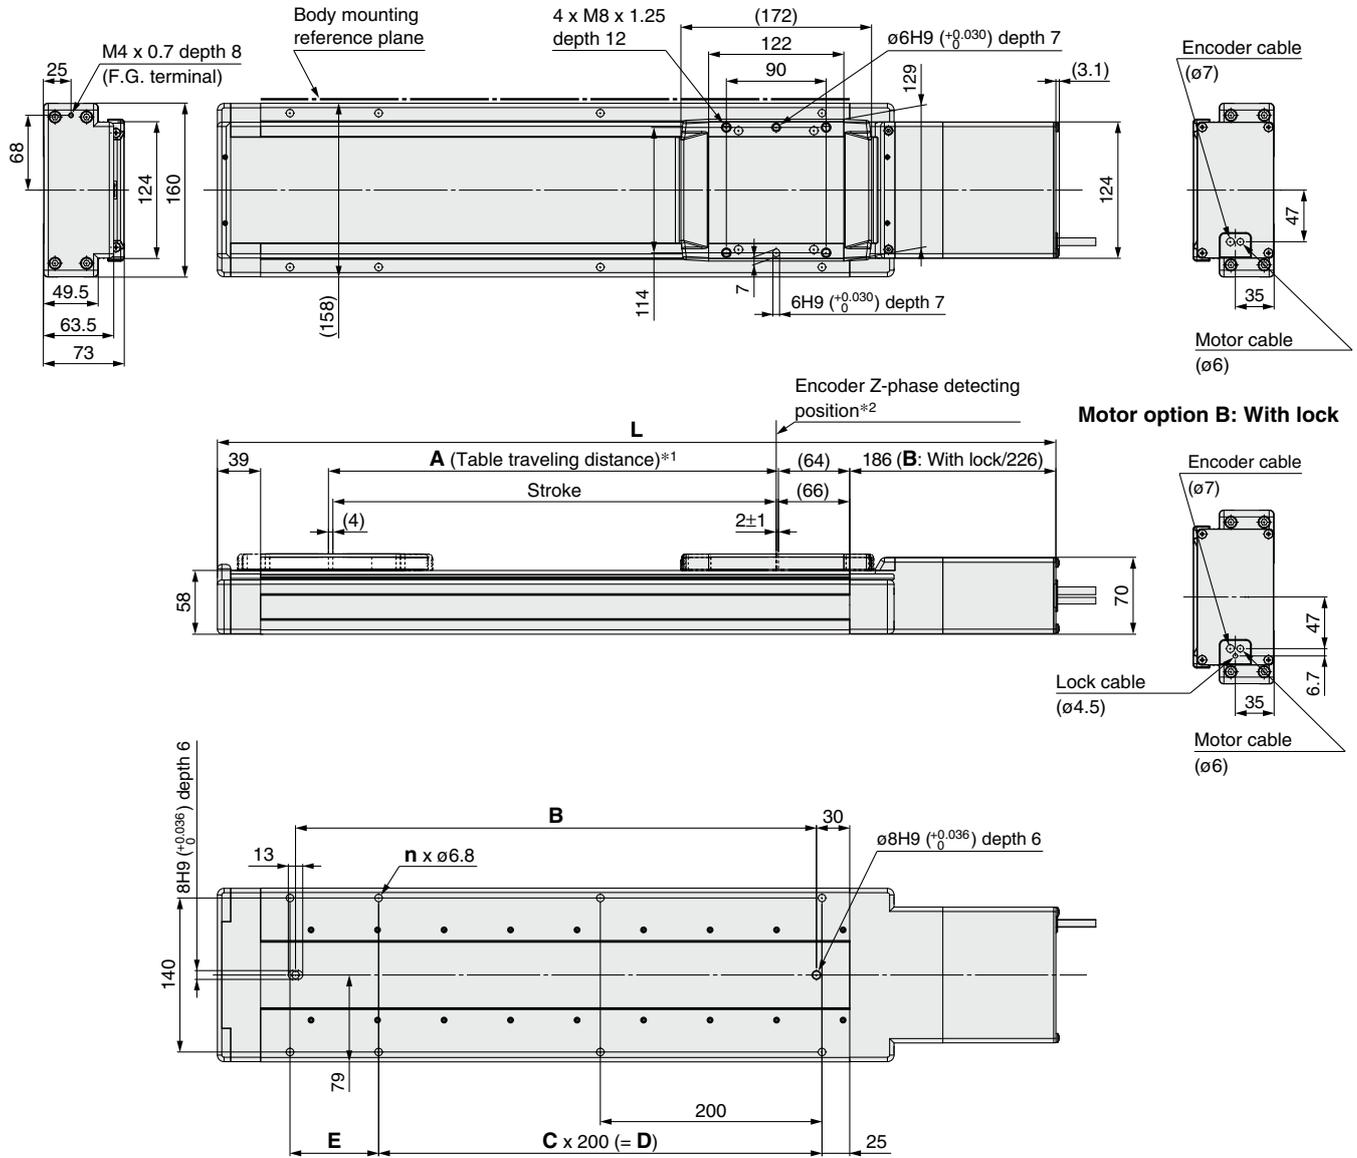

*1 This is the distance within which the table can move when it returns to origin. Make sure workpieces mounted on the table do not interfere with the workpieces and facilities around the table.
 *2 The Z-phase first detecting position from the stroke end of the motor side
 * The auto switch magnet is located in the table center.

Model	L		A	B	n	C	D	E
	Without lock	With lock						
LEJS63□□□-300□-□□□□	656.5	696.5	306	370	6	1	200	180
LEJS63□□□-400□-□□□□	756.5	796.5	406	470	8	2	400	80
LEJS63□□□-500□-□□□□	856.5	896.5	506	570	8	2	400	180
LEJS63□□□-600□-□□□□	956.5	996.5	606	670	10	3	600	80
LEJS63□□□-700□-□□□□	1056.5	1096.5	706	770	10	3	600	180
LEJS63□□□-800□-□□□□	1156.5	1196.5	806	870	12	4	800	80
LEJS63□□□-900□-□□□□	1256.5	1296.5	906	970	12	4	800	180
LEJS63□□□-1000□-□□□□	1356.5	1396.5	1006	1070	14	5	1000	80
LEJS63□□□-1200□-□□□□	1556.5	1596.5	1206	1270	16	6	1200	80
LEJS63□□□-1500□-□□□□	1856.5	1896.5	1506	1570	18	7	1400	180

- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEY-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC□
- JXC□
- LECS□
- LECS□-T
- LECY□
- Motorless
- LAT3

Built-in Intermediate Supports Type

These specifications enable the maximum speed to be realized throughout the entire stroke.

Electric Actuator/High Rigidity Slider Type Ball Screw Drive LEJS63□-□M Series


The LECSB-S, LECS-S, and LECS-S electric actuator drivers are to be discontinued. The LECSB-T, LECS-T, and LECS-T drivers are available as substitutes. In the product number, select T7 instead of S7 for the **Motor type**, and select B2 instead of B1, C2 instead of C1, or S2 instead of S1 for the **Driver type**.

Please contact SMC for clean room specification and the models compatible with secondary batteries.

Standard LEJS Series ▶ p. 188 LECY Series ▶ p. 200 Motorless Type ▶ p. 889



How to Order

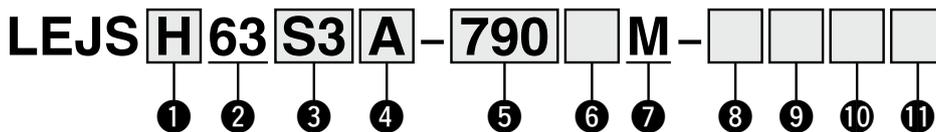

① Accuracy

Nil	Basic type
H	High-precision type

② Size

63

③ Motor type

Symbol	Type	Output [W]	Actuator size	Compatible drivers
S3	AC servo motor (Incremental encoder)	200	63	LECSA□-S3
S7	AC servo motor (Absolute encoder)	200	63	LECSB□-S7 LECS□-S7 LECS□-S7
T7	AC servo motor (Absolute encoder)	200	63	LECSB2-T7 LECS2-T7 LECSN2-T7-□ LECSS2-T7

④ Lead [mm]

H	30
A	20
B	10

⑤ Stroke [mm]*1

● Standard ○ Produced upon receipt of order

790	890	990	1190	1490	1790
●	●	○	○	○	○

*1 Please consult with SMC for non-standard strokes as they are produced upon receipt of order.

⑥ Motor option

Nil	Without option
B	With lock

⑦ Built-in intermediate supports

M	Built-in intermediate supports
---	--------------------------------

⑧ Cable type*2 *3

Nil	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

*2 When a driver type is selected, a cable is included. Select the cable type and cable length.

Example)

S2S2: Standard cable (2 m) + Driver (LECSS2)

S2: Standard cable (2 m)

Nil: Without cable and driver

*3 The motor and encoder cables are included. (The lock cable is included when the motor with lock option is selected.)

⑨ Cable length*2 *4

Nil	Without cable
2	2
5	5
A	10

*4 The length of the motor, encoder, and lock cables are the same.

⑩ I/O connector*5

Nil	Without cable
H	Without cable (Connector only)
1	1.5 [m]

*5 When "Without driver" is selected, only "Without cable" can be selected.

⑩ Driver type*2

Symbol	Compatible drivers	Power supply voltage [V]
Nil	Without driver	—
A1	LECSA1-S□	100 to 120
A2	LECSA2-S□	200 to 230
B1	LECSB1-S□	100 to 120
B2	LECSB2-S□	200 to 230
	LECSB2-T□	200 to 240
C1	LECS1-S□	100 to 120
C2	LECS2-S□	200 to 230
	LECS2-T□	
S1	LECSS1-S□	100 to 120
S2	LECSS2-S□	200 to 230
	LECSS2-T□	200 to 240
N2	LECSN2-T□	200 to 240
92	LECSN2-T□-9	200 to 240
E2	LECSN2-T□-E	200 to 240
P2	LECSN2-T□-P	200 to 240

Compatible Drivers

For auto switches, refer to pages 210 to 213.

Driver type	Pulse input type /Positioning type	Pulse input type	CC-Link direct input type	SSCNET III type	Pulse input type	CC-Link direct input type	SSCNET III/H type	Network card type
Series	LECSA	LECSB	LECS	LECSS	LECSB-T	LECS-T	LECSS-T	LECSN-T
Number of point tables*6	Up to 7	—	Up to 255	—	Up to 255	Up to 255 (2 stations occupied)	—	Up to 255
Pulse input	○	○	—	—	○	—	—	—
Applicable network	—	—	CC-Link	SSCNET III	—	CC-Link	SSCNET III/H	PROFINET EtherCAT® EtherNet/IP™
Control encoder	Incremental 17-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder	Absolute 22-bit encoder
Communication function	USB communication	USB communication, RS422 communication	—	USB communication	USB communication, RS422 communication	RS422 communication	USB communication	USB communication
Power supply voltage [V]	—	100 to 120 VAC (50/60 Hz) 200 to 230 VAC (50/60 Hz)	—	—	200 to 240 VAC (50/60 Hz)	200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)
Reference page	777							

*6 The LECSN-T only supports PROFINET and EtherCAT®.


Specifications

		Lead [mm]	30	20	10
Work load [kg]	Horizontal		30	45	85
	Vertical		6	10	20
Speed [mm/s]	Stroke range	790	1800	1200	600
		890			
		990			
		1190			
		1490			
		1790			

For the model selection method, refer to page 175. Other specifications that are not listed are the same as those of the standard product. Refer to page 189 for details.

Construction

Top view of actuator (Shown with the dust seal band removed)

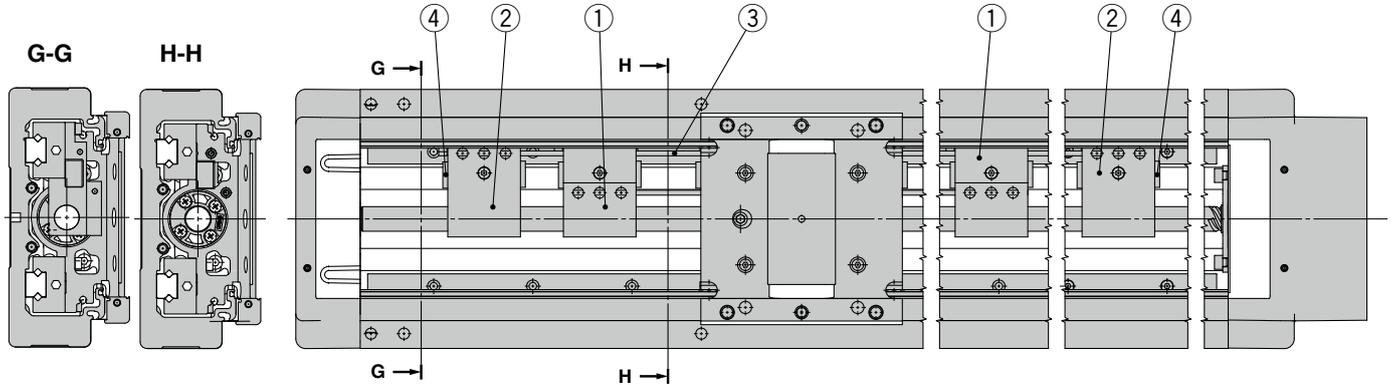

Component Parts

No.	Description	Material
1	Support A	Synthetic resin
2	Support B	Synthetic resin
3	Connection pipe	Stainless steel
4	Bumper	Low-elasticity rubber

LEFS
LEFB

LEJS
LEJB

LEL

LEM

LEY
LEYG

LES
LESH

LEPY
LEPS

LER

LEH

LEY-X5

11-LEFS

11-LEJS

25A-

LEC□

JXC□

LECS□
LECS□-T

LECY□


Motorless

LAT3

LEJS63□-□M Series

Dimensions: Ball Screw Drive

AC servo motor

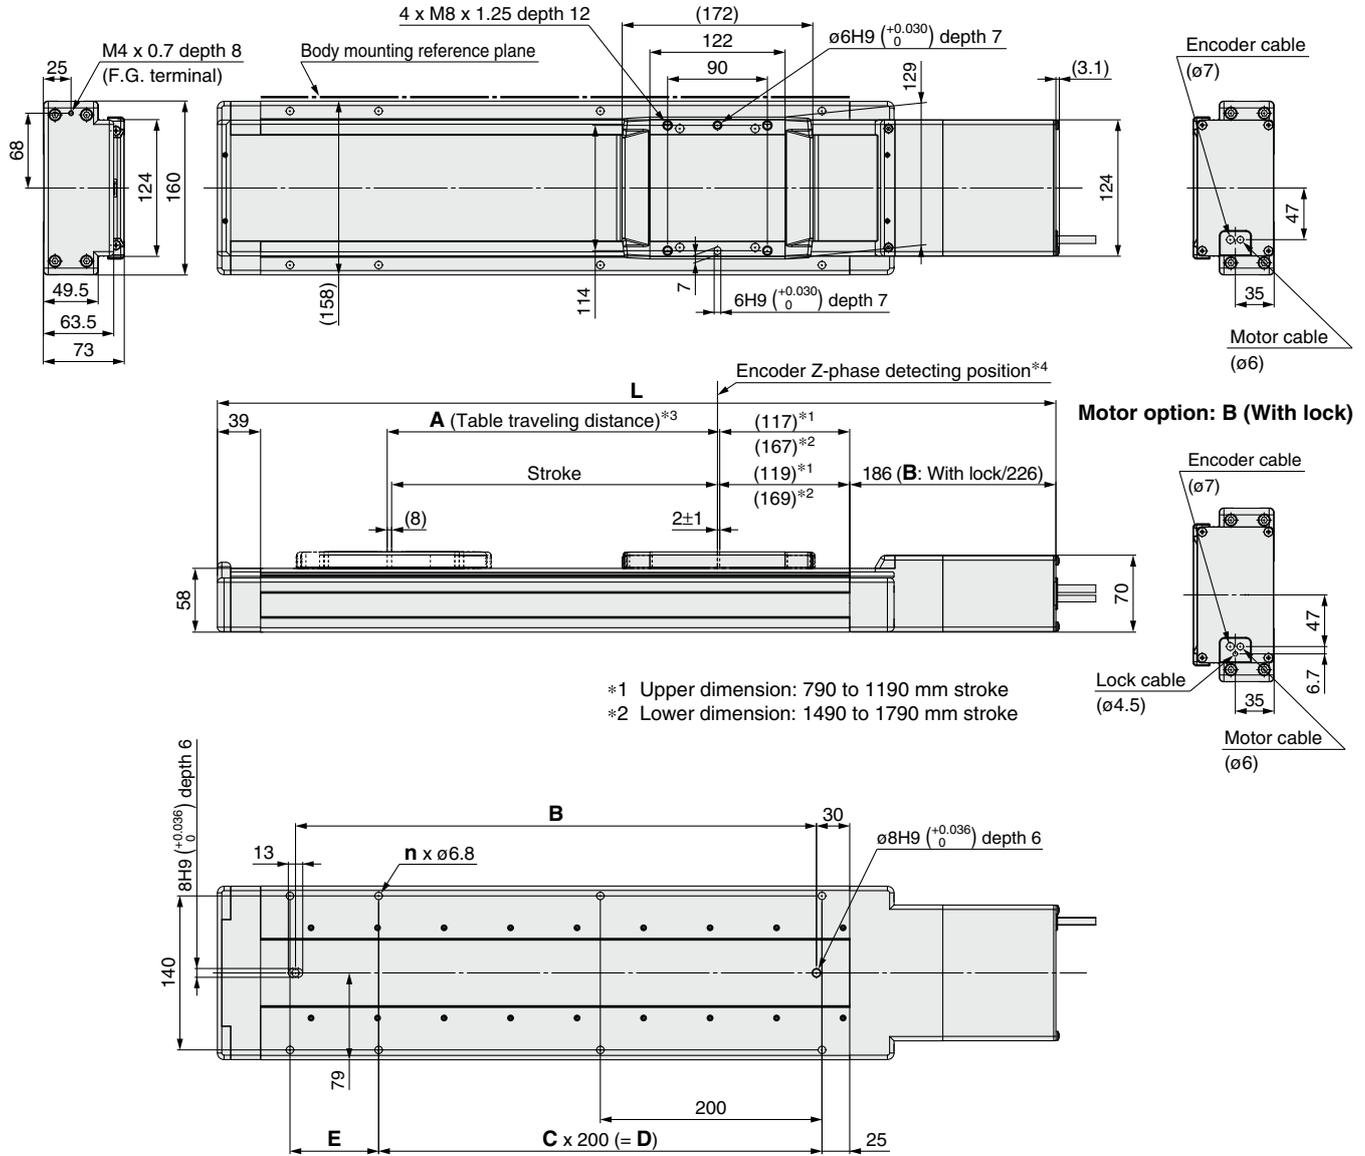

*1 Upper dimension: 790 to 1190 mm stroke
 *2 Lower dimension: 1490 to 1790 mm stroke

- *3 This is the distance within which the table can move when it returns to origin. Make sure workpieces mounted on the table do not interfere with the workpieces and facilities around the table.
- *4 The Z-phase first detecting position from the stroke end of the motor side
- * The auto switch magnet is located in the table center.

⚠ Caution

1. During operation, the intermediate support mechanism emits a collision noise due to the structure.
2. Compared to the standard product, the entire length of the product will be longer for each stroke. For details, refer to the dimensions.
3. The stopper type origin position return method cannot be used as the return to origin method (due to the bumper as shown in Construction ④).

Dimensions and Weight

Model	L		A	B	n	C	D	E	Product weight*1 [kg]
	Without lock	With lock							
LEJS□63□□-790□M-□□□□	1256.5	1296.5	800	970	12	4	800	180	19.4
LEJS□63□□-890□M-□□□□	1356.5	1396.5	900	1070	14	5	1000	80	20.7
LEJS□63□□-990□M-□□□□	1456.5	1496.5	1000	1170	14	5	1000	180	21.9
LEJS□63□□-1190□M-□□□□	1656.5	1696.5	1200	1370	16	6	1200	180	24.4
LEJS□63□□-1490□M-□□□□	2056.5	2096.5	1500	1770	20	8	1600	180	29.9
LEJS□63□□-1790□M-□□□□	2356.5	2396.5	1800	2070	24	10	2000	80	33.7

*1 When using a lock, add 0.4 (incremental encoder) or 0.7 (absolute encoder).

Electric Actuator/High Rigidity Slider Type Ball Screw Drive

LEJS Series LEJS40, 63




Click [here](#) for details.

Please contact SMC for clean room specification and the models compatible with secondary batteries.

Built-in Intermediate Supports Type▶p. 200 **LECS**□ Series▶p. 188 **Clean Room Specification**▶p. 659 **Secondary Battery Compatible**▶p. 672

Motorless Type▶p. 885

How to Order

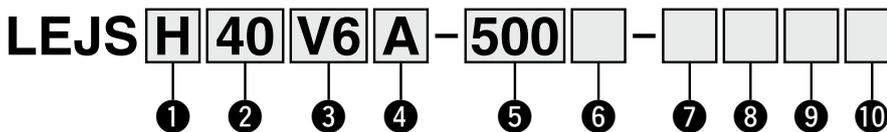

1 Accuracy

Nil	Basic type
H	High-precision type

2 Size

40
63

3 Motor type*1

Symbol	Type	Output [W]	Actuator size	Compatible drivers
V6	AC servo motor (Absolute encoder)	100	40	LECYM2-V5 LECYU2-V5
V7	AC servo motor (Absolute encoder)	200	63	LECYM2-V7 LECYU2-V7

*1 For motor type V6, the compatible driver part number suffix is V5.

4 Lead [mm]

Symbol	LEJS40	LEJS63
H	24	30
A	16	20
B	8	10

5 Stroke [mm]*2

200
to
1500

*2 Refer to the applicable stroke table for details.

6 Motor option

Nil	Without option
B	With lock

7 Cable type*4 *5

Nil	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

*5 The motor and encoder cables are included. (The lock cable is included when the motor with lock option is selected.)

8 Cable length [m]*4 *6

Nil	Without cable
3	3
5	5
A	10
C	20

*6 The length of the motor, encoder, and lock cables are the same.

9 Driver type*4

	Compatible drivers	Power supply voltage [V]
Nil	Without driver	—
M2	LECYM2-V□	200 to 230
U2	LECYU2-V□	200 to 230

10 I/O cable length*7

Nil	Without cable
H	Without cable (Connector only)
1	1.5 [m]

*7 When "Without driver" is selected for driver type, only "Nil: Without cable" can be selected. Refer to page 808 if I/O cable is required. (Options are shown on page 808.)

Applicable Stroke Table*3

●: Standard

Model \ Stroke [mm]	200	300	400	500	600	700	800	900	1000	1200	1500
LEJS40	●	●	●	●	●	●	●	●	●	●	—
LEJS63	—	●	●	●	●	●	●	●	●	●	●

*3 Please consult with SMC for non-standard strokes as they are produced as special orders.

For auto switches, refer to pages 210 to 213.

Compatible Drivers

Driver type	MECHATROLINK-II type	MECHATROLINK-III type
Series	LECYM	LECYU
Applicable network	MECHATROLINK-II	MECHATROLINK-III
Control encoder	Absolute 20-bit encoder	
Communication device	USB communication, RS-422 communication	
Power supply voltage [V]	200 to 230 VAC (50/60 Hz)	
Reference page	801	

- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEY-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC□
- LEC
- JXC□
- JXC
- LECS□
- LECS□-T
- LECY□
- LECY
- Motorless
- LAT3

LEJS Series

AC Servo Motor

Specifications

AC Servo Motor (100/200 W)

Model		LEJS40V6			LEJS63V7				
Actuator specifications	Stroke [mm]*1	200, 300, 400, 500, 600, 700, 800 900, 1000, 1200			300, 400, 500, 600, 700, 800, 900 1000, 1200, 1500				
	Work load [kg]*2	Horizontal	15	30	55	30	45	85	
		Vertical	3	5	10	6	10	20	
	Speed*3 [mm/s]	Stroke range	Up to 500	1800	1200	600	1800	1200	600
			501 to 600	1580	1050	520	1800	1200	600
			601 to 700	1170	780	390	1800	1200	600
			701 to 800	910	600	300	1390	930	460
			801 to 900	720	480	240	1110	740	370
			901 to 1000	580	390	190	900	600	300
			1001 to 1100	480	320	160	750	500	250
			1101 to 1200	410	270	130	630	420	210
			1201 to 1300	—	—	—	540	360	180
	1301 to 1400	—	—	—	470	310	150		
	1401 to 1500	—	—	—	410	270	130		
	Max. acceleration/deceleration [mm/s ²]		20000 (Refer to pages 179 and 180 for limit according to work load and duty ratio.)						
Positioning repeatability [mm]	Basic type	±0.02							
	High-precision type	±0.01							
Lost motion [mm]*4	Basic type	0.1 or less							
	High-precision type	0.05 or less							
Lead [mm]		24	16	8	30	20	10		
Impact/Vibration resistance [m/s ²]*5		50/20							
Actuation type		Ball screw							
Guide type		Linear guide							
Static allowable moment*6 [N·m]	Mep (Pitching)	83.9			121.5				
	Mey (Yawing)	88.2			135.1				
	Mer (Rolling)	88.2			135.1				
Operating temperature range [°C]		5 to 40							
Operating humidity range [%RH]		90 or less (No condensation)							
Regenerative resistor		May be required depending on speed and work load. (Refer to page 187.)							
Motor output [W]/Size [mm]		100/□40			200/□60				
Motor type		AC servo motor (200 VAC)							
Encoder		Absolute 20-bit encoder (Resolution: 1048576 p/rev)							
Power [W]*7		Max. power 445			Max. power 725				
Type*8		Non-magnetizing lock							
Holding force [N]		67	101	202	108	162	324		
Power consumption at 20°C [W]		5.5			6				
Rated voltage [V]		24 VDC ^{+10%} ₀							

*1 Please consult with SMC for non-standard strokes as they are produced as special orders.

*2 Check the "Speed-Work Load Graph (Guide)" on page 187.

*3 The allowable speed changes according to the stroke.

*4 A reference value for correcting an error in reciprocal operation

*5 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*6 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*7 Indicates the max. power during operation (including the driver)

When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.

*8 Only when motor option "With lock" is selected

* Sensor magnet position is located in the table center. For detailed dimensions, refer to the "Auto Switch Mounting Position."

* Do not allow collisions at either end of the table traveling distance. Additionally, when running the positioning operation, do not set within 2 mm of both ends.


* For the manufacture of intermediate strokes, please contact SMC. (LEJS40/Manufacturable stroke range: 200 to 1200 mm, LEJS63/Manufacturable stroke range: 300 to 1500 mm)

Weight

Model	LEJS40									
Stroke [mm]	200	300	400	500	600	700	800	900	1000	1200
Product weight [kg]	5.6	6.4	7.1	7.9	8.7	9.4	10.2	11.0	11.7	13.3
Additional weight with lock [kg]	0.3 (Absolute encoder)									

Model	LEJS63									
Stroke [mm]	300	400	500	600	700	800	900	1000	1200	1500
Product weight [kg]	11.4	12.7	13.9	15.2	16.4	17.7	18.9	20.1	22.6	26.4
Additional weight with lock [kg]	0.7 (Absolute encoder)									

Dimensions: Ball Screw Drive
LEJS40

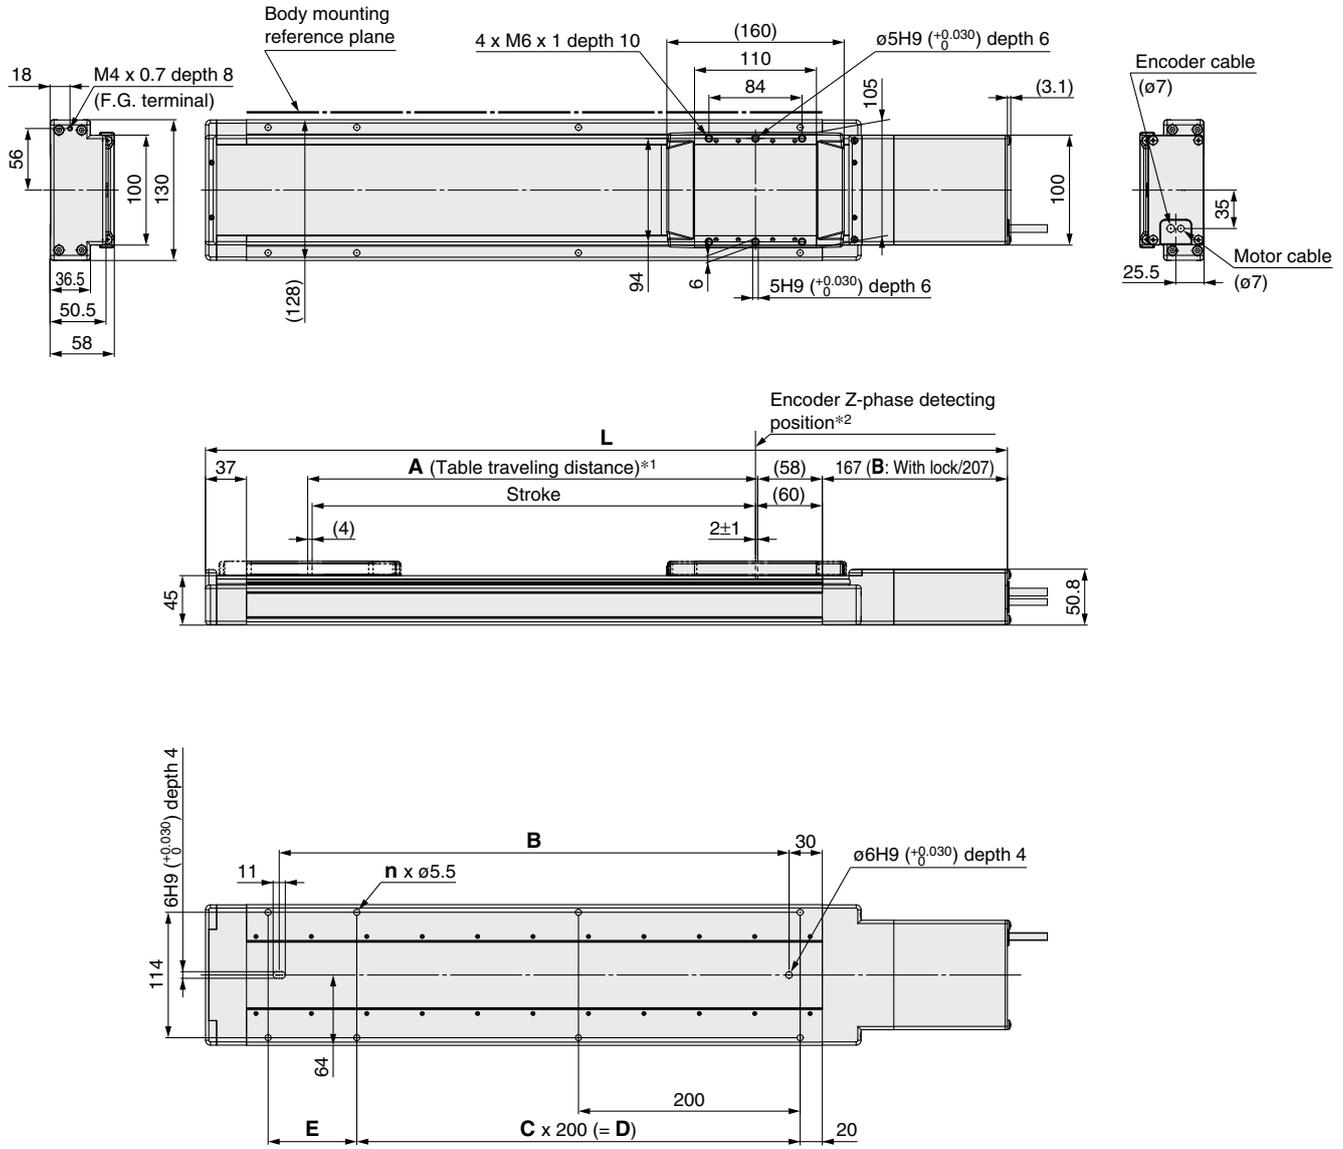


*1 This is the distance within which the table can move when it returns to origin. Make sure workpieces mounted on the table do not interfere with the workpieces and facilities around the table.
 *2 The Z-phase first detecting position from the stroke end of the motor side
 * The auto switch magnet is located in the table center.

Model	L		A	B	n	C	D	E
	Without lock	With lock						
LEJS40V□□-200□-□□□□	523.5	563.5	206	260	6	1	200	80
LEJS40V□□-300□-□□□□	623.5	663.5	306	360	6	1	200	180
LEJS40V□□-400□-□□□□	723.5	763.5	406	460	8	2	400	80
LEJS40V□□-500□-□□□□	823.5	863.5	506	560	8	2	400	180
LEJS40V□□-600□-□□□□	923.5	963.5	606	660	10	3	600	80
LEJS40V□□-700□-□□□□	1023.5	1063.5	706	760	10	3	600	180
LEJS40V□□-800□-□□□□	1123.5	1163.5	806	860	12	4	800	80
LEJS40V□□-900□-□□□□	1223.5	1263.5	906	960	12	4	800	180
LEJS40V□□-1000□-□□□□	1323.5	1363.5	1006	1060	14	5	1000	80
LEJS40V□□-1200□-□□□□	1523.5	1563.5	1206	1260	16	6	1200	80

- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEY-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC□
- JXC□
- LECS□
- LECS□-T
- LECY□
- Motorless
- LAT3

Dimensions: Ball Screw Drive

LEJS63

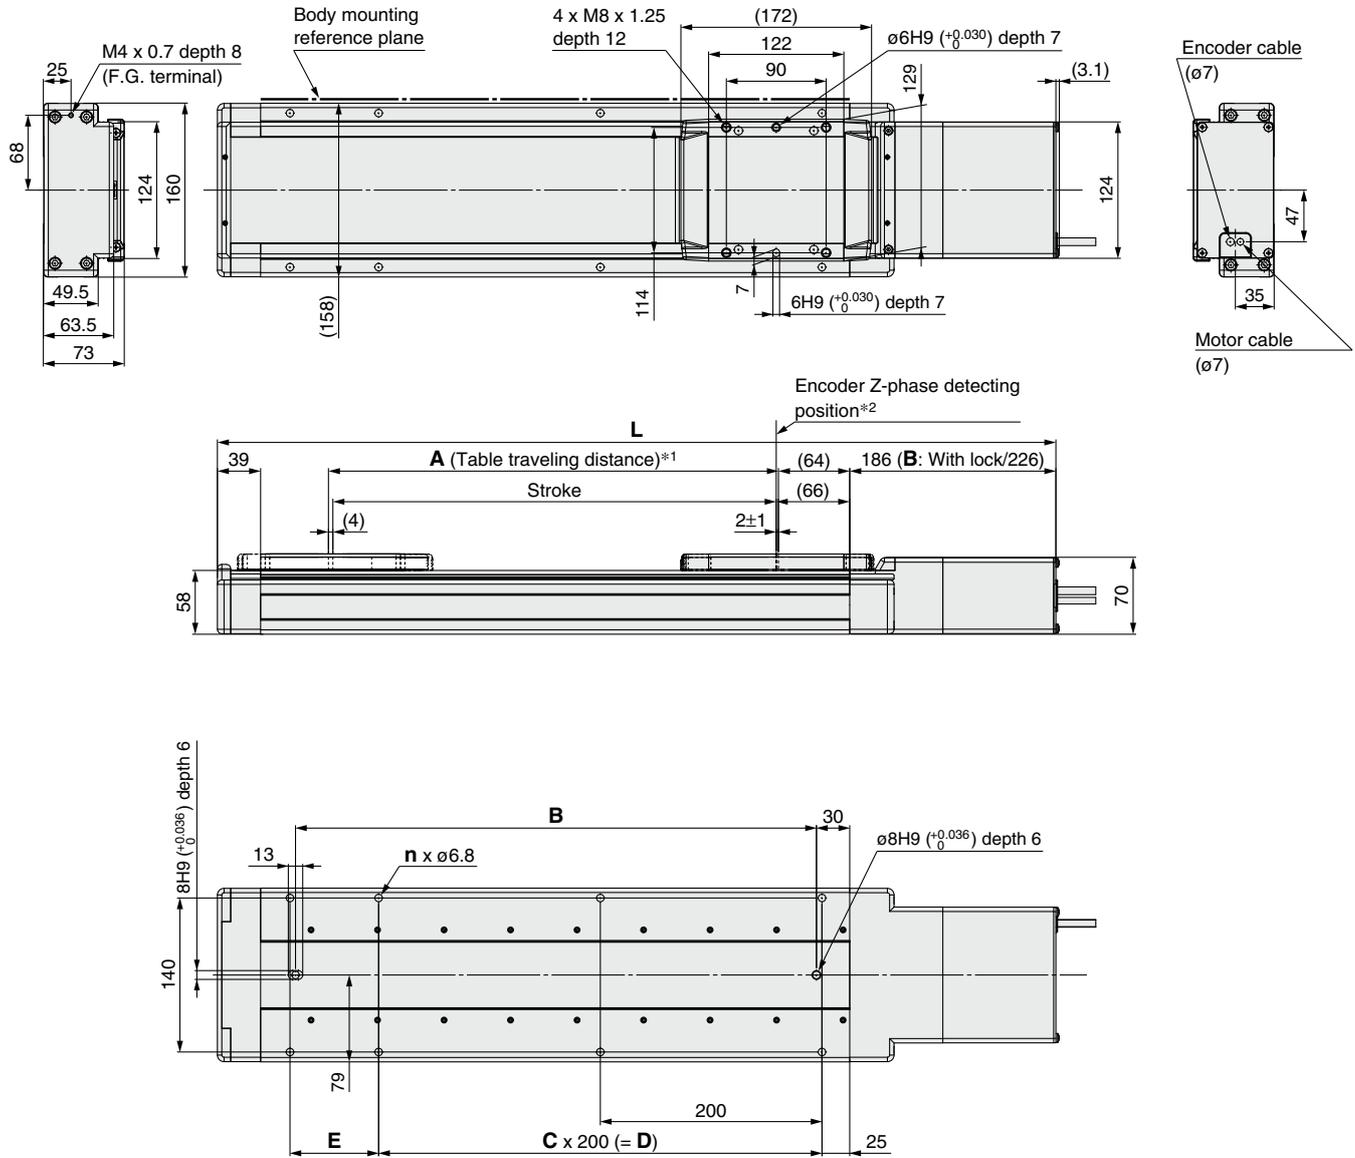

*1 This is the distance within which the table can move when it returns to origin. Make sure workpieces mounted on the table do not interfere with the workpieces and facilities around the table.

*2 The Z-phase first detecting position from the stroke end of the motor side

* The auto switch magnet is located in the table center.

Model	L		A	B	n	C	D	E
	Without lock	With lock						
LEJS63V□□-300□-□□□□	656.5	696.5	306	370	6	1	200	180
LEJS63V□□-400□-□□□□	756.5	796.5	406	470	8	2	400	80
LEJS63V□□-500□-□□□□	856.5	896.5	506	570	8	2	400	180
LEJS63V□□-600□-□□□□	956.5	996.5	606	670	10	3	600	80
LEJS63V□□-700□-□□□□	1056.5	1096.5	706	770	10	3	600	180
LEJS63V□□-800□-□□□□	1156.5	1196.5	806	870	12	4	800	80
LEJS63V□□-900□-□□□□	1256.5	1296.5	906	970	12	4	800	180
LEJS63V□□-1000□-□□□□	1356.5	1396.5	1006	1070	14	5	1000	80
LEJS63V□□-1200□-□□□□	1556.5	1596.5	1206	1270	16	6	1200	80
LEJS63V□□-1500□-□□□□	1856.5	1896.5	1506	1570	18	7	1400	180

Built-in Intermediate Supports Type

These specifications enable the maximum speed to be realized throughout the entire stroke.

Electric Actuator/High Rigidity Slider Type Ball Screw Drive

LEJS63□-□M Series




Click [here](#) for details.

Please contact SMC for clean room specification and the models compatible with secondary batteries.

Standard LEJS Series ▶ p. 196 **LECS** Series ▶ p. 193

For the model selection method, refer to page 186, and for details on the specifications, construction, and dimensions, refer to page 194 and onwards.

How to Order

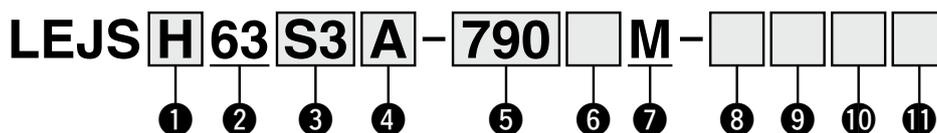

1 Accuracy

Nil	Basic type
H	High-precision type

2 Size

63

3 Motor type

Symbol	Type	Output [W]	Actuator size	Compatible drivers
V7	AC servo motor (Absolute encoder)	200	63	LECYM2-V7 LECYU2-V7

4 Lead [mm]

H	30
A	20
B	10

5 Stroke [mm]*1

● Standard ○ Produced upon receipt of order

790	890	990	1190	1490	1790
●	●	○	○	○	○

*1 Please consult with SMC for non-standard strokes as they are produced upon receipt of order.

6 Motor option

Nil	Without option
B	With lock

7 Built-in intermediate supports

M	Built-in intermediate supports
---	--------------------------------

10 Driver type*2

Symbol	Compatible driver	Power supply voltage [V]
Nil	Without driver	—
M2	LECYM2-V□	200 to 230
U2	LECYU2-V□	200 to 230

11 I/O connector*5

Nil	Without cable
H	Without cable (Connector only)
1	1.5 [m]

*5 When "Without driver" is selected, only "Without cable" can be selected.

8 Cable type*2 *3

Nil	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

*2 When a driver type is selected, a cable is included. Select the cable type and cable length.

Example)

S2S2: Standard cable (2 m) + Driver (LECS2)

S2: Standard cable (2 m)

Nil: Without cable and driver

*3 The motor and encoder cables are included. (The lock cable is included when the motor with lock option is selected.)

9 Cable length*2 *4

Nil	Without cable
3	3
5	5
A	10
C	20

*4 The length of the motor, encoder, and lock cables are the same.

Compatible Drivers

For auto switches, refer to pages 210 to 213.

Driver type	MECHATROLINK-II type	MECHATROLINK-III type
Series	LECYM	LECYU
Applicable network	MECHATROLINK-II	MECHATROLINK-III
Control encoder	Absolute 20-bit encoder	
Communication device	USB communication, RS-422 communication	
Power supply voltage [V]	200 to 230 VAC (50/60 Hz)	
Reference page	801	

LEFS
LEJB
LEJ
LEM
LEY
LESH
LEPS
LER
LEH
LEY-X5
11-LEFS
11-LEJS
25A-
LEC
JXC
LECS
LECY
Motorless
LAT3

Electric Actuator/High Rigidity Slider Type Belt Drive


LEJB Series



Click here for details. Click here for details.

LECY□ Series ▶ p. 206

How to Order

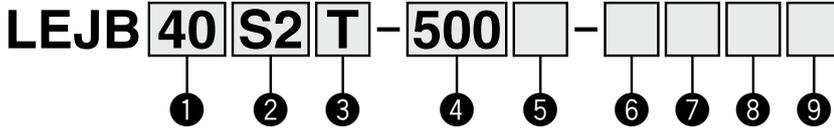

The LECSB-S, LECS-C-S, and LECS-S-S electric actuator drivers are to be discontinued. The LECSB-T, LECS-C-T, and LECS-S-T drivers are available as substitutes. In the product number, select T6 instead of S6, or T7 instead of S7 for the ② Motor type, and select B2 instead of B1, C2 instead of C1, or S2 instead of S1 for the ③ Driver type.

① Size

40
63

③ Lead [mm]

Symbol	LEJB40	LEJB63
T	27	42

④ Stroke [mm]^{*3}

200
to
3000

*3 Refer to the applicable stroke table for details.

⑤ Motor option

Nil	Without option
B	With lock

⑥ Cable type^{*5 *6 *7}

Nil	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

② Motor type

Symbol	Type	Output [W]	Actuator size	Compatible drivers	UL-compliant
S2 ^{*1}	AC servo motor (Incremental encoder)	100	40	LECSA□-S1	●
S3	AC servo motor (Incremental encoder)	200	63	LECSA□-S3	●
S6 ^{*1}	AC servo motor (Absolute encoder)	100	40	LECSB□-S5 LECS-C□-S5 LECSS□-S5	—
S7	AC servo motor (Absolute encoder)	200	63	LECSB□-S7 LECS-C□-S7 LECSS□-S7	—
T6 ^{*2}	AC servo motor (Absolute encoder)	100	40	LECSB2-T5 LECS-C2-T5 LECSN2-T5-□	—
T7		200	63	LECSB2-T7 LECS-C2-T7 LECSN2-T7-□	●

*1 For motor type S2 and S6, the compatible driver part number suffixes are S1 and S5 respectively.

*2 For motor type T6, the compatible driver part number is LECS□2-T5.

⑦ Cable length [m]^{*5 *8}

Nil	Without cable
2	2
5	5
A	10

*8 The length of the motor, encoder, and lock cables are the same.

⑨ I/O cable length^{*9}

Nil	Without cable
H	Without cable (Connector only)
1	1.5 [m]

*9 When "Without driver" is selected for driver type, only "Nil: Without cable" can be selected. Refer to page 797 if I/O cable is required. (Options are shown on page 797.)

*6 The motor and encoder cables are included. (The lock cable is included when the motor with lock option is selected.)

*7 Standard cable entry direction is "(A) Axis side." (Refer to page 796 for details.)

⑧ Driver type^{*5}

	Compatible drivers	Power supply voltage [V]
Nil	Without driver	—
A1	LECSA1	100 to 120
A2	LECSA2	200 to 230
B1	LECSB1	100 to 120
B2	LECSB2-S□ LECSB2-T□	200 to 230 200 to 240
C1	LECS-C1	100 to 120
C2	LECS-C2-S□ LECS-C2-T□	200 to 230 200 to 240
S1	LECSS1	100 to 120
S2	LECSS2-S□ LECSS2-T□	200 to 230 200 to 240
N2	LECSN2-T□	200 to 240
92	LECSN2-T□-9	200 to 240
E2	LECSN2-T□-E	200 to 240
P2	LECSN2-T□-P	200 to 240

Applicable Stroke Table^{*4}

●: Standard

Model	Stroke [mm]	200	300	400	500	600	700	800	900	1000	1200	1500	2000	3000
LEJB40		●	●	●	●	●	●	●	●	●	●	●	●	—
LEJB63		—	●	●	●	●	●	●	●	●	●	●	●	●

*4 Please consult with SMC for non-standard strokes as they are produced as special orders.

*5 When a driver type is selected, a cable is included. Select the cable type and cable length.

Example)

S2S2: Standard cable (2 m) + Driver (LECSS2)

S2: Standard cable (2 m)

Nil: Without cable and driver

For auto switches, refer to pages 210 to 213.

Compatible Drivers


Driver type	Pulse input type /Positioning type	Pulse input type	CC-Link direct input type	SSCNET III type	Pulse input type	CC-Link direct input type	SSCNET III type	Network card type
Series	LECSA	LECSB	LECS-C	LECSS	LECSB-T	LECS-C-T	LECSS-T	LECSN-T
Number of point tables ^{*8}	Up to 7	—	Up to 255	—	Up to 255	Up to 255 (2 stations occupied)	—	Up to 255
Pulse input	○	○	—	—	○	—	—	—
Applicable network	—	—	CC-Link	SSCNET III	—	CC-Link	SSCNET III/H	PROFINET EtherCAT® EtherNet/IP™
Control encoder	Incremental 17-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder	Absolute 22-bit encoder
Communication function	USB communication	USB communication, RS422 communication	—	USB communication	USB communication, RS422 communication	—	USB communication	—
Power supply voltage [V]	—	100 to 120 VAC (50/60 Hz) 200 to 230 VAC (50/60 Hz)	—	—	200 to 240 VAC (50/60 Hz)	200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)
Reference page	—	—	—	—	—	—	—	—

*8 The LECSN-T only supports PROFINET and EtherCAT®.

LEJB Series

AC Servo Motor

Construction

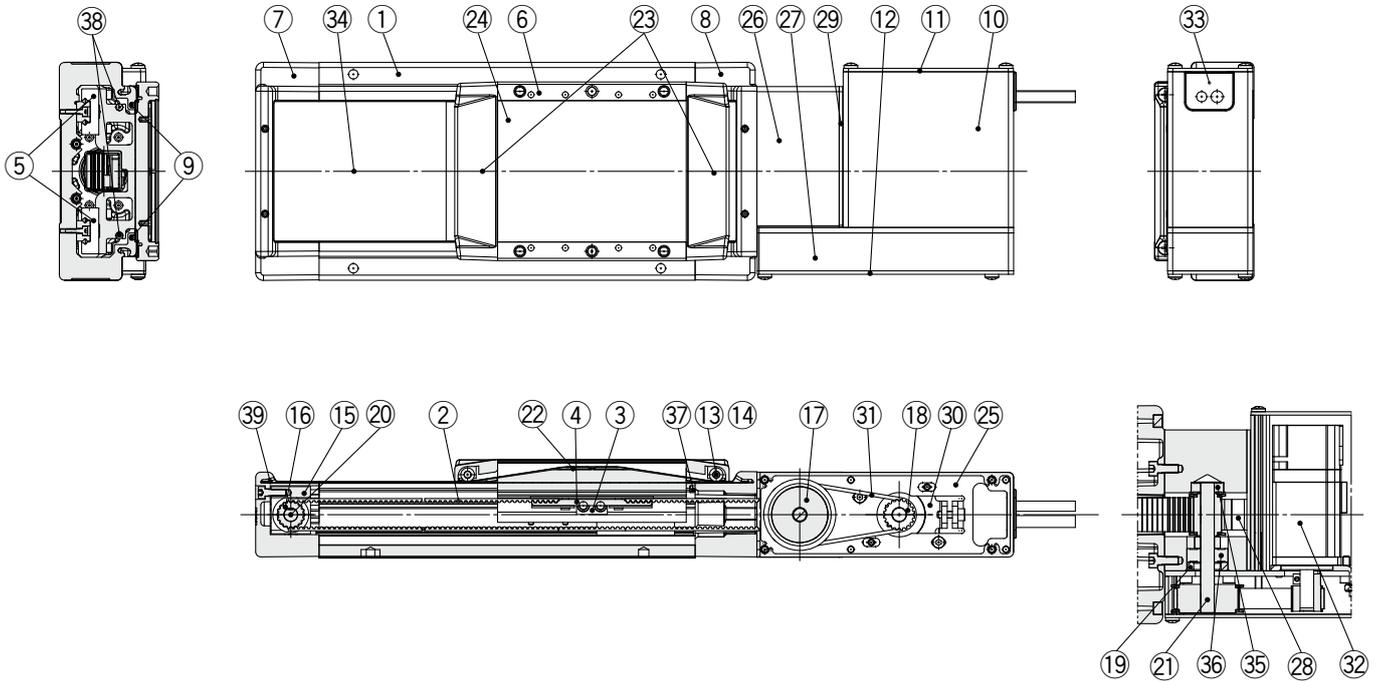

Motor details


Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Belt	—	
3	Belt holder	Carbon steel	
4	Belt stopper	Aluminum alloy	
5	Linear guide assembly	—	
6	Table	Aluminum alloy	Anodized
7	Housing A	Aluminum alloy	Coating
8	Housing B	Aluminum alloy	Coating
9	Seal magnet	—	
10	Motor cover	Aluminum alloy	Anodized
11	End cover A	Aluminum alloy	Anodized
12	End cover B	Aluminum alloy	Anodized
13	Roller shaft	Stainless steel	
14	Roller	Synthetic resin	
15	Pulley holder	Aluminum alloy	
16	Drive pulley	Aluminum alloy	
17	Speed reduction pulley	Aluminum alloy	
18	Motor pulley	Aluminum alloy	
19	Spacer	Aluminum alloy	
20	Pulley shaft A	Stainless steel	

No.	Description	Material	Note
21	Pulley shaft B	Stainless steel	
22	Table cap	Synthetic resin	
23	Seal band holder	Synthetic resin	
24	Blanking plate	Aluminum alloy	Anodized
25	Motor mount plate	Carbon steel	
26	Pulley block	Aluminum alloy	Anodized
27	Pulley cover	Aluminum alloy	Anodized
28	Belt stopper	Aluminum alloy	
29	Side plate	Aluminum alloy	Anodized
30	Motor plate	Carbon steel	
31	Belt	—	
32	Motor	—	
33	Grommet	NBR	
34	Dust seal band	Stainless steel	
35	Bearing	—	
36	Bearing	—	
37	Stopper pin	Stainless steel	
38	Magnet	—	
39	Seal band stopper	Stainless steel	

Dimensions: Belt Drive

LEJB40

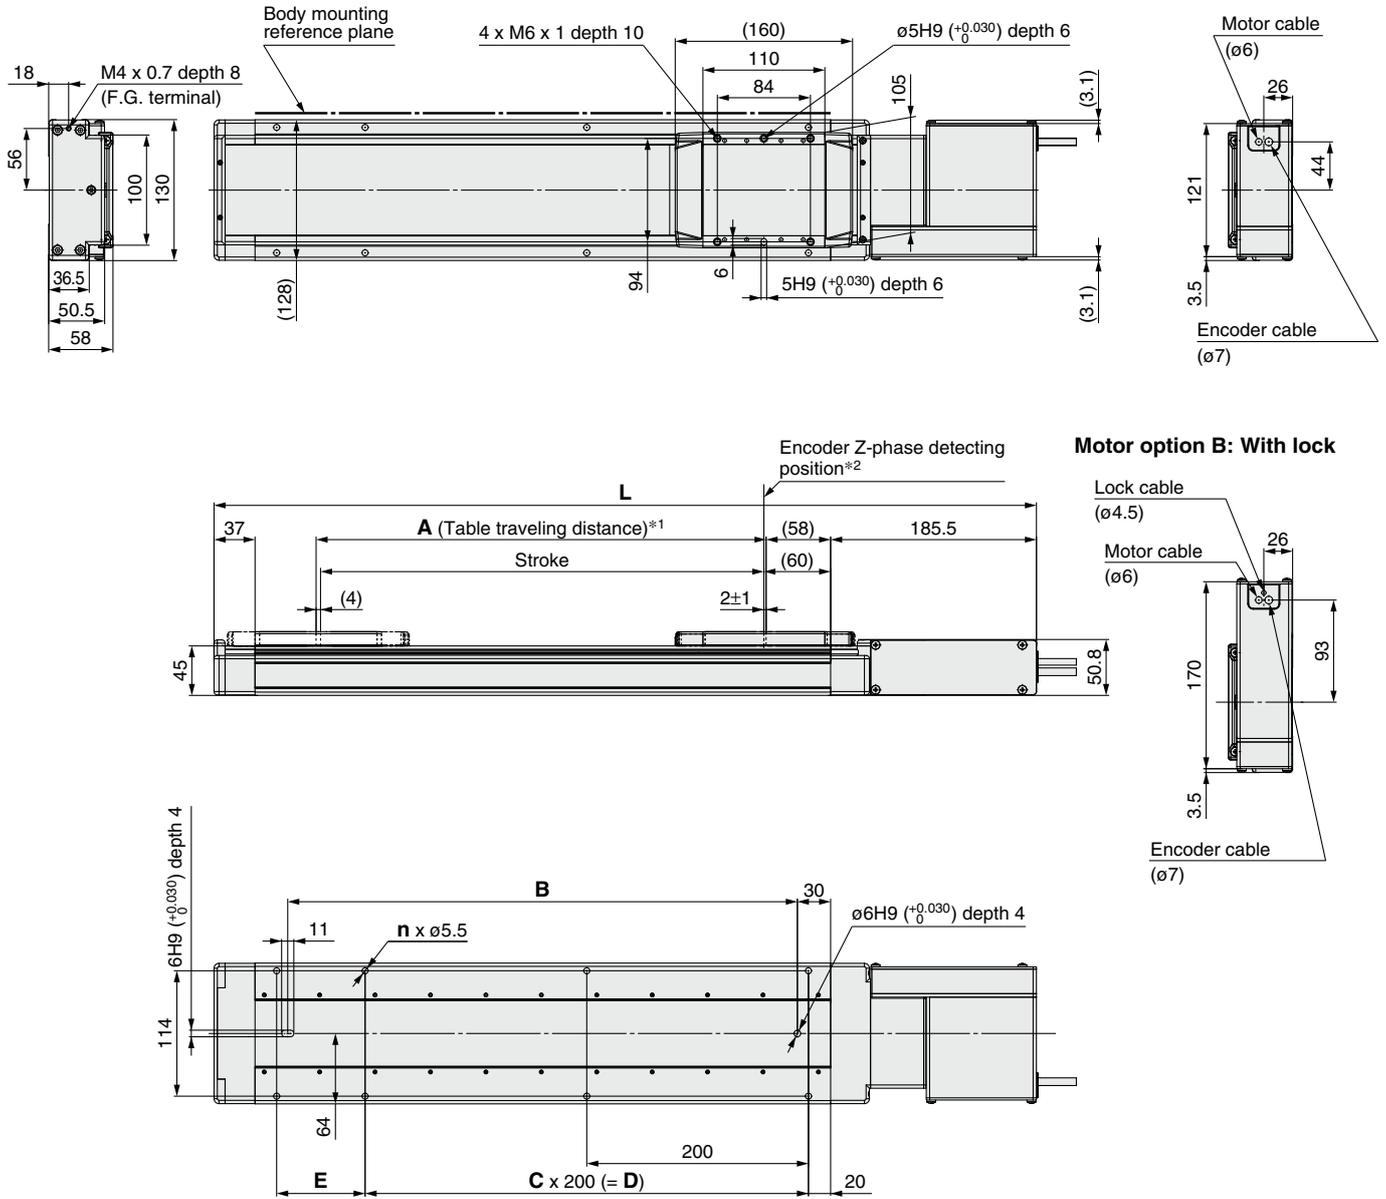

*1 This is the distance within which the table can move when it returns to origin. Make sure workpieces mounted on the table do not interfere with the workpieces and facilities around the table.

*2 The Z-phase first detecting position from the stroke end of the motor side

* The auto switch magnet is located in the table center.

Model	L	A	B	n	C	D	E
LEJB40□□□-200□-□□□□	542	206	260	6	1	200	80
LEJB40□□□-300□-□□□□	642	306	360	6	1	200	180
LEJB40□□□-400□-□□□□	742	406	460	8	2	400	80
LEJB40□□□-500□-□□□□	842	506	560	8	2	400	180
LEJB40□□□-600□-□□□□	942	606	660	10	3	600	80
LEJB40□□□-700□-□□□□	1042	706	760	10	3	600	180
LEJB40□□□-800□-□□□□	1142	806	860	12	4	800	80
LEJB40□□□-900□-□□□□	1242	906	960	12	4	800	180
LEJB40□□□-1000□-□□□□	1342	1006	1060	14	5	1000	80
LEJB40□□□-1200□-□□□□	1542	1206	1260	16	6	1200	80
LEJB40□□□-1500□-□□□□	1842	1506	1560	18	7	1400	180
LEJB40□□□-2000□-□□□□	2342	2006	2060	24	10	2000	80


- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEYG
- LEYS
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEY-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC□
- JXC□
- LECS□
- LECS□-T
- LECY□
- Motorless
- LAT3

LEJB Series

AC Servo Motor

Dimensions: Belt Drive

LEJB63

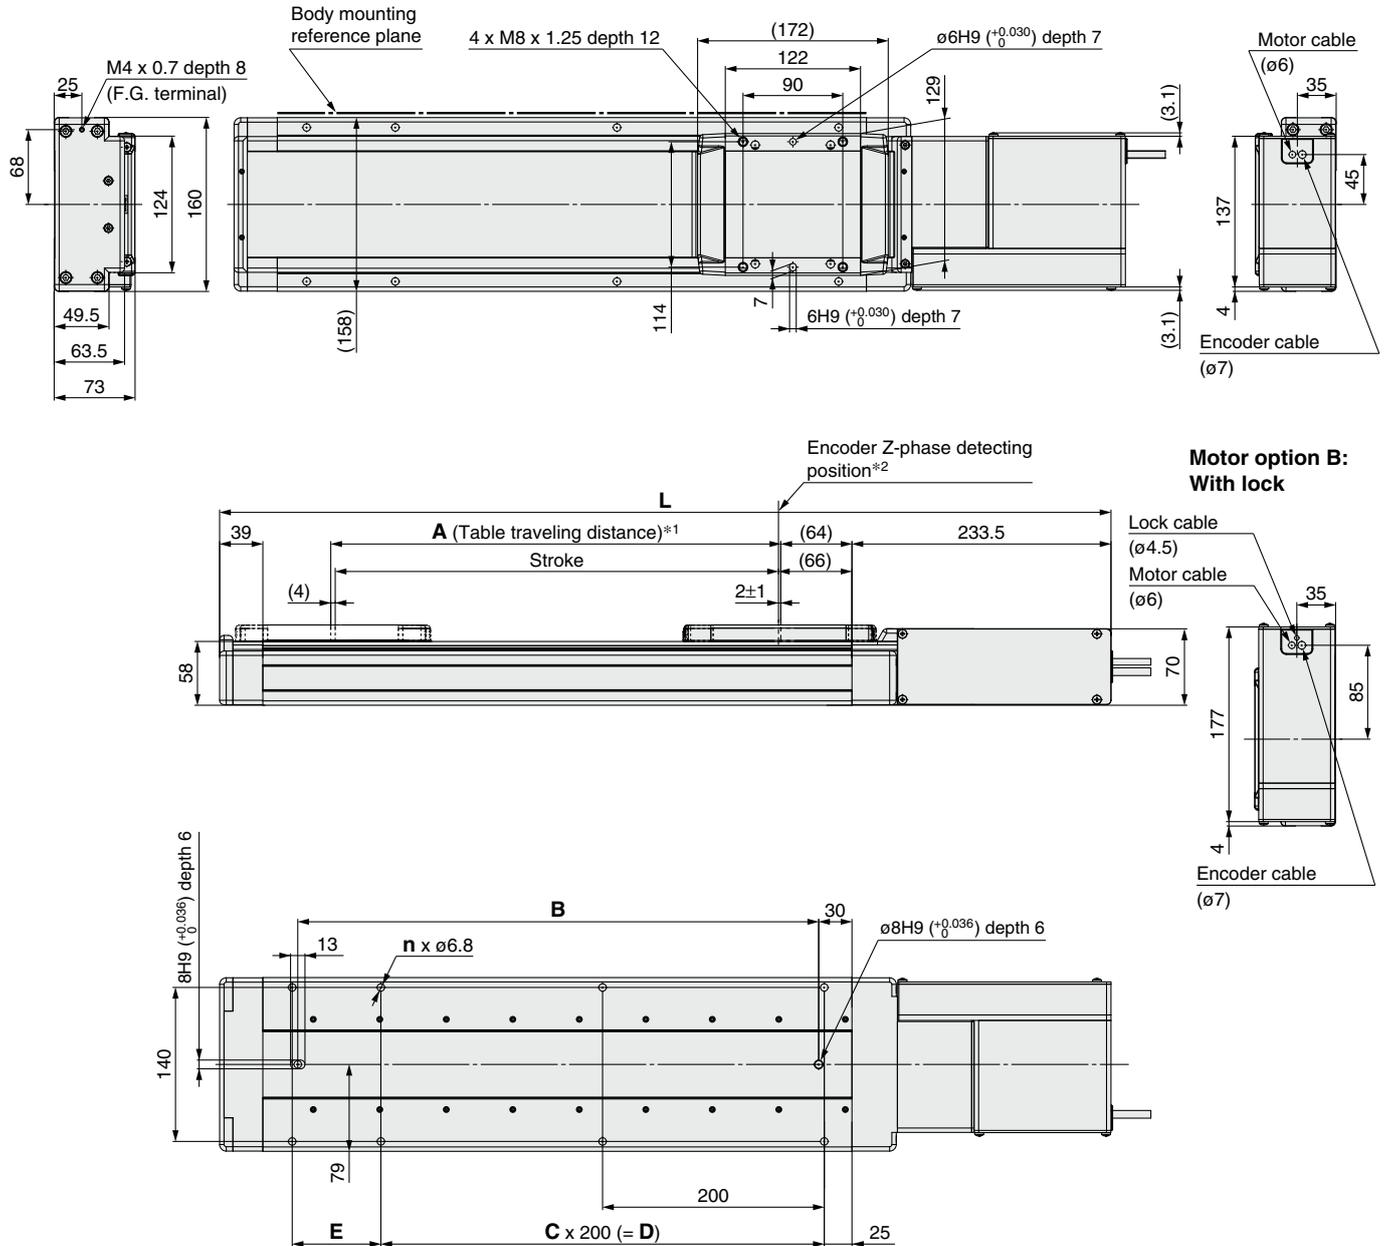

- *1 This is the distance within which the table can move when it returns to origin. Make sure workpieces mounted on the table do not interfere with the workpieces and facilities around the table.
- *2 The Z-phase first detecting position from the stroke end of the motor side
- * The auto switch magnet is located in the table center.

Model	L	A	B	n	C	D	E
LEJB63□□□-300□-□□□□	704	306	370	6	1	200	180
LEJB63□□□-400□-□□□□	804	406	470	8	2	400	80
LEJB63□□□-500□-□□□□	904	506	570	8	2	400	180
LEJB63□□□-600□-□□□□	1004	606	670	10	3	600	80
LEJB63□□□-700□-□□□□	1104	706	770	10	3	600	180
LEJB63□□□-800□-□□□□	1204	806	870	12	4	800	80
LEJB63□□□-900□-□□□□	1304	906	970	12	4	800	180
LEJB63□□□-1000□-□□□□	1404	1006	1070	14	5	1000	80
LEJB63□□□-1200□-□□□□	1604	1206	1270	16	6	1200	80
LEJB63□□□-1500□-□□□□	1904	1506	1570	18	7	1400	180
LEJB63□□□-2000□-□□□□	2404	2006	2070	24	10	2000	80
LEJB63□□□-3000□-□□□□	3404	3006	3070	34	15	3000	80


Electric Actuator/High Rigidity Slider Type Belt Drive

LEJB Series LEJB40, 63



LECS Series ▶ p. 201

How to Order

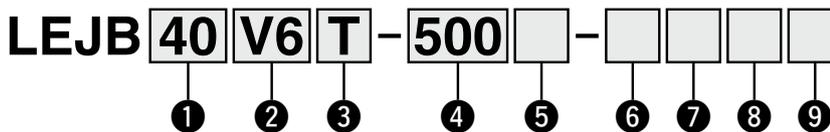

1 Size

40
63

2 Motor type*1

Symbol	Type	Output [W]	Actuator size	Compatible drivers
V6	AC servo motor (Absolute encoder)	100	40	LECYM2-V5 LECYU2-V5
V7	AC servo motor (Absolute encoder)	200	63	LECYM2-V7 LECYU2-V7

*1 For motor type V6, the compatible driver part number suffix is V5.

3 Lead [mm]

Symbol	LEJB40	LEJB63
T	27	42

4 Stroke [mm]*2

200
to
3000

*2 Refer to the applicable stroke table for details.

5 Motor option

Nil	Without option
B	With lock

6 Cable type*4 *5

Nil	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

*5 The motor and encoder cables are included. (The lock cable is included when the motor with lock option is selected.)

7 Cable length [m]*4 *6

Nil	Without cable
3	3
5	5
A	10
C	20

*6 The length of the motor, encoder, and lock cables are the same.

8 Driver type*4

	Compatible drivers	Power supply voltage [V]
Nil	Without driver	—
M2	LECYM2-V□	200 to 230
U2	LECYU2-V□	200 to 230

9 I/O cable length*7

Nil	Without cable
H	Without cable (Connector only)
1	1.5 [m]

*7 When "Without driver" is selected for driver type, only "Nil: Without cable" can be selected. Refer to page 808 if I/O cable is required. (Options are shown on page 808.)

Applicable Stroke Table*3

Model	Stroke [mm]	●: Standard												
		200	300	400	500	600	700	800	900	1000	1200	1500	2000	3000
LEJB40		●	●	●	●	●	●	●	●	●	●	●	●	—
LEJB63		—	●	●	●	●	●	●	●	●	●	●	●	●

*3 Please consult with SMC for non-standard strokes as they are produced as special orders.

For auto switches, refer to pages 210 to 213.

Compatible Drivers

Driver type	MECHATROLINK-II type	MECHATROLINK-III type
Series	LECYM	LECYU
Applicable network	MECHATROLINK-II	MECHATROLINK-III
Control encoder	Absolute 20-bit encoder	
Communication device	USB communication, RS-422 communication	
Power supply voltage [V]	200 to 230 VAC (50/60 Hz)	
Reference page	801	

- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEY-X5
- 11-LEFS
- 11-LEJS
- 11-LEJ5
- 25A-
- LEC□
- LEC
- JXC□
- JXC
- LECS□
- LECS□-T
- LECY□
- LECY□-T
- Motorless
- LAT3

LEJB Series

AC Servo Motor

Specifications

AC Servo Motor

Model		LEJB40V6	LEJB63V7	
Actuator specifications	Stroke [mm]*1	200, 300, 400, 500, 600, 700, 800 900, 1000, 1200, 1500, 2000	300, 400, 500, 600, 700, 800 900, 1000, 1200, 1500, 2000, 3000	
	Work load [kg]	20 (If the stroke exceeds 1000 mm: 10)	30	
	Speed [mm/s]*2	2000	3000	
	Max. acceleration/deceleration [mm/s ²]	20000 (Refer to page 181 for limit according to work load and duty ratio.)		
	Positioning repeatability [mm]	±0.04		
	Lost motion [mm]*3	0.1 or less		
	Lead [mm]	27	42	
	Impact/Vibration resistance [m/s ²]*4	50/20		
	Actuation type	Belt		
	Guide type	Linear guide		
	Static allowable moment*5 [N·m]	Mep (Pitching)	83.9	121.5
		Mey (Yawing)	88.2	135.1
		Mer (Rolling)	88.2	135.1
	Allowable external force [N]	20		
Operating temperature range [°C]	5 to 40			
Operating humidity range [%RH]	90 or less (No condensation)			
Regenerative resistor	May be required depending on speed and work load. (Refer to page 187.)			
Electric specifications	Motor output [W/Size [mm]	100/□40	200/□60	
	Motor type	AC servo motor (200 VAC)		
	Encoder	Absolute 20-bit encoder (Resolution: 1048576 p/rev)		
	Power [W]*6	Max. power 445	Max. power 725	
Lock unit specifications	Type*7	Non-magnetizing lock		
	Holding force [N]	59	77	
	Power consumption at 20°C [W]	5.5	6	
	Rated voltage [V]	24 VDC ^{+10%} ₀		

*1 Please consult with SMC for non-standard strokes as they are produced as special orders.

*2 Check the "Speed-Work Load Graph (Guide)" on page 187.

*3 A reference value for correcting an error in reciprocal operation

*4 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*5 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*6 Indicates the max. power during operation (including the driver)

When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.

*7 Only when motor option "With lock" is selected

* Sensor magnet position is located in the table center.

For detailed dimensions, refer to the "Auto Switch Mounting Position."

* Do not allow collisions at either end of the table traveling distance. Additionally, when running the positioning operation, do not set within 2 mm of both ends.

* For the manufacture of intermediate strokes, please contact SMC.



(LEJB40/Manufacturable stroke range: 200 to 2000 mm, LEJB63/Manufacturable stroke range: 300 to 3000 mm)

Weight

Model	LEJB40											
Stroke [mm]	200	300	400	500	600	700	800	900	1000	1200	1500	2000
Product weight [kg]	5.7	6.4	7.1	7.7	8.4	9.1	9.8	10.5	11.2	12.6	14.7	18.1
Additional weight with lock [kg]	0.3 (Absolute encoder)											

Model	LEJB63											
Stroke [mm]	300	400	500	600	700	800	900	1000	1200	1500	2000	3000
Product weight [kg]	11.5	12.7	13.8	15.0	16.2	17.4	18.6	19.7	22.1	25.7	31.6	43.4
Additional weight with lock [kg]	0.7 (Absolute encoder)											

Dimensions: Belt Drive
LEJB40

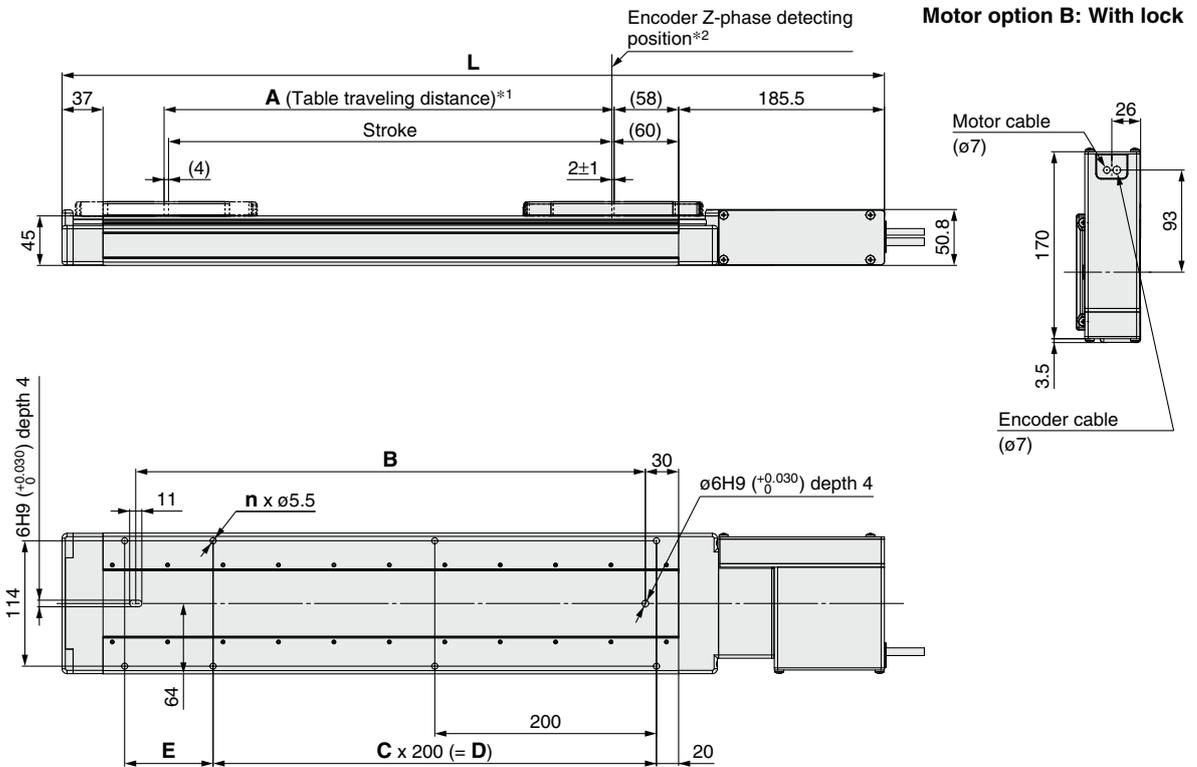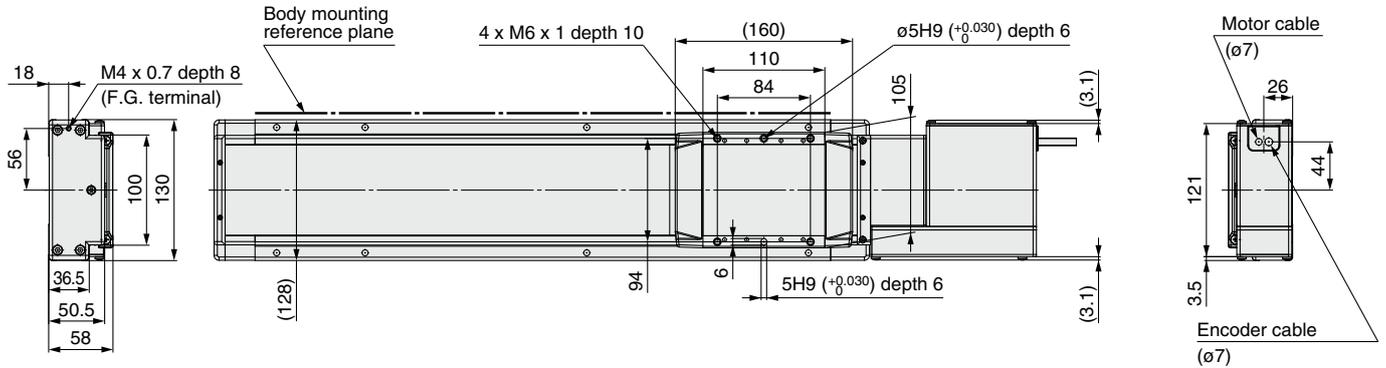


*1 This is the distance within which the table can move when it returns to origin. Make sure workpieces mounted on the table do not interfere with the workpieces and facilities around the table.
 *2 The Z-phase first detecting position from the stroke end of the motor side
 * The auto switch magnet is located in the table center.

Model	L	A	B	n	C	D	E
LEJB40V□□-200□-□□□□	542	206	260	6	1	200	80
LEJB40V□□-300□-□□□□	642	306	360	6	1	200	180
LEJB40V□□-400□-□□□□	742	406	460	8	2	400	80
LEJB40V□□-500□-□□□□	842	506	560	8	2	400	180
LEJB40V□□-600□-□□□□	942	606	660	10	3	600	80
LEJB40V□□-700□-□□□□	1042	706	760	10	3	600	180
LEJB40V□□-800□-□□□□	1142	806	860	12	4	800	80
LEJB40V□□-900□-□□□□	1242	906	960	12	4	800	180
LEJB40V□□-1000□-□□□□	1342	1006	1060	14	5	1000	80
LEJB40V□□-1200□-□□□□	1542	1206	1260	16	6	1200	80
LEJB40V□□-1500□-□□□□	1842	1506	1560	18	7	1400	180
LEJB40V□□-2000□-□□□□	2342	2006	2060	24	10	2000	80

- LEFS
- LEFB
- LEJS
- LEJB
- LEL
- LEM
- LEY
- LEYG
- LES
- LESH
- LEPY
- LEPS
- LER
- LEH
- LEY-X5
- 11-LEFS
- 11-LEJS
- 25A-
- LEC□
- JXC□
- LECS□
- LECS□-T
- LECY□
- Motorless
- LAT3

LEJ Series Auto Switch Mounting

Auto Switch Mounting Position

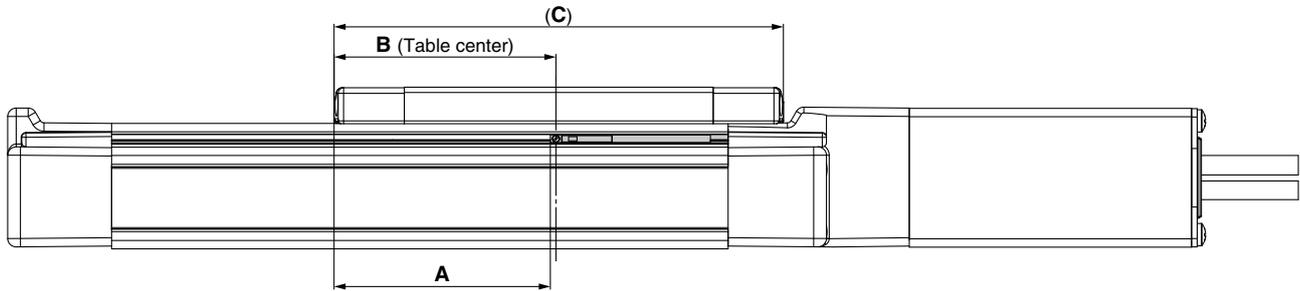

Model	Size	A	B	C	Operating range
LEJS40	40	77	80	160	5.5
LEJB40					5.0
LEJS63	63	83	86	172	7.0
LEJB63					6.5


* The operating range is a guideline including hysteresis, not meant to be guaranteed. There may be large variations (as much as $\pm 30\%$) depending on the ambient environment.

Auto Switch Mounting

When mounting the auto switches, they should be inserted into the actuator's auto switches mounting groove from the direction shown in the drawing on the below. Once in the mounting position, use a flat head watchmaker's screwdriver to tighten the included auto switch mounting screw.

Auto Switch Mounting Screw Tightening Torque [N·m]

Auto switch model	Tightening torque
D-M9□(V) D-M9□W(V) D-M9□E	0.10 to 0.15

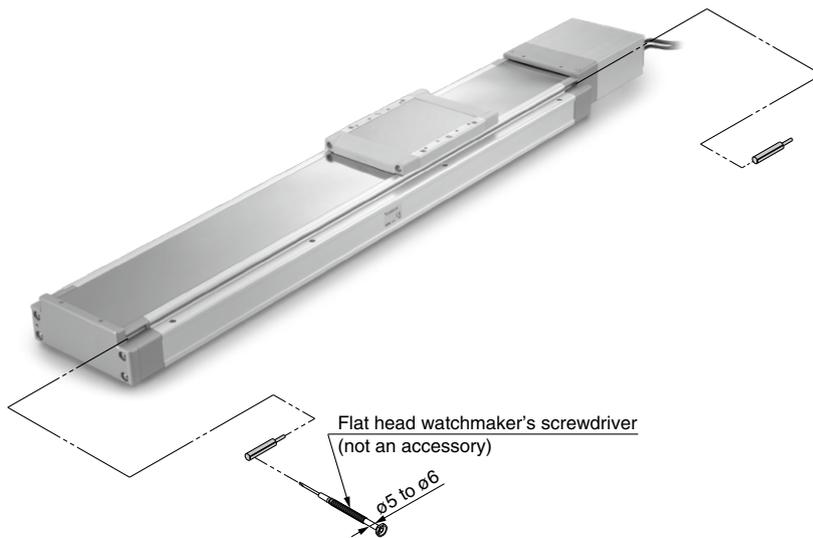

* When tightening the auto switch mounting screw, use a watchmaker's screwdriver with a handle diameter of about 5 to 6 mm.

LEFS
LEFBLEJS
LEJB

LEL

LEM

LEY
LEYGLES
LESHLEPY
LEPS

LER

LEH

LEY-X5

11-LEFS

11-LEJS

25A-

LEC□

JXC□

LECS□
LECS□-T

LECY□

Motorless

LAT3

Solid State Auto Switch Direct Mounting Type

D-M9N(V)/D-M9P(V)/D-M9B(V)



Refer to SMC website for the details of the products conforming to the international standards.

Auto Switch Specifications

PLC: Programmable Logic Controller

D-M9□, D-M9□V (With indicator light)						
Auto switch model	D-M9N	D-M9NV	D-M9P	D-M9PV	D-M9B	D-M9BV
Electrical entry direction	In-line	Perpendicular	In-line	Perpendicular	In-line	Perpendicular
Wiring type	3-wire				2-wire	
Output type	NPN		PNP		—	
Applicable load	IC circuit, Relay, PLC				24 VDC relay, PLC	
Power supply voltage	5, 12, 24 VDC (4.5 to 28 V)				—	
Current consumption	10 mA or less				—	
Load voltage	28 VDC or less		—		24 VDC (10 to 28 VDC)	
Load current	40 mA or less				2.5 to 40 mA	
Internal voltage drop	0.8 V or less at 10 mA (2 V or less at 40 mA)				4 V or less	
Leakage current	100 μA or less at 24 VDC				0.8 mA or less	
Indicator light	Red LED illuminates when turned ON.					
Standard	CE marking, RoHS					

Grommet

- 2-wire load current is reduced (2.5 to 40 mA).
- Using flexible cable as standard spec.



Oilproof Heavy-duty Lead Wire Specifications

Auto switch model		D-M9N(V)	D-M9P(V)	D-M9B(V)
Sheath	Outside diameter [mm]	2.6		
Insulator	Number of cores	3 cores (Brown/Blue/Black)		2 cores (Brown/Blue)
	Outside diameter [mm]	0.88		
Conductor	Effective area [mm ²]	0.15		
	Strand diameter [mm]	0.05		
Minimum bending radius [mm] (Reference values)		17		

Caution

Precautions

Fix the auto switch with the existing screw installed on the auto switch body. The auto switch may be damaged if a screw other than the one supplied is used.

- * Refer to page 996 for solid state auto switch common specifications.
- * Refer to page 996 for lead wire lengths.

Weight


[g]

Auto switch model		D-M9N(V)	D-M9P(V)	D-M9B(V)
Lead wire length	0.5 m (Nil)	8	7	7
	1 m (M)	14	13	13
	3 m (L)	41	38	38
	5 m (Z)	68	63	63


Dimensions

[mm]

D-M9□

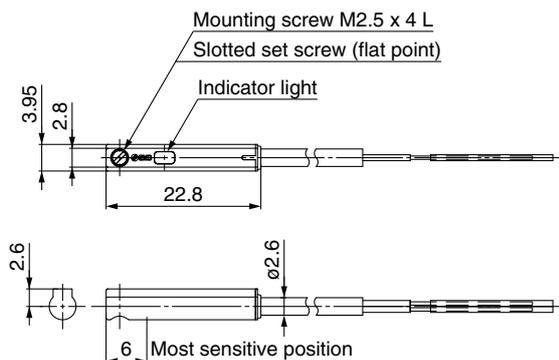

D-M9□V

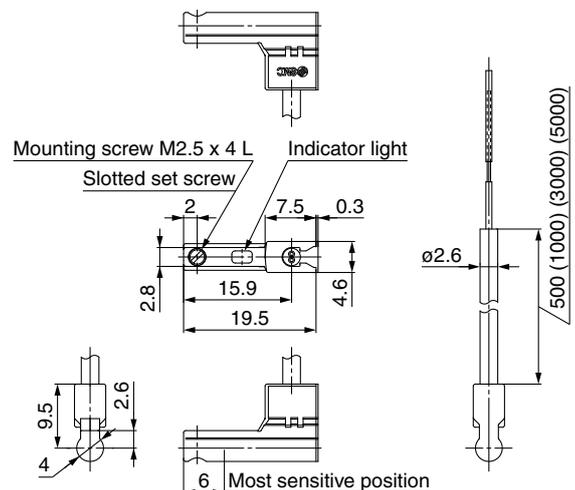

Normally Closed Solid State Auto Switch Direct Mounting Type D-M9NE(V)/D-M9PE(V)/D-M9BE(V)



Refer to SMC website for the details of the products conforming to the international standards.

Auto Switch Specifications

PLC: Programmable Logic Controller

D-M9□E, D-M9□EV (With indicator light)						
Auto switch model	D-M9NE	D-M9NEV	D-M9PE	D-M9PEV	D-M9BE	D-M9BEV
Electrical entry direction	In-line	Perpendicular	In-line	Perpendicular	In-line	Perpendicular
Wiring type	3-wire				2-wire	
Output type	NPN		PNP		—	
Applicable load	IC circuit, Relay, PLC				24 VDC relay, PLC	
Power supply voltage	5, 12, 24 VDC (4.5 to 28 V)				—	
Current consumption	10 mA or less				—	
Load voltage	28 VDC or less		—		24 VDC (10 to 28 VDC)	
Load current	40 mA or less				2.5 to 40 mA	
Internal voltage drop	0.8 V or less at 10 mA (2 V or less at 40 mA)				4 V or less	
Leakage current	100 μA or less at 24 VDC				0.8 mA or less	
Indicator light	Red LED illuminates when turned ON.					
Standard	CE marking, RoHS					

Oilproof Heavy-duty Lead Wire Specifications

Auto switch model	D-M9NE(V)	D-M9PE(V)	D-M9BE(V)
Sheath	Outside diameter [mm]		
	2.6		
Insulator	Number of cores		
	3 cores (Brown/Blue/Black)		2 cores (Brown/Blue)
Conductor	Outside diameter [mm]		
	0.88		
	Effective area [mm ²]		
	0.15		
	Strand diameter [mm]		
	0.05		
Minimum bending radius [mm] (Reference values)			
17			

* Refer to page 996 for solid state auto switch common specifications.
* Refer to page 996 for lead wire lengths.

Grommet

- Output signal turns on when no magnetic force is detected.
- Can be used for the actuator adopted by the solid state auto switch D-M9 series (excluding special order products)



Caution

Precautions

Fix the auto switch with the existing screw installed on the auto switch body. The auto switch may be damaged if a screw other than the one supplied is used.

Weight

[g]


Auto switch model	D-M9NE(V)	D-M9PE(V)	D-M9BE(V)
Lead wire length	0.5 m (Nil)	8	7
	1 m (M)*1	14	13
	3 m (L)	41	38
	5 m (Z)*1	68	63

*1 The 1 m and 5 m options are produced upon receipt of order.


Dimensions

[mm]

D-M9□E

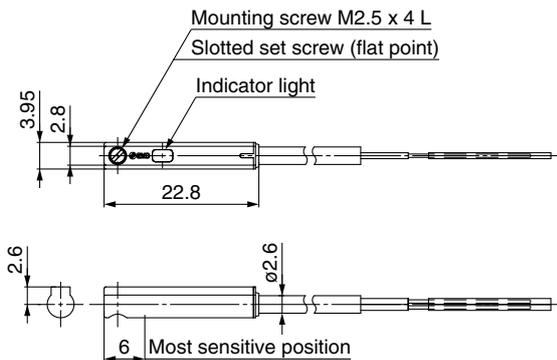

D-M9□EV

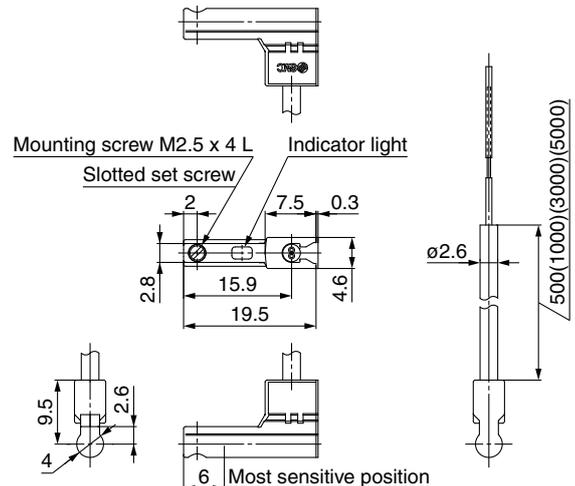

LEFS
LEJB
LEJ
LEM
LEYG
LESH
LEPS
LER
LEH
LEY-X5
11-LEFS
11-LEJS
25A-
LEC
JXC
LECS
LECS-T
LECY
Motorless
LAT3

2-Color Indicator Solid State Auto Switch Direct Mounting Type

D-M9NW(V)/D-M9PW(V)/D-M9BW(V)



Refer to SMC website for the details of the products conforming to the international standards.

Grommet

- 2-wire load current is reduced (2.5 to 40 mA).
- Using flexible cable as standard spec.
- The proper operating range can be determined by the color of the light. (Red → Green ← Red)



Caution

Precautions

Fix the auto switch with the existing screw installed on the auto switch body. The auto switch may be damaged if a screw other than the one supplied is used.

Auto Switch Specifications

PLC: Programmable Logic Controller

D-M9□W, D-M9□WV (With indicator light)						
Auto switch model	D-M9NW	D-M9NWV	D-M9PW	D-M9PWV	D-M9BW	D-M9BWV
Electrical entry direction	In-line	Perpendicular	In-line	Perpendicular	In-line	Perpendicular
Wiring type	3-wire				2-wire	
Output type	NPN		PNP		—	
Applicable load	IC circuit, Relay, PLC				24 VDC relay, PLC	
Power supply voltage	5, 12, 24 VDC (4.5 to 28 V)				—	
Current consumption	10 mA or less				—	
Load voltage	28 VDC or less		—		24 VDC (10 to 28 VDC)	
Load current	40 mA or less				2.5 to 40 mA	
Internal voltage drop	0.8 V or less at 10 mA (2 V or less at 40 mA)				4 V or less	
Leakage current	100 μA or less at 24 VDC				0.8 mA or less	
Indicator light	Operating range Red LED illuminates. Proper operating range Green LED illuminates.					
Standard	CE marking, RoHS					

Oilproof Flexible Heavy-duty Lead Wire Specifications

Auto switch model		D-M9NW(V)	D-M9PW(V)	D-M9BW(V)
Sheath	Outside diameter [mm]	2.6		
Insulator	Number of cores	3 cores (Brown/Blue/Black)		2 cores (Brown/Blue)
	Outside diameter [mm]	0.88		
Conductor	Effective area [mm ²]	0.15		
	Strand diameter [mm]	0.05		
Minimum bending radius [mm] (Reference values)		17		

- * Refer to page 996 for solid state auto switch common specifications.
- * Refer to page 996 for lead wire lengths.

Weight


[g]

Auto switch model		D-M9NW(V)	D-M9PW(V)	D-M9BW(V)
Lead wire length	0.5 m (Nil)	8	7	7
	1 m (M)	14	13	13
	3 m (L)	41	38	38
	5 m (Z)	68	63	63


Dimensions

[mm]

D-M9□W

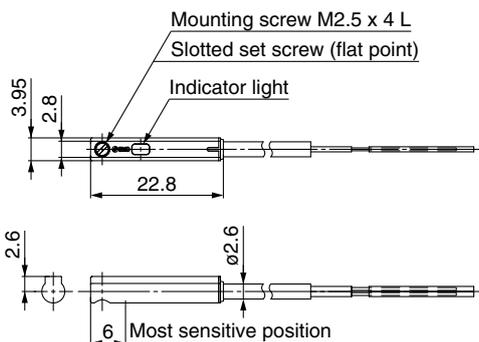

D-M9□WV

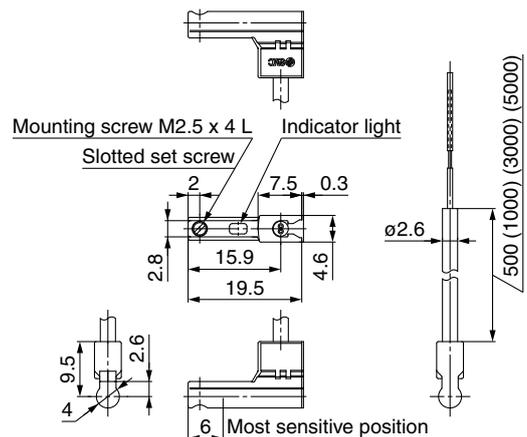



LEJ Series Specific Product Precautions 1

Be sure to read this before handling the products. Refer to page 984 for safety instructions, pages 985 to 990 for electric actuator precautions, and pages 991 to 1000 for auto switch precautions.

Design

⚠ Caution

- Do not apply a load in excess of the specification limits.**
Select a suitable actuator by work load and allowable moment. If a load in excess of the specification limits is applied to the guide, adverse effects such as the generation of play in the guide, reduced accuracy, or reduced service life of the product may occur.
- Do not use the product in applications where excessive external force or impact force is applied to it.**
The product can be damaged.
The components including the motor are manufactured to precise tolerances. So that even a slight deformation may cause a malfunction or seizure.

Selection

⚠ Warning

- Do not increase the speed in excess of the specification limits.**
Select a suitable actuator by the relationship between the allowable work load and speed, and the allowable speed of each stroke. If the product is used outside of the specification limits, adverse effects such as the generation of noise, reduced accuracy, or reduced service life of the product may occur.
- When the product repeatedly cycles with partial strokes (100 mm or less), lubrication can run out. Operate it at a full stroke at least once a day or every a thousand cycles.**
- When external force is to be applied to the table, it is necessary to add the external force to the work load as the total carried load when selecting a size.**
When a cable duct or flexible moving tube is attached to the actuator, the sliding resistance of the table will increase, which may lead to the malfunction of the product.

Handling

⚠ Caution

- Never allow the table to collide with the stroke end.**
When incorrect instructions are inputted, such as those which cause the product to operate outside of the specification limits or outside of the actual stroke through changes in the controller/driver settings and/or origin position, the table may collide with the stroke end of the actuator. Be sure to check these points before use.
If the table collides with the stroke end of the actuator, the guide, belt, or internal stopper may break. This can result in abnormal operation.



Handle the actuator with care when it is used in the vertical direction as the workpiece will fall freely from its own weight.

- The actual speed of this actuator is affected by the work load and stroke.**
Check the model selection section of the catalog.
- Do not apply a load, impact or resistance in addition to the transferred load during return to origin.**
- Do not dent, scratch, or cause other damage to the body or table mounting surfaces.**
Doing so may cause unevenness in the mounting surface, play in the guide, or an increase in the sliding resistance.
- Do not apply strong impact or an excessive moment while mounting the product or a workpiece.**
If an external force over the allowable moment is applied, it may cause play in the guide or an increase in the sliding resistance.
- Keep the flatness of the mounting surface within 0.1 mm/500 mm.**
If a workpiece or base does not sit evenly on the body of the product, play in the guide or an increase in the sliding resistance may occur.
In the case of overhang mounting (including cantilever), use a support plate or support guide to avoid deflection of the actuator body.
- When mounting the actuator, use all mounting holes.**
If all mounting holes are not used, it influences the specifications, e.g., the amount of displacement of the table increases.
- Do not allow a workpiece to collide with the table during the positioning operation or within the positioning range.**
- Do not apply external force to the dust seal band.**
Particularly during the transportation

LEFS
LEFBLEJS
LEJB

LEL

LEM

LEY
LEYGLES
LESHLEPY
LEPS

LER

LEH

LEY-X5

11-LEFS

11-LEJS

25A-

LEC

JXC

LECS
LECS-T

LECY

Motorless

LAT3



LEJ Series Specific Product Precautions 2

Be sure to read this before handling the products. Refer to page 984 for safety instructions, pages 985 to 990 for electric actuator precautions, and pages 991 to 1000 for auto switch precautions.


Handling

⚠ Caution

10. When mounting the product, use screws of adequate length and tighten them with adequate torque.


Tightening the screws with a higher torque than recommended may result in a malfunction, while tightening with a lower torque can result in the displacement of the mounting position or, in extreme conditions, the actuator could become detached from its mounting position.

Body fixed



Model	Screw size	Max. tightening torque [N·m]	ϕA [mm]	L [mm]
LEJ□40	M5	3.0	5.5	36.5
LEJ□63	M6	5.2	6.8	49.5


Workpiece fixed



Model	Screw size	Max. tightening torque [N·m]	L (Max. screw-in depth) [mm]
LEJ□40	M6 x 1	5.2	10
LEJ□63	M8 x 1.25	12.5	12

To prevent the workpiece retaining screws from touching the body, use screws that are 0.5 mm or shorter than the maximum screw-in depth. If long screws are used, they may touch the body and cause a malfunction.

11. Do not operate by fixing the table and moving the actuator body.
12. The belt drive actuator cannot be used for vertical applications.
13. Vibration may occur during operation, this could be caused by the operating conditions.
If it occurs, adjust response value of auto tuning of driver to be lower.
During the first auto tuning noise may occur, the noise will stop when the tuning is complete.
14. When mounting the actuator using the body mounting reference plane, use a pin. Set the height of the pin to be 5 mm or more because of round chamfering. (Recommended height 6 mm)

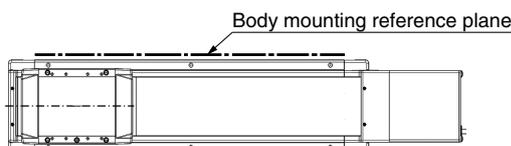

15. When the fluctuations in the load are caused during operation, malfunction, noise, or alarm generation may occur. (In the case of the AC servo motor)

The gain tuning may not be suitable for fluctuating loads. Adjust the gain properly by following the instructions in the driver manual.

Maintenance

⚠ Warning

Maintenance frequency

Perform maintenance according to the table below.

Frequency	Appearance check	Internal check	Belt check
Inspection before daily operation	○	—	—
Inspection every 6 months/1000 km/5 million cycles*1	○	○	○

*1 Select whichever comes first.

• Items for visual appearance check

1. Loose set screws, Abnormal amount of dirt, etc.
2. Check for visible damage, Check of cable joint
3. Vibration, Noise

• Items for internal check

1. Lubricant condition on moving parts
* For lubrication, use lithium grease No. 2.
2. Loose or mechanical play in fixed parts or fixing screws

• Items for belt check

Stop operation immediately and replace the belt when any of the following occur. In addition, ensure your operating environment and conditions satisfy the requirements specified for the product.

a. Tooth shape canvas is worn, out

Canvas fiber becomes fuzzy, Rubber is coming off and the fiber has become whitish, Lines of fibers have become unclear

b. Peeling off or wearing of the side of the belt

Belt corner has become rounded and frayed threads stick out

c. Belt partially cut

Belt is partially cut, Foreign matter caught in the teeth of other parts is causing damage

d. A vertical line on belt teeth is visible

Damage which is made when the belt runs on the flange

e. Rubber back of the belt is softened and sticky


f. Cracks on the back of the belt are visible

High Rigidity Slider Type

Electric Actuator



● Supports **750 W** (Motor output)

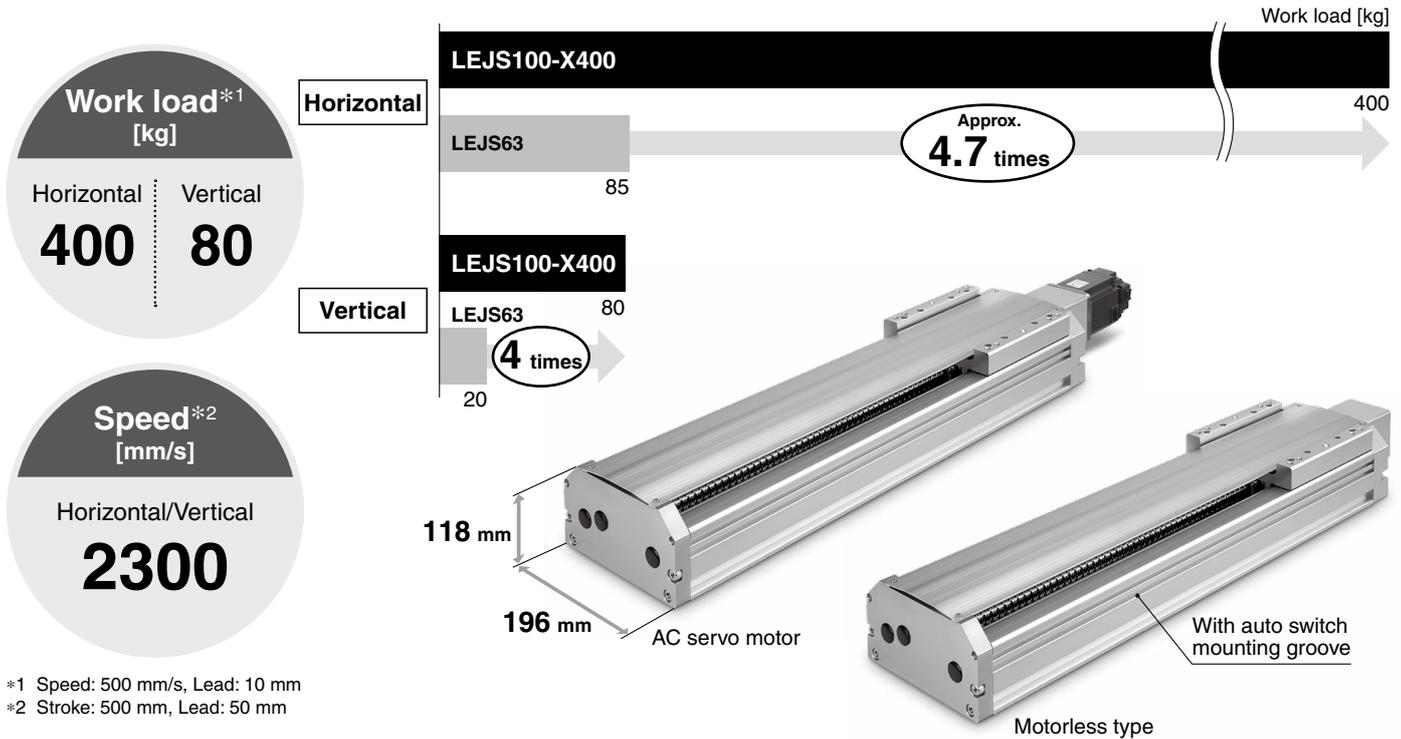

*1 Speed: 500 mm/s, Lead: 10 mm
 *2 Stroke: 500 mm, Lead: 50 mm

● Max. acceleration/deceleration: **10000 mm/s²**

AC Servo Motor
 For absolute encoder

Pulse input type/ Positioning type LECSB-T Series		CC-Link Direct input type LECSC-T Series		SSCNET III/H type LECSS-T Series	
---	--	--	--	--	--

Motorless Type Compatible Motors by Manufacturer

Manufacturer	Series	Type	Compatible interfaces						
			Battery-less absolute encoder	Pulse input	CC-Link IE Field	CC-Link IE TSN	SSCNET III/H	MECHATROLINK II	MECHATROLINK III
Mitsubishi Electric Corporation	MELSERVO-J4	HG-KR73	●	●	●	●	●	●	●
	MELSERVO-J5	HK-KT7M3W	●	●	●	●	●	●	●
YASKAWA Electric Corporation	Σ-V	SGMJV-08	●	●	●	●	●	●	●
	Σ-7	SGM7J-08	●	●	●	●	●	●	●

Trademark: DeviceNet™ is a trademark of ODVA.

LEJS100-X400




LEJS100-X400


AC Servo Motor Motorless Type

System Construction

Absolute encoder compatible **LECSB-T Series** (Pulse input type/Positioning type)

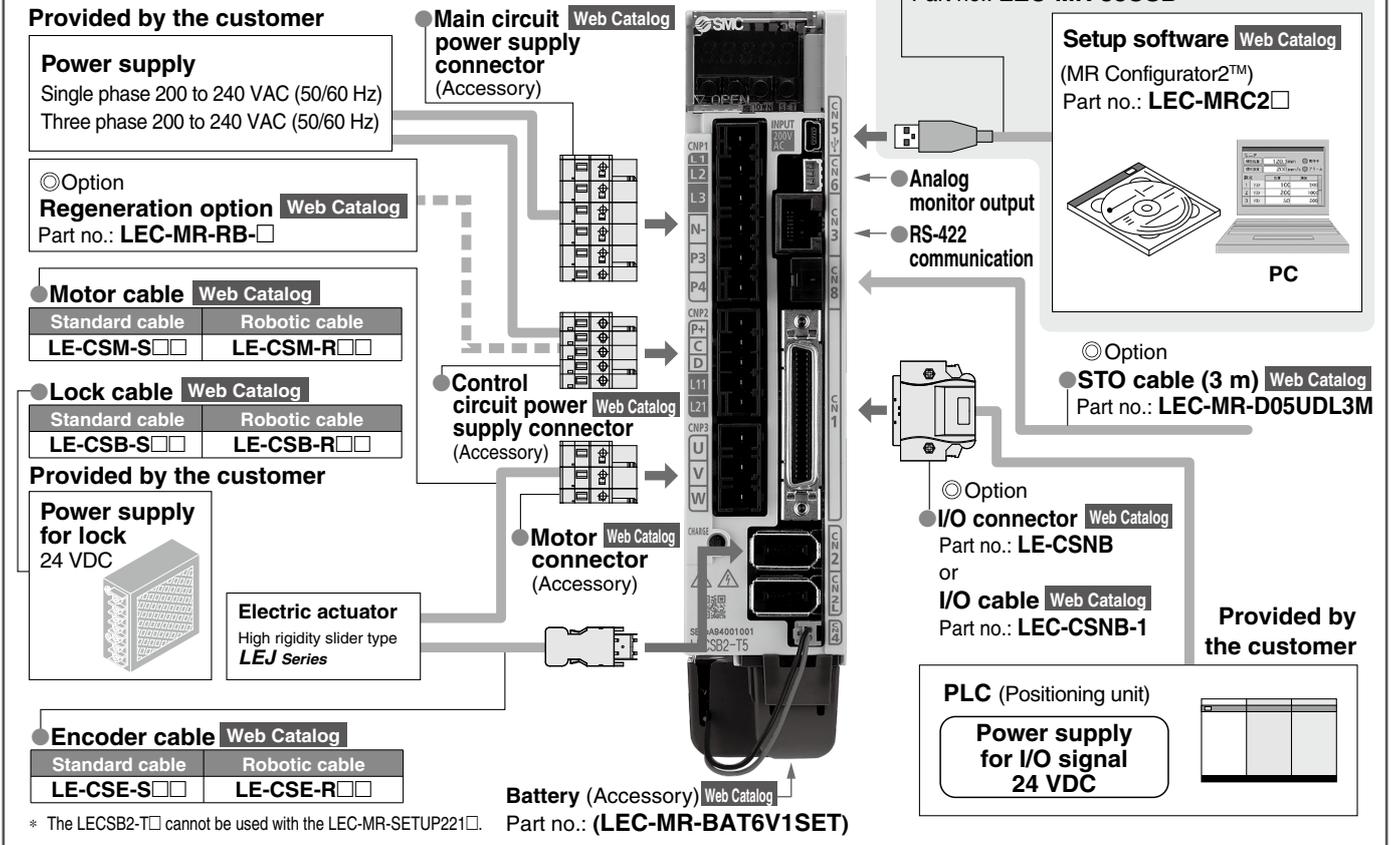


Absolute encoder compatible **LECSC-T Series** (CC-Link direct input type)

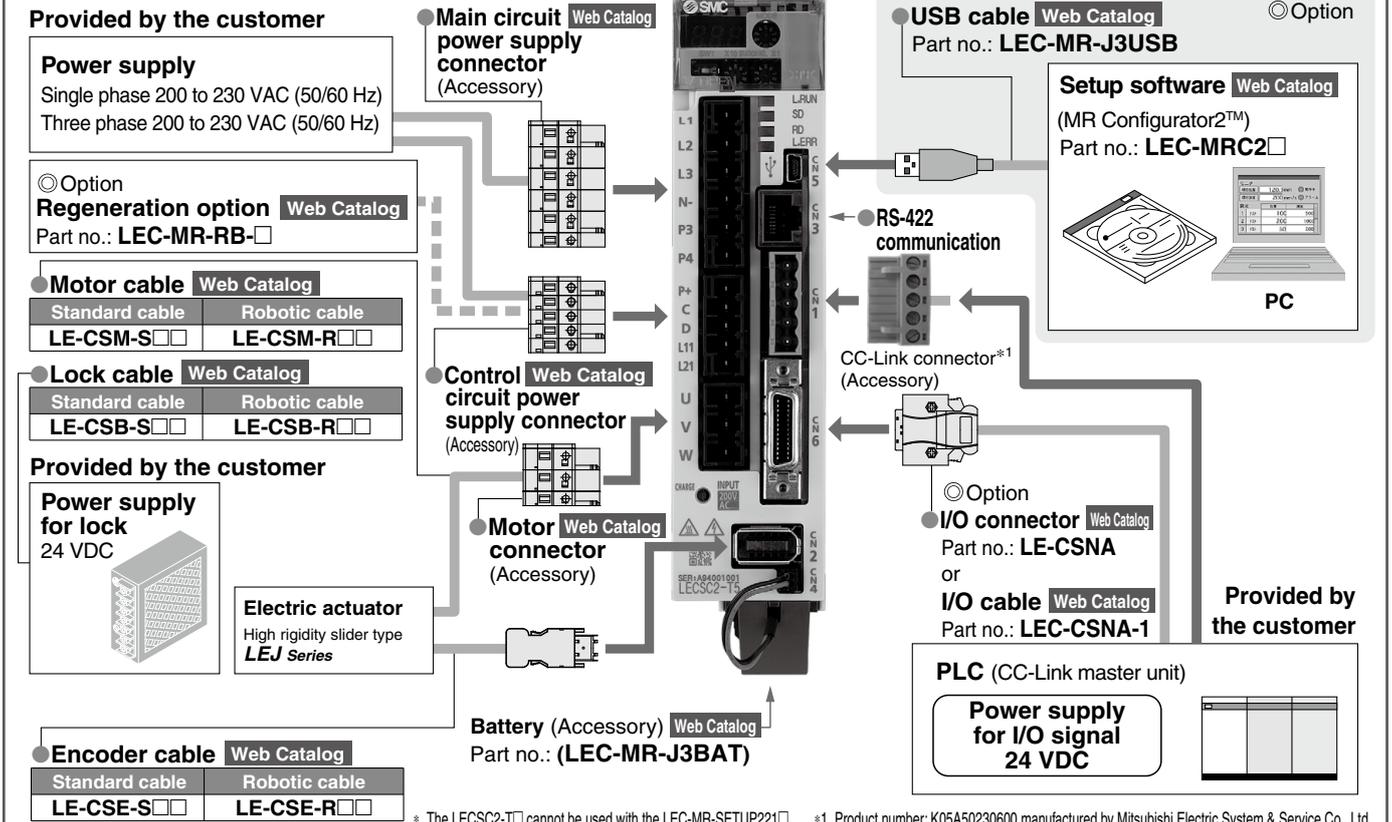

Electric Actuator/High Rigidity Slider Type Ball Screw Drive **LEJS100-X400**

AC Servo Motor Motorless Type

System Construction

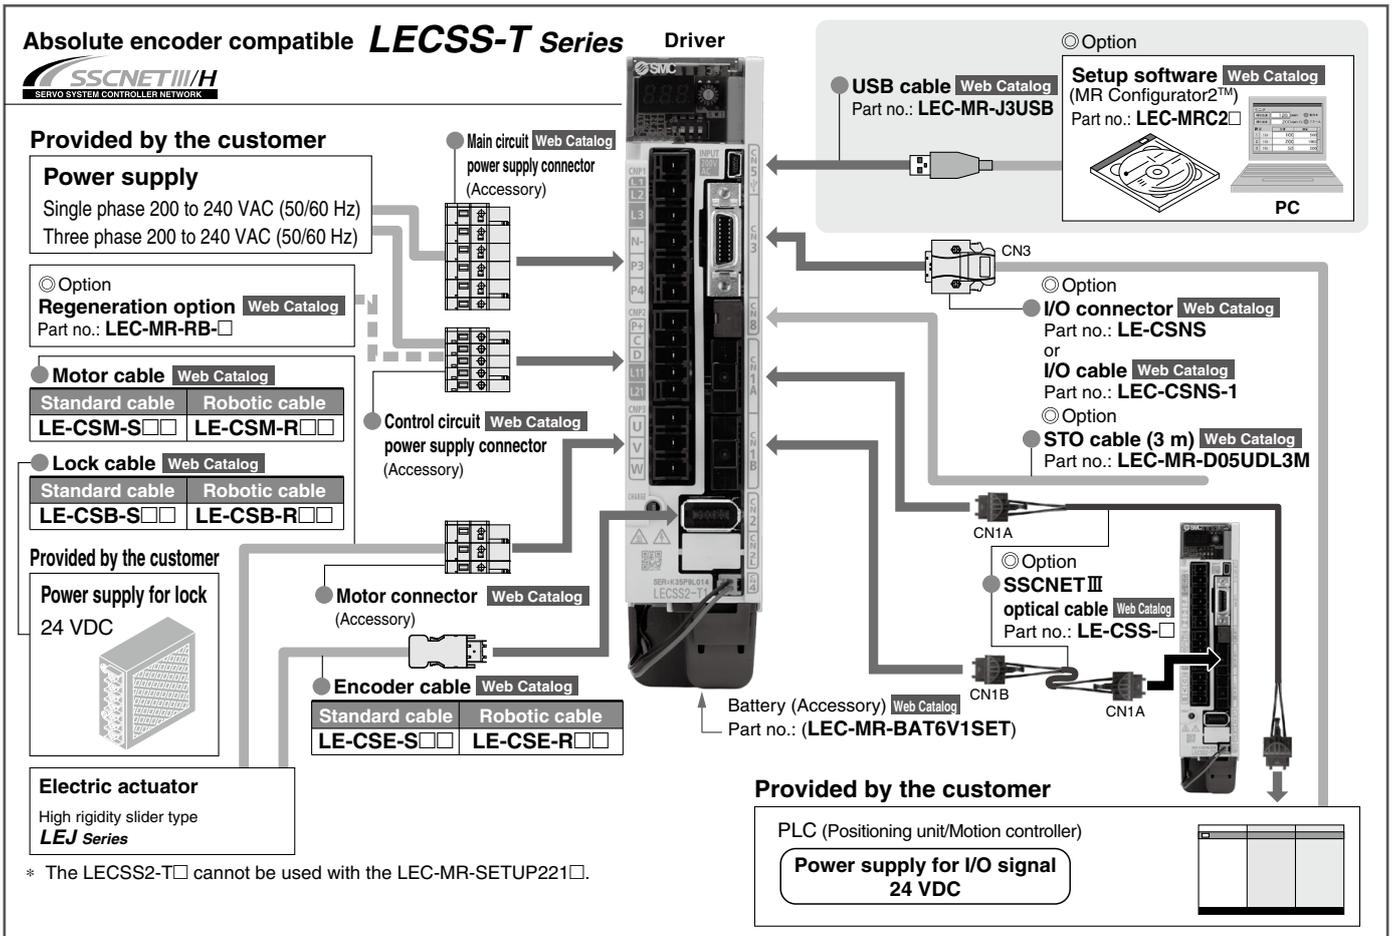


Electric Actuator/High Rigidity Slider Type Ball Screw Drive/LEJS100-X400 Model Selection




Speed-Work Load Graph/Required Conditions for "Regeneration Option" (Guide)

AC Servo Motor

Horizontal

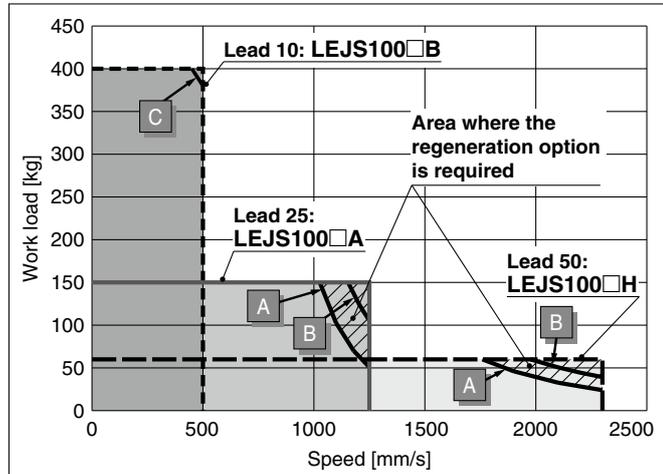

Vertical

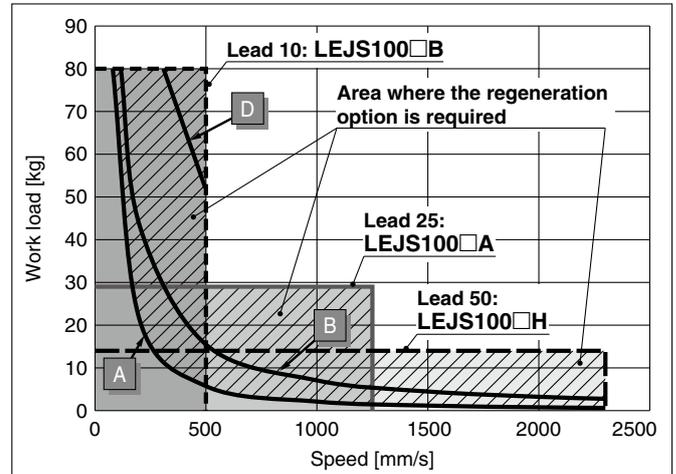

Required conditions for "Regeneration option"

* The regeneration option is required if the product is to be used in the "area beyond the regeneration line (A, B, C, or D)" in the graph. (Order separately.)

"Regeneration Option" Models


Operating condition	Regenerative condition Duty ratio	Regeneration option
A	100%	LEC-MR-RB-032
B		
C	80%	LEC-MR-RB-12
D	65%	

* Confirm the operating area, and order the regeneration option if needed.


Speed-Work Load Graph (Guide)

Motorless Type

Horizontal

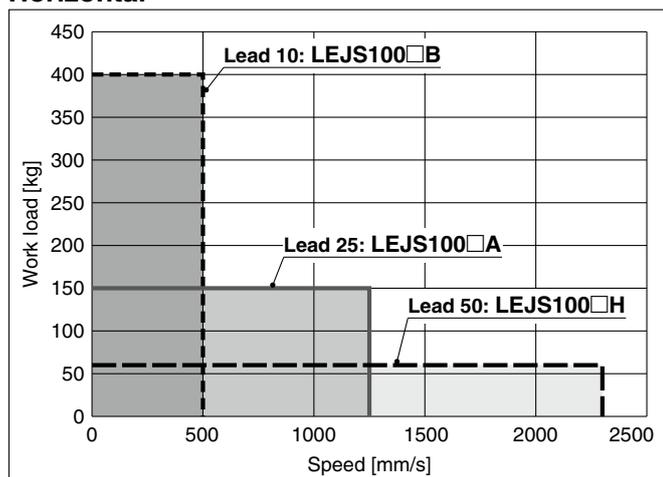

Vertical

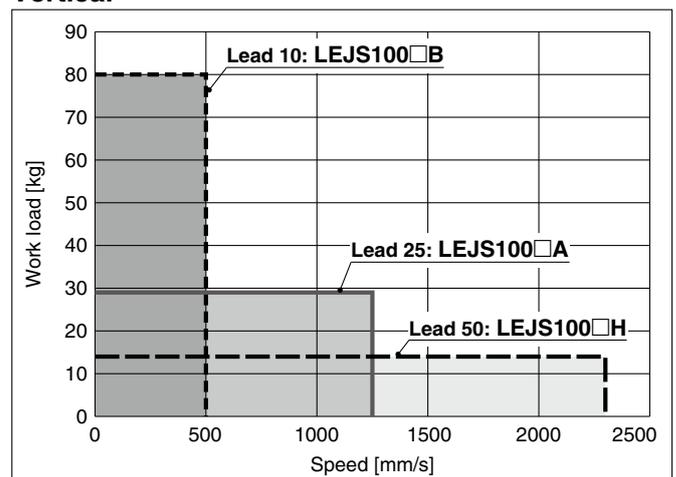

Static Allowable Moment*1

[N·m]

Model	Size	Pitching	Yawing	Rolling
LEJS	100	805	771	939

*1 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.
If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

LEJS100-X400

AC Servo Motor Motorless Type

* This graph shows the amount of allowable overhang (guide unit) when the center of gravity of the workpiece overhangs in one direction. When selecting the overhang, refer to "Calculation of Guide Load Factor" for confirmation.

Dynamic Allowable Moment

Acceleration/Deceleration ——— 1000 mm/s² - - - - 3000 mm/s² ——— 5000 mm/s² ······ 9800 mm/s²

Orientation		Load overhanging direction	
Orientation		Load overhanging direction	
m: Work load [kg]		m: Work load [kg]	
Me: Dynamic allowable moment [N·m]		Me: Dynamic allowable moment [N·m]	
L: Overhang to the work load center of gravity [mm]		L: Overhang to the work load center of gravity [mm]	
Horizontal	X		
	Y		
	Z		
Wall	X		
	Y		
	Z		
Bottom	X		
	Y		
	Z		
Vertical	Y		
	Z		

Calculation of Guide Load Factor

1. Decide operating conditions.

Model: LEJS-X400

Size: 100

Mounting orientation: Horizontal/Bottom/Wall/Vertical

Acceleration [mm/s²]: **a**

Work load [kg]: **m**

Work load center position [mm]: **Xc/Yc/Zc**

2. Select the target graph with reference to the model, size, and mounting orientation.

3. Based on the acceleration and work load, obtain the overhang [mm]: **Lx/Ly/Lz** from the graph.


4. Calculate the load factor for each direction.

$$\alpha_x = Xc/Lx \quad \alpha_y = Yc/Ly \quad \alpha_z = Zc/Lz$$

5. Confirm the total of α_x , α_y , and α_z is 1 or less.

$$\alpha_x + \alpha_y + \alpha_z \leq 1$$

When 1 is exceeded, please consider a reduction of acceleration and work load, or a change of the work load center position and series.

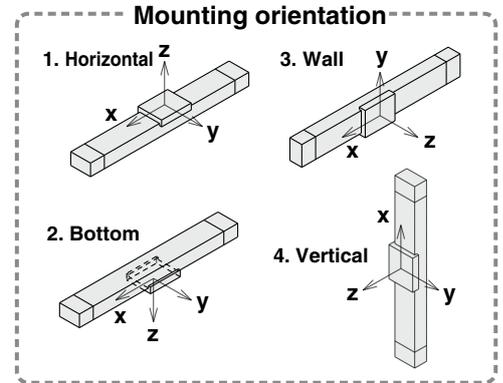

Example

1. Operating conditions

Model: LEJS-X400

Size: 100

Mounting orientation: Horizontal

Acceleration [mm/s²]: 5000

Work load [kg]: 100

Work load center position [mm]: **Xc = 50, Yc = 100, Zc = 200**

2. Select the graph on page 3, top and left side first row.

3. **Lx = 300 mm, Ly = 380 mm, Lz = 650 mm**




4. The load factor for each direction can be obtained as follows.

$$\alpha_x = 50/300 = 0.17$$

$$\alpha_y = 100/380 = 0.26$$

$$\alpha_z = 200/650 = 0.31$$

5. $\alpha_x + \alpha_y + \alpha_z = 0.74 \leq 1$

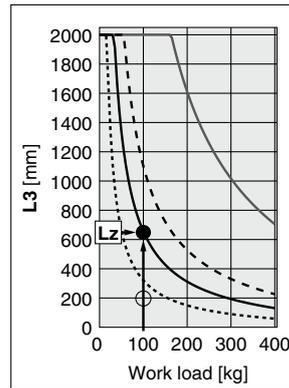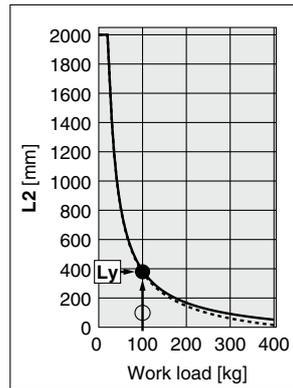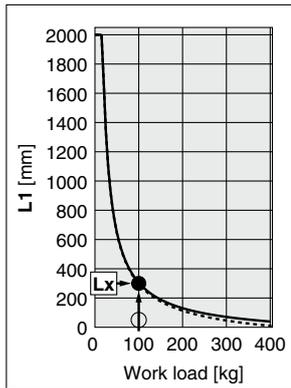

Electric Actuator/High Rigidity Slider Type Ball Screw Drive

LEJS100-X400



How to Order

LEJS100 T9 B - 500 T - - - - X400

Motor type: AC servo motor (Absolute encoder) 750 W
 With top cover type

1 Lead [mm]

H	50
A	25
B	10

2 Stroke [mm]

200	200	800	800
300	300	1000	1000
400	400	1200	1200
500	500	1500	1500
600	600		

3 Motor option

Nil	Without option
B	With lock

4 Cable type*1*2

Nil	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

*1 When a driver type is selected, a cable is included. Select the cable type and cable length. Example

S2B2: Standard cable (2 m) + Driver (LECSB2)
 S2 : Standard cable (2 m)
 Nil : Without cable and driver

*2 The motor and encoder cables are included. (The lock cable is included when the motor with lock option is selected.)

5 Cable length [m]*3

Nil	Without cable
2	2
5	5
A	10

*3 The length of the motor, encoder, and lock cables are the same.

6 Driver type*1

	Compatible driver Model	Power supply voltage [V]	Control method
Nil	Without driver	—	—
B2	LECSB2-T9	200 to 240	Pulse input/Point table
C2	LECSC2-T□	200 to 230	CC-Link
S2	LECSS2-T□	200 to 240	SSCNET III/H

7 I/O cable length [m]*4

Nil	Without cable
H	Connector only
1	1.5

*4 When "Without driver" is selected for driver type, only "Nil: Without cable" can be selected.

Compatible Driver

Driver type	Pulse input type/ Positioning type	CC-Link direct input type	SSCNET III/H type
Series	LECSB-T	LECSC-T	LECSS-T
Number of point tables	Up to 255	Up to 255 (2 stations occupied)	—
Pulse input	○	—	—
Applicable network	—	CC-Link	SSCNET III/H
Control encoder	Absolute 22-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder
Communication function	USB communication, RS422 communication	USB communication, RS422 communication	USB communication
Power supply voltage [V]	200 to 240 VAC (50/60 Hz)	200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)

Specifications

Stroke [mm]*1		200, 300, 400, 500, 600, 800, 1000, 1200, 1500				
Actuator specifications	Lead [mm]		50	25	10	
	Work load*2 [kg]	Horizontal	3000 (mm/s ²)	60	150	400
			5000 (mm/s ²)	43	93	150
			9800 (mm/s ²)	22	36	—
		Vertical	3000 (mm/s ²)	14	29	80
			5000 (mm/s ²)	12	29	30
			9800 (mm/s ²)	8	9	—
	Max. speed*3 [mm/s]	Stroke range	200 to 800	2300	1250	500
			1000	1600	800	320
			1200	1200	600	240
			1500	900	450	180
	Max. acceleration/deceleration [mm/s ²]		9800			
	Positioning repeatability [mm]		±0.01			
	Lost motion [mm]*4		0.05 or less			
Impact/Vibration resistance [m/s ²]*5		50/20				
Actuation type		Ball screw				
Guide type		Linear guide				
Static allowable moment*6 [N·m]	Mep (Pitching)		805			
	Mey (Yawing)		771			
	Mer (Rolling)		939			
Operating temperature range [°C]		5 to 40				
Operating humidity range [%RH]		90 or less (No condensation)				
Regeneration option		May be required depending on speed and work load. (Refer to page 2.)				
Electric specifications	Motor output [W]/Size [mm]		750/□80			
	Motor type		AC servo motor (200 VAC)			
	Encoder		Absolute 22-bit encoder (Resolution: 4194304 p/rev)			
	Power [W]*7		Max. power 1100			
Lock unit specifications	Type*8		Non-magnetizing lock			
	Holding force [N]		240	480	1200	
	Power consumption [W] at 20°C		10			
	Rated voltage [V]		24 VDC ⁰ _{-10%}			

*1 Strokes other than those listed in the table above are available as special orders. Please contact SMC for further details.

*2 For details, refer to "Speed-Work Load Graph (Guide)" on page 2.

*3 The allowable speed changes according to the stroke.

*4 A reference value for correcting an error in reciprocal operation

*5 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*6 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.


*7 Indicates the max. power during operation (including the driver)

When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.

*8 Only when motor option "With lock" is selected

* Do not allow collisions at either end of the table traveling distance. Additionally, when running the positioning operation, do not set within 7 mm of both ends.

Construction

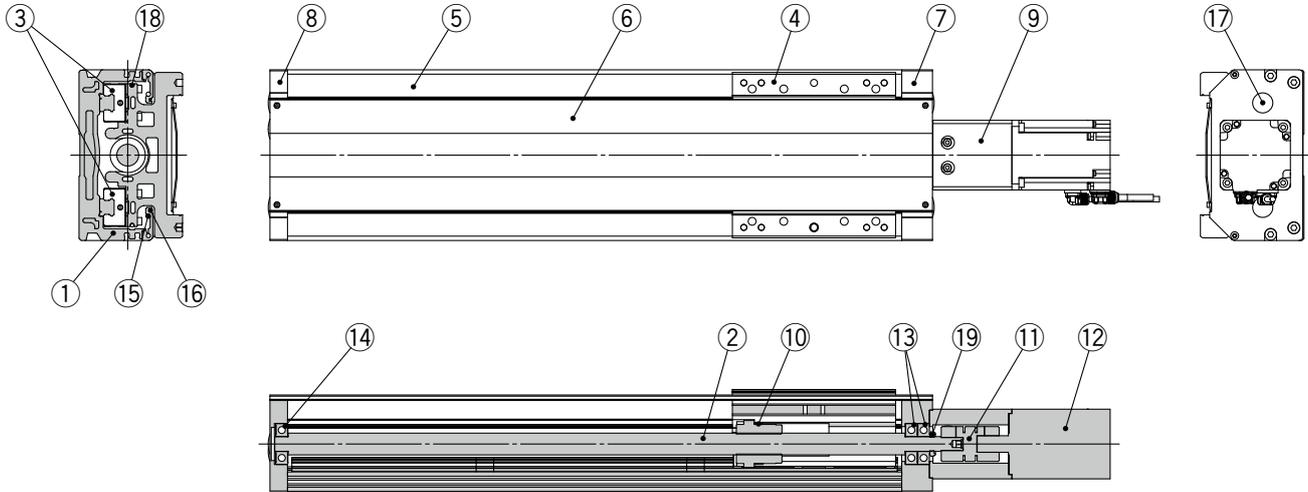

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Ball screw assembly	—	
3	Linear guide assembly	—	
4	Table	Aluminum alloy	Anodized
5	Side cover	Aluminum alloy	Anodized
6	Dust cover	Aluminum alloy	Anodized
7	Plate M	Aluminum alloy	Anodized
8	Plate E	Aluminum alloy	Anodized
9	Motor block	Aluminum alloy	Anodized
10	Spacer	Aluminum alloy	"Lead: H" only
11	Coupling	—	
12	Motor	—	
13	Bearing	—	
14	Bearing	—	
15	Pin	Carbon steel	
16	Pin	Carbon steel	
17	Cap	Polyethylene	
18	Magnet	—	
19	Lock nut	—	

Replacement Parts/Grease Pack

Applied portion	Order no.
Ball screw	GR-S-010 (10 g)
Linear guide portion	GR-S-020 (20 g)

AC Servo Motor Driver

Absolute Type



LECSB-T (Pulse input type/Positioning type)

LECSC-T (CC-Link direct input type)/**LECSS-T** (SSCNET III/H type) *Series*

How to Order



LECSB-T LECSC-T LECSS-T

LECS B 2 - T9

Driver type

B	Pulse input type/Positioning type (For absolute encoder)
C	CC-Link direct input type (For absolute encoder)
S	SSCNET III/H type (For absolute encoder)

Power supply voltage

2	200 to 240 VAC, 50/60 Hz (For LECSB2-T/LECSS2-T)
	200 to 230 VAC, 50/60 Hz (For LECSC2-T)

* If an I/O connector is required, order the part number "LE-CSN□" separately.
 * If an I/O cable is required, order the part number "LEC-CSN□-1" separately.
 (Since the electric actuator will not operate without forced stop (EM2) wiring when using the LECSB-T in any mode other than positioning mode, an I/O connector or an I/O cable is required.)

Compatible motor type


Symbol	Type	Capacity	Encoder
T9	AC servo motor (T9*1)	750 W	Absolute

*1 The symbol shows the motor type (actuator).

LECS□-T Series

Dimensions


LECSB2-T9

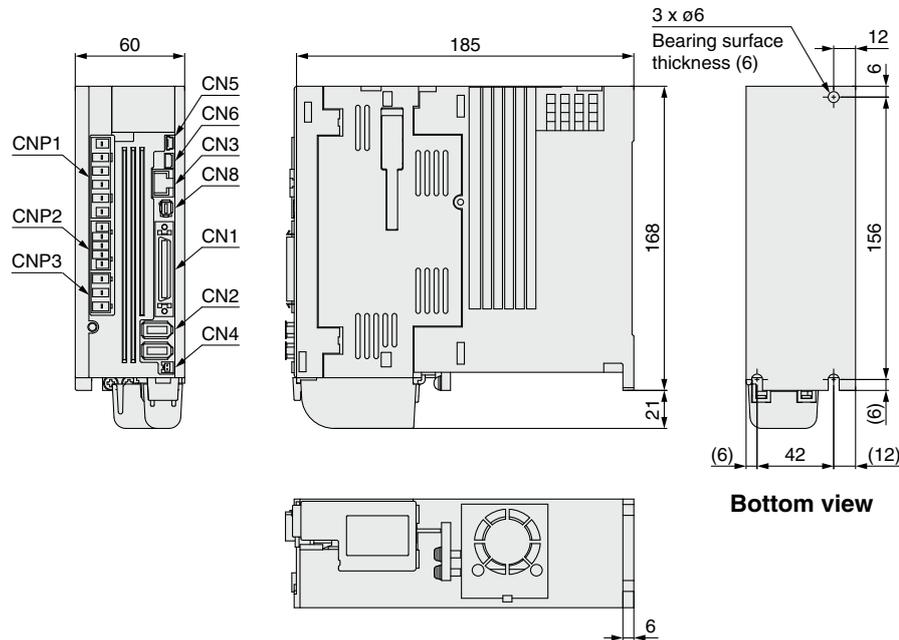

Connector

Connector name	Description
CN1	I/O signal connector
CN2	Encoder connector
CN3	RS-422 communication connector
CN4	Battery connector
CN5	USB communication connector
CN6	Analog monitor connector
CN8	STO input signal connector
CNP1	Main circuit power supply connector
CNP2	Control circuit power supply connector
CNP3	Servo motor power connector

LECS C2-T9

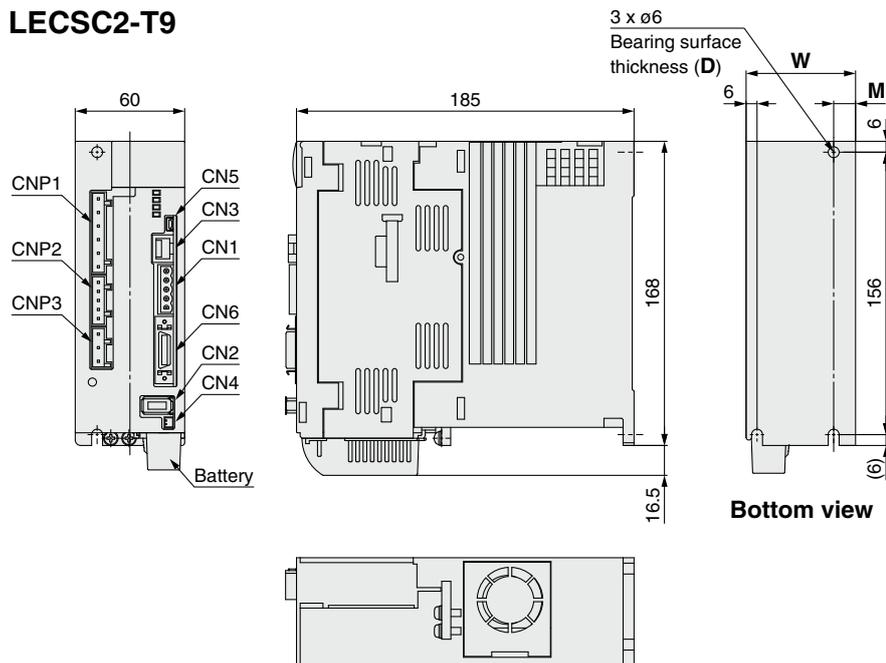


Connector

Connector name	Description
CN1	CC-Link connector
CN2	Encoder connector
CN3	RS-422 communication connector
CN4	Battery connector
CN5	USB communication connector
CN6	I/O signal connector
CNP1	Main circuit power supply connector
CNP2	Control circuit power supply connector
CNP3	Servo motor power connector

Dimensions

LECSS2-T9

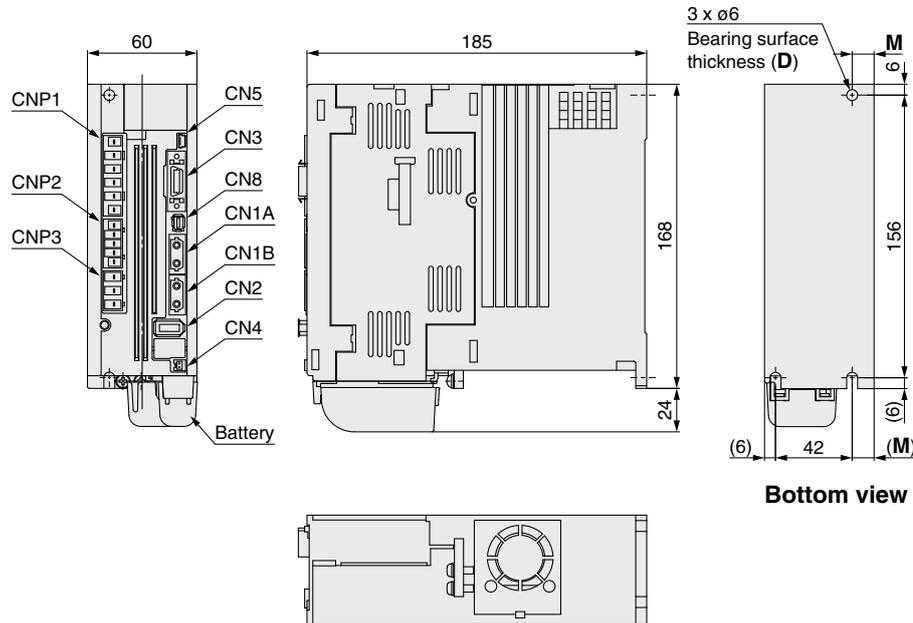

Connector

Connector name	Description
CN1A	Front axis connector for SSCNET III/H
CN1B	Rear axis connector for SSCNET III/H
CN2	Encoder connector
CN3	I/O signal connector
CN4	Battery connector
CN5	USB communication connector
CN8	STO input signal connector
CNP1	Main circuit power supply connector
CNP2	Control circuit power supply connector
CNP3	Servo motor power connector

LECS□-T Series

Specifications

Model		LECSB2-T9
Compatible motor capacity [W]		750
Compatible encoder		Absolute 22-bit encoder (Resolution: 4194304 p/rev)
Main power supply	Power voltage [V]	Three phase 200 to 240 VAC (50/60 Hz), Single phase 200 to 240 VAC (50/60 Hz)
	Allowable voltage fluctuation [V]	Three phase 170 to 264 VAC (50/60 Hz), Single phase 170 to 264 VAC (50/60 Hz)
	Rated current [A]	3.8
Control power supply	Control power supply voltage [V]	Single phase 200 to 240 VAC (50/60 Hz)
	Allowable voltage fluctuation [V]	Single phase 170 to 264 VAC
	Rated current [A]	0.2
Parallel input		10 inputs
Parallel output		6 outputs
Max. input pulse frequency [pps]		4 M (for differential receiver), 200 k (for open collector)
Function	In-position range setting [pulse]	0 to ±65535 (Command pulse unit)
	Error excessive	±3 rotations
	Torque limit	Parameter setting or external analog input setting (0 to 10 VDC)
	Communication	USB communication, RS422 communication*1
	Point table	Up to 255 points
	Pushing operation	Point table no. input method, Up to 127 points
Operating temperature range [°C]		0 to 55 (No freezing)
Operating humidity range [%RH]		90 or less (No condensation)
Storage temperature range [°C]		-20 to 65 (No freezing)
Storage humidity range [%RH]		90 or less (No condensation)
Insulation resistance [MΩ]		Between the housing and SG: 10 (500 VDC)
Safety function		STO (IEC/EN 61800-5-2)
Safety standards*2		EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL3, EN 61800-5-2
Weight [g]		1400

*1 USB communication and RS422 communication cannot be performed at the same time.

*2 The safety level depends on the set value of the driver parameter [Pr. PF18 STO diagnosis error detection time] and whether STO input diagnosis by TOFB output is performed or not. Refer to the LECSB-T operation manual for details.

LECS-C-T Series

Model		LECS-C2-T9	
Compatible motor capacity [W]		750	
Compatible encoder		Absolute 18-bit encoder (Resolution: 262144 p/rev)	
Main power supply	Power voltage [V]	Three phase 200 to 230 VAC (50/60 Hz), Single phase 200 to 230 VAC (50/60 Hz)	
	Allowable voltage fluctuation [V]	Three phase 170 to 253 VAC, Single phase 170 to 253 VAC	
	Rated current [A]	3.8	
Control power supply	Control power supply voltage [V]	Single phase 200 to 230 VAC (50/60 Hz)	
	Allowable voltage fluctuation [V]	Single phase 170 to 253 VAC	
	Rated current [A]	0.2	
Communication specifications	Applicable Fieldbus protocol (Version)		CC-Link communication (Ver. 1.10)
	Connection cable		CC-Link Ver. 1.10 compliant cable (Shielded 3-core twisted pair cable)*1
	Remote station number		1 to 64
	Cable length	Communication speed [bps]/ Maximum overall cable length [m]	16 k/1200, 625 k/900, 2.5 M/400, 5 M/160, 10 M/100
		Cable length between stations [m]	0.2 or more
	I/O occupation area (Inputs/Outputs)		1 station occupied (Remote I/O 32 points/32 points)/(Remote register 4 words/4 words) 2 stations occupied (Remote I/O 64 points/64 points)/(Remote register 8 words/8 words)
	Number of connectable drivers		Up to 42 (when 1 station is occupied by 1 driver), Up to 32 (when 2 stations are occupied by 1 driver), when there are only remote device stations.
Command method	Remote register input		Available with CC-Link communication (2 stations occupied)
	Point table No. input		Available with CC-Link communication, RS422 communication CC-Link communication (1 station occupied): 31 points, CC-Link communication (2 stations occupied): 255 points RS422 communication: 255 points
	Indexer positioning input		Available with CC-Link communication CC-Link communication (1 station occupied): 31 points, CC-Link communication (2 stations occupied): 255 points
Communication function		USB communication, RS-422 communication*2	
Operating temperature range [°C]		0 to 55 (No freezing)	
Operating humidity range [%RH]		90 or less (No condensation)	
Storage temperature range [°C]		-20 to 65 (No freezing)	
Storage humidity range [%RH]		90 or less (No condensation)	
Insulation resistance [MΩ]		Between the housing and SG: 10 (500 VDC)	
Weight [g]		1400	

*1 If the system comprises of both CC-Link Ver. 1.00 and Ver. 1.10 compliant cables, Ver. 1.00 specifications are applied to the overall cable length and the cable length between stations.

*2 USB communication and RS422 communication cannot be performed at the same time.

Specifications

LECSS-T Series

Model		LECSS2-T9
Compatible motor capacity [W]		750
Compatible encoder		Absolute 22-bit encoder (Resolution: 4194304 p/rev)
Main power supply	Power voltage [V]	Three phase 200 to 240 VAC (50/60 Hz), Single phase 200 to 240 VAC (50/60 Hz)
	Allowable voltage fluctuation [V]	Three phase 170 to 264 VAC (50/60 Hz), Single phase 170 to 264 VAC (50/60 Hz)
	Rated current [A]	3.8
Control power supply	Control power supply voltage [V]	Single phase 200 to 240 VAC (50/60 Hz)
	Allowable voltage fluctuation [V]	Single phase 170 to 264 VAC
	Rated current [A]	0.2
Applicable Fieldbus protocol		SSCNET III/H (High-speed optical communication)
Communication function		USB communication
Operating temperature range [°C]		0 to 55 (No freezing)
Operating humidity range [%RH]		90 or less (No condensation)
Storage temperature range [°C]		-20 to 65 (No freezing)
Storage humidity range [%RH]		90 or less (No condensation)
Insulation resistance [MΩ]		Between the housing and SG: 10 (500 VDC)
Safety function		STO (IEC/EN 61800-5-2)
Safety standards*1		EN ISO 13849-1 Category 3 PL d, EN 61508 SIL 2, EN 62061 SIL CL2, EN 61800-5-2
Weight [g]		1400

*1 Refer to the LECSS-T operation manual for details.

Motorless Type

Electric Actuator/High Rigidity Slider Type Ball Screw Drive LEJS100-X400



RoHS

How to Order

LEJS100 N B - 500 T - X400

Motorless type • ① ② • With top cover type

① Lead [mm]

H	50
A	25
B	10

② Stroke [mm]

200	200
300	300
400	400
500	500
600	600
800	800
1000	1000
1200	1200
1500	1500

Specifications

Stroke*1 [mm]		200, 300, 400, 500, 600, 800, 1000, 1200, 1500			
Lead [mm]		50		25	
Work load*2 [kg]	Horizontal	3000 [mm/s ²]		60	
		5000 [mm/s ²]		43	
		9800 [mm/s ²]		22	
	Vertical	3000 [mm/s ²]		14	
		5000 [mm/s ²]		12	
		9800 [mm/s ²]		8	
Max. speed*3 [mm/s]	Stroke range	200 to 800		2300	
		1000		1600	
		1200		1200	
		1500		900	
Max. acceleration/deceleration [mm/s ²]		9800			
Positioning repeatability [mm]		±0.01			
Lost motion*4 [mm]		0.05 or less			
Ball screw specifications	Thread size [mm]		ø25		
	Shaft length [mm]		Stroke + 284.5		
Impact/Vibration resistance*5 [m/s ²]		50/20			
Actuation type		Ball screw			
Guide type		Linear guide			
Static allowable moment*6 [N·m]	Mep (Pitching)		805		
	Mey (Yawing)		771		
	Mer (Rolling)		939		
Operating temperature range [°C]		5 to 40			
Operating humidity range [%RH]		90 or less (No condensation)			
Other*7 specifications	Actuation unit weight [kg]		4.58		
	Other inertia [kg·cm ²]		0.43		
	Friction coefficient		0.05		
	Mechanical efficiency		0.8		
Reference motor specifications	Motor type		AC servo motor (200 VAC)		
	Rated output capacity [W]		750		
	Rated torque [N·m]		2.4		
	Rated rotation [rpm]		3000		

*1 Strokes other than those listed in the table above are available as special orders. Please contact SMC for further details.

*2 For details, refer to "Speed-Work Load Graph (Guide)" on page 2.

*3 The allowable speed changes according to the stroke.

*4 A reference value for correcting an error in reciprocal operation

*5 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

*6 The static allowable moment is the amount of static moment which can be applied to the actuator when it is stopped.

If the product is exposed to impact or repeated load, be sure to take adequate safety measures when using the product.

*7 Each value is only to be used as a guide to select a motor of the appropriate capacity.

* Values in this specifications table are the allowable values of the actuator body with the standard motor mounted. Do not use the actuator so that it exceeds these values.

* Before mounting the coupling, remove any dust, oil, etc., adhered to the shaft and the inner surface of the coupling.

* This product does not come with a motor, motor mounting screws, or couplings. They should be prepared separately by the customer.


* Take measures to prevent the loosening of the motor mounting screws.

* Do not allow collisions at either end of the table traveling distance. Additionally, when running the positioning operation, do not set within 7 mm of both ends.

LEJS100-X400

Motorless Type

Dimensions

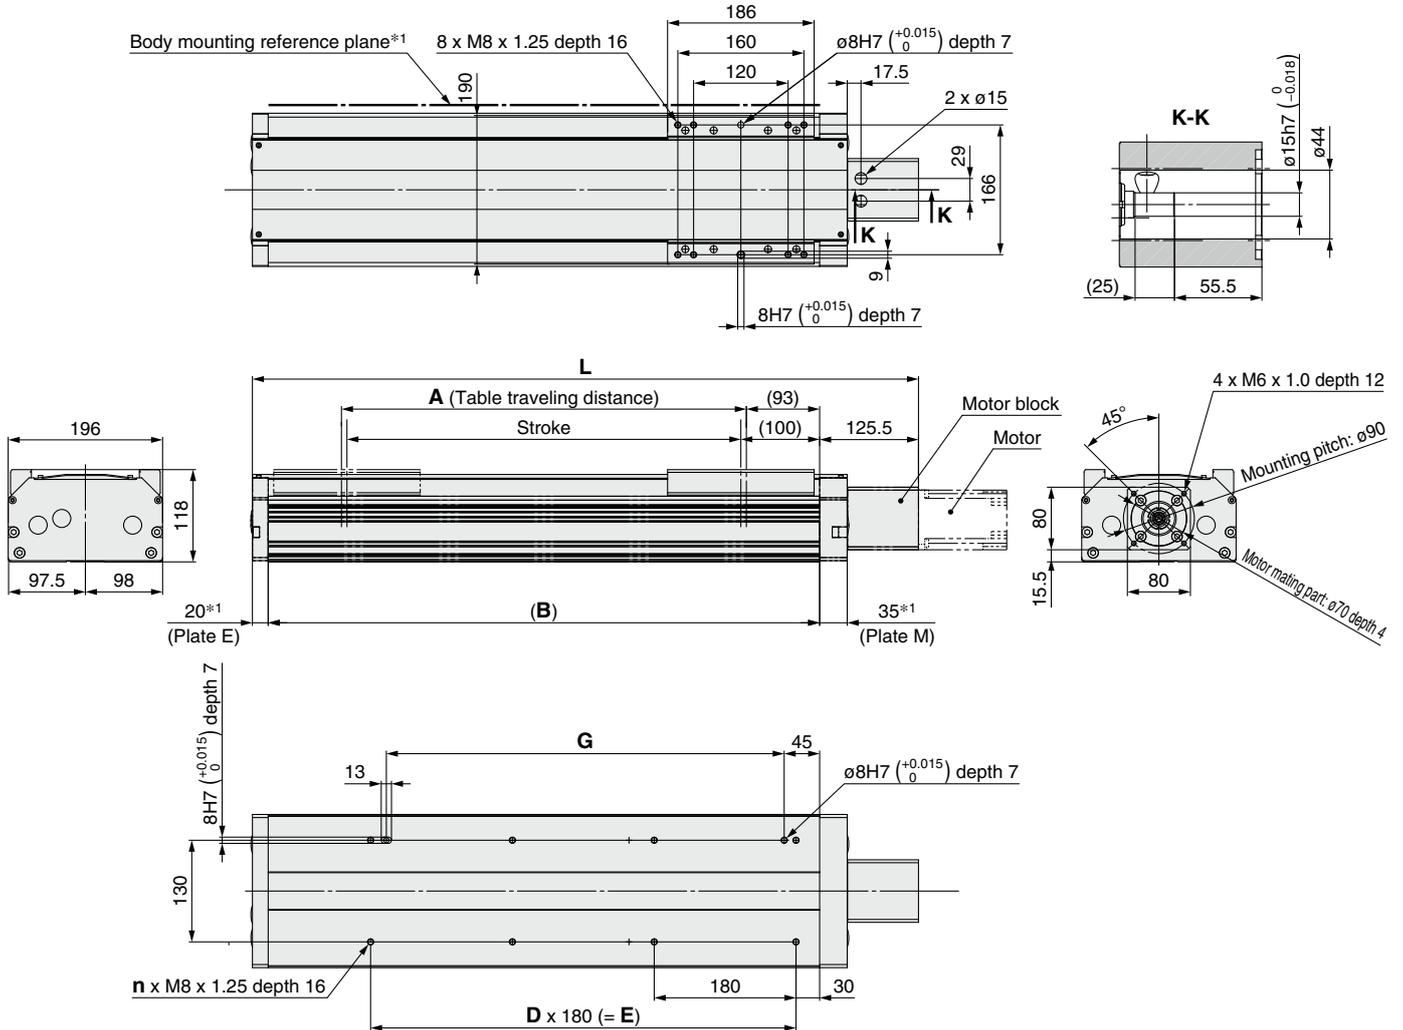

Recommended coupling

Manufacturer	Part no.
Nabeya Bi-tech Kaisha	MJT-40C-RD-15-19
Miki Pulley Co., Ltd	ALS-040-B-15B-19B
KTR Japan Co., Ltd.	ROTEX-GS19-98Sha-GS-2.5- $\phi 15$ -2.5- $\phi 19$
SUNGIL Machinery Co., Ltd.	SJCB-40C-GR-15X19

*1 When mounting the actuator using the body mounting reference plane, set the height of the opposite surface or pin to be 5 mm or more. (Recommended height 6 mm)


The surfaces of plates M and E on the ends of the product may slightly protrude from the body mounting reference plane (Body/B dimension range). Be sure to provide a clearance of 1 mm or more to avoid interference.

Dimensions and Weight

Stroke	L	A	B	n	D	E	G	Weight [kg]
200	545.5	214	400	6	2	360	325	17.6
300	645.5	314	500	6	2	360	325	19.7
400	745.5	414	600	8	3	540	505	21.8
500	845.5	514	700	8	3	540	505	23.9
600	945.5	614	800	10	4	720	685	26
800	1145.5	814	1000	12	5	900	865	30.2
1000	1345.5	1014	1200	14	6	1080	1045	34.3
1200	1545.5	1214	1400	16	7	1260	1225	38.5
1500	1845.5	1514	1700	20	9	1620	1585	44.8

Side Supports


Side supports: MY-S50A

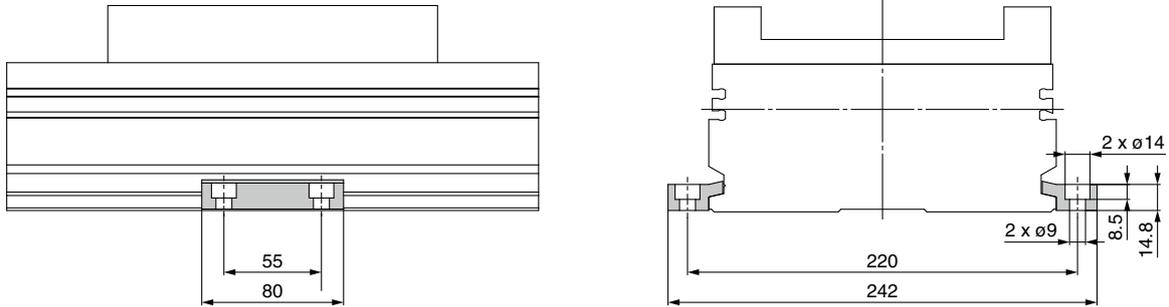

* The side supports consist of a set of right and left brackets.

Usage Guide for Side Supports

When mounting with the side supports, be sure to use the number of side supports (N) and the support spacing (L1) shown in the figure and table below as a guide.

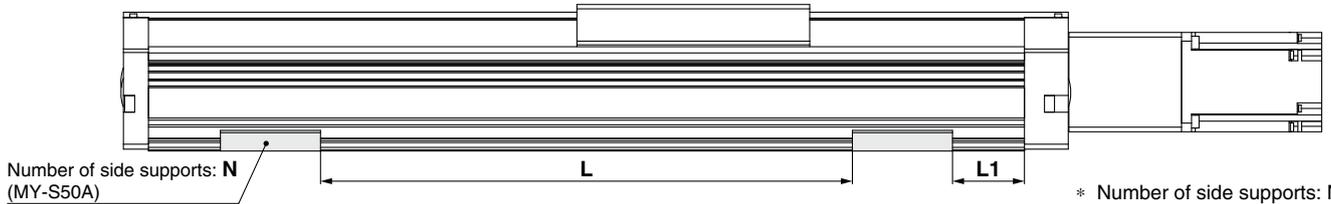


* Number of side supports: N is the combined number of left and right supports.

Stroke	N (Qty.)	L1 [mm]	Screw size	Max. tightening torque [N·m]
200 st	6	15	M8 x 1.25	12.5
300 st	6			
400 st	6			
500 st	6			
600 st	8			
800 st	8			
1000 st	10			
1200 st	10			
1500 st	14			

- Secure the side supports using the support spacing (L) in the table above.
- When mounting with the side supports, use in combination with the pin on the bottom of the body.
- For vertical or bottom mounting, please refrain from using only the side supports.

Auto Switch Mounting

When mounting an auto switch, first, hold a switch spacer between your fingers and press it into the auto switch mounting groove. When doing this, confirm that it is set in the correct mounting orientation, or reattach it if necessary. Next, insert an auto switch into the auto switch mounting groove and slide it until it is positioned under the switch spacer. After establishing the mounting position, use a flathead watchmaker's screwdriver to tighten the included auto switch mounting screw.

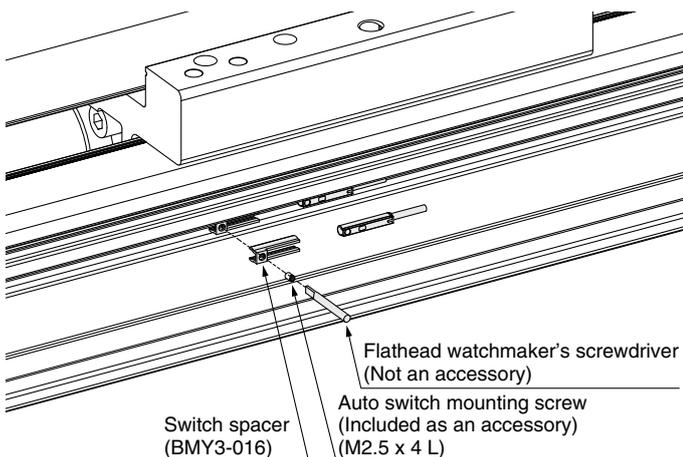

Auto Switch Mounting Screw Tightening Torque

Auto switch model	Tightening torque
D-M9□(V)	0.10 to 0.15
D-M9□W(V)	

 **Safety Instructions** Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.