

Energy Saving Type

Pilot Operated 2 Port Solenoid Valve

Series *VXED21/22/23*

For Air/Water/Oil



Valve

Normally closed (N.C.)

Solenoid Coil

Coil: Class B

Rated Voltage


24 VDC, 12 VDC

Material

Body — Brass (C37)/CAC407,
Stainless steel
Seal — NBR, FKM, EPDM

Electrical Entry

- Grommet
- Conduit
- DIN terminal
- Conduit terminal

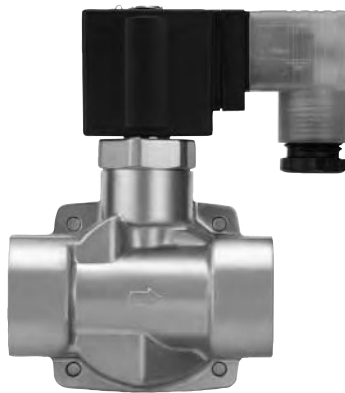

Model	VXED2130	VXED2140	VXED2150	VXED2260
Orifice dia.	10 mmø	●	—	—
	15 mmø	—	●	—
	20 mmø	—	—	●
	25 mmø	—	—	●
Port size (Thread)	1/4	3/8	3/4	1
	3/8	1/2		
	1/2			

Model	VXED2270	VXED2380	VXED2390
Orifice dia.	35 mmø	●	—
	40 mmø	—	●
	50 mmø	—	●
Port size (Flange)	32A	40A	50A

Series VXED21/22/23

Common Specifications

Standard Specifications

Valve specifications	Valve construction	Pilot operated 2 port diaphragm type
	Valve type	N.C.
	Withstand pressure	8A to 25A: 5.0 MPa, 32A to 50A: 2.0 MPa
	Body material	Brass (C37), Stainless steel, CAC407
	Seal material	NBR, FKM, EPDM
	Enclosure	Dusttight, Low jetproof (IP65)
	Environment	Location without corrosive or explosive gases
Coil specifications	Rated voltage	24 VDC, 12 VDC
	Allowable voltage fluctuation	±10% of rated voltage
	Allowable leakage voltage	2% or less of rated voltage
	Coil insulation type	Class B
	Surge voltage suppressor	Built-in surge voltage suppressor

Solenoid Coil Specifications

Normally Closed (N.C.)

DC Specification

Model	Power consumption (W) (Holding)	Inrush current (A) (Inrush time: 200 ms)		Temperature increase (C°) <small>Note)</small>
		24 VDC	12 VDC	
VXED2130	1.8	0.23	0.46	30
VXED2140/2150	1.5	0.19	0.38	25
VXED2260/2270	2.3	0.29	0.58	25
VXED2380/2390	3	0.44	0.88	30

Note) Value for ambient temperature at 20°C and when the rated voltage is applied.

Applicable Fluid Check List / All Options (8A to 25A)

VXED2 ³₂ ¹₄ ⁵₀ - - 1 -

● Option symbol

Fluid and application	Option symbol	Seal material	Body material
Air	Nil	NBR	Brass (C37)
	G		Stainless steel
Water	Nil	NBR	Brass (C37)
	G		Stainless steel
Oil <small>Note 2)</small>	A	FKM	Brass (C37)
	H		Stainless steel
High corrosive/Oil-free	L <small>Note 1)</small>	FKM	Stainless steel
Copper-free/Fluoro-free <small>Note 3)</small>	J	EPDM	Stainless steel
Other combination	B	EPDM	Brass (C37)

Note 1) The L option is oil-free treatment.

Note 2) The dynamic viscosity of the fluid must not exceed 50 mm²/s or less.

Note 3) The nuts (non-wetted parts) are nickel plated on the C37 material.

* If using for other fluids, please consult with SMC.

Applicable Fluid Check List / All Options (32A to 50A)

VXED2 ²₃ ⁷₈ ⁹₀ - - 1 -

● Option symbol

Fluid and application	Option symbol	Seal material	Body material
Air	Nil	NBR	CAC407
Water	Nil	NBR	
Oil <small>Note 2)</small>	A	FKM	
Other combination	B	EPDM	

Note 1) The L option is oil-free treatment.

Note 2) The dynamic viscosity of the fluid must not exceed 50 mm²/s or less.

* If using for other fluids, please consult with SMC.


Series VXED21/22/23

For Air

(Inert gas)

Model/Valve Specifications

N.C.



Port size		Orifice dia. (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics			Max. system pressure (MPa)	Weight (g) ^(Note)
						C	b	Cv		
Thread (Nominal size)	1/4 (8A)	10	VXED2130-02	0.02	0.7	8.5	0.35	2.0	1.5	420
	3/8 (10A)	10	VXED2130-03			9.2		2.4		
		15	VXED2140-03		1.0	18.0		5.0		
	1/2 (15A)	10	VXED2130-04			0.7		9.2		
		15	VXED2140-04		1.0	20.0		5.5		
	3/4 (20A)	20	VXED2150-06			38.0		0.30		

Port size		Orifice dia. (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics	Max. system pressure (MPa)	Weight (g) ^(Note)
						Effective area (mm ²)		
Thread (Nominal size)	1 (25A)	25	VXED2260-10	0.02	1.0	225	1.5	1650
Flange	32A	35	VXED2270-32	0.03		415		5400
	40A	40	VXED2380-40			560		6800
	50A	50	VXED2390-50			880		8400



Note) Weight of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.
 • Refer to "Glossary" on page 44 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
Nil, G	
-10 to 60	-10 to 60

Note) Dew point temperature: -10°C or less

Valve Leakage

Internal Leakage

Seal material	Leakage (Air)	
	1/4 to 1	32A to 50A
NBR	2 cm ³ /min or less	10 cm ³ /min or less

External Leakage

Seal material	Leakage (Air)	
	1/4 to 1	32A to 50A
NBR	1 cm ³ /min or less	1 cm ³ /min or less

How to Order

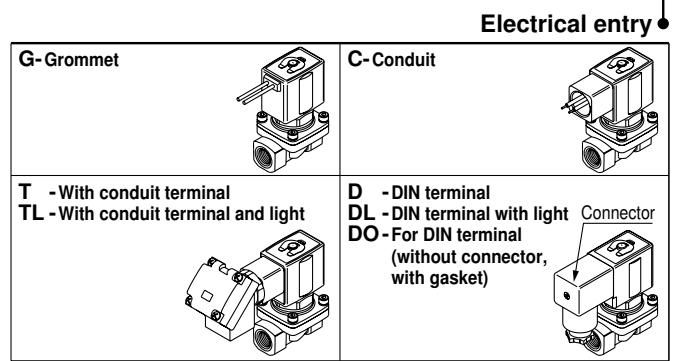
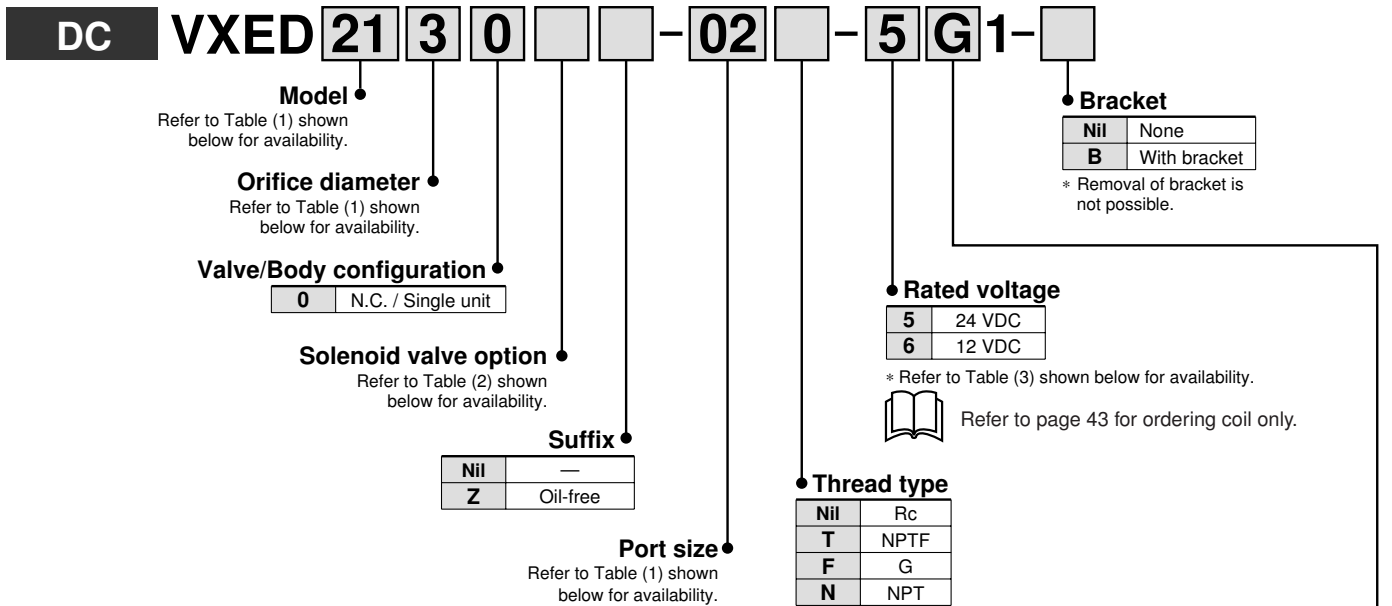


Table (1) Model/Orifice Diameter/Port Size Normally Closed (N.C.)

Solenoid valve model (Port size)				Orifice diameter							Material		
Model	VXED21	VXED22	VXED23	3 (10 mmø)	4 (15 mmø)	5 (20 mmø)	6 (25 mmø)	7 (35 mmø)	8 (40 mmø)	9 (50 mmø)	Body	Seal	
Port symbol (Port size)	Thread	02 (1/4)	—	—	●	—	—	—	—	—	Brass (C37)	NBR	
		03 (3/8)	—	—	●	●	—	—	—	—			
		04 (1/2)	—	—	●	●	—	—	—	—			
		06 (3/4)	—	—	—	—	●	—	—	—			
	Flange	—	10 (1)	—	—	—	—	●	—	—			Stainless steel
		—	32 (32A)	—	—	—	—	—	●	—			
—	—	—	40 (40A)	—	—	—	—	—	●	—	—		
—	—	—	50 (50A)	—	—	—	—	—	—	●	—		

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material
Nil	NBR	Brass (C37), CAC407
G <small>Note)</small>		Stainless steel

Note) The G option (stainless steel specification) is for port size 1/4 to 1 only.

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

Model

VXE2

VXED2

VXEZ2

Specifications

Applications

For Air

For Water

For Oil

Construction


Dimensions

Series VXED21/22/23

For Water

Model/Valve Specifications

N.C.



Port size		Orifice dia. (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics		Max. system pressure (MPa)	Weight (g) ^(Note)
						Av x 10 ⁻⁶ m ²	Cv converted		
Thread (Nominal size)	1/4 (8A)	10	VXED2130-02	0.02	0.5	46	1.9	1.5	420
	3/8 (10A)	10	VXED2130-03			58	2.4		670
		15	VXED2140-03		110	4.5	500		
	1/2 (15A)	10	VXED2130-04		58	2.4	670		
		15	VXED2140-04		130	5.5	1150		
	3/4 (20A)	20	VXED2150-06		230	9.5	1650		
Flange	1 (25A)	25	VXED2260-10	1.0	1.0	310	13	5400	
	32A	35	VXED2270-32			550	23	6800	
	40A	40	VXED2380-40		740	31	8400		
	50A	50	VXED2390-50		1200	49	8400		

Note) Weight of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.
 • Refer to "Glossary" on page 44 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
Nii, G, L	
1 to 60	-10 to 60

Note) With no freezing

Valve Leakage

Internal Leakage

Seal material	Leakage (Water)	
	1/4 to 1	32A to 50A
NBR, FKM	0.2 cm ³ /min or less	1 cm ³ /min or less

External Leakage

Seal material	Leakage (Water)	
	1/4 to 1	32A to 50A
NBR, FKM	0.1 cm ³ /min or less	0.1 cm ³ /min or less

How to Order

DC **VXED** **21** **3** **0** **02** **5** **G** **1**

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
0 N.C. / Single unit

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix

Nil	—
Z	Oil-free

Port size
Refer to Table (1) shown below for availability.

Thread type

Nil	Rc
T	NPTF
F	G
N	NPT

Rated voltage

5	24 VDC
6	12 VDC





* Refer to Table (3) shown below for availability.
Refer to page 43 for ordering coil only.

Bracket

Nil	None
B	With bracket

* Removal of bracket is not possible.

Electrical entry

G- Grommet 	C- Conduit 
T -With conduit terminal TL -With conduit terminal and light 	D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket) 

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

Table (1) Model/Orifice Diameter/Port Size
Normally Closed (N.C.)

Solenoid valve model (Port size)				Orifice diameter							Material	
Model	VXED21	VXED22	VXED23	3 (10 mmø)	4 (15 mmø)	5 (20 mmø)	6 (25 mmø)	7 (35 mmø)	8 (40 mmø)	9 (50 mmø)	Body	Seal
Port symbol (Port size)	Thread	02 (1/4)	—	—	●	—	—	—	—	—	Brass (C37) Stainless steel	NBR FKM
		03 (3/8)	—	—	●	●	—	—	—	—		
		04 (1/2)	—	—	●	●	●	—	—	—		
		06 (3/4)	—	—	—	—	●	—	—	—		
	Flange	—	10 (1)	—	—	—	—	●	—	—	CAC407	
		—	32 (32A)	—	—	—	—	●	—	—		
		—	—	40 (40A)	—	—	—	—	●	—		
		—	—	50 (50A)	—	—	—	—	—	●		

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material	Note
Nil	NBR	Brass (C37), CAC407	—
G (Note)		Stainless steel	
L (Note)	FKM	Stainless steel	High corrosive/Oil-free

Note) The G and L options (stainless steel specification) are for port size 1/4 to 1 only.

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

Model

VXE2

VXED2

VXEZ2

Specifications

Applications

For Air

For Water

For Oil

Construction

Dimensions


Series VXED21/22/23

For Oil

⚠ When the fluid is oil.
The dynamic viscosity of the fluid must not exceed 50 mm²/s.

Model/Valve Specifications

N.C.



Port size	Orifice dia. (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics		Max. system pressure (MPa)	Weight (g) ^(Note)	
					Av x 10 ⁻⁶ m ²	Cv converted			
Thread (Nominal size)	1/4 (8A)	10	0.02	0.4	VXED2130-02	46	1.9	1.5	420
	3/8 (10A)	10			VXED2130-03	58	2.4		670
		15			VXED2140-03	110	4.5		500
	1/2 (15A)	10		VXED2130-04	0.4	58	2.4		670
		15		VXED2140-04	130	5.5	1150		
	3/4 (20A)	20		VXED2150-06	0.7	230	9.5		1650
Flange	1 (25A)	25	0.03	0.7	VXED2260-10	310	13	5400	
	32A	35			VXED2270-32	550	23	6800	
	40A	40			VXED2380-40	740	31	8400	
	50A	50			VXED2390-50	1200	49	8400	

Note) Weight of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.
• Refer to "Glossary" on page 44 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
A, H	
-5 to 60	-10 to 60

Note) Dynamic viscosity: 50 mm²/s or less

Valve Leakage

Internal Leakage

Seal material	Leakage (Oil)	
	FKM	1/4 to 1
	0.2 cm ³ /min or less	1 cm ³ /min or less

External Leakage

Seal material	Leakage (Oil)	
	FKM	1/4 to 1
	0.1 cm ³ /min or less	0.1 cm ³ /min or less

How to Order

DC **VXED** **21** **3** **0** **02** **5** **G** **1**

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
0 N.C. / Single unit

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix

Nil	—
Z	Oil-free

Port size
Refer to Table (1) shown below for availability.

Thread type

Nil	Rc
T	NPTF
F	G
N	NPT

Rated voltage

5	24 VDC
6	12 VDC





* Refer to Table (3) shown below for availability.
Refer to page 43 for ordering coil only.

Bracket

Nil	None
B	With bracket

* Removal of bracket is not possible.

Electrical entry

G-Grommet 	C-Conduit 
T - With conduit terminal TL - With conduit terminal and light 	D - DIN terminal DL - DIN terminal with light DO - For DIN terminal (without connector, with gasket) 

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

Table (1) Model/Orifice Diameter/Port Size
Normally Closed (N.C.)

Solenoid valve model (Port size)				Orifice diameter							Material	
Model	VXED21	VXED22	VXED23	3 (10 mmø)	4 (15 mmø)	5 (20 mmø)	6 (25 mmø)	7 (35 mmø)	8 (40 mmø)	9 (50 mmø)	Body	Seal
Port symbol (Port size)	Thread	02 (1/4)	—	—	●	—	—	—	—	—	Brass (C37) Stainless steel	FKM
		03 (3/8)	—	—	●	●	—	—	—	—		
		04 (1/2)	—	—	●	●	●	—	—	—		
		06 (3/4)	—	—	—	—	●	—	—	—		
	—	10 (1)	—	—	—	—	●	—	—	—		
	Flange	—	32 (32A)	—	—	—	—	—	●	—		
—		—	40 (40A)	—	—	—	—	—	●	—		
—		—	50 (50A)	—	—	—	—	—	—	●		

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material
A	FKM	Brass (C37), CAC407
H (Note)		Stainless steel

Note) The H option (stainless steel specification) is for port size 1/4 to 1 only.

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

Model

VXE2

VXED2

VXEZ2

Specifications

Applications

For Air

For Water

For Oil

Construction

Dimensions

Series VXED21/22/23

For Air/Water/Oil



Construction

Normally closed (N.C.)


Body material: Brass (C37) (32A or more: CAC407), Stainless steel (32A or more: not available)

VXED2130 (8A/10A)

VXED2140/2150/2260
(10A to 25A)

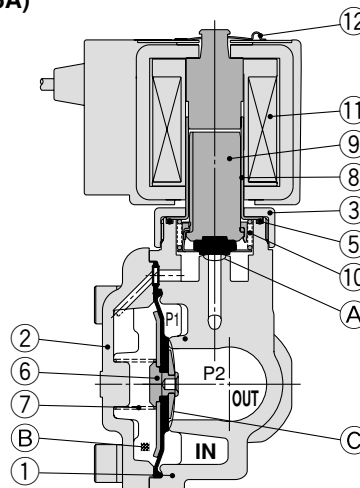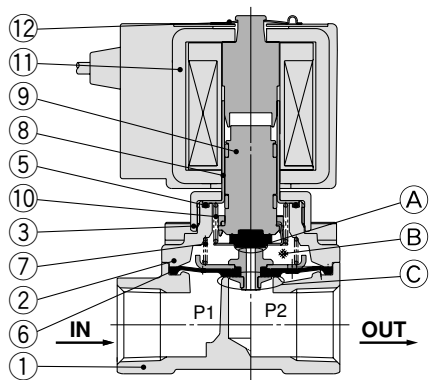

VXED2270/2380/2390 (32A to 50A)

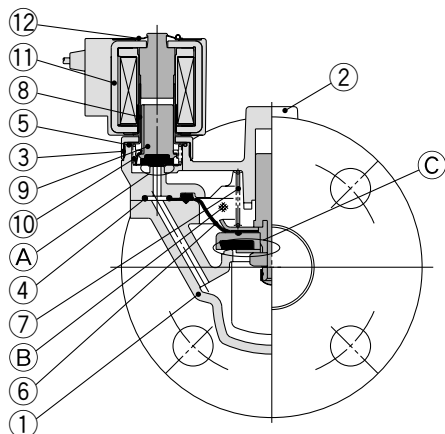

Working principle

<Valve opened>

When the coil ⑪ is energized, the armature assembly ⑨ is attracted into the core of the tube assembly ⑧ and the pilot valve ① opens. Then the pressure in the pressure action chamber ② falls to open the main valve ③.

<Valve closed>

When the coil ⑪ is not energized, the pilot valve ① is closed and the pressure in the pressure action chamber ② rises and the main valve ③ closes.

Component Parts


No.	Description	Size	Material	
			Brass (C37) (CAC407) body specification	Stainless steel body specification
1	Body	8A to 25A	Brass (C37)	Stainless steel
		32A to 50A	CAC407	—
2	Bonnet	8A to 25A	Brass (C37)	Stainless steel
		32A to 50A	CAC407	—
3	Nut	8A to 50A	Brass (C37)	Brass (C37), Ni plated
4	O-ring	32A to 50A	(NBR, FKM, EPDM)	
5	O-ring	8A to 50A	(NBR, FKM, EPDM)	
6	Diaphragm assembly	8A to 25A	(NBR, FKM, EPDM) Stainless steel	
		32A to 50A	(NBR, FKM, EPDM) Stainless steel, Brass (C37)	(NBR, FKM, EPDM) Stainless steel
7	Valve spring	8A to 50A	Stainless steel	
8	Tube assembly	8A to 50A	Stainless steel	
9	Armature assembly	8A to 50A	(NBR, FKM, EPDM) Stainless steel, PPS	
10	Return spring	8A to 50A	Stainless steel	
11	Solenoid coil	8A to 50A	—	
12	Clip	8A to 50A	SK	

The materials in parentheses are seal materials.


Dimensions: Single Unit/Body Material: Brass (C37), Stainless Steel

VXED2130


Grommet: G

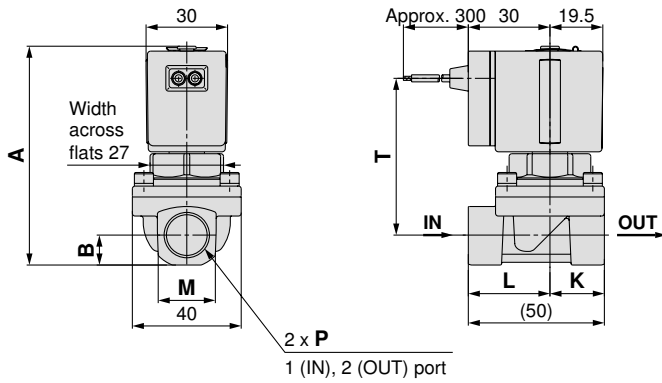


Conduit: C

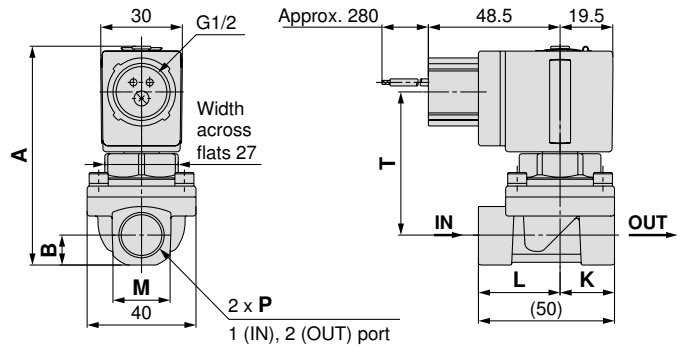



DIN terminal: D

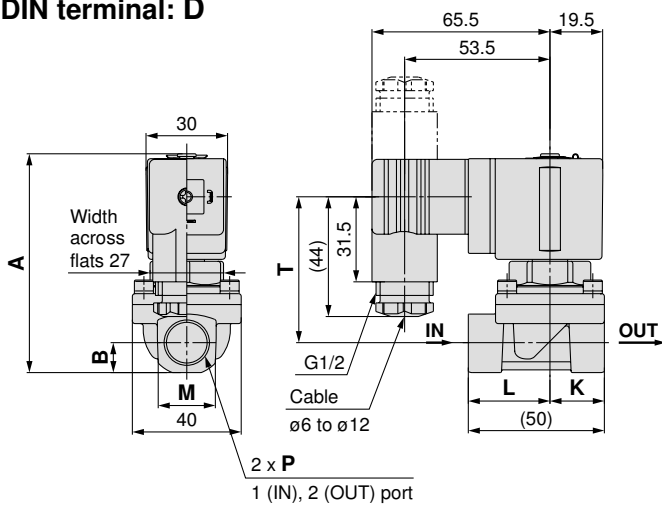

Conduit terminal: T

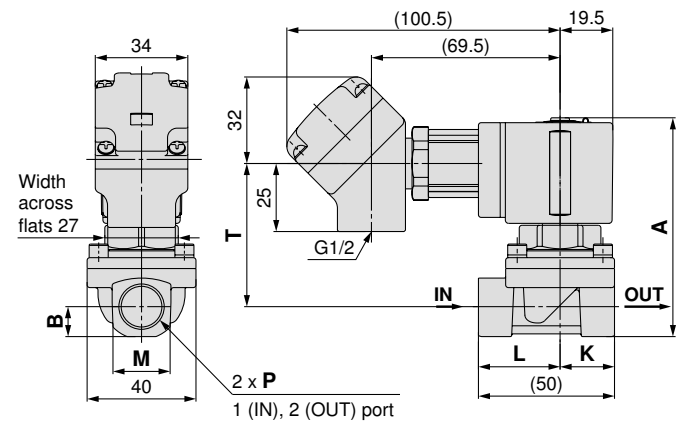

With bracket

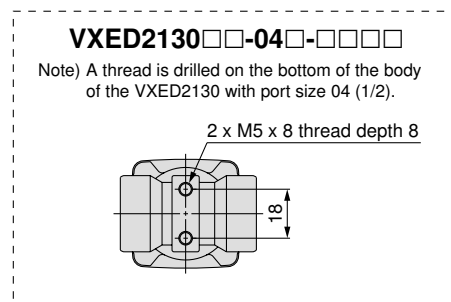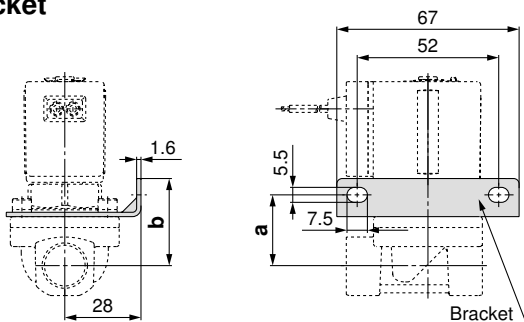

Model	Port size P	A	B	K	L	M	Electrical entry									Bracket mounting dimension		
							Grommet		Conduit		DIN terminal			Conduit terminal			a	b
							T	U	T	U	T	U	V	T	U	V		
VXED2130	1/4, 3/8	80.5	11	20	30	22	58	30	53	48.5	54	65.5	53.5	53	100.5	69.5	26	32
	1/2	86	14.5	24	26	28	60	30	55	48.5	56	65.5	53.5	55	100.5	69.5	28	34

Model

VXE2

VXED2

VXE22

Specifications

Applications

For Air

For Water

For Oil

Dimensions

Construction


Series VXED21/22/23

For Air/Water/Oil


Dimensions: Single Unit/Body Material: Brass (C37), Stainless Steel

VXED2140/2150/2260


Grommet: G

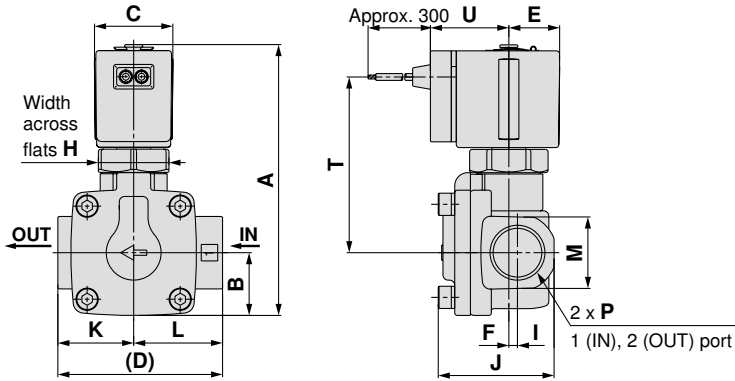


Conduit: C

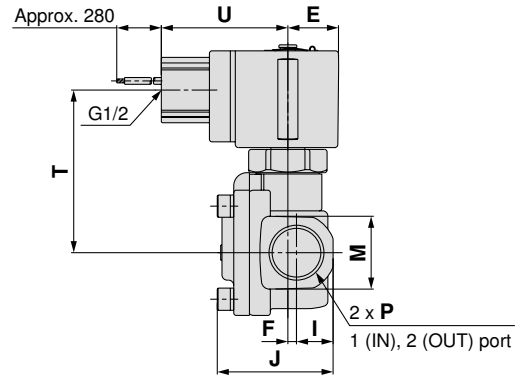


DIN terminal: D

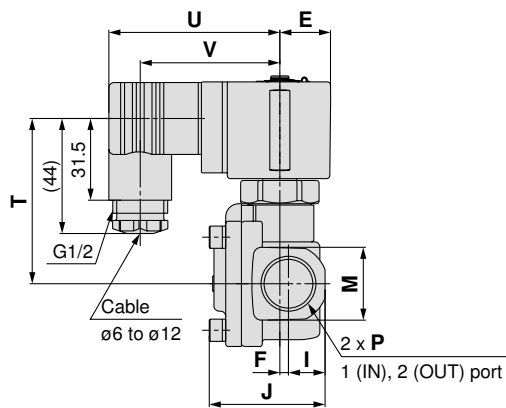

Conduit terminal: T

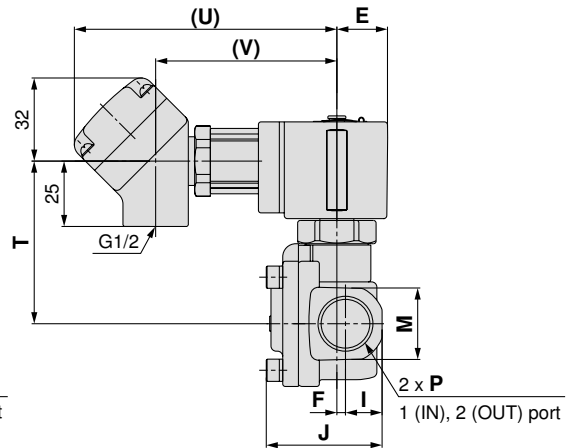

With bracket

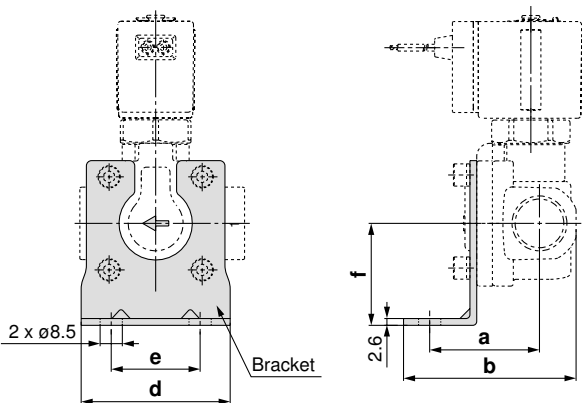


Model	Port size P	A	B	C	D	E	F	H	I	J	K	L	M	Electrical entry														
														Grommet		Conduit		DIN terminal		Conduit terminal		Bracket mounting dimension						
														T	U	T	U	T	U	V	T	U	V	a	b	d	e	f
VXED2140	3/8, 1/2	103.5	24	30	63	19.5	3.5	27	14	44.5	29	34	28	67.5	30	62.5	48.5	63.5	65.5	53.5	62.5	100.5	69.5	42	66	57	34	39
VXED2150	3/4	115	29	30	80	19.5	4.5	27	17	51.5	37	43	35	74	30	69	48.5	70	65.5	53.5	69	100.5	69.5	51	78	74	51	45.5
VXED2260	1	133	33	35	90	22.5	4.5	32	20	60	43	47	42	88	33	83	51.5	84	68.5	56.5	83	103.5	72.5	56	86	81	58	49.5


Dimensions: Single Unit/Body Material: Brass (C37), Stainless Steel

VXED2270/2380/2390


Grommet: G

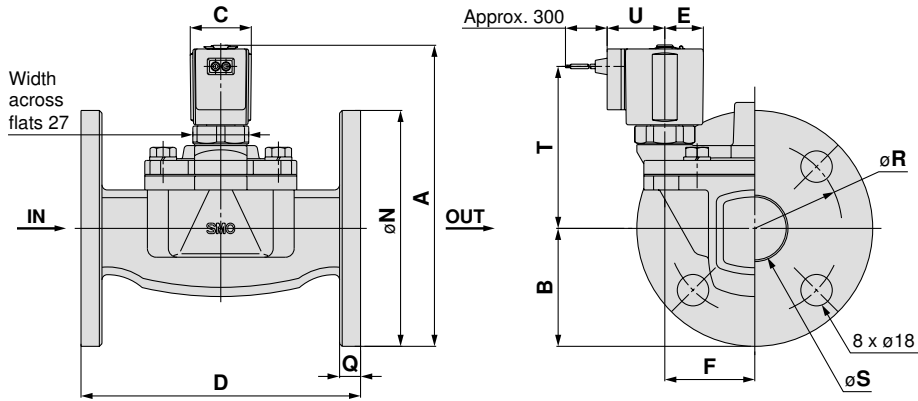


Conduit: C

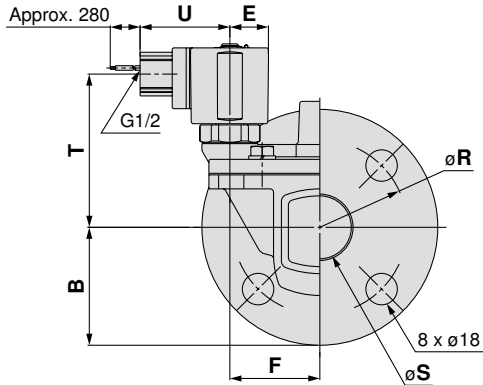

DIN terminal: D

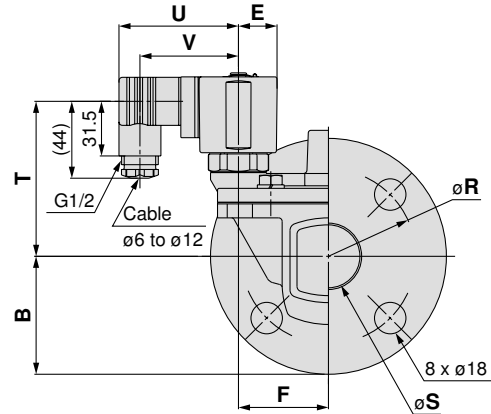

Conduit terminal: T

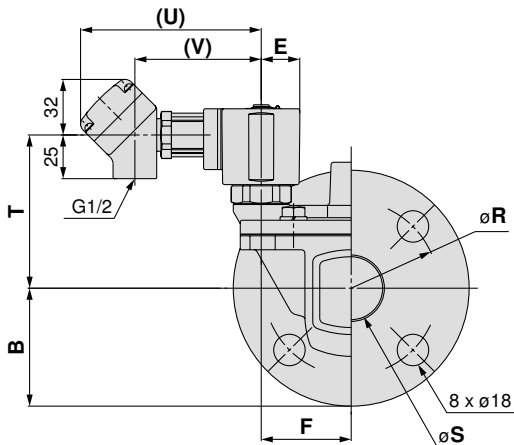

Model	Applicable flange	(mm)																				
		A	B	C	D	E	F	H	N	Q	R	S	Electrical entry									
													Grommet		Conduit		DIN terminal			Conduit terminal		
N.C.													T	U	T	U	T	U	V	T	U	V
VXED2270	32A	172.5	67.5	35	160	22.5	51.5	32	135	12	100	36	93	33	88	51.5	89	68.5	56.5	88	103.5	72.5
VXED2380	40A	185	70	40	170	25	54.5	36	140	14	105	42	103	36	98	54	99	71	59	98	106	75
VXED2390	50A	198	77.5	40	180	25	59	36	155	14	120	52	108.5	36	103.5	54	104.5	71	59	103.5	106	75

Model

VXE2

VXED2

VXE2

Specifications

Applications

For Air

For Water

For Oil

Construction

Dimensions