

Air Operated Type/with Solenoid Valve

How to Order

XLAV — 16 — [] — F — M9N — [] — 1 G — [] — []

High vacuum angle valve
(Normally closed, bellows seal, air operated type with solenoid valve)

Flange size

16
25
40
50
63
80
100
160

Flange type

Symbol	Type	Applicable flange size
Nil	KF(NW)	16, 25, 40, 50, 63, 80, 100, 160
D	K(DN)	63, 80, 100, 160

Solenoid valve/Indicator direction

F	With indicator/Left flange surface
G	With indicator/Rear flange surface
J	With indicator/Right flange surface
K	Without indicator/Left flange surface
L	Without indicator/Rear flange surface
M	Without indicator/Right flange surface

Note) Actuation port direction
(Example) Left flange surface: Indicates that the direction of the actuation port is to the left side when the flange surface is viewed from the front.

Type of auto switch

Symbol	Auto switch	Remarks
Nil	—	Without auto switch (without built-in magnet)
M9N (L)	D-M9N (L)	Solid state switch
M9P (L)	D-M9P (L)	
M9B (L)	D-M9B (L)	
A90 (L)	D-A90 (L)	Reed switch
A93 (L)	D-A93 (L)	(Flange size 16 is not available.)
M9//	—	Without auto switch (with built-in magnet)

Note 1) Auto switches cannot be mounted in the case of high temperature types (temperature specifications H0). The standard lead wire length is 0.5 m. For 3 m, "L" is added at the end of the part number. (Example) -M9NL

Note 2) The auto switch should be secured against the stopper in the auto switch groove for detection of valve opening, or secured against a stopper or the valve body (depending on the valve size) for detection of valve closing.



XLAV

Option
Refer to "Seal material, part number and specification" on page 38.

Light/Surge voltage suppressor

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (non-polar type)

* The S type is not available for AC.
* The U type is DC only.

Electrical entry

G	Grommet (lead wire length 300 mm)
H	Grommet (lead wire length 600 mm)
L	L type plug connector
M	M type plug connector ^{Note)}

Note) M type plug connector is not available under one or more of the following conditions:

- When the flange size is 16 or 25
- When "J" or "M" is selected from "Solenoid valve/Indicator direction"
- When AC is selected from "Rated voltage"

Rated voltage

1	100 V AC, 50/60 Hz
2	200 V AC, 50/60 Hz
3	110 V AC, 50/60 Hz
4	220 V AC, 50/60 Hz
5	24 V DC
6	12 V DC

Number of switches/Mounting position

Symbol	Quantity	Mounting position
Nil	—	—
A	2 pcs.	Valve open/closed
B	1 pc.	Valve open
C	1 pc.	valve closed

The following applies to the options above.

Note 1) Option specifications/Combinations

This model has indicator, auto switch and K(DN) flange options, but high temperature/heater options are not available.

Note 2) Solenoid valves

XLAV-16, 25, 40, 50: SYJ319 XLAV-63, 80, 100, 160: SYJ519 Example) SYJ319-1GS, etc.

For further details on solenoid valves, refer to SMC Best Pneumatics 2004 catalog vol. 4.

Note 3) Solenoid valves are shipped facing downward (flange side), but can be rotated to face upward.

Series XLA, XLAV


Specifications

Model	XLA(V)-16	XLA(V)-25	XLA(V)-40	XLA(V)-50	XLA(V)-63	XLA(V)-80	XLA(V)-100	XLA(V)-160	
Valve type	Normally closed (Pressurize to open, Spring seal)								
Fluid	Non-corrosive gas for aluminum alloy (A6063) and SUS304/316								
Operating temperature °C	XLA	5 to 60 (High temperature type: 5 to 150)							
	XLAV	5 to 50							
Operating pressure Pa {Torr}	Atmospheric pressure to 1×10^{-6} {760 to 7.5×10^{-9} }								
Conductance L/s <small>Note 1)</small>	5	14	45	80	160	200	300	800	
Leakage $\text{Pa}\cdot\text{m}^3/\text{s}$ {Torr L/s }	Internal	1.3×10^{-10} { 1×10^{-9} } at ordinary temperatures, excluding gas permeation (In case of standard material FKM)							
	External	1.3×10^{-11} { 1×10^{-10} } at ordinary temperatures, excluding gas permeation (In case of standard material FKM)							
Flange type	KF (NW)				KF (NW), K (DN)				
Principle materials	Body: Aluminum alloy Bellows: Stainless steel Seal: FKM (Fluoro rubber)								
Surface treatment	Exterior: Hard anodized Interior: Bare surface								
Actuation pressure MPa {kgf/cm ² }	0.4 to 0.7 {4 to 7}								
Actuation port size	XLA	M5		Rc (PT) 1/8				Rc 1/4	
	XLAV	M5 (Ports P, R)			Rc (PT) 1/8 (Port P): M5 (Port R)				
Weight kg	XLA	0.25	0.45	1.1	1.6	2.9	5.0	10.6	18.5
	XLAV	0.29	0.49	1.14	1.64	2.96	5.06	10.7	18.6

Note 1) Conductance is the same as that of an elbow with the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option Specifications, 1 Heaters" on page 26.


Construction/Operation

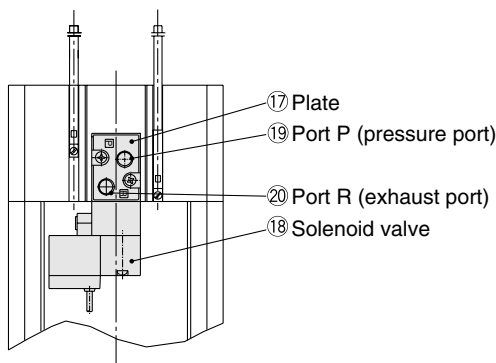

With solenoid valve

<<Options>>

- ④ Auto switch: The magnet ⑩ actuates the auto switch ④ indicating the position of the integrated valve ⑮ and piston ⑧. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at ordinary temperatures only (5 to 60°C).
- ⑤ Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 80, 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly ① is a heat resistant structure.
- ⑥ Indicator: When the valve is open, an orange marker about 1 mm in height appears in the center of the name plate ⑯.

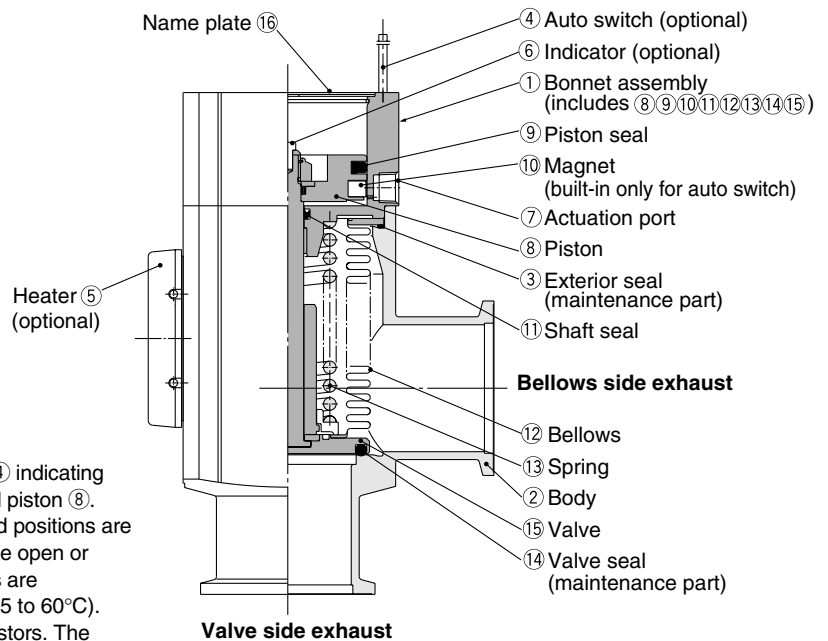


<<Operation principle>>

By applying pressure from the actuation port ⑦, the piston ⑧, which is sealed by the shaft seal ⑪ and the piston seal ⑨, overcomes the force of the spring ⑬, and the valve ⑮ opens. With the exhaust of air pressure, the valve ⑮ is closed by the force of the spring ⑬ and is sealed by the valve seal ⑭. In the case of the XLAV, port P ⑱ is normally pressurized, and the valve ⑮ opens when the solenoid valve ⑱ is turned ON and closes when it is turned OFF. Operation is the same as that of the XLA.

Dimensions

XLAV/Air operated type

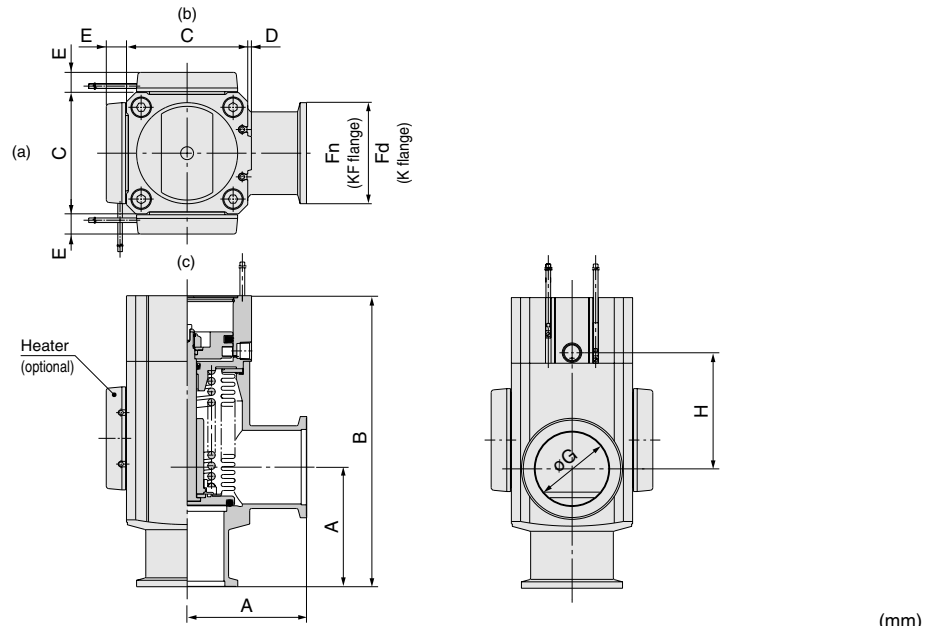

Model	A	B	C	D	E ^{Note 1)}	Fn	Fd	G	H
XLA-16	40	103	38	1	—	30	—	17	40
XLA-25	50	113	48	1	12	40	—	26	39
XLA-40	65	158	66	2	11	55	—	41	63
XLA-50	70	170	79	2	11	75	—	52	68
XLA-63	88	196	100	3	11	87	95	70	69
XLA-80	90	235	117	3	11	114	110	83	96
XLA-100	108	300	154	3	11	134	130	102	131
XLA-160	138	315	200	3	11	190	180	153	112


Note 1) Dimension E applies when heater option is included. (lead wire length: approx. 1 m)

Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.

Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under Replacement heaters/Part Nos. on page 35.

XLAV/With solenoid valve

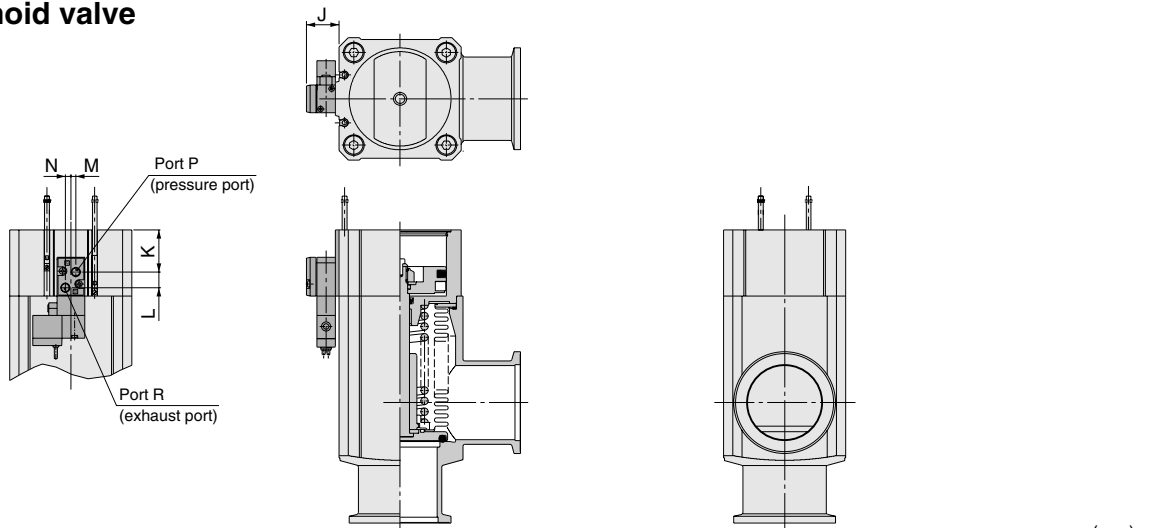

Model	J	K	L	M	N
XLAV-16	16.5	13	8.5	3	3
XLAV-25	16.5	14	8.5	3	3
XLAV-40	17.5	23	8.5	3	3
XLAV-50	17.5	25	8.5	3	3
XLAV-63	29	29	12	4	2
XLAV-80	29	39	12	4	2
XLAV-100	29	51	12	4	2
XLAV-160	29	58	12	4	2

* Other dimensions are the same as XLA.

Air Operated Type/with Solenoid Valve

How to Order

XLCV — **16** **K** — **M9N** **1** **G**

High vacuum angle valve
Double acting, bellows seal, air operated type with solenoid valve

Flange size

16
25
40
50
63
80
100
160

Flange type

Symbol	Type	Applicable flange size
Nil	KF(NW)	16, 25, 40, 50, 63, 80, 100, 160
D	K(DN)	63, 80, 100, 160

Solenoid valve direction

K	Left flange surface
L	Rear flange surface
M	Right flange surface

Note) Actuation port direction (Example) Left flange surface:
Indicates that the direction of the actuation port is to the left side when the flange surface is viewed from the front.

Type of auto switch

Symbol	Auto switch	Remarks
Nil	—	Without auto switch (without built-in magnet)
M9N (L)	D-M9N (L)	Solid state switch
M9P (L)	D-M9P (L)	
M9B (L)	D-M9B (L)	
A90 (L)	D-A90 (L)	Reed switch (Flange size 16 is not available.)
A93 (L)	D-A93 (L)	
M9//	—	Without auto switch (with built-in magnet)

Note 1) Auto switches cannot be mounted in the case of high temperature types (temperature specifications H0). The standard lead wire length is 0.5 m. For 3 m, "L" is added at the end of the part number. (Example) -M9NL

Note 2) The auto switch should be secured against the stopper in the auto switch groove for detection of valve opening, or secured against a stopper or the valve body (depending on the valve size) for detection of valve closing.

Option
Refer to "Seal material, part number and specification" on page 38.

Light/Surge voltage suppressor

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (non-polar type)

* The S type is not available for AC.
* The U type is DC only.

Electrical entry

G	Grommet (lead wire length 300 mm)
H	Grommet (lead wire length 600 mm)
L	L type plug connector
M	M type plug connector ^{Note)}

Note) M type plug connector is not available under one or more of the following conditions:

- When the flange size is 16 or 25
- When "J" or "M" is selected from "Solenoid valve direction"
- When AC is selected from "Rated voltage"

Solenoid valve action

Nil	2 position single
W	2 position double

Rated voltage

1	100 V AC, 50/60 Hz
2	200 V AC, 50/60 Hz
3	110 V AC, 50/60 Hz
4	220 V AC, 50/60 Hz
5	24 V DC
6	12 V DC

Number of switches/Mounting position

Symbol	Quantity	Mounting position
Nil	—	—
A	2 pcs.	Valve open/closed
B	1 pc.	Valve open
C	1 pc.	Valve closed



XLCV

The following applies to the options above.

- Note 1) Option specifications/Combinations
This model has auto switch and K (DN) flange options, but high temperature/heater options are not available.
- Note 2) Solenoid valves
2 position single: XLCV-16, 25, 40, 50: SYJ3190 XLCV-63, 80, 100, 160: SYJ5190
2 position double: XLCV-16, 25, 40, 5 : SYJ3290 XLCV-63, 80, 100, 160: SYJ5290
Examples) SYJ3190-1GS SYJ3290-1GS
For further details on solenoid valves, refer to SMC Best Pneumatics catalog vol. 1.
- Note 3) The direction of solenoid valve coils cannot be changed.

Series XLC, XLCV


Specifications

Model	XLC(V)-16	XLC(V)-25	XLC(V)-40	XLC(V)-50	XLC(V)-63	XLC(V)-80	XLC(V)-100	XLC(V)-160	
Valve type	Double acting (Dual operation), pressurize to open/close								
Fluid	Non-corrosive gas for aluminum alloy (A6063) and SUS304/316								
Operating temperature °C	XLC	5 to 60 (High temperature type: 5 to 150)							
	XLCV	5 to 50							
Operating pressure Pa {Torr}	Atmospheric pressure to 1×10^{-6} {760 to 7.5×10^{-9} }								
Conductance μs <small>Note 1)</small>	5	14	45	80	160	200	300	800	
Leakage $\text{Pa}\cdot\text{m}^3/\text{s}$ {Torr μs }	Internal	1.3×10^{-10} { 1×10^{-9} } at ordinary temperatures, excluding gas permeation (In case of standard material FKM)							
	External	1.3×10^{-11} { 1×10^{-10} } at ordinary temperatures, excluding gas permeation (In case of standard material FKM)							
Flange type	KF (NW)				KF (NW), K (DN)				
Principle materials	Body: Aluminum alloy Bellows: Stainless steel Seal: FKM (Fluoro rubber)								
Surface treatment	Exterior: Hard anodized Interior: Bare surface								
Actuation pressure MPa {kgf/cm ² }	0.3 to 0.6 {3 to 6}								
Actuation port size	XLC	M5		Rc (PT) 1/8				Rc 1/4	
	XLCV	M5 (Ports P, R1/R2)			Rc (PT) 1/8 (Port P): M5 (Port R1/R2)				
Weight kg	XLC	0.28	0.46	1.1	1.7	3.1	5.1	10.6	18.5
	XLCV	0.32	0.5	1.15	1.74	3.16	5.16	10.7	18.6

Note 1) Conductance is the same as that of an elbow with the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option Specifications, 1 Heaters" on page 26.

Construction/Operation

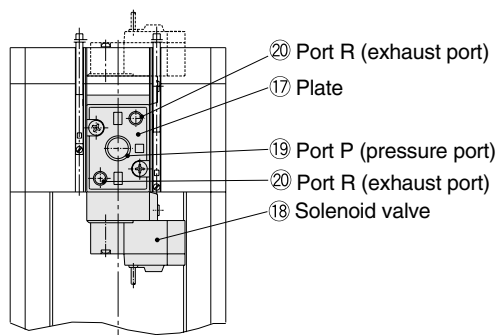

With solenoid valve

<<Operating principle>>


By applying pressure from the actuating port 1-7, the piston 8, sealed by the shaft seal 11 and the piston seal 9, is operated opening the valve. (actuation port 2-7 is released)

Conversely, by applying pressure to actuation port 2-7, the piston 8, sealed by the cylinder seal 13 and the piston seal 9, is operated closing the valve (15) which is sealed by the valve seal 14. (actuation port 1-7 is released)

In the case of the XLCV, port P 19 is normally pressurized, and the valve 15 opens when the solenoid valve 18 is turned ON, and closes when it is turned OFF.

Moreover, in the case of a double solenoid, the valve moves to the side where the solenoid valve 18 is turned ON. Operation is the same as that of the XLC.

For sizes 50, 63 and 80, the valve is sealed with a standard load by means of an overrun mechanism.

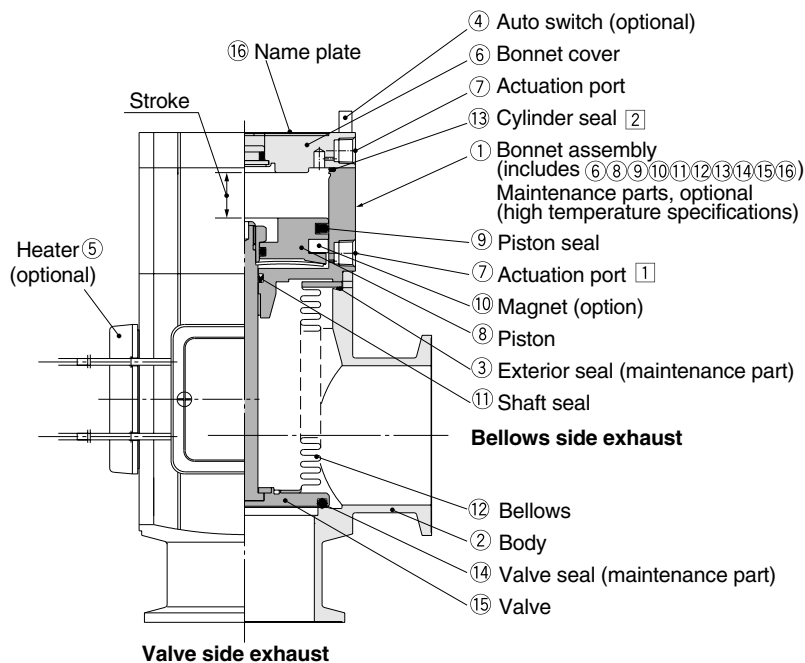


<<Options>>

④ Auto switch: The magnet 10 actuates the auto switch 4 indicating the position of the integrated valve 15 and piston 8. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at ordinary temperatures only (5 to 60°C).

⑤ Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 80, 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly 1 is a heat resistant structure.

Dimensions

XLC/Air operated type

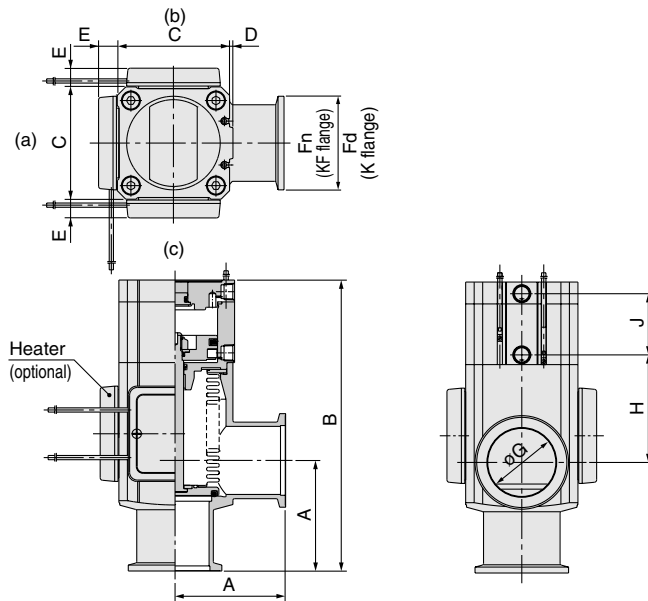

Model	A	B	C	D	E ^{Note 1)}	Fn	Fd	G	H	J
XLC-16	40	110	38	1	—	30	—	17	40	26
XLC-25	50	120	48	1	12	40	—	26	39	28
XLC-40	65	171	66	2	11	55	—	41	63	36
XLC-50	70	183	79	2	11	75	—	52	68	38
XLC-63	88	209	100	3	11	87	95	70	69	45
XLC-80	90	250	117	3	11	114	110	83	96	56
XLC-100	108	317.5	154	3	11	134	130	102	131	69
XLC-160	138	339	200	3	11	190	180	153	112	75


Note 1) Dimension E applies when heater option is included. (lead wire length: approx. 1 m)

Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.

Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under Replacement heaters/Part Nos. on page 35.

XLCV/With solenoid valve

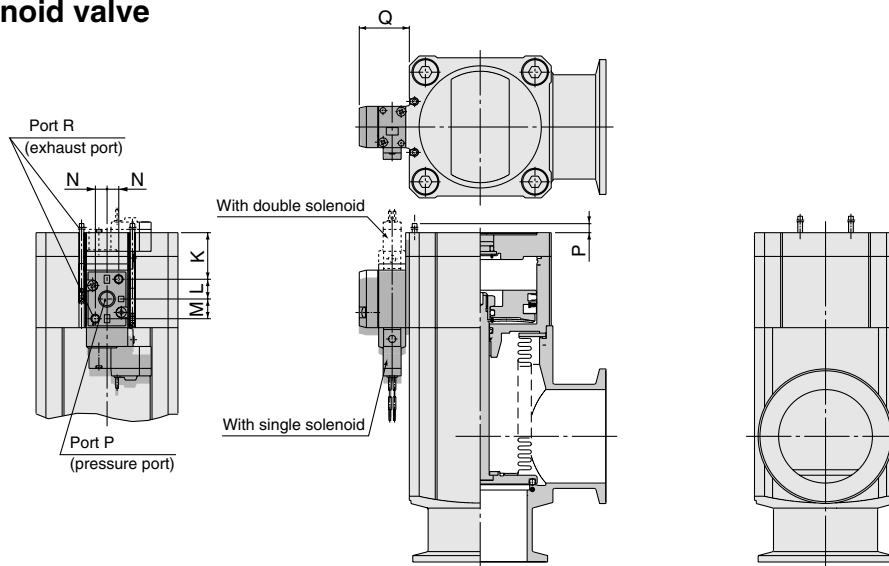

Model	K	L	M	N	P	Q
XLCV-16	14	9	6.5	3	17	16.5
XLCV-25	16	9	6.5	3	15	16.5
XLCV-40	29	9	6.5	3	2	17.5
XLCV-50	42	9	6.5	3	6	17.5
XLCV-63	32	11	11	6.5	—	29
XLCV-80	45	11	11	6.5	—	29
XLCV-100	59	11	11	6.5	—	29
XLCV-160	72	11	11	6.5	—	29

* Other dimensions are the same as XLA.

Air Operated Type/with Solenoid Valve

How to Order

XLFV — **16** **F** — **M9N** — **1** **G**

High vacuum angle valve
(Normally closed, O-ring seal, air operated type with solenoid valve)

Flange size

16
25
40
50
63
80
100
160

Flange type

Symbol	Type	Applicable flange size
Nil	KF(NW)	16, 25, 40, 50, 63, 80, 100, 160
D	K(DN)	63, 80, 100, 160

Solenoid valve/Indicator direction

F	With indicator/Left flange surface
G	With indicator/Rear flange surface
J	With indicator/Right flange surface
K	Without indicator/Left flange surface
L	Without indicator/Rear flange surface
M	Without indicator/Right flange surface

Note) Actuation port direction
(Example) Left flange surface: Indicates that the direction of the actuation port is to the left side when the flange surface is viewed from the front.

Type of auto switch

Symbol	Auto switch	Remarks
Nil	—	Without auto switch (without built-in magnet)
M9N (L)	D-M9N (L)	Solid state switch
M9P (L)	D-M9P (L)	
M9B (L)	D-M9B (L)	
A90 (L)	D-A90 (L)	Reed switch (Flange size 16 is not available.)
A93 (L)	D-A93 (L)	
M9//	—	Without auto switch (with built-in magnet)

Note 1) Auto switches cannot be mounted in the case of high temperature types (temperature specifications H0). The standard lead wire length is 0.5 m. For 3 m, "L" is added at the end of the part number. (Example) -M9NL

Note 2) The auto switch should be secured against the stopper in the auto switch groove for detection of valve opening, or secured against a stopper or the valve body (depending on the valve size) for detection of valve closing.



XLFV

Light/Surge voltage suppressor

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (non-polar type)

* The S type is not available for AC.
* The U type is DC only.

Electrical entry

G	Grommet (lead wire length 300 mm)
H	Grommet (lead wire length 600 mm)
L	L type plug connector
M	M type plug connector ^{Note)}

Note) M type plug connector is not available under one or more of the following conditions:

- When the flange size is 16 or 25
- When "J" or "M" is selected from "Solenoid valve/Indicator direction"
- When AC is selected from "Rated voltage"

Rated voltage

1	100 V AC, 50/60 Hz
2	200 V AC, 50/60 Hz
3	110 V AC, 50/60 Hz
4	220 V AC, 50/60 Hz
5	24 V DC
6	12 V DC

Number of switches/Mounting position

Symbol	Quantity	Mounting position
Nil	—	—
A	2 pcs.	Valve open/closed
B	1 pc.	Valve open
C	1 pc.	Valve closed

The following applies to the options above.

Note 1) Option specifications/Combinations

This model has indicator, auto switch and K(DN) flange options, but high temperature/heater options are not available.

Note 2) Solenoid valves

XLFV-16, 25, 40: SYJ319 XLFV-50, 63, 80, 100, 160: SYJ519 Example) SYJ319-1GS

For further details on solenoid valves, refer to SMC Best Pneumatics catalog vol. 4.

Note 3) Solenoid valves are shipped facing downward (flange side), but can be rotated to face upward.

Series XLF, XLFV


Specifications

Model	XLF(V)-16	XLF(V)-25	XLF(V)-40	XLF(V)-50	XLF(V)-63	XLF(V)-80	XLF(V)-100	XLF(V)-160	
Valve type	Normally closed (Pressurize to open, Spring seal)								
Fluid	Non-corrosive gas for aluminum alloy (A6063) and SUS304/316								
Operating temperature °C	XLF	5 to 60 (High temperature type: 5 to 150)							
	XLFV	5 to 50							
Operating pressure Pa {Torr}	Atmospheric pressure to 1×10^{-5} {760 to 7.5×10^{-8} }								
Conductance L/s ^{Note 1)}	5	14	45	80	160	200	300	800	
Leakage $\text{Pa}\cdot\text{m}^3/\text{s}$ {Torr L/s }	Internal	1.3×10^{-10} { 1×10^{-9} } at ordinary temperatures, excluding gas permeation							
	External	1.3×10^{-11} { 1×10^{-10} } at ordinary temperatures, excluding gas permeation							
Flange type	KF (NW)					KF (NW), K (DN)			
Principle materials	Body: Aluminum alloy Bellows: Stainless steel Seal: FKM (Fluoro rubber)								
Surface treatment	Exterior: Hard anodized Interior: Bare surface								
Actuation pressure MPa {kgf/cm ² }	0.4 to 0.7 {4 to 7}								
Actuation port size	XLF	M5			Rc (PT) 1/8				Rc 1/4
	XLFV	M5 (Ports P, R)				Rc (PT) 1/8 (Port P): M5 (Port R)			
Weight kg	XLF	0.25	0.45	1.1	1.6	3.0	4.8	10	18
	XLFV	0.29	0.49	1.14	1.66	3.06	4.86	10.1	18.1

Note 1) Conductance is the same as that of an elbow with the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option Specifications, 1 Heaters" on page 26.

Construction/Operation

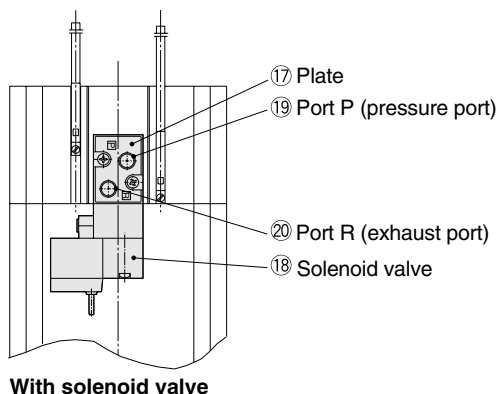


<<Operating principle>>

By applying pressure from the actuation port ⑦, the piston ⑧, which is sealed by the shaft seal ⑪ and the piston seal ⑨, overcomes the force of the spring ⑬, and the valve ⑮ opens.

With the exhaust of air pressure, the valve ⑮ is closed by the force of the spring ⑬ and is sealed by the valve seal ⑭.

In the case of the XLFV, port P ⑱ is normally pressurized, and the valve ⑮ opens when the solenoid valve ⑱ is turned ON, and closes when it is turned OFF. Operation is the same as that of the XLF.

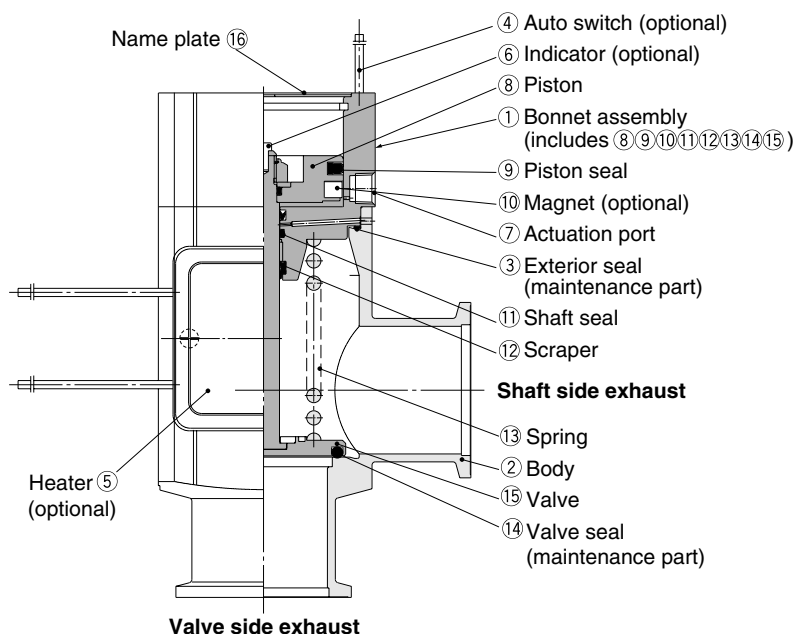


<<Options>>

For selections, refer to item 3, model number and option symbol table.

- ④ Auto switch: The magnet ⑩ actuates the auto switch ④ indicating the position of the integrated valve ⑮ and piston ⑧. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at ordinary temperatures only (5 to 60°C).
- ⑤ Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 80, 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly ① is a heat resistant structure. This is not available with solenoid valve.
- ⑥ Indicator: When the valve is open, an orange marker about 1 mm in height appears in the center of the name plate ⑯.

Dimensions

XLF/Air operated type

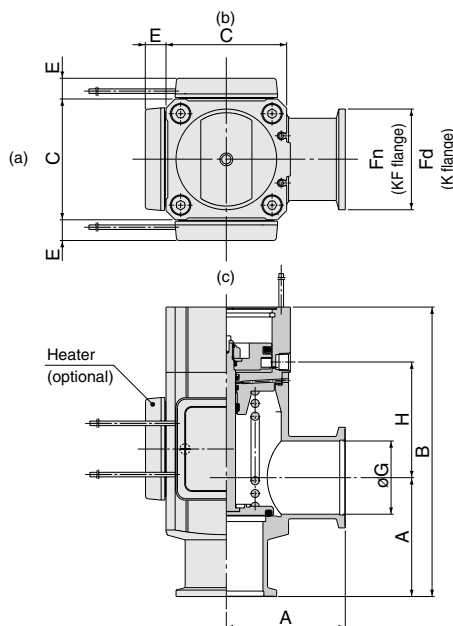

Model	A	B	C	D	E ^{Note 1)}	Fn	Fd	G	H
XLF-16	40	103	38	1	—	30	—	17	40
XLF-25	50	113	48	1	12	40	—	26	39
XLF-40	65	158	66	2	11	55	—	41	63
XLF-50	70	170	79	2	11	75	—	52	68
XLF-63	88	196	100	3	11	87	95	70	69
XLF-80	90	235	117	3	11	114	110	83	96
XLF-100	108	300	154	3	11	134	130	102	131
XLF-160	138	315	200	3	11	190	180	153	112


Note 1) Dimension E applies when heater option is included. (lead wire length: approx. 1 m)

Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.

Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under Replacement heaters/Part Nos. on page 35.

XLFV/With solenoid valve

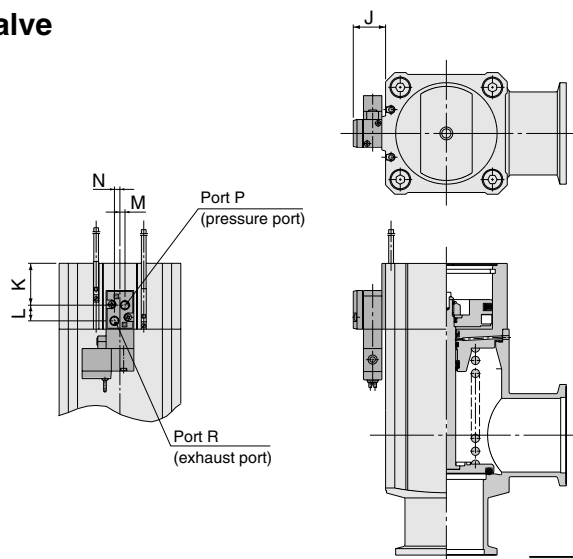

Model	J	K	L	M	N
XLFV-16	16.5	13	8.5	3	3
XLFV-25	16.5	14	8.5	3	3
XLFV-40	17.5	23	8.5	3	3
XLFV-50	28	23	12	4	2
XLFV-63	29	29	12	4	2
XLFV-80	29	39	12	4	2
XLFV-100	29	50	12	4	2
XLFV-160	29	58	12	4	2

* Other dimensions are the same as XLF.

Air Operated Type/with Solenoid Valve

How to Order

XLGV — **16** **K** — **M9N** — **1** **G**

High vacuum angle valve
 Double acting,
 O-ring seal,
 air operated type
 with solenoid valve

Flange size

16
25
40
50
63
80

Flange type

Symbol	Type	Applicable flange size
Nil	KF(NW)	16, 25, 40, 50, 63, 80
D	K(DN)	63, 80

Solenoid valve direction

K	Left flange surface
L	Rear flange surface
M	Right flange surface

Note) Actuation port direction
 (Example) Left flange surface: Indicates that the direction of the actuation port is to the left side when the flange surface is viewed from the front.

Type of auto switch

Symbol	Auto switch	Remarks
Nil	—	Without auto switch (without built-in magnet)
M9N (L)	D-M9N (L)	Solid state switch
M9P (L)	D-M9P (L)	
M9B (L)	D-M9B (L)	
A90 (L)	D-A90 (L)	Reed switch (Flange size 16 is not available.)
A93 (L)	D-A93 (L)	
M9//	—	Without auto switch (with built-in magnet)

Note 1) Auto switches cannot be mounted in the case of high temperature types (temperature specifications H0). The standard lead wire length is 0.5 m. For 3 m, "L" is added at the end of the part number. (Example) -M9N_L

Note 2) The auto switch should be secured against the stopper in the auto switch groove for detection of valve opening, or secured against a stopper or the valve body (depending on the valve size) for detection of valve closing.



XLGV

Light/Surge voltage suppressor

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (non-polar type)

* The S type is not available for AC.
 * The U type is DC only.

Electrical entry

G	Grommet (lead wire length 300 mm)
H	Grommet (lead wire length 600 mm)
L	L type plug connector
M	M type plug connector ^{Note)}

Note) M type plug connector is not available under one or more of the following conditions:

- When the flange size is 16 or 25
- When "M" is selected from "Solenoid valve/Indicator direction"
- When AC is selected from "Rated voltage"

Solenoid valve action

Nil	2 position single
W	2 position double

Rated voltage

1	100 V AC, 50/60 Hz
2	200 V AC, 50/60 Hz
3	110 V AC, 50/60 Hz
4	220 V AC, 50/60 Hz
5	24 V DC
6	12 V DC

Number of switches/Mounting position

Symbol	Quantity	Mounting position
Nil	—	—
A	2 pcs.	Valve open/closed
B	1 pc.	Valve open
C	1 pc.	Valve closed

The following applies to the options above.

Note 1) Option specifications/Combinations

This model has auto switch and K(DN) flange options, but high temperature/heater options are not available.

Note 2) Solenoid valves

2 position single: XLGV-16, 25, 40: SYJ3190 XLGV-50, 63, 80: SYJ5190
 2 position double: XLGV-16, 25, 40: SYJ3290 XLGV-50, 63, 80: SYJ5290
 Examples) SYJ3190-1GS SYJ3290-1GS

For further details on solenoid valves, refer to SMC Best Pneumatics catalog vol.1.

Note 3) The direction of solenoid valves cannot be changed.

Series XLG, XLGV


Specifications

Model	XLG(V)-16	XLG(V)-25	XLG(V)-40	XLG(V)-50	XLG(V)-63	XLG(V)-80	
Valve type	Double acting (Dual operation), pressurize to open/close						
Fluid	Non-corrosive gas for aluminum alloy (A6063) and SUS304/316						
Operating temperature °C	XLG	5 to 60 (High temperature type: 5 to 150)					
	XLGV	5 to 50					
Operating pressure Pa {Torr}	Atmospheric pressure to 1×10^{-5} {760 to 7.5×10^{-8} }						
Conductance d/s <small>Note 1)</small>	5	14	45	80	160	200	
Leakage $\text{Pa}\cdot\text{m}^3/\text{s}$ {Torr d/s }	Internal	1.3×10^{-10} { 1×10^{-9} } at ordinary temperatures, excluding gas permeation					
	External	1.3×10^{-10} { 1×10^{-9} } at ordinary temperatures, excluding gas permeation					
Flange type	KF (NW)			KF (NW), K (DN)			
Principle materials	Body: Aluminum alloy Bellows: Stainless steel Seal: FKM (Fluoro rubber)						
Surface treatment	Exterior: Hard anodized Interior: Bare surface						
Actuation pressure MPa {kgf/cm ² }	0.3 to 0.6 {3 to 6}						
Actuation port size	XLG	M5		Rc (PT) 1/8			
	XLGV	M5 (Ports P, R1/R2)			Rc (PT) 1/8 (Port P): M5 (Port R1/R2)		
Weight kg	XLG	0.28	0.46	1.1	1.7	3.1	5.1
	XLGV	0.32	0.5	1.14	1.76	3.16	5.16

Note 1) Conductance is the same as that of an elbow with the same dimensions.


Note 2) For valve heater specifications, refer to "Common Option Specifications, 1 Heaters" on page 26.

Construction/Operation

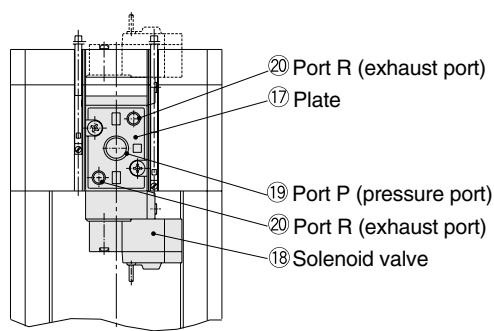

<<Operating principle>>

By applying pressure from the actuating port 1-7, the piston 8, sealed by the shaft seal 11 and the piston seal 9, is operated opening the valve (actuation port 2-7 is released). Conversely, by applying pressure to actuation port 2-7, the piston 8, sealed by the cylinder seal 13 and the piston seal 9, is operated closing the valve 15 which is sealed by the valve seal 14 (actuation port 1-7 is released). In the case of the XLCV, port P 19 is normally pressurized, and the valve 15 opens when the solenoid valve 18 is turned ON, and closes when it is turned OFF. Moreover, in the case of a double solenoid, the valve moves to the side where the solenoid valve 18 is turned ON. Operation is the same as that of the XLC. For sizes 50, 63 and 80, the valve is sealed with a standard load by means of an overrun mechanism.

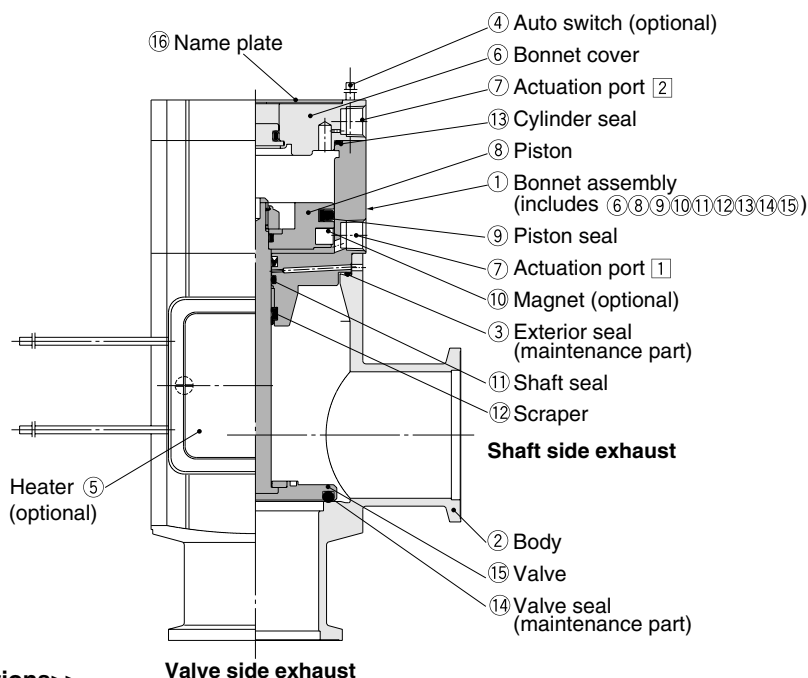


<<Options>>

- ④ Auto switch: The magnet 10 actuates the auto switch 4 indicating the position of the integrated valve 15 and piston 8. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at ordinary temperatures only (5 to 60°C).
- ⑤ Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 80, 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly 1 is a heat resistant structure. This is not available with solenoid valve.

Dimensions

XLG/Air operated type

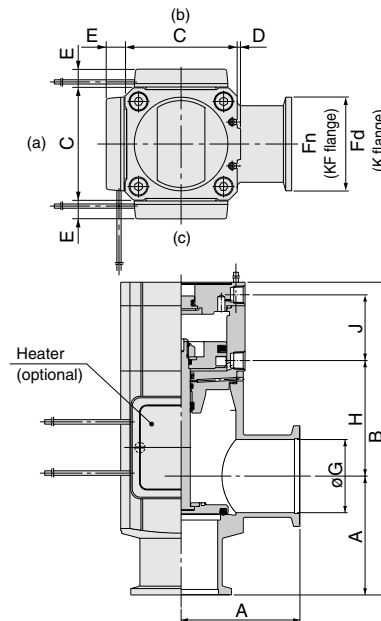

Model	A	B	C	D	E <small>Note 1)</small>	Fn	Fd	G	H	J
XLG-16	40	110	38	1	—	30	—	17	40	26
XLG-25	50	120	48	1	12	40	—	26	39	28
XLG-40	65	171	66	2	11	55	—	41	63	36
XLG-50	70	183	79	2	11	75	—	52	68	38
XLG-63	88	209	100	3	11	87	95	70	69	45
XLG-80	90	250	117	3	11	114	110	83	96	56


Note 1) Dimension E applies when heater option is included. (lead wire length: approx. 1 m)

Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.

Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under Replacement heaters/Part Nos. on page 35.

XLGV/With solenoid valve

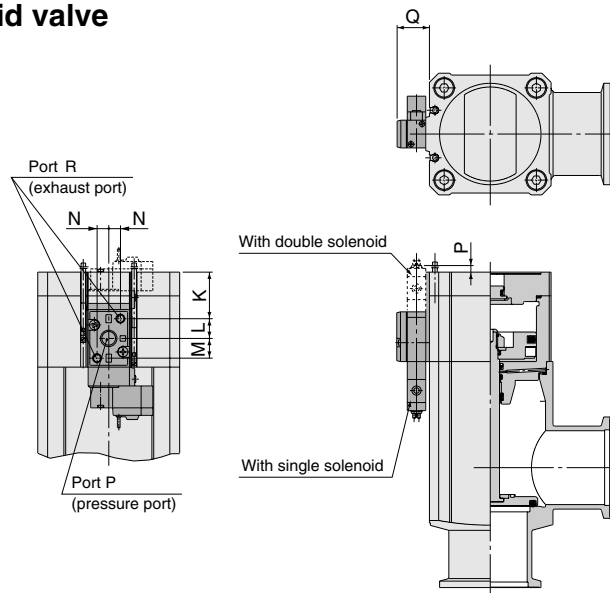

Model	K	L	M	N	P	Q
XLGV-16	14	9	6.5	3	17	16.5
XLGV-25	16	9	6.5	3	15	16.5
XLGV-40	29	9	6.5	3	2	17.5
XLGV-50	26	11	11	6.5	6	28
XLGV-63	32	11	11	6.5	—	29
XLGV-80	45	11	11	6.5	—	29

* Other dimensions are the same as XLG.

Air Operated Type/with Solenoid Valve

How to Order

XLDV — **25** — **K** — **M9N** — **1** **G** — [Option]

High vacuum angle valve
(Smooth exhaust valve, normally closed, air operated type with solenoid valve)

Flange size

25
40
50
63
80
100
160

Flange type

Symbol	Type	Applicable flange size
Nil	KF(NW)	25, 40, 50, 63, 80, 100, 160
D	K(DN)	63, 80, 100, 160

Solenoid valve direction

Symbol	Direction
K	Left flange surface
L	Rear flange surface
M	Right flange surface

Note) Actuation port direction
(Example) Left flange surface: Indicates that the direction of the actuation port is to the left side when the flange surface is viewed from the front.

Option
Refer to "Seal material, part number and specification" on page 44.

Light/Surge voltage suppressor

Symbol	Description
Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (non-polar type)

* The S type is not available for AC.
* The U type is DC only.

Electrical entry

Symbol	Description
G	Grommet (lead wire length 300 mm)
H	Grommet (lead wire length 600 mm)
L	L type plug connector
M	M type plug connector ^{Note)}

Note) M type plug connector is not available for XLDV-25.

Rated voltage

Symbol	Rated Voltage
1	100 V AC, 50/60 Hz
2	200 V AC, 50/60 Hz
3	110 V AC, 50/60 Hz
4	220 V AC, 50/60 Hz
5	24 V DC
6	12 V DC


Number of switches/Mounting position

Symbol	Quantity	Mounting position
Nil	—	—
A	2 pcs.	Valve open/closed
B	1 pc.	Valve open
C	1 pc.	Valve closed

Type of auto switch (For exhaust valve)

Symbol	Auto switch	Remarks
Nil	—	Without auto switch (without built-in magnet)
M9N (L)	D-M9N (L)	Solid state switch
M9P (L)	D-M9P (L)	
M9B (L)	D-M9B (L)	
A90 (L)	D-A90 (L)	Reed switch
A93 (L)	D-A93 (L)	
M9//	—	Without auto switch (with built-in magnet)

Note 1) Auto switches cannot be mounted in the case of high temperature types (temperature specifications H0).
 Note 2) The standard lead wire length is 0.5 m.
 For 3 m, "L" is added at the end of the part number.
 (Example) -M9NL
 Note 3) The auto switch should be secured against the stopper in the auto switch groove for detection of valve opening, or secured against a stopper or the valve body for detection of valve closing.



XLDV

The following applies to the options above.

Note 1) Option specifications/Combinations
 This model has indicator, auto switch and K(DN) flange options, but high temperature/heater options are not available.

Note 2) Solenoid valves

Model	Initial exhaust valve	Main exhaust valve	Example
XLDV-25	SY114*		SY114-1GS
XLDV-40, 50, 63, 80	SY114*	SYJ314	SYJ314-1GS

For further details on solenoid valves, refer to SMC Best Pneumatics catalog vol.4.
 * SY114 will be replaced with V114 after the current stock runs out.

Series XLD, XLDV


Specifications

Model		XLD(V)-25	XLD(V)-40	XLD(V)-50	XLD(V)-63	XLD(V)-80	XLD(V)-100	XLD(V)-160
Valve type		Normally closed (Spring return & seal) [Both main & initial exhaust valves]						
Fluid		Non-corrosive gas for aluminum alloy (A6063) and SUS304/316						
Operating temperature °C	XLD	5 to 60 (High temperature type: 5 to 150)						
	XLDV	5 to 50						
Operating pressure Pa {Torr}		Atmospheric pressure to 1×10^{-5} {760 to 7.5×10^{-8} }						
Conductance ℓ/s ^{Note 1)}	Main exhaust valve	14	45	80	160	200	300	800
	Initial exhaust valve	0.5 to 3	2 to 3	2.5 to 11	4 to 18	4 to 18	6.5 to 31.5	6.5 to 31.5
Leakage $\text{Pa}\cdot\text{m}^3/\text{s}$ {Torr ℓ/s }	Internal	1.3×10^{-10} { 1×10^{-9} } at ordinary temperatures, excluding gas permeation						
	External	1.3×10^{-11} { 1×10^{-10} } at ordinary temperatures, excluding gas permeation						
Flange type		KF (NW)			KF (NW), K (DN)			
Principle materials		Body: Aluminum alloy Bellows: Stainless steel Seal: FKM (Fluoro rubber)						
Surface treatment		Exterior: Hard anodized Interior: Bare surface						
Actuation pressure MPa {kgf/cm ² }		0.4 to 0.7 {4 to 7} [Both main & initial exhaust valves]						
Actuation port size	XLD	M5	Rc (PT) 1/8					
	XLDV	M5 (Ports P, R)						
Weight kg	XLD	0.5	1.2	1.8	3.4	5.6	11.5	20
	XLDV	0.57	1.3	1.9	3.5	5.7	11.6	20.1

Note 1) The main exhaust conductance is the value for the molecular flow of an elbow having the same dimensions. The initial exhaust valve conductance is the value for the viscous flow.

Note 2) For valve heater specifications, refer to "Common Option Specifications, [1] Heaters" on page 26.


Construction/Operation

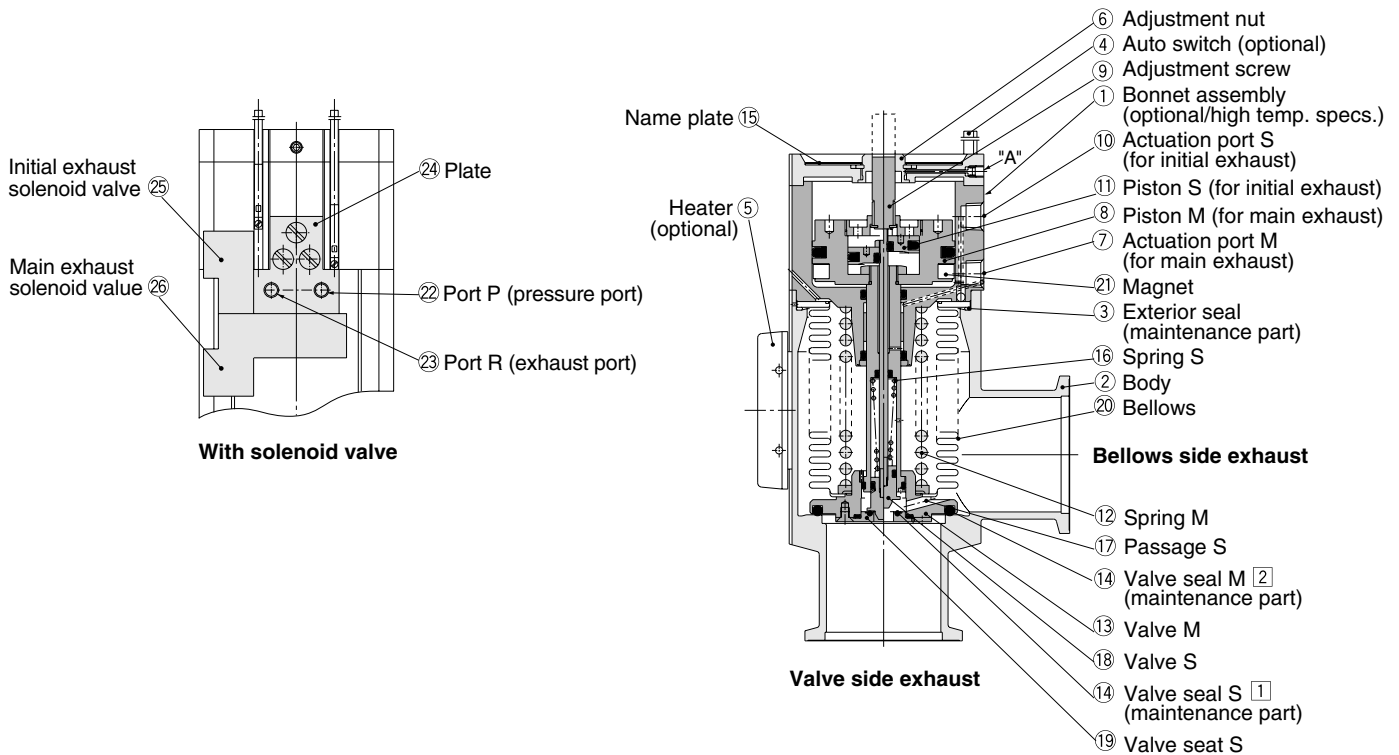

<<Operating principle>>

- 1 **Initial exhaust valve opening adjustment**
The initial exhaust rate should be adjusted before operation (with pilot port S in an unpressurized state).
The initial exhaust rate is set to zero by turning the adjustment nut clockwise until it just stops. (Do not use a tool.)
The initial exhaust rate is adjusted by turning the nut anti-clockwise. The number of adjustment nut (its pitch is 1mm) rotations and initial exhaust conductance should be confirmed referring to the figure on the right.
- 2 **Opening of the initial exhaust valve (valve S)**
When pressure is applied to the pilot port S, the valve S is removed from the valve S assembly and opens until the adjusted opening setting.
- 3 **Opening of the main exhaust valve (valve M)**
When pressure is applied to the pilot port M, the valve M is removed from the body seat surface and fully opens.
- 4 **Closing of the initial exhaust valve, the main exhaust valve**
By removing the pressure from the pilot ports S and M, both valves return to their sealed position.


Initial exhaust valve conductance setting

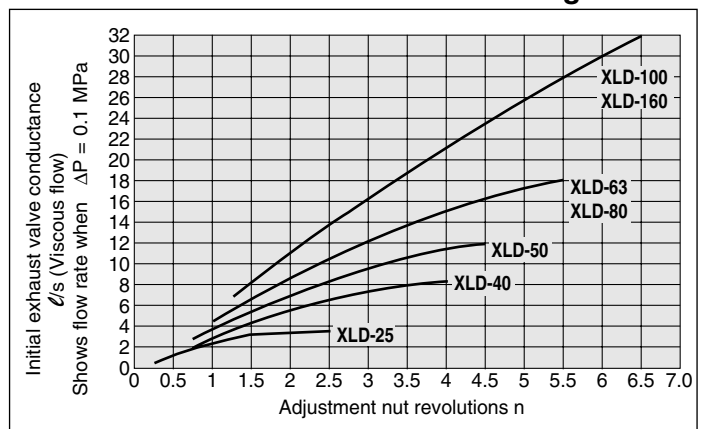


<<Options>>

- 4 **Auto switch:** The magnet 21 actuates the auto switch 4 indicating the position of the integrated valve M 13 and the piston M 8. With two auto switches, the open and closed positions are detected, and with one auto switch, either the open or closed position is detected. Auto switches are applicable at ordinary temperatures only (5 to 60°C).
- 5 **Heater:** Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the heater option and valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly 1 is a heat resistant structure. This is not available with solenoid valve.

XLDV-25/With solenoid valve

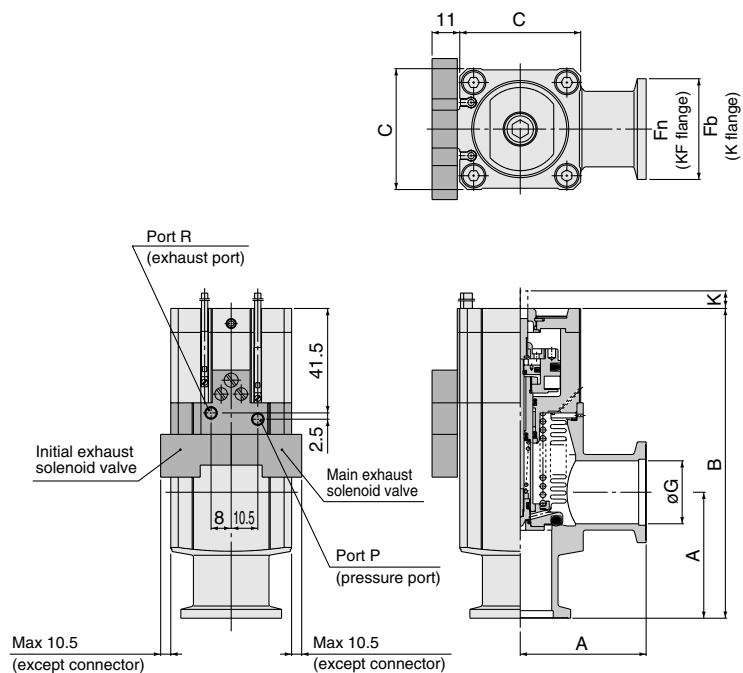

XLDV-40 to 160/With solenoid valve

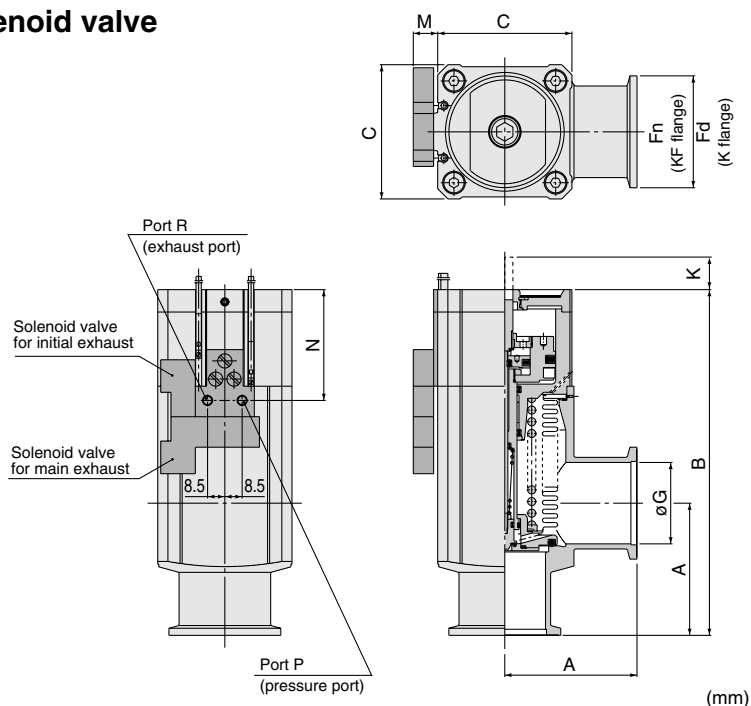

Model	A	B	C	Fn	Fd	G	M	N	K
XLDV-25	50	123	48	40	—	26	—	—	6.5
XLDV-40	65	170	66	55	—	41	12	54.5	14
XLDV-50	70	183	79	75	—	52	12	58.5	16.5
XLDV-63	88	217	100	87	95	70	13	73.2	18.5
XLDV-80	90	256	117	114	110	83	13	83.6	25.5
XLDV-100	108	321	154	134	138	102	16.5	—	38
XLDV-160	138	335	200	190	180	153	16.5	—	40

Maintenance Parts

Air operated angle valve/Manual valve Bonnet & handle assembly/Construction part number: (1)

Model	Temperature specifications	Valve size					
		XL -16	XL -25	XL -40	XL -50	XL -63	XL -80
XLA	General use	XLA16-30-1	XLA25-30-1	XLA40-30-1	XLA50-30-1	XLA63-30-1	XLA80-30-1
	High temperature	XLA16-30-1H	XLA25-30-1H	XLA40-30-1H	XLA50-30-1H	XLA63-30-1H	XLA80-30-1H
XLAV	General use	XLAV16-30-1	XLAV25-30-1	XLAV40-30-1	XLAV50-30-1	XLAV63-30-1	XLAV80-30-1
XLC	General use	XLC16-30-1	XLC25-30-1	XLC40-30-1	XLC50-30-1	XLC63-30-1	XLC80-30-1
	High temperature	XLC16-30-1H	XLC25-30-1H	XLC40-30-1H	XLC50-30-1H	XLC63-30-1H	XLC80-30-1H
XLCV	General use	XLCV16-30-1	XLCV25-30-1	XLCV40-30-1	XLCV50-30-1	XLCV63-30-1	XLCV80-30-1
XLF	General use	XLF16-30-1	XLF25-30-1	XLF40-30-1	XLF50-30-1	XLF63-30-1	XLF80-30-1
	High temperature	XLF16-30-1H	XLF25-30-1H	XLF40-30-1H	XLF50-30-1H	XLF63-30-1H	XLF80-30-1H
XLFV	General use	XLFV16-30-1	XLFV25-30-1	XLFV40-30-1	XLFV50-30-1	XLFV63-30-1	XLFV80-30-1
XLG	General use	XLG16-30-1	XLG25-30-1	XLG40-30-1	XLG50-30-1	XLG63-30-1	XLG80-30-1
	High temperature	XLG16-30-1H	XLG25-30-1H	XLG40-30-1H	XLG50-30-1H	XLG63-30-1H	XLG80-30-1H
XLGV	General use	XLGV16-30-1	XLGV25-30-1	XLGV40-30-1	XLGV50-30-1	XLGV63-30-1	XLGV80-30-1
XLD	General use	—	XLD25-30-1	XLD40-30-1	XLD50-30-1	XLD63-30-1	XLD80-30-1
	High temperature	—	XLD25-30-1H	XLD40-30-1H	XLD50-30-1H	XLD63-30-1H	XLD80-30-1H
XLDV	General use	—	XLDV25-30-1	XLDV40-30-1	XLDV50-30-1	XLDV63-30-1	XLDV80-30-1
XLH	Standard	XLH16-30-1	XLH25-30-1	XLH40-30-1	XLH50-30-1	—	—

Exterior seal, (M) Valve seal, S Valve seal Assemblies

Construction No.	Description	XL(A, C, H) [V]-16	XL(F, G) [V]-16	XLD [V]-25	XL(A, C, H) [V]-25	XL(F, G) [V]-25	XLD [V]-40	XL [V]-40	XLD [V]-50	XL [V]-50	XLD [V]-63	XL [V]-63	XLD [V]-80	XL [V]-80
③	Exterior seal	AS568-025V	XLF16-6	AS568-030V		XLF25-6	AS568-035V		AS568-039V		AS568-043V		AS568-045V	
⑭ (-②)	(M) Valve seal	B2401-V15V		B2401-V24V			B2401-P42V		AS568-227V		AS568-233V		B2401-V85V	
⑭ (-②)	S Valve seal assembly	—		AS568-009V		—	XLD40-2-9-1A	—	XLD50-2-9-1A	—	XLD80-2-9-3A	—	XLD80-2-9-3A	—

* Refer to the Construction/Operation drawing of each series for the construction numbers.

Replacement heaters/Part Nos. (XLA, XLC, XLD, XLF, XLG, XLH)

Model	Part Nos./Mounting positions/Set quantity					
	H2 (heater for 100°C)	Mounting position	Set quantity	H3 (heater for 120°C)	Mounting position	Set quantity
XL -25	—	—	—	XLA25-60M-1	(a)	1
XL -40	XLA25-60M-1	(a)	1	XLA25-60M-2	(b) (c)	1
XL -50	XLA25-60M-1	(a)	1	XLA25-60M-2	(b) (c)	1
XL -63	XLA25-60M-2	(b) (c)	1	XLA25-60M-3	(a) (b) (c)	1
XL -80	XLA25-60M-3	(a) (b) (c)	1	XLA25-60M-2	(b) (c)	2

Note 1) The above (a), (b), (c) indicate heater mounting positions. The heater mounting positions (a), (b), (c) are shown in the dimension drawing for each series.

Note 2) Heater set quantity indicates multiple heaters.

(Example) The heaters included with XLA-80-H3 are 2 pieces of XLH25-60M-2 (a set including 2 heater units).

Angle solenoid valve

Construction No.	Description	XLS-16- 	XLS-16-P 	XLS-25- 	XLS-25-P
②	Coil assembly	XLS16-20- G, C, T, D	XLS16-20-P G	XLS25-20- G, C, T, D	XLS25-20-P G
⑥	Core assembly	XLS16-30-1		XLS25-30-1	
④	Armature assembly	XLS16-30-2		XLS25-30-2	
③-①	Core O-ring	AS568-018V		AS568-018V	
③-②	Bonnet O-ring	AS568-025V		AS568-030V	

Note) The voltage symbol is entered here. (Refer to "How to Order")

The letters G, C, T and D following indicate grommet, conduit, terminal and DIN respectively.

* Refer to the Construction/Operation sections for construction numbers.

Stainless Steel High Vacuum Angle/In-line Valve

Series XMA, XYA

Normally Closed/Bellows Seal



How to Order

Angle type

XMA — 16 — — — M9N A — —

In-line type

XYA — 25 — — — M9N A — —

1 2 3 4 5 6 7




1. Flange size

Size	XMA	XYA
16	●	—
25	●	●
40	●	●
50	●	●
63	●	●
80	●	●

3. Indicator/Pilot port direction

XMA

Symbol	Indicator	Pilot port direction
Nil	Without indicator	Flange side
A	With indicator	Flange side
F		Left flange surface
G		Rear flange surface
J		Right flange surface
K	Without indicator	Left flange surface
L	Without indicator	Rear flange surface
M	Without indicator	Right flange surface



4. Temperature specifications

Symbol	Temperature range
Nil	5 to 60°C
H0	5 to 150°C

6. No. of auto switches/Detecting position

Symbol	Quantity	Detecting position
Nil	Without auto switch	—
A	2 pcs.	Valve open/closed
B	1 pc.	Valve open
C	1 pc.	Valve closed

7. Seal material, part number and specification

Seal material

Symbol	Seal material	Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez®	4079
R1	Chemraz®	SS592
R2		SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640

*: Produced by Mitsubishi Cable Industries, Ltd.

2. Flange type

XMA


Symbol	Type	Applicable flange size
Nil	KF (NW)	16, 25, 40, 50, 63, 80
D	K (DN)	63, 80
C	CF	16 (034), 40 (070), 63 (114)

XYA

Nil	KF (NW)	25, 40, 50, 63, 80
D	K (DN)	63, 80

XYA

Symbol	Indicator	Pilot port direction
Nil	Without indicator	Rear flange side
A	With indicator	Rear flange side
F		Left flange surface
J		Right flange surface
K	Without indicator	Left flange surface
M	Without indicator	Right flange surface



5. Auto switch type

Symbol	Auto switch	Remarks
Nil	—	Without auto switch (without built-in magnet)
M9N (L)	D-M9N (L)	Solid state switch
M9P (L)	D-M9P (L)	
M9B (L)	D-M9B (L)	
A90 (L)	D-A90 (L)	Reed switch (Flange size 16 is not available.)
A93 (L)	D-A93 (L)	
M9//	—	Without auto switch (with built-in magnet)

Auto switches cannot be mounted in the case of high temperature types (temperature specifications H0). The standard lead wire length is 0.5 m. For 3 m, "L" is added at the end of the part number. Ex.) -M9NL

Part nos. for seal material replacement and leakage specification

Symbol	Replacement part ^{Note 2)}	Leakage Pa·m ³ /s or less ^{Note 1)}	
		Internal (2) ^{Note 2)}	External (3) ^{Note 2)}
Nil	—	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)
A	2, 3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹
B	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)
C	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹

Note 1) Values at ambient temperatures, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on the page 39 for changed part. Number indicates parts number of "Construction" accordingly.

To order something else "Nil" (standard), list the symbols starting with "X", followed by each symbol for "seal material" and then "changed parts" at last.

Ex.) XMA-16-M9NA-XN1A

Stainless Steel High Vacuum Angle/In-line Valve

Series **XMD, XYD**

2 Stage Control, Single Acting/Bellows, O-ring Seal

PAT.



How to Order

Angle type

XMD — 25 □ □ □ — M9N A — □

In-line type

XYD — 25 □ □ □ — M9N A — □

1 2 3 4 5 6 7




1. Flange size

Size	XMD	XYD
25	●	●
40	●	●
50	●	●
63	●	●
80	●	●

3. Pilot port direction

XMD

Symbol	Pilot port direction
Nil	Flange side
K	Left flange surface
L	Rear flange surface
M	Right flange surface



4. Temperature specifications

Symbol	Temperature range
Nil	5 to 60°C
H0	5 to 150°C

6. No. of auto switches/Detecting position

Symbol	Quantity	Detecting position
Nil	Without auto switch	—
A	2 pcs.	Valve open/closed
B	1 pc.	Valve open
C	1 pc.	Valve closed

7. Seal material, part number and specification

Seal material

Symbol	Seal material	Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez®	4079
R1	Chemraz®	SS592
R2		SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640

The material used in the sliding part of the S-valve is: FKM *: Produced by Mitsubishi Cable Industries, Ltd.

2. Flange type

XMD


Symbol	Type	Applicable flange size
Nil	KF (NW)	25, 40, 50, 63, 80
D	K (DN)	63, 80
C	CF	40 (070), 63 (114)

XYD

Nil	KF (NW)	25, 40, 50, 63, 80
D	K (DN)	63, 80

XYD

Symbol	Pilot port direction
Nil	Rear flange surface
K	Left flange surface
M	Right flange surface



5. Auto switch type

Symbol	Auto switch	Remarks
Nil	—	Without auto switch (without built-in magnet)
M9N (L)	D-M9N (L)	Solid state switch
M9P (L)	D-M9P (L)	
M9B (L)	D-M9B (L)	
A90 (L)	D-A90 (L)	Reed switch
A93 (L)	D-A93 (L)	
M9//	—	Without auto switch (with built-in magnet)

Auto switches cannot be mounted in the case of high temperature types (temperature specifications H0). The standard lead wire length is 0.5 m. For 3 m, "L" is added at the end of the part number. Ex.) -M9NL

Part nos. for seal material replacement and leakage specification

Symbol	Replacement part ^{Note 2)}	Leakage Pa·m ³ /s or less ^{Note 1)}		
		Internal (2) (4) (5) ^{Note 2)}	External (3) ^{Note 2)}	
Nil	—	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)	
A	2, 3, 4, 5	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹	
B	2, 4, 5	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)	
C	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹	

Note 1) Values at ambient temperatures, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on the page 46 for changed part. Number indicates parts number of "Construction" accordingly.

To order something else "Nil" (standard), list the symbols starting with "X", followed by each symbol for "seal material" and then "changed parts" at last.

Ex.) XMD-25-M9NA-XN1A