

Suction Cup/With Non-slip Feature

Bowl Shape

Ø 32, Ø 40, Ø 50, Ø 63, Ø 80, Ø 100

Bowl Bellows Shape

Ø 32, Ø 40, Ø 50, Ø 63, Ø 80, Ø 100

Oval Flat Shape

16 x 50, 30 x 90, 40 x 80, 50 x 100

Oval Bellows Shape

30 x 60, 40 x 80, 55 x 110

RoHS

Longer life (More than twice that of urethane cups)

Cup material: **FS61** (Fluoro-based rubber) with excellent abrasion resistance

Reduced number of cup replacements

Non-slip special ribs

Diagonal ribs are radially arranged to secure the gripping force in all directions.

- Prevents workpiece slippage
- Secure adsorbing and transferring are possible.

Bowl shape with excellent flexibility

Curved workpieces can also be adsorbed.

Horizontal holding force: 387 N (Cup diameter Ø 100)*1



Suitable for high-temperature workpieces (200 °C)*1

*1 For details, refer to the specifications on pages 5, 12, and 20.



Suitable for workpieces with oil film

As oil is ejected to the grooves between special ribs, the lateral slipping of workpiece can be suppressed even on a steel plate with oil film.

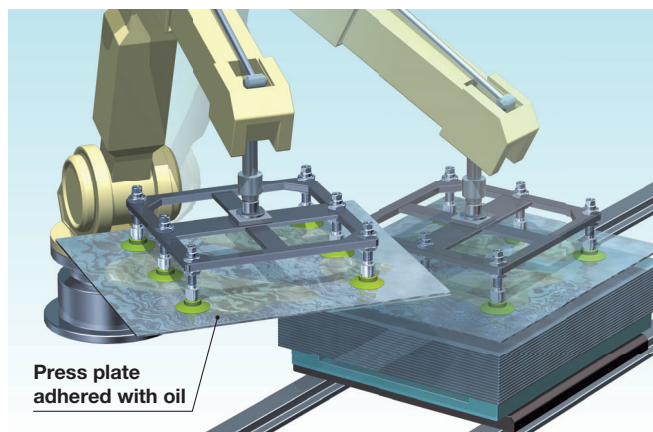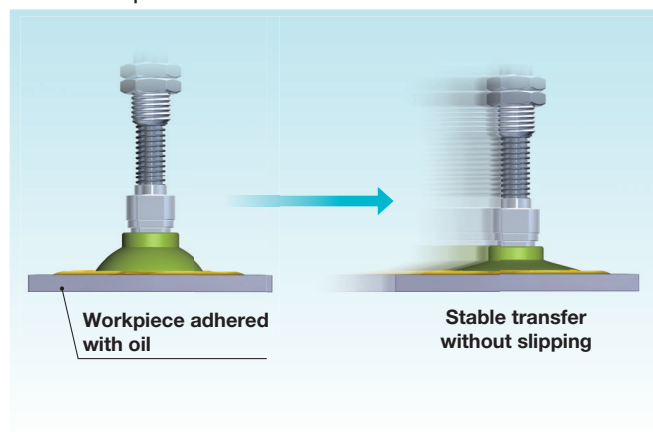


ZP3M Series




CAT.EUS100-147Ca-UK

Suction Cup/With Non-slip Feature **ZP3M Series**

Mesh filter (Option)

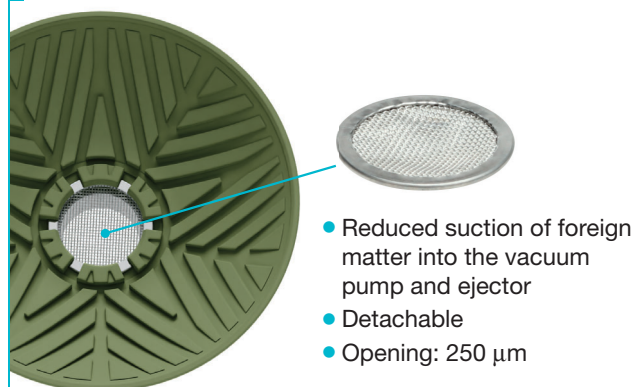


Insert-molded cup

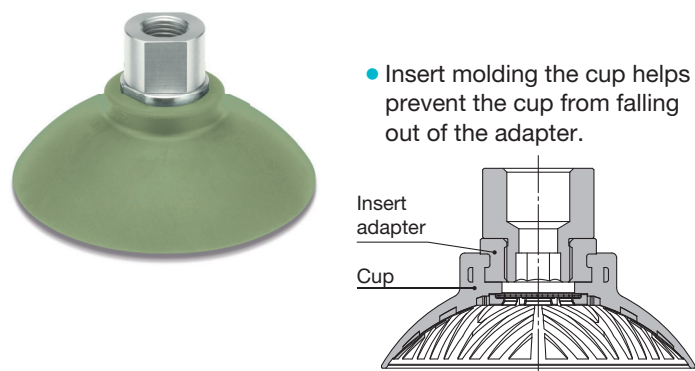

Mounting

① Mounting with a hexagon wrench
(Adapter (Male thread/Female thread))



② Mounting with a standard wrench
(Adapter (Male thread/Female thread))



③ Square adapter mounting



④ Plate mounting




Bowl bellows shape

Discharge time reduced by max. **40 %**
(horizontal transfer during adsorption)


Transfer conditions

Cup diameter: $\varnothing 50$, Workpiece mass: 1.3 kg,
Supply pressure: -85 kPa , Acceleration/Deceleration: 5 [G]


ZP3M (Bowl bellows shape)

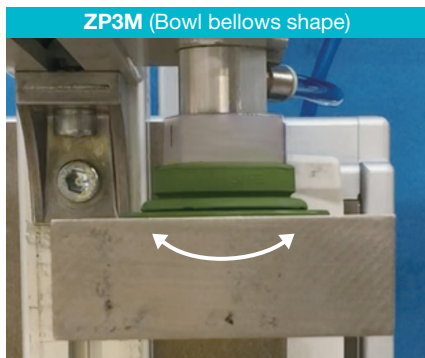

ZP3E (Bellows shape)

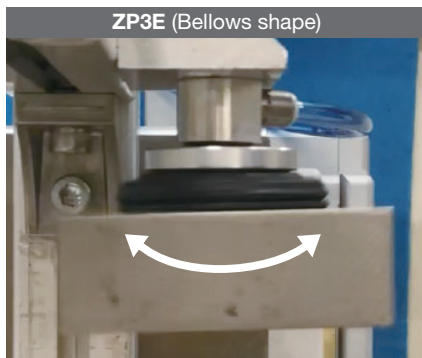

Relationship between the amplitude and time

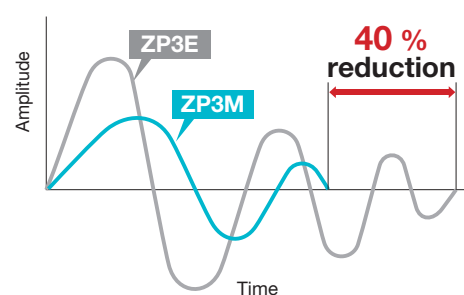


Deflection Small Discharge time **0.18 s** **Deflection Large** Discharge time **0.30 s**

Anti-stick grooves

Anti-stick grooves/Improved durability


The anti-stick grooves on the circumference prevent the bellows from sticking during suction. This reduces returning failure after the workpiece is released.




The bowl shape can handle curved workpieces.

The cup follows the workpiece shape, making stable adsorption possible.

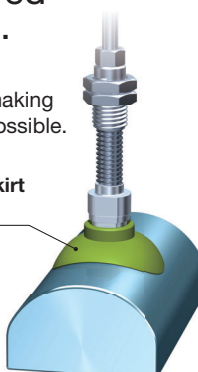


Bowl-shape skirt with flexibility

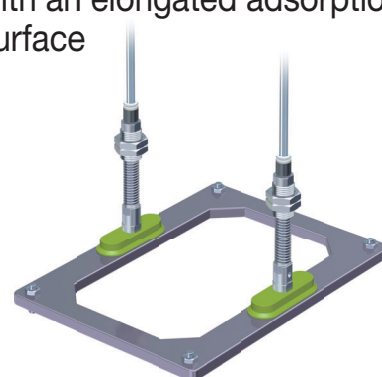




Compatible with workpieces with an elongated adsorption surface





Bowl Shape Variations

Type	Mounting	Buffer specifications	Vacuum inlet direction	Connection			Vacuum inlet		Page
				Type	Size		Size		
					Cup diameter: Ø 32 to Ø 50	Cup diameter: Ø 63 to Ø 100	Cup diameter: Ø 32 to Ø 50	Cup diameter: Ø 63 to Ø 100	
	Direct mounting	—	Vertical	Male thread	M10 x 1.0	M16 x 1.5	Use the connection thread.		
				Female thread	G1/4				
					M14 x 1.0				
					Square adapter	G1/4			
G3/8									
□31.8									
	Plate mounting	—	Vertical	Male thread	M14 x 1.0	M16 x 1.5	Rc1/8		
			Lateral				Female thread	M8 x 1.25	M12 x 1.75
	Plate mounting	JB	Vertical	Male thread	M18 x 1.5	M22 x 1.5	Rc1/8		
			Lateral				M5 x 0.8	Rc1/8	
		KB	Vertical	Male thread	M22 x 1.5	M26 x 1.5	Rc1/8		
			Lateral				M5 x 0.8	Rc1/8	



Bowl Bellows Shape Variations

Type	Mounting	Buffer specifications	Vacuum inlet direction	Connection			Vacuum inlet		Page
				Type	Size		Size		
					Cup diameter: Ø 32 to Ø 50	Cup diameter: Ø 63 to Ø 100	Cup diameter: Ø 32 to Ø 50	Cup diameter: Ø 63 to Ø 100	
With adapter 	Direct mounting	—	Vertical	Male thread	M10 x 1.0	M16 x 1.5	Use the connection thread.		12
				Female thread	G1/4				
					G1/4				
					G3/8				
		Square adapter	□31.8						
	Plate mounting	—	Vertical	Male thread	M14 x 1.0	M16 x 1.5	Rc1/8		
			Lateral				Female thread	M8 x 1.25	
With buffer VAC 	Plate mounting	JB	Vertical	Male thread	M18 x 1.5	M22 x 1.5	Rc1/8		
			Lateral				M5 x 0.8	Rc1/8	
		KB	Vertical	Male thread	M22 x 1.5	M26 x 1.5	Rc1/8		
			Lateral				M5 x 0.8	Rc1/8	

Oval Flat Shape Variations

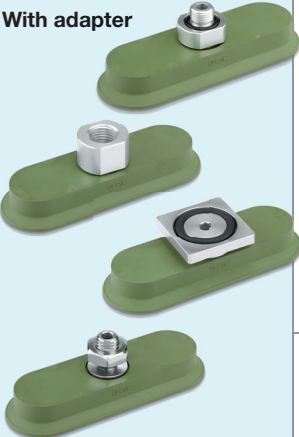
Type	Mounting	Vacuum inlet direction	Connection			Vacuum inlet			Page
			Type	Size		Type	Size		
				Cup size: 16 x 50, 30 x 90	Cup size: 40 x 80, 50 x 100		Cup size: 16 x 50, 30 x 90	Cup size: 40 x 80, 50 x 100	
With adapter 	Direct mounting	Vertical	Male thread	M10 x 1.0	M16 x 1.5	—	Use the connection thread.	20	
			Female thread	G1/4					
				G3/8					
	Plate mounting	Vertical	Square adapter	□31.8		Female thread	M5 x 0.8 Rc1/8		
			Male thread	M10 x 1.5					
				M14 x 1.5 G1/4					
With buffer 	Plate mounting	Vertical	Male thread	M22 x 1.5	M26 x 1.5	Female thread	Rc1/8		

Oval Bellows Shape Variations


Type	Mounting	Vacuum inlet direction	Connection			Vacuum inlet			Page
			Type	Size		Type	Size		
				Cup size: 30 x 60	Cup size: 40 x 80, 55 x 110		Cup size: 30 x 60	Cup size: 40 x 80, 55 x 110	
	Direct mounting	Vertical	Male thread	M10 x 1.0	M16 x 1.5	—	Use the connection thread.		25-1
			Female thread	G1/4					
				G3/8					
	Plate mounting	Vertical	Square adapter	□31.8		Female thread	M5 x 0.8 Rc1/8		
			Male thread	M10 x 1.5					
				M14 x 1.5 G1/4					
	Plate mounting	Vertical	Male thread	M22 x 1.5	M26 x 1.5	Female thread	Rc1/8		
		Lateral							

CONTENTS


Suction Cup/With Non-slip Feature *ZP3M Series*

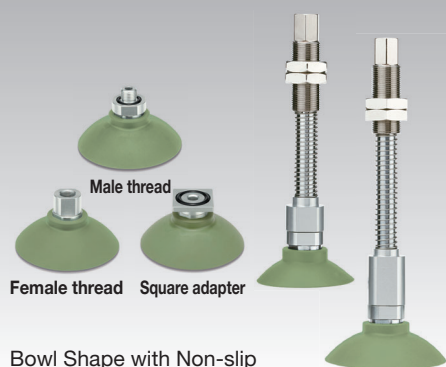


Bowl Shape with Non-slip Feature

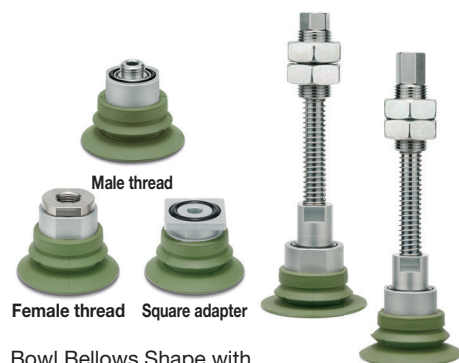

Bowl Bellows Shape with Non-slip Feature

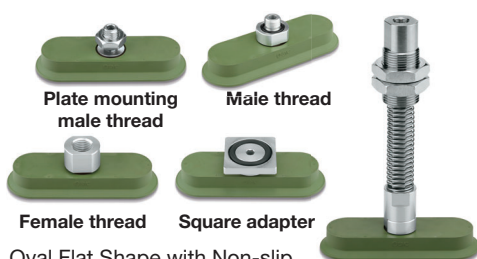

Oval Flat Shape with Non-slip Feature

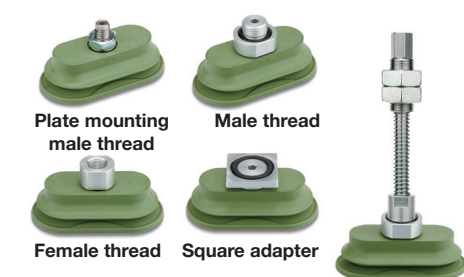

Oval Bellows Shape with Non-slip Feature

• Bowl Shape with Non-slip Feature

How to Order	p. 5
Specifications	p. 5
Dimensions/Models	p. 6
Construction	p. 10
Mounting Bracket Assembly	p. 10-1

• Bowl Bellows Shape with Non-slip Feature

How to Order	p. 12
Specifications	p. 12
Dimensions/Models	p. 13
Construction	p. 18
Mounting Bracket Assembly	p. 19

• Oval Flat Shape with Non-slip Feature

How to Order	p. 20
Specifications	p. 20
Dimensions/Models	p. 21
Construction	p. 24
Mounting Bracket Assembly	p. 25


• Oval Bellows Shape with Non-slip Feature

How to Order	p. 25-1
Specifications	p. 25-1
Dimensions/Models	p. 25-2
Construction	p. 25-5
Mounting Bracket Assembly	p. 25-6

Specific Product Precautions	p. 26
------------------------------------	-------

Suction Cup/ Bowl Shape with Non-slip Feature

ZP3M Series

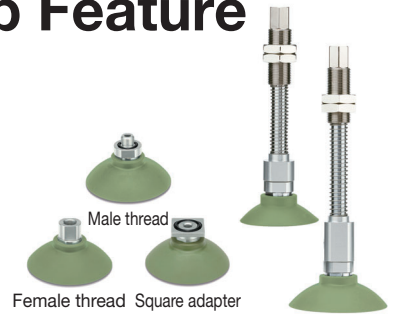

How to Order

With adapter

ZP3M - T 63 R FS

- A16 - B01 -

With buffer

ZP3M - T 63 R FS JB 30

Bowl shape

1 Vacuum inlet direction

T	Vertical
Y	Lateral

2 Cup diameter

32	Ø 32
40	Ø 40
50	Ø 50
63	Ø 63
80	Ø 80
100	Ø 100

3 Material

Symbol	Material	Colour
FS	FS61 (Fluoro-based rubber)	Green

4 Buffer specifications

JB	Rotating, With bushing
KB	Non-rotating, With bushing

5 Buffer stroke

Stroke [mm]	Cup size
10	All sizes
30	
50	

6 Connection thread / 7 Vacuum inlet

Vacuum inlet direction	Mounting	⑥ Connection thread			⑦ Vacuum inlet			Cup diameter [mm]		
		Type	Symbol	Connection thread	Symbol	Type	Connection thread	Ø 32 to Ø 50	Ø 63 to Ø 100	
T: Vertical	Direct mounting	Male thread	A10	M10 x 1.0	—	Use the connection thread.		●	—	
			A16	M16 x 1.5				—	●	
			AG02	G1/4				●	●	
		Female thread	B14	M14 x 1.0				●	●	
			BG02	G1/4				●	●	
			BG03	G3/8				●	●	
		Square adapter	S32	□31.8				●	●	
Y: Lateral	Plate mounting	Male thread	A14	M14 x 1.0	B01	Female thread	Rc1/8	●	—	
			A16	M16 x 1.5				—	●	
		Male thread	A14	M14 x 1.0	B5			M5 x 0.8	●	—
			A16	M16 x 1.5	B01			Rc1/8	—	●
		Female thread	B8	M8 x 1.25	B5			M5 x 0.8	●	—
			B12	M12 x 1.75	B01			Rc1/8	—	●

* The direct mounting type adapter and cup are adhered to each other and cannot be disassembled.

Specifications

Cup Material

Material	FS61 (Fluoro-based rubber)
Colour of rubber	Green
Rubber hardness (Shore A: ±5°)	65
Operating temperature range*1	0 °C to 200 °C
Ambient temperature	0 °C to 150 °C

*1 Surface temperature of the workpiece to be adsorbed

Adapter Specifications

Connection	Male thread		Female thread	Square adapter
Cup diameter	Ø 32 to Ø 50	Ø 63 to Ø 100	Ø 32 to Ø 100	Ø 32 to Ø 100
Size	M10 x 1.0 G1/4	M16 x 1.5 G1/4	M14 x 1.0 G1/4 G3/8	□31.8
Vacuum inlet	Use the connection thread and type.			

Buffer Specifications

Non-rotating specification	Cup diameter		Ø 32 to Ø 50			Ø 63 to Ø 100		
	Stroke [mm]		10	30	50	10	30	50
JB Rotating, With bushing	Connection thread		M18 x 1.5			M22 x 1.5		
	Spring reactive force [N]	At 0 stroke	5.0			10.0		
		At full stroke	6.5	8.5	10.5	11.5	13.5	15.5
KB Non-rotating, With bushing	Connection thread		M22 x 1.5			M26 x 1.5		
	Spring reactive force [N]	At 0 stroke	5.0			10.0		
		At full stroke	7.0	9.0	11.0	13.5	15.5	17.5

Cup Specifications

Part no.	Horizontal holding force [N]*1		Minimum curvature radius for adsorption [mm]*2
	Without oil	With oil	
ZP3M-T32RFS	47	21	14
ZP3M-T40RFS	81	53	15
ZP3M-T50RFS	111	74	20
ZP3M-T63RFS	170	108	27.5
ZP3M-T80RFS	231	178	36
ZP3M-T100RFS	387	224	46

*1 These are actual measurement values when flat workpieces were adsorbed at a setting vacuum pressure of -60 kPa; however, they are not guaranteed values. (According to SMC's tests)
The values vary depending on the conditions (shape, surface roughness, oil type, oil amount, and other conditions) of the workpiece.

*2 These are actual measurement values when cylindrical workpieces were adsorbed at a setting vacuum pressure of -85 kPa; however, they are not guaranteed values. (According to SMC's tests)

Mesh Filter Specifications



Mesh filter	60
Opening	250 µm

Buffer assembly part no. p. 11

* The mounting nut is shipped together with the product (unassembled).

Dimensions/Models

With adapter Direct mounting type (Male thread)

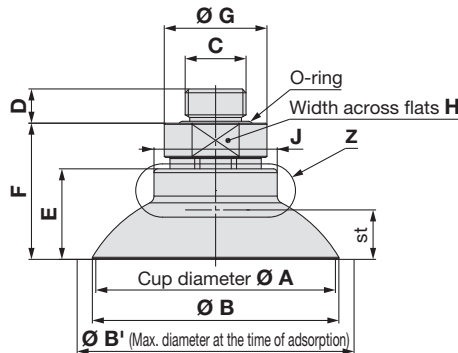

ZP3M - T **63** **R** **FS** - **A16** - **MF**

1

2

3

4





		Cup diameter [mm]	
		Ø 32 to Ø 50	Ø 63 to Ø 100
A10	M10 x 1.0	○	—
A16	M16 x 1.5	—	○
AG02	G1/4	○	○

Model						A	B	B ^{*2}	C	D	E	F	G	H	J	K	st ^{*2}	Min. opening hole size of the adapter	Weight [g]
Vacuum inlet direction	1 Cup diameter	Form	2 Material *1	3 Connection thread	4 Mesh filter														
ZP3M	T	R	FS	A10	MF	32	33.2	38.3	M10 x 1.0	7	14.3	23.8	20	17	20.4	5	6	Ø 5	16.1
									G1/4	6.5		24.1	25	22				Ø 5	24.5
						40	41.3	47.8	M10 x 1.0	7	17.8	27.3	20	17	21	5	8.4	Ø 5	17.3
									G1/4	6.5		27.6	25	22				Ø 5	25.7
						50	51.6	58.6	M10 x 1.0	7	19.4	28.9	20	17	21.4	5	10.4	Ø 5	21.1
									G1/4	6.5		29.2	25	22				Ø 5	29.5
						63.5	64.8	73.3	M16 x 1.5	9	24.1	36.1	27	24	32.4	8	12	Ø 8	47.1
									G1/4	6.5		35.6						Ø 6	46.7
						80.6	81.8	92.2	M16 x 1.5	9	27.1	39.1	27	24	33	8	14.4	Ø 8	61.3
									G1/4	6.5		38.6						Ø 6	60.9
						100	102.2	113.4	M16 x 1.5	9	33.9	45.9	27	24	34.4	8	20.1	Ø 8	96.7
									G1/4	6.5		45.4						Ø 8	100.4

*1 FS: FS61 (Fluoro-based rubber)

*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

With adapter Direct mounting type (Female thread)

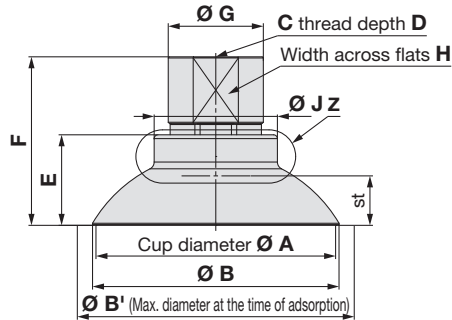

ZP3M - T **63** **R** **FS** - **B14** - **MF**

1

2

3

4



		Cup diameter [mm]	
		Ø 32 to Ø 100	
B14	M14 x 1.0	○	
BG02	G1/4	○	
BG03	G3/8	○	

Model						A	B	B ^{*2}	C	D	E	F	G	H	J	K	st ^{*2}	Min. opening hole size of the adapter	Weight [g]
Vacuum inlet direction	1 Cup diameter	Form	2 Material *1	3 Connection thread	4 Mesh filter														
ZP3M	T	R	FS	B14	MF	32	33.2	38.3	M14 x 1.0	8	14.3	31.6	23	19	20.4	5	6	Ø 5	20.9
									G1/4	11		33.6	20	17				Ø 5	19.1
									G3/8	11.4		34.1	26	22				Ø 5	26.3
						40	41.3	47.8	M14 x 1.0	8	17.8	35.1	23	19	21	5	8.4	Ø 5	22.1
									G1/4	11		37.1	20	17				Ø 5	20.3
									G3/8	11.4		37.6	26	22				Ø 5	27.5
						50	51.6	58.6	M14 x 1.0	8	19.4	36.7	23	19	21.4	5	10.4	Ø 5	25.9
									G1/4	11		38.7	20	17				Ø 5	24.1
									G3/8	11.4		39.2	26	22				Ø 5	31.3
						63.5	64.8	73.3	M14 x 1.0	8	24.1	41.6	23	19	32.4	8	12	Ø 8	42.2
									G1/4	11		42.6	22					Ø 8	42.5
									G3/8	11.4		44.6	25	22				Ø 8	46.4
						80.6	81.8	92.2	M14 x 1.0	8	27.1	44.6	23	19	33	8	14.4	Ø 8	56.4
									G1/4	11		45.6	22					Ø 8	56.7
									G3/8	11.4		47.6	25	22				Ø 8	60.5
						100	102.2	113.4	M14 x 1.0	8	33.9	51.4	23	19	34.4	8	20.1	Ø 8	92.3
									G1/4	11		52.4	22					Ø 8	92.6
									G3/8	11.4		54.4	25	22				Ø 8	96.5

*1 FS: FS61 (Fluoro-based rubber)



*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

Dimensions/Models

With adapter Plate mounting type (Male thread/Vacuum inlet: Lateral)



ZP3M - Y 63 R FS - A16 - B01 - MF

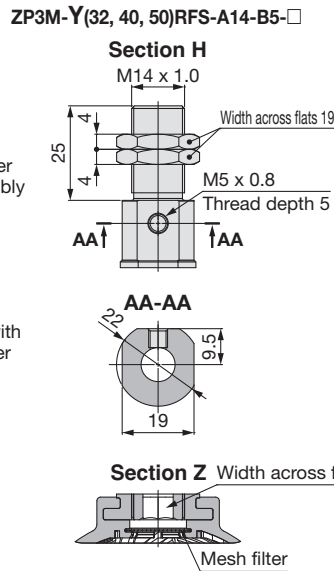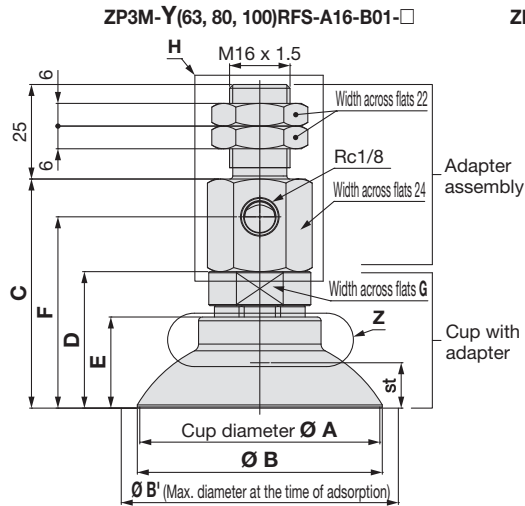

				Cup diameter [mm]	
				Ø 32 to Ø 50	Ø 63 to Ø 100
A14	M14 x 1.0	B5	M5 x 0.8	○	—
A16	M16 x 1.5	B01	Rc1/8	—	○

[illegible]

*1 FS: FS61 (Fluoro-based rubber)

*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.




ZP3M Series

Dimensions/Models

With adapter Plate mounting type (Female thread/Vacuum inlet: Lateral)



ZP3M - Y **63** **R** **FS** - **B12** - **B01** - **MF**

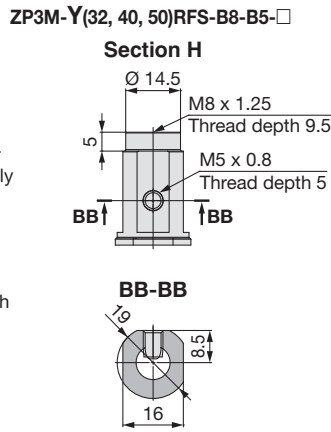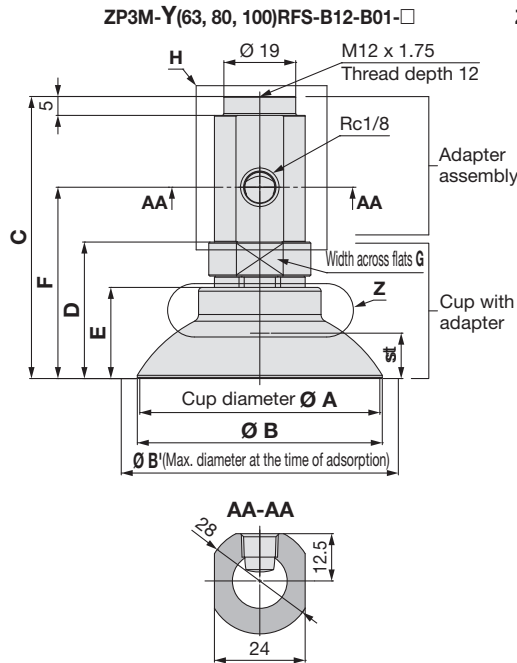

				Cup diameter [mm]	
				Ø 32 to Ø 50	Ø 63 to Ø 100
B8	M8 x 1.25	B5	M5 x 0.8	○	—
B12	M12 x 1.75	B01	Rc1/8	—	○


Model								A	B	B ^{*±2}	C	D	E	F	G	J	st ^{*2}	Min. opening hole size of the adapter	Weight [g]
Vacuum inlet direction	① Cup diameter	Form	② Material *1	③ Connection thread	④ Vacuum inlet	⑤ Mesh filter													
ZP3M	Y	32	R	FS	B8	B5	— MF	32	33.2	38.3	51.8	23.8	14.3	33.7	17	5	6	Ø 5	28.6
		40						41.3	47.8	55.3	27.3	17.8	37.2	8.4			30.3		
		50						51.6	58.6	56.9	28.9	19.4	38.8	10.4			33.4		
		63			B12	B01		63.5	64.8	73.3	74.6	36.1	24.1	50.6	24	8	12	Ø 8	84.8
		80						80.6	81.8	92.2	77.6	39.1	27.1	53.6			14.4		111.9
		100						100	102.2	113.4	84.4	45.9	33.9	60.4			20.1		114.2

*1 FS: FS61 (Fluoro-based rubber)

*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

Dimensions/Models

With buffer Plate mounting type (Vacuum inlet direction: Vertical)

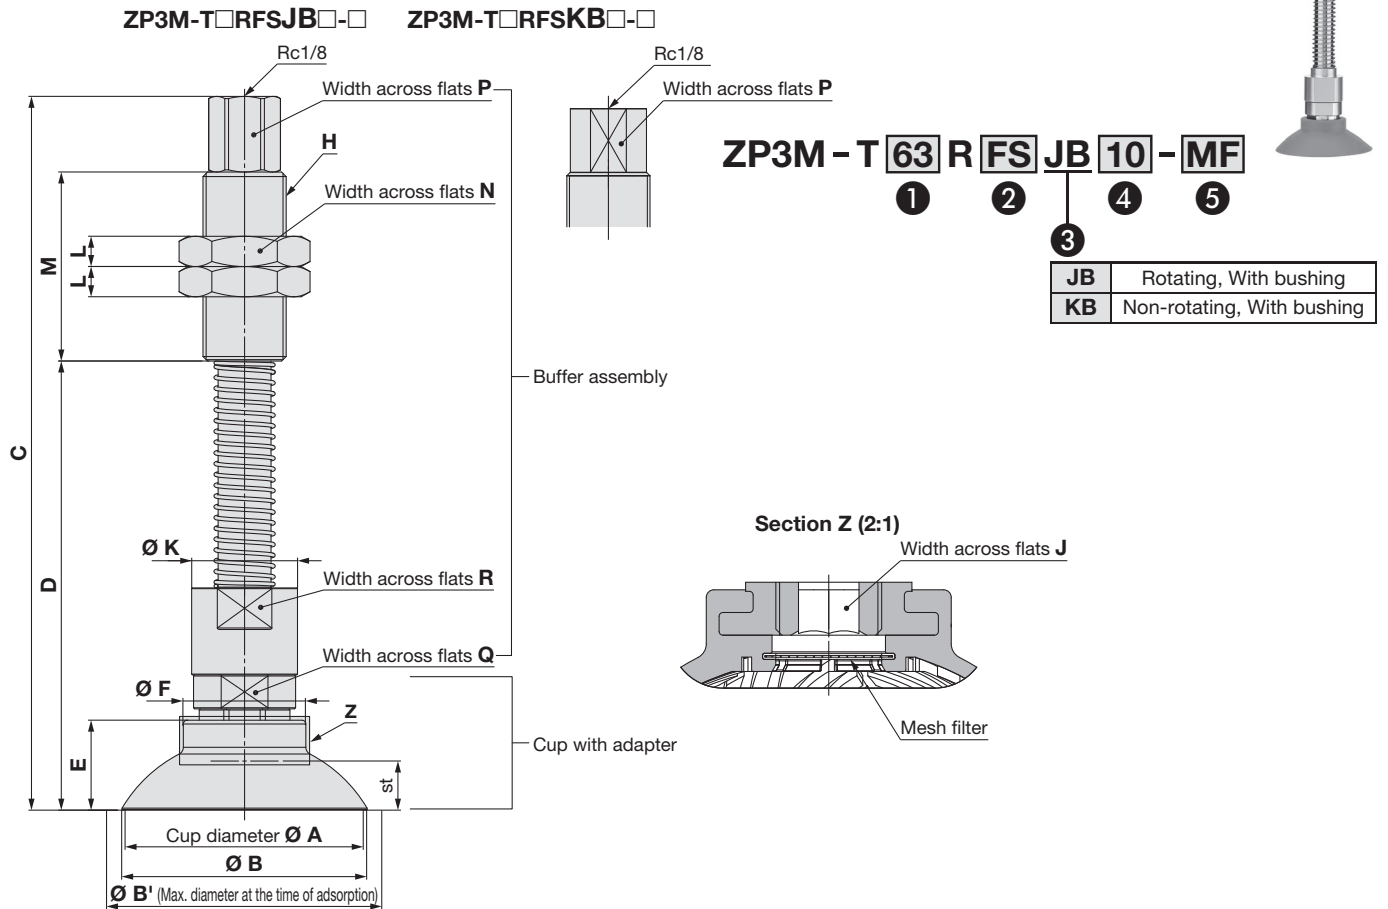

Model							A	B	B*2	C	D	E	F	H		J	K	L	M	N	P	Q	R	st*2	Min. opening hole size of the adapter	Weight [g]																																																	
Vacuum inlet direction	① Cup diameter	Form	② Material *1	③ Buffer spec.	④ Buffer stroke	⑤ Mesh filter								JB	KB			JB/KB		JB/KB	JB/KB																																																						
ZP3M	T	R	FS	JB KB	10	— MF	32	33.2	38.3	123.3	71.3	14.3	20.4	M18 x 1.5	M22 x 1.5	5	19	11	35	27	30	14	18	17	16	8.4	Ø 3	205	245.2																																														
					30					148.3	96.3																	219.5	271.2																																														
					50					168.3	116.3																	231	291.1																																														
					10					126.8	74.8																	206.2	246.9																																														
					30		40	41.3	47.8	151.8	99.8	17.8	21															M18 x 1.5	M22 x 1.5	5	19	11	35	27	30	14	18	17	16	8.4	Ø 3	220.7	272.9																																
					50					171.8	119.8																															232.2	292.8																																
					10					128.4	76.4																															210	250.0																																
					30					153.4	101.4																															224.5	276.0																																
					50					173.4	121.4																															236	295.9																																
					10					164.1	94.1			M22 x 1.5	M26 x 1.5	8	28	8	50	30	32	17	21	24	24	14.4	Ø 4															355	389.3																																
					30		63.5	64.8	73.3	189.1	119.1	24.1	32.4																													383.8	425.4																																
					50					209.1	139.1																															406.7	453.1																																
					10					167.1	97.1																															369.2	416.4																																
					30					80.6	81.8	92.2																192.1	122.1	27.1	33	M22 x 1.5	M26 x 1.5	8	28	8	50	30	32	17	21	24	24	14.4	Ø 4	397.9	452.5																												
					50																							212.1	142.1																	420.9	480.2																												
					10		173.9	103.9	404.6				418.7																																																														
					100		102.2	113.4	198.9	128.9	33.9	34.4	M22 x 1.5															M26 x 1.5	8	28	8															50	30	32	17	21	24	24	14.4	Ø 4	433.4	454.8																			
									50	218.9																																													148.9	456.3	482.4																		
									10	100																102.2																													113.4	198.9	128.9	33.9	34.4	M22 x 1.5	M26 x 1.5	8	28	8	50	30	32	17	21	24	24	14.4	Ø 4	433.4	454.8
									50																																																																	218.9	148.9


*1 FS: FS61 (Fluoro-based rubber)

*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

ZP3M Series

Dimensions/Models

With buffer Plate mounting type (Vacuum inlet direction: Lateral)

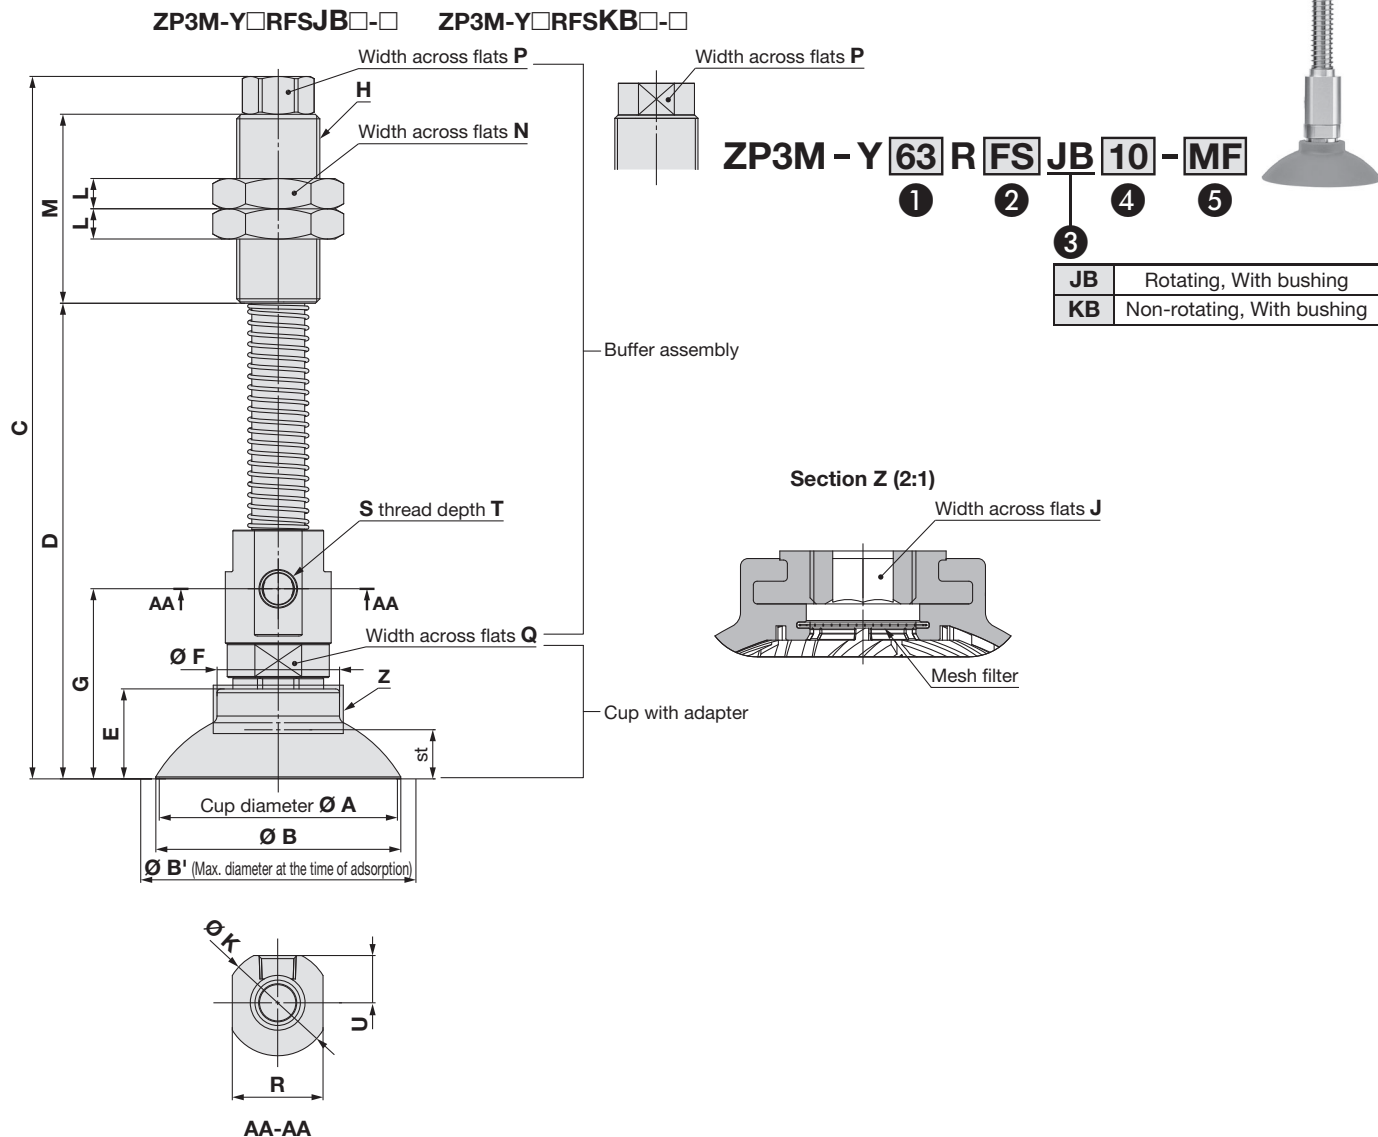[illegible]

*1 FS: FS61 (Fluoro-based rubber)

*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

Construction

With adapter

Plate mounting type (Male thread/Vacuum inlet: Vertical)

ZP3M-T□RFS-□-□-□





Plate mounting type (Male thread/Vacuum inlet: Lateral)

ZP3M-Y□RFS-□-□-□



Component Parts


No.	Description	Material	Note
1	Cup	FS61 (Fluoro-based rubber)	—
2	Insert adapter	Aluminum alloy	—
3	Adapter	Aluminum alloy (Anodized)	—
4	O-ring	FKM	—
5	Mesh filter	Stainless steel	—
6	Adapter	Aluminum alloy (Anodized)	Cup diameter: For Ø 32 to Ø 50
		Brass (Electroless nickel plating)	Cup diameter: For Ø 63 to Ø 100
7	Nut	Steel (Zinc chromated)	Cup diameter: For Ø 32 to Ø 50 M14 x 1
		Special steel (Zinc chromated)	Cup diameter: For Ø 63 to Ø 100 M16 x 1.5

* The parts 1, 2, and 3 are adhered to each other and cannot be disassembled.

With adapter

Plate mounting type (Female thread/Vacuum inlet: Lateral)

ZP3M-Y□RFS-□-□-□




Component Parts

No.	Description	Material
1	Cup	FS61 (Fluoro-based rubber)
2	Insert adapter	Aluminum alloy
3	Adapter	Aluminum alloy (Anodized)
4	O-ring	FKM
5	Mesh filter	Stainless steel
6	Adapter	Aluminum alloy (Anodized)


* The parts 1, 2, and 3 are adhered to each other and cannot be disassembled.

With buffer

ZP3M-T□RFS□(JB/KB)□-□

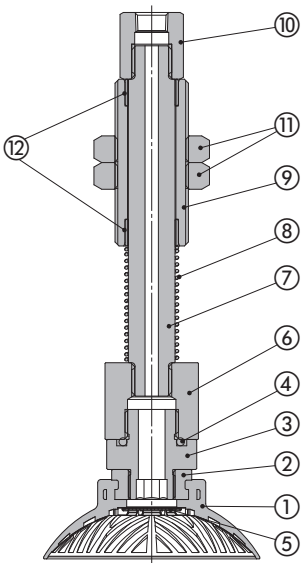

ZP3M-Y□RFS□(JB/KB)□-□

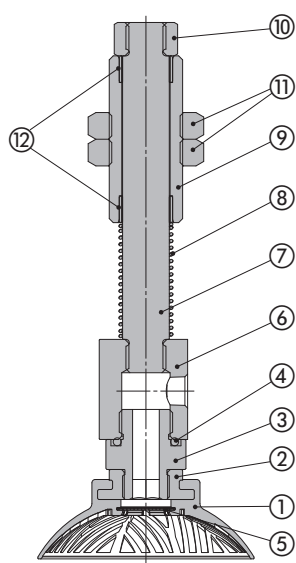

Component Parts

No.	Description	Material	Note
1	Cup	FS61 (Fluoro-based rubber)	—
2	Insert adapter	Aluminum alloy	—
3	Adapter	Aluminum alloy (Anodized)	—
4	O-ring	FKM	—
5	Mesh filter	Stainless steel	—
6	Adapter	Aluminum alloy (Anodized)	—
7	Piston rod	Structural steel (Hard chrome plating)	ZP3M-(T,Y)□RFSJB□-□
		Stainless steel	ZP3M-(T,Y)□RFSKB□-□
8	Return spring	Stainless steel	—
9	Buffer body	Brass (Electroless nickel plating)	—
10	Buffer adapter	Brass (Electroless nickel plating)	—
11	Nut	Steel (Zinc chromated)	M18 x 1.5
		Structural steel (Nickel plating)	M22 x 1.5
		Structural carbon steel (Nickel plating)	M26 x 1.5
12	Bushing	—	—

* The parts 1, 2, and 3 are adhered to each other and cannot be disassembled.

Replacement Parts: Mesh Filter Unit

Part no.	Cup diameter	
	Ø 32 to Ø 50	Ø 63 to Ø 100
ZPMF-60-D13	●	—
ZPMF-60-D18	—	●



ZP3M Series





Mounting Bracket Assembly

With adapter Plate mounting type (Male thread/Vacuum inlet: Vertical)

Product part no.	<p style="text-align: center;">ZP3M - T ① R FS - ② - ③ - □</p> <p style="text-align: center;"> T: Vertical vacuum inlet Cup diameter Cup material Mesh filter Vacuum inlet Connection thread </p>	
Component parts	<p>ZP3M-T(32, 40, 50)RFS-A14-B01-□</p> <p>③ Mounting nut</p> <p>① Adapter assembly (Vacuum inlet: Vertical) (With mounting nut)</p> <p>② Cup with adapter</p>	<p>ZP3M-T(63, 80, 100)RFS-A16-B01-□</p> <p>③ Mounting nut</p> <p>① Adapter assembly (Vacuum inlet: Vertical) (With mounting nut)</p> <p>② Cup with adapter</p>

				Symbol			Symbol	① Cup diameter					
								32	40	50	63	80	100
① Adapter assembly	② Connection thread	Male thread	M14 x 1.0	A14	③ Vacuum inlet	Rc1/8	B01	ZP3EA-TAL14			—		
			M16 x 1.5	A16				—			ZP3EA-TAL16		
② Cup with adapter			M10 x 1.0				ZP3M-T(32/40/50)RFS-A10-□			—			
			M16 x 1.5				—			ZP3M-T(63/80/100)RFS-A16-□			
③ Mounting nut (Single unit)			M14 x 1.0				ZPNA-M14			—			
			M16 x 1.5				—			RBQ16J			

With adapter Plate mounting type (Male thread/Vacuum inlet: Lateral)
(Female thread/Vacuum inlet: Lateral)

Product part no.	<p>ZP3M - Y ① R FS - ② - ③ - □</p> <p>Y: Lateral vacuum inlet Cup diameter Cup material RFS ②: Connection thread ③: Vacuum inlet □: Mesh filter</p>	
Component parts	<p>ZP3M-Y(32, 40, 50)RFS-A14-B5-□</p> <p>③ Mounting nut</p>  <p>① Adapter assembly (Vacuum inlet: Lateral) (With mounting nut)</p> <p>② Cup with adapter</p>	<p>ZP3M-Y(63, 80, 100)RFS-A16-B01-□</p> <p>③ Mounting nut</p>  <p>① Adapter assembly (Vacuum inlet: Lateral) (With mounting nut)</p> <p>② Cup with adapter</p>
	<p>ZP3M-Y(32, 40, 50)RFS-B8-B5-□</p>  <p>① Adapter assembly (Vacuum inlet: Lateral)</p> <p>② Cup with adapter</p>	<p>ZP3M-Y(63, 80, 100)RFS-B12-B01-□</p>  <p>① Adapter assembly (Vacuum inlet: Lateral)</p> <p>② Cup with adapter</p>

				Symbol			Symbol	① Cup diameter					
								32	40	50	63	80	100
① Adapter assembly	② Connection thread	Male thread	M14 x 1.0	A14	③ Vacuum inlet	M5 x 0.8	B5	ZP3EA-YAL14			—		
			M16 x 1.5	A16		Rc1/8	B01	—			ZP3EA-YAL16		
		Female thread	M8 x 1.25	B8		M5 x 0.8	B5	ZP3EA-YB8			—		
			M12 x 1.75	B12		Rc1/8	B01	—			ZP3EA-YB12		
② Cup with adapter			M10 x 1.0					ZP3M-T(32/40/50)RFS-A10-□			—		
			M16 x 1.5					—			ZP3M-T(63/80/100)RFS-A16-□		
③ Mounting nut (Single unit)			M14 x 1.0					ZPNA-M14			—		
			M16 x 1.5					—			RBQ16J		

ZP3M Series Mounting Bracket Assembly

With buffer

Product part no.	<p>ZP3M - (T/Y) ① R FS ② (JB/KB) ③ - □</p> <p>T: Vertical vacuum inlet Y: Lateral vacuum inlet</p> <p>Cup diameter</p> <p>Cup material</p> <p>JB: Rotating, With bushing KB: Non-rotating, With bushing</p> <p>Mesh filter</p> <p>Buffer stroke</p>	
Component parts	<p>ZP3M-T□RFS(JB/KB)□-□</p> <p>③ Mounting nut</p> <p>① Buffer assembly (Vacuum inlet: Vertical) (With mounting nut)</p> <p>② Cup with adapter</p>	<p>ZP3M-Y□RFS(JB/KB)□-□</p> <p>③ Mounting nut</p> <p>① Buffer assembly (Vacuum inlet: Lateral) (With mounting nut)</p> <p>② Cup with adapter</p>

		Symbol	① Cup diameter						
			32	40	50	63	80	100	
① Buffer assembly (With mounting nut)	③ Buffer stroke	10	ZP3EB-(T/Y)1(JB/KB)10			ZP3EB-(T/Y)2(JB/KB)10			
		30	ZP3EB-(T/Y)1(JB/KB)30			ZP3EB-(T/Y)2(JB/KB)30			
		50	ZP3EB-(T/Y)1(JB/KB)50			ZP3EB-(T/Y)2(JB/KB)50			
② Cup with adapter		M10 x 1.0	ZP3M-T(32/40/50)RFS-A10-□			—			
		M16 x 1.5	—			ZP3M-T(63/80/100)RFS-A16-□			
③ Mounting nut (Single unit)	② Buffer specifications	JB	M18 x 1.5	NT-05			—		
			M22 x 1.5	—			ZPNA-M22		
		KB	M22 x 1.5	ZPNA-M22			—		
			M26 x 1.5	—			ZPNA-M26		


[Buffer assembly part number example]

Product part no. **ZP3M - T63RFS JB 10**

Buffer assembly **ZP3EB - T2 JB 10**

② Buffer stroke

Suction Cup/ Bowl Bellows Shape with Non-slip Feature **ZP3M Series**

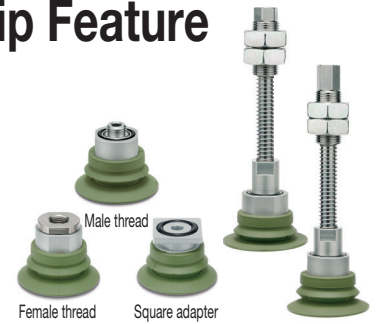

How to Order

With adapter ZP3M - T 63 RB FS - A16 - B01 -
With buffer ZP3M - T 63 RB FS JB 30

1 2 3 4 5 6 7 8

Bowl bellows shape

1 Vacuum inlet direction

T	Vertical
Y	Lateral

2 Cup diameter

32	Ø 32
40	Ø 40
50	Ø 50
63	Ø 63
80	Ø 80
100	Ø 100

3 Material

Symbol	Material	Colour
FS	FS61 (Fluoro-based rubber)	Green

4 Buffer specifications

JB	Rotating, With bushing
KB	Non-rotating, With bushing

5 Buffer stroke

Stroke [mm]	Cup size
10	All sizes
30	
50	

6 Connection thread / 7 Vacuum inlet

Vacuum inlet direction	Mounting	6 Connection thread			7 Vacuum inlet			Cup diameter [mm]	
		Type	Symbol	Connection thread	Symbol	Type	Connection thread	Ø 32 to Ø 50	Ø 63 to Ø 100
T: Vertical	Direct mounting	Male thread	A10	M10 x 1.0	-	Use the connection thread.		●	-
			A16	M16 x 1.5				-	●
			AG02	G1/4				●	●
		Female thread	B14	M14 x 1.0				●	●
			BG02	G1/4				●	●
			BG03	G3/8				●	●
		Square adapter	S32	□31.8				●	●
Y: Lateral	Plate mounting	Male thread	A14	M14 x 1.0	B01	Female thread	Rc1/8	●	-
			A16	M16 x 1.5				-	●
		Male thread	A14	M14 x 1.0		B5	M5 x 0.8	●	-
			A16	M16 x 1.5			Rc1/8	-	●
		Female thread	B8	M8 x 1.25		B5	M5 x 0.8	●	-
			B12	M12 x 1.75			Rc1/8	-	●

* The direct mounting type adapter and cup are adhered to each other and cannot be disassembled.

Specifications

Cup Material

Material	FS61 (Fluoro-based rubber)
Colour of rubber	Green
Rubber hardness (Shore A: ±5°)	65
Operating temperature range*1	0 °C to 200 °C
Ambient temperature	0 °C to 150 °C

*1 Surface temperature of the workpiece to be adsorbed

Adapter Specifications

Connection	Male thread	Female thread	Square adapter
Cup diameter	Ø 32 to Ø 50	Ø 63 to Ø 100	Ø 32 to Ø 100
Size	M10 x 1.0 G1/4	M16 x 1.5 G1/4	G1/4 G3/8
Vacuum inlet	Use the connection thread and type.		

Buffer Specifications

Non-rotating specification	Cup diameter		Ø 32 to Ø 50			Ø 63 to Ø 100		
	Stroke [mm]		10	30	50	10	30	50
JB Rotating, With bushing	Connection thread		M18 x 1.5			M22 x 1.5		
	Spring reactive force [N]	At 0 stroke	5.0			10.0		
		At full stroke	6.5	8.5	10.5	11.5	13.5	15.5
KB Non-rotating, With bushing	Connection thread		M22 x 1.5			M26 x 1.5		
	Spring reactive force [N]	At 0 stroke	5.0			10.0		
		At full stroke	7.0	9.0	11.0	13.5	15.5	17.5

Cup Specifications

Part no.	Horizontal holding force [N]*1		Minimum curvature radius for adsorption [mm]*2
	Without oil	With oil	
ZP3M-T32RBFS	35.8	18.0	12.5
ZP3M-T40RBFS	37.5	25.2	17.5
ZP3M-T50RBFS	63	46	27.5
ZP3M-T63RBFS	86	59	27.5
ZP3M-T80RBFS	122	91	34
ZP3M-T100RBFS	184.1	149.1	60

*1 These are actual measurement values when flat workpieces were adsorbed at a setting vacuum pressure of -60 kPa; however, they are not guaranteed values. (According to SMC's tests)

The values vary depending on the conditions (shape, surface roughness, oil type, oil amount, and other conditions) of the workpiece.

*2 These are actual measurement values when cylindrical workpieces were adsorbed at a setting vacuum pressure of -85 kPa; however, they are not guaranteed values. (According to SMC's tests)

Mesh Filter Specifications

Mesh filter	60
Opening	250 µm


Buffer assembly part no. p. 19

* The mounting nut is shipped together with the product (unassembled).

ZP3M Series

Dimensions/Models

With adapter Direct mounting type (Male thread)

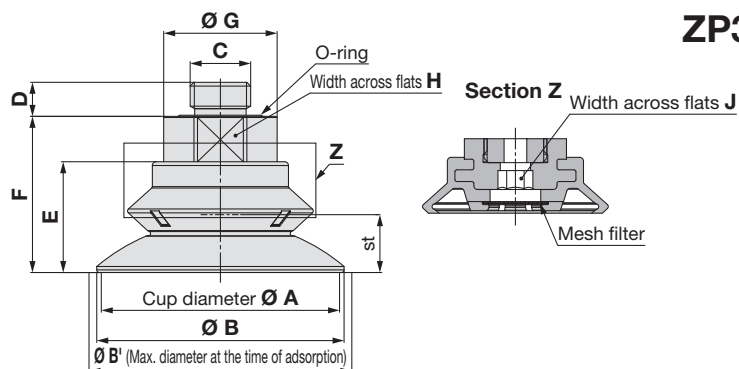

ZP3M - T 63 RB FS - A16 - MF

1

2

4



		Cup diameter [mm]	
		Ø 32 to Ø 50	Ø 63 to Ø 100
A10	M10 x 1.0	○	—
A16	M16 x 1.5	—	○
AG02	G1/4	○	○

Model							A	B	B'±2	C	D	E	F	G	H	J	st*2	Min. opening hole size of the adapter	Weight [g]
Vacuum inlet direction	1 Cup diameter	Form	2 Material *1	3 Connection thread	4 Mesh filter														
ZP3M	T	RB	FS	A10	— MF		32	34	34.9	M10 x 1.0	7	19	28	22	19	5	9	Ø 5	29.9
				AG02						G1/4	6.5						10	Ø 6	31.7
				A10			40	41.8	43.9	M10 x 1.0	7	19.8	28.8					Ø 5	31.4
				AG02						G1/4	6.5							Ø 6	33.1
				A10			50	52.4	55.6	M10 x 1.0	7	24.9	36.9	30	27	8	11.8	Ø 5	68.6
				AG02						G1/4	6.5								70.3
				A16			63	65.4	69.5	M16 x 1.5	9	29.3	41.3				15.2		86.3
				AG02						G1/4	6.5								80.1
				A16			80	82.6	87.5	M16 x 1.5	9	37.9	49.9				22.1		119.3
				AG02						G1/4	6.5								113.1
				A16			100	103	107.1	M16 x 1.5	9	44.6	56.6				25.8		166.5
				AG02						G1/4	6.5								160.4

*1 FS: FS61 (Fluoro-based rubber)

*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

Dimensions/Models

With adapter Direct mounting type (Female thread)

ZP3M - T 63 RB FS - BG02 - MF


① ② ③ ④



Connection thread: BG02

Ø 32, Ø 40


Ø 50 to Ø 100

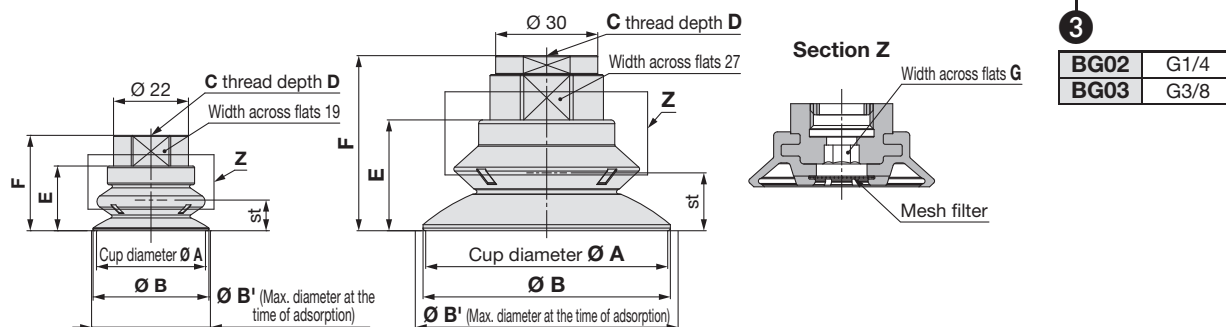

Connection thread: BG03

Ø 32, Ø 40

Ø 50 to Ø 100

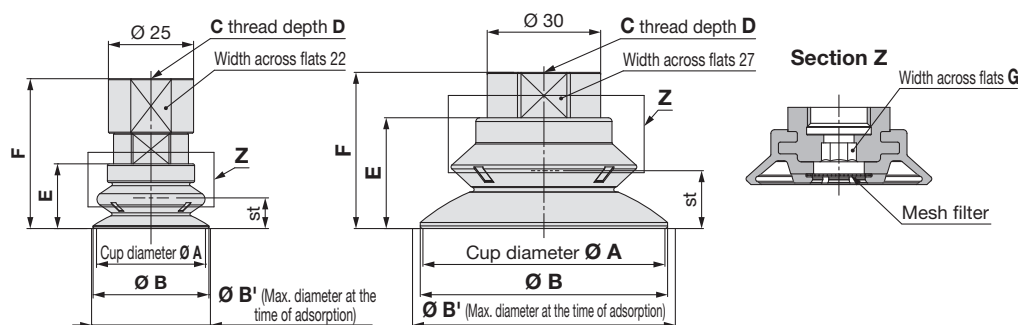

Model							A	B	B ¹ *2	C	D	E	F	G	st*2	Min. opening hole size of the adapter	Weight [g]			
Vacuum inlet direction	① Cup diameter	Form	② Material *1	③ Connection thread	④ Mesh filter															
ZP3M	T	32	RB	FS	BG02	— MF	32	34	34.9	G1/4	11.0	19	28.0	5	9	Ø 5	17.5			
					BG03					G3/8	11.4		44.0				33.5			
		40			BG02		40	41.8	43.9	G1/4	11.0	19.8	28.8		10		8	11.8	Ø 8	19.0
					BG03					G3/8	11.4		44.8							34.9
		50			BG02		50	52.4	55.6	G1/4	12.5	24.9	41.9	15.2	22.1	25.8		69.1		
					BG03					G3/8	11.4		36.9					46.4		
		63			BG02		63	65.4	69.5	G1/4	12.5	29.3	46.3				25.8	25.8	78.8	
					BG03					G3/8	11.4		41.3						55.9	
		80			BG02		80	82.6	87.5	G1/4	12.5	37.9	54.9	25.8	25.8	111.9				
					BG03					G3/8	11.4		49.9			89.0				
		100			BG02		100	103	107.1	G1/4	12.5	44.6	61.6			25.8	25.8	159.1		
					BG03					G3/8	11.4		56.6					136.2		



*1 FS: FS61 (Fluoro-based rubber)

*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

ZP3M Series

Dimensions/Models

With adapter **Direct mounting type (Square adapter)**

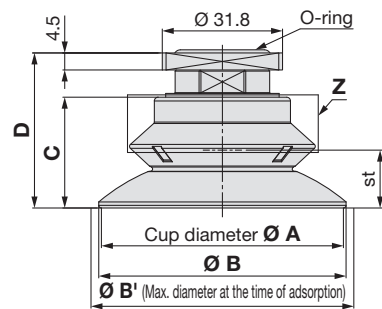

ZP3M - T 63 RB FS - S32 - MF

1

2

3




Model							A	B	B ¹⁺²	C	D	st*2	Min. opening hole size of the adapter	Weight [g]
	Vacuum inlet direction	❶ Cup diameter	Form	❷ Material *1	Connection thread	❸ Mesh filter								
ZP3M	T	32	RB	FS	S32	— MF	32	34	34.9	19	31.2	9	Ø 5	30.2
		40					40	41.8	43.9	19.8	32	10		31.6
		50					50	52.4	55.6	24.9	36.6	11.8	Ø 8	50.0
		63					63	65.4	69.5	29.3	41	15.2		59.8
		80					80	82.6	87.5	37.9	49.6	22.1		92.8
		100					100	103	107.1	44.6	56.3	25.8		140.0

*1 FS: FS61 (Fluoro-based rubber)

*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.


Square adapter mounting groove dimensions (Recommended)

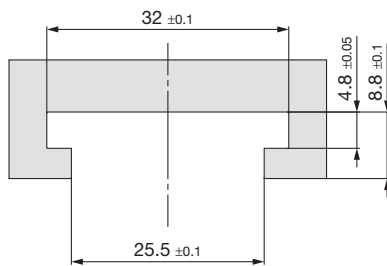

* For details on how to use the square adapter, refer to “Mounting” on page 26.


Dimensions/Models

With adapter Plate mounting type (Male thread/Vacuum inlet: Vertical)

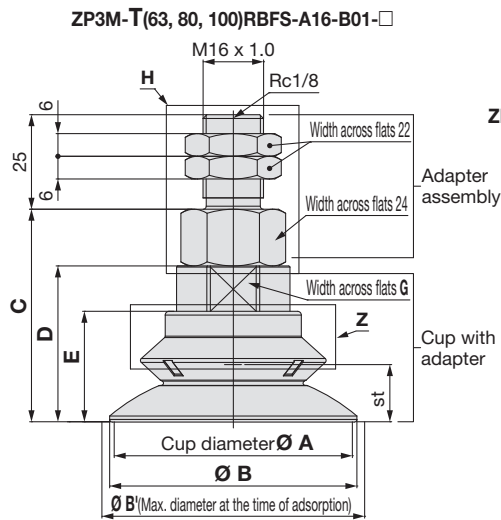

ZP3M - T **63** RB **FS** - **A16** - **B01** - **MF**

ZP3M-T(32, 40, 50)RBFS-A14-B01-□

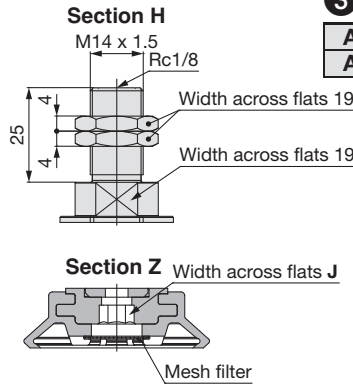


Cup diameter [mm]			
Ø 32 to Ø 50	Ø 63 to Ø 100		
A14	M14 x 1.0	B01	Rc1/8
A16	M16 x 1.5		

Model								A	B	B ¹⁺²	C	D	E	G	J	st ^{*2}	Min. opening hole size of the adapter	Weight [g]
Vacuum inlet direction	① Cup diameter	Form	② Material *1	③ Connection thread	④ Vacuum inlet	⑤ Mesh filter												
ZP3M	T	32	RB	FS	A14	B01	MF	32	34	34.9	37	28	19	19	5	9	Ø 5	54.7
		40						40	41.8	43.9	37.8	28.8	19.8			10		56.1
		50						50	52.4	55.6	45.9	36.9	24.9			11.8		93.3
		63			A16			63	65.4	69.5	56.3	41.3	29.3	27	8	15.2	Ø 6	180.8
		80						80	82.6	87.5	64.9	49.9	37.9			22.1		213.9
		100						100	103	107.1	71.6	56.6	44.6			25.8		261.1

*1 FS: FS61 (Fluoro-based rubber)


*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

With adapter Plate mounting type (Male thread/Vacuum inlet: Lateral)

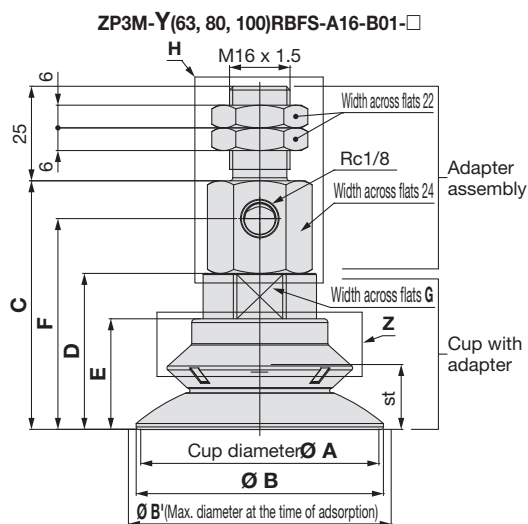

ZP3M - Y **63** RB **FS** - **A16** - **B01** - **MF**

ZP3M-Y(32, 40, 50)RBFS-A14-B5-□



Cup diameter [mm]			
Ø 32 to Ø 50	Ø 63 to Ø 100		
A14	M14 x 1.0	B5	M5 x 0.8
A16	M16 x 1.5	B01	Rc1/8

Model								A	B	B*2	C	D	E	F	G	J	st*2	Min. opening hole size of the adapter	Weight [g]
Vacuum inlet direction	① Cup diameter	Form	② Material *1	③ Connection thread	④ Vacuum inlet	⑤ Mesh filter													
ZP3M	Y	32	RB	FS	A14	B5	— MF	32	34	34.9	44	28	19	37.9	19	5	9	Ø 5	64.3
		40						40	41.8	43.9	44.8	28.8	19.8	38.7			10		65.8
		50						50	52.4	55.6	52.9	36.9	24.9	46.8			11.8		84.3
		63			A16			B01	63	65.4	69.5	65.8	41.3	29.3	55.8	15.2	224.7		
		80							80	82.6	87.5	74.4	49.9	37.9	64.4	22.1	257.7		
		100							100	103	107.1	81.1	56.6	44.6	71.1	25.8	304.9		

*1 FS: FS61 (Fluoro-based rubber)






*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

Dimensions/Models

With adapter Plate mounting type (Female thread/Vacuum inlet: Lateral)



ZP3M - Y 63 RB FS - B12 - B01 - MF

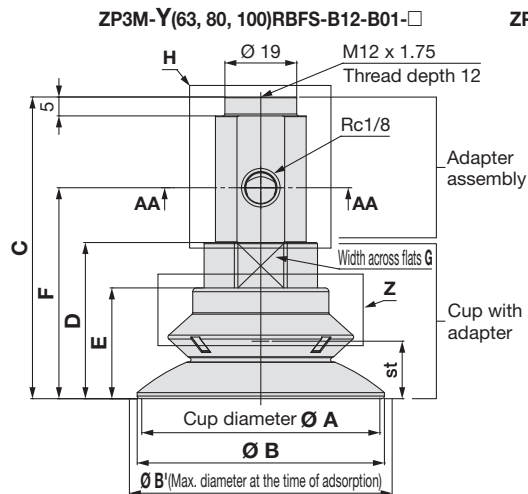

3	4	Cup diameter [mm]			
		Ø 32 to Ø 50	Ø 63 to Ø 100		
B8	M8 x 1.25	B5	M5 x 0.8	○	—
B12	M12 x 1.75	B01	Rc1/8	—	○


[illegible]

*1 FS: FS61 (Fluoro-based rubber)

*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

Dimensions/Models

With buffer Plate mounting type (Vacuum inlet direction: Vertical)

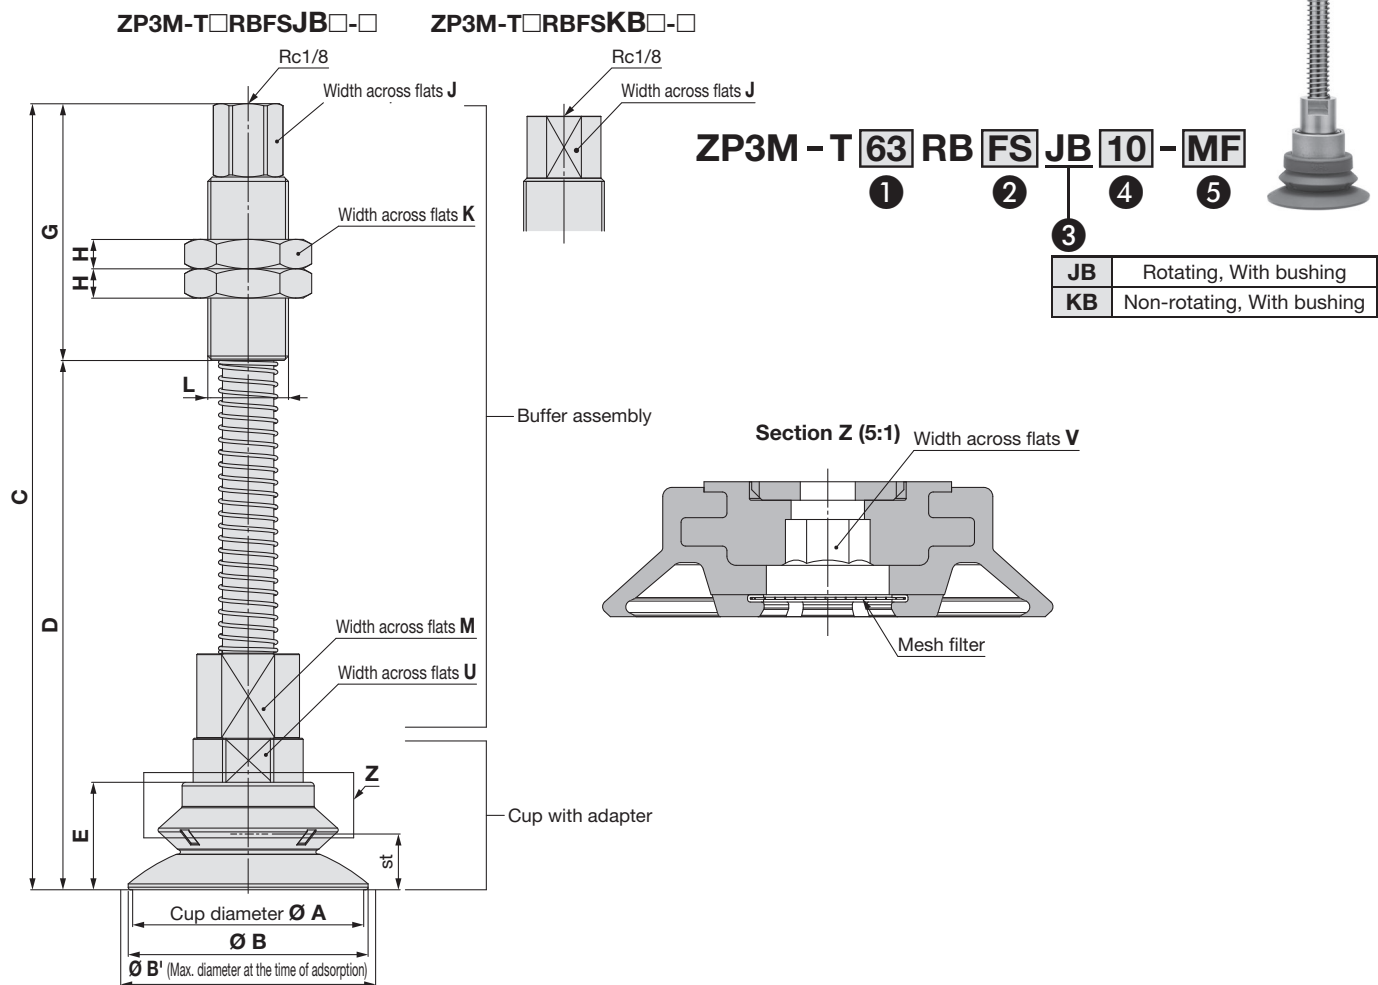

Model								A	B	B'±2	C	D	E	G	H		J		K		L		M	U	V	st*2	Min. opening hole size	Weight [g]		
Vacuum inlet direction	① Cup diameter	Form	② Material *1	③ Buffer spec.	④ Buffer stroke	⑤ Mesh filter	JB								KB	JB	KB	JB	KB	JB	KB									
ZP3M	T	32	RB	FS	JB KB	— MF	32	34	34.9	127.5	75.5	19	35	11	8							M18 x 1.5	M22 x 1.5	16	19	5	10	Ø 3	221.0	262.2
										152.5	100.5																		235.5	288.2
										172.5	120.5																		246.9	308.1
							40	41.8	43.9	128.3	76.3	19.8				14	18	27	30	M18 x 1.5	M22 x 1.5	16	19	5	10	Ø 3	222.4		263.7	
										153.3	101.3																236.9		289.7	
										173.3	121.3																248.3		309.5	
		50					52.4	55.6	136.4	84.4	24.9															Ø 3	259.7	300.9		
									161.4	109.4																	274.2	326.9		
									181.4	129.4																	285.6	346.8		
		63					65.4	69.5	169.3	99.3	29.3																Ø 3	399.1	435.9	
									194.3	124.3																		427.9	472.0	
									214.3	144.3																		450.8	499.6	
		80					82.6	87.5	177.9	107.9	37.9	50			8													Ø 4	432.2	468.9
									202.9	132.9																			460.9	505.0
									222.9	152.9																			483.9	532.7
		100							184.6	114.6	44.6																	Ø 4	479.4	516.2
									209.6	139.6																			508.2	552.2
									229.6	159.6																			531.1	579.9


*1 FS: FS61 (Fluoro-based rubber)

*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

ZP3M Series

Dimensions/Models

With buffer Plate mounting type (Vacuum inlet direction: Lateral)

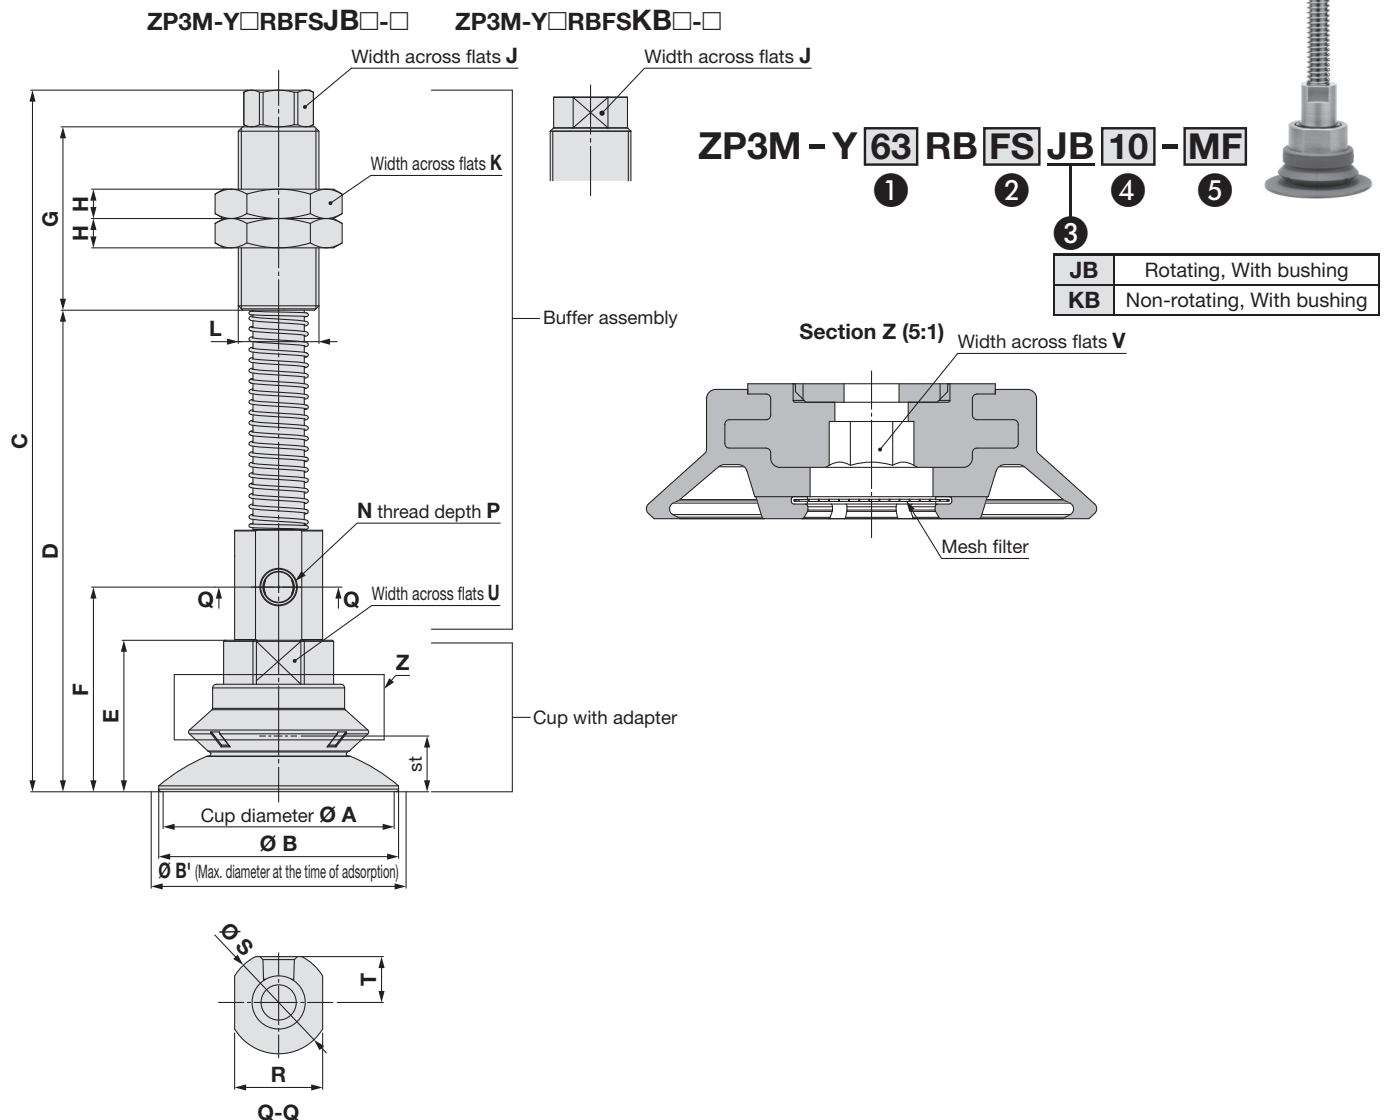

Model							A	B	B' *2	C	D	E	F	G	H	J	K	L		N	P	R	S	T	U	V	st *2	Min. opening hole size	Weight [g]				
Vacuum inlet direction	① Cup diameter	Form	② Material *1	③ Buffer spec.	④ Buffer stroke	⑤ Mesh filter												JB	KB										JB	KB	JB	KB	
ZP3M	Y	RB	FS	JB KB	— MF	10	32	34	34.9	122.5	78.5	19	37.9						M18 x 1.5	M22 x 1.5	M5 x 0.8	5	16	19	8.5	19	5	9	Ø 5	JB	KB		
						30				219.4	251.9																						
						50				235.2	279.3																						
						10				247.8	300.3																						
						30	40	41.8	43.9	123.3	79.3	19.8	38.7	35	11	14	18	27	30	M18 x 1.5	M22 x 1.5	M5 x 0.8	5	16	19	8.5	19	5	10	Ø 5	JB	KB	
						30				220.8	253.3																						
						50				236.7	280.7																						
						10				249.2	301.7																						
						30	50	52.4	55.6	131.4	87.4	24.9	46.8			8				32	M22 x 1.5	M26 x 1.5	Rc1/8	—	24	28	12.5	27	8	11.8	Ø 5	JB	KB
						30				258.0	290.6																						
						50				273.9	318.0																						
						10				286.5	339.0																						
						30	63	65.4	69.5	166.3	106.3	29.3	55.8			8	17	21	30	32	M22 x 1.5	M26 x 1.5	Rc1/8	—	24	28	12.5	27	8	15.2	Ø 6	JB	KB
						30				400.3	422.8																						
						50				431.5	461.4																						
						10				456.4	491.1																						
						30	80	82.6	87.5	174.9	114.9	37.9	64.4	50	8	17	21	30	32	M22 x 1.5	M26 x 1.5	Rc1/8	—	24	28	12.5	27	8	22.1	Ø 6	JB	KB	
						30				433.3	455.9																						
						50				464.5	494.5																						
						10				489.4	524.1																						
						30	100	103	107	181.6	121.6	44.6	71.1			8	17	21	30	32	M22 x 1.5	M26 x 1.5	Rc1/8	—	24	28	12.5	27	8	25.8	Ø 6	JB	KB
						30				480.6	503.1																						
						50				511.8	541.7																						
						10				536.7	571.4																						


*1 FS: FS61 (Fluoro-based rubber)

*2 B': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.


Construction

With adapter


ZP3M-T□RBFS-A□




ZP3M-T□RBFS-S32




ZP3M-T (32, 40) RBFS-BG02




ZP3M-T (50, 63, 80, 100) RBFS-BG02



ZP3M-T (32, 40) RBFS-BG03



ZP3M-T (50, 63, 80, 100) RBFS-BG03



With adapter

Plate mounting type (Male thread/Vacuum inlet: Vertical)

ZP3M-T□RBFS-□-□-□





Plate mounting type (Male thread/Vacuum inlet: Lateral)


ZP3M-Y□RBFS-□-□-□

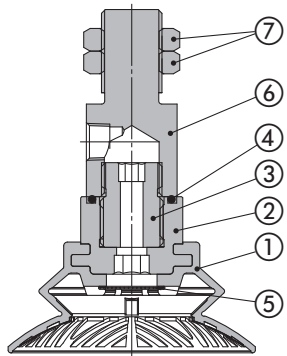

With adapter

Plate mounting type (Female thread/Vacuum inlet: Lateral)

ZP3M-Y□RBFS-□-□-□



Component Parts

No.	Description	Material	Note
1	Cup	FS61 (Fluoro-based rubber)	—
2	Insert adapter	Aluminum alloy	—
3	Adapter	Structural carbon steel (Electroless nickel plating)	ZP3M-T (32, 40) RBFS-A□ ZP3M-T (50, 63, 80, 100) RBFS- (A□, BG02)
		Aluminum alloy (Anodized)	ZP3M-T (32, 40) RBFS-BG03 ZP3M-T□RBFS-S32
4	O-ring	FKM	—
5	Mesh filter	Stainless steel	—

* The parts 1, 2, and 3 are adhered to each other and cannot be disassembled.

Component Parts

No.	Description	Material	Note
1	Cup	FS61 (Fluoro-based rubber)	—
2	Insert adapter	Aluminum alloy	—
3	Adapter	Structural carbon steel (Electroless nickel plating)	—
4	O-ring	FKM	—
5	Mesh filter	Stainless steel	—
6	Adapter	Aluminum alloy (Anodized)	Cup diameter: For Ø 32 to Ø 50
		Brass (Electroless nickel plating)	Cup diameter: For Ø 63 to Ø 100
7	Nut	Steel (Zinc chromated)	Cup diameter: For Ø 32 to Ø 50 M14 x 1
		Special steel (Zinc chromated)	Cup diameter: For Ø 63 to Ø 100 M16 x 1.5

* The parts 1, 2, and 3 are adhered to each other and cannot be disassembled.

Component Parts

No.	Description	Material
1	Cup	FS61 (Fluoro-based rubber)
2	Insert adapter	Aluminum alloy
3	Adapter	Structural carbon steel (Electroless nickel plating)
4	O-ring	FKM
5	Mesh filter	Stainless steel
6	Adapter	Aluminum alloy (Anodized)

* The parts 1, 2, and 3 are adhered to each other and cannot be disassembled.



ZP3M Series

Construction

With buffer

ZP3M-T□RBFS(JB/KB)□-□

ZP3M-Y□RBFS(JB/KB)□-□

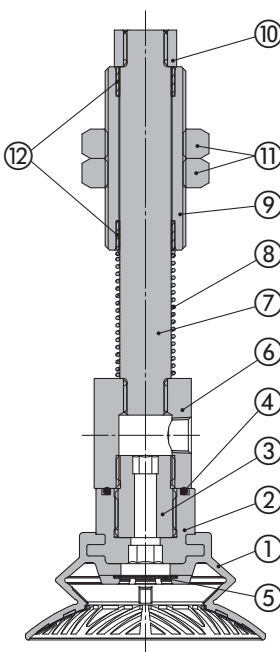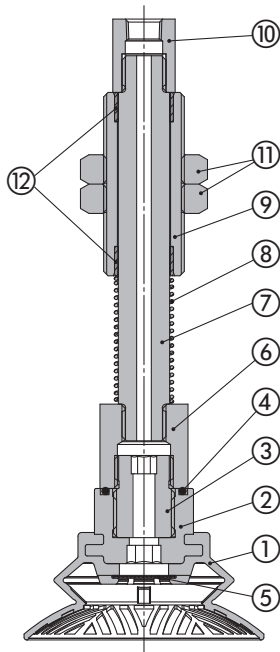

Component Parts

No.	Description	Material	Note
1	Cup	FS61 (Fluoro-based rubber)	—
2	Insert adapter	Aluminum alloy	—
3	Adapter	Structural carbon steel (Electroless nickel plating)	—
4	O-ring	FKM	—
5	Mesh filter	Stainless steel	—
6	Adapter	Aluminum alloy (Anodized)	—
7	Piston rod	Structural steel (Hard chrome plating)	ZP3M-(T,Y)□RBFSJB□-□
		Stainless steel	ZP3M-(T,Y)□RBFSKB□-□
8	Return spring	Stainless steel	—
9	Buffer body	Brass (Electroless nickel plating)	—
10	Buffer adapter	Brass (Electroless nickel plating)	—
11	Nut	Steel (Zinc chromated)	M18 x 1.5
		Structural steel (Nickel plating)	M22 x 1.5
		Structural carbon steel (Nickel plating)	M26 x 1.5
12	Bushing	—	—

* The parts 1, 2, and 3 are adhered to each other and cannot be disassembled.



Replacement Parts: Mesh Filter Unit

Part no.	Cup diameter	
	Ø 32 to Ø 50	Ø 63 to Ø 100
ZPMF-60-D13	●	—
ZPMF-60-D18	—	●



ZP3M Series

Mounting Bracket Assembly

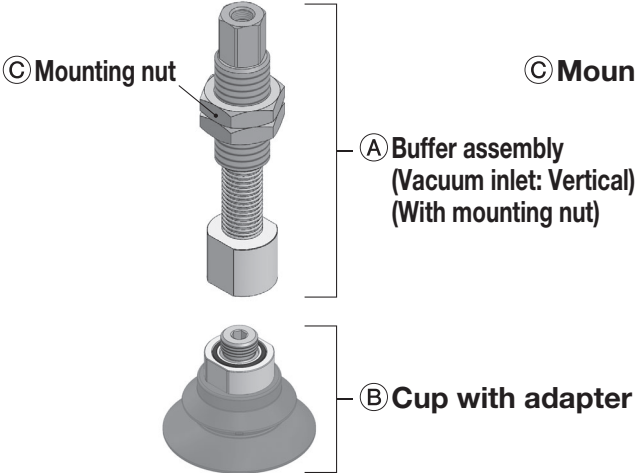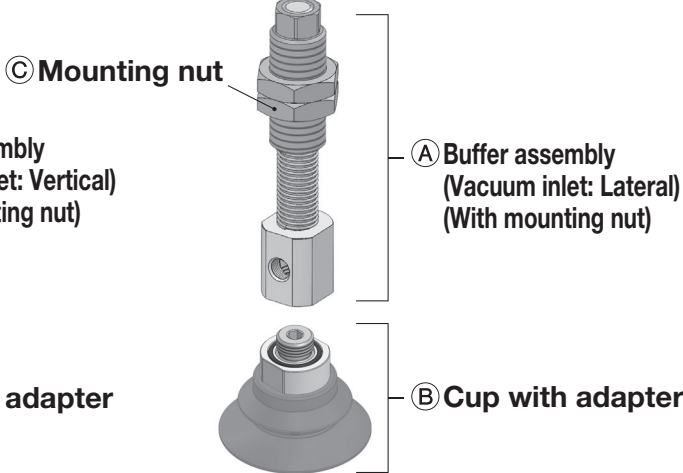Product part no.	<p>ZP3M - (T/Y) ① RB FS ②(JB/KB) ③ - □</p> <p>T: Vertical vacuum inlet Y: Lateral vacuum inlet</p> <p>Cup diameter</p> <p>Cup material</p> <p>JB: Rotating, With bushing KB: Non-rotating, With bushing</p> <p>Mesh filter</p> <p>Buffer stroke</p>	
Component parts	<p>ZP3M-T□RBFS(JB/KB)□-□</p>  <p>③ Mounting nut</p> <p>① Buffer assembly (Vacuum inlet: Vertical) (With mounting nut)</p> <p>② Cup with adapter</p>	<p>ZP3M-Y□RBFS(JB/KB)□-□</p>  <p>③ Mounting nut</p> <p>① Buffer assembly (Vacuum inlet: Lateral) (With mounting nut)</p> <p>② Cup with adapter</p>

		Symbol	① Cup diameter						
			32	40	50	63	80	100	
Ⓐ Buffer assembly (With mounting nut)	③ Buffer stroke	10	ZP3EB-(T/Y)1(JB/KB)10			ZP3EB-(T/Y)2(JB/KB)10			
		30	ZP3EB-(T/Y)1(JB/KB)30			ZP3EB-(T/Y)2(JB/KB)30			
		50	ZP3EB-(T/Y)1(JB/KB)50			ZP3EB-(T/Y)2(JB/KB)50			
Ⓑ Cup with adapter		M10 x 1.0	ZP3M-T(32/40/50)RBFS-A10-□			—			
		M16 x 1.5	—			ZP3M-T(63/80/100)RBFS-A16-□			
Ⓒ Mounting nut (Single unit)	② Buffer specifications	JB	M18 x 1.5	NT-05			—		
			M22 x 1.5	—			ZPNA-M22		
		KB	M22 x 1.5	ZPNA-M22			—		
			M26 x 1.5	—			ZPNA-M26		

[Buffer assembly part number example]

Product part no. **ZP3M - T63RBFS JB 10**

Buffer assembly **ZP3EB - T2 JB 10**

② Buffer stroke

ZP3M Series


Product part no.	<div><div>ZP3M - T①RBFS - ② - ③ - □</div><div>T: Vertical vacuum inlet</div><div>Cup diameter</div><div>Cup material</div><div>Vacuum inlet</div><div>Mesh filter</div><div>Connection thread</div></div>	
Component parts	<div><div>ZP3M-T(32, 40, 50)RBFS-A14-B01-□</div><div><div>Ⓒ Mounting nut</div><div><div>Ⓐ Adapter assembly (Vacuum inlet: Vertical) (With mounting nut)</div><div>Ⓑ Cup with adapter</div></div></div></div> <div><div>ZP3M-T(63, 80, 100)RBFS-A16-B01-□</div><div><div>Ⓒ Mounting nut</div><div><div>Ⓐ Adapter assembly (Vacuum inlet: Vertical) (With mounting nut)</div><div>Ⓑ Cup with adapter</div></div></div></div>	

				Symbol			Symbol	① Cup diameter					
								32	40	50	63	80	100
④ Adapter assembly	② Connection thread	Male thread	M14 x 1.0	A14	③ Vacuum inlet	Rc1/8	B01	ZP3EA-TAL14			—		
			M16 x 1.5	A16				—			ZP3EA-TAL16		
⑤ Cup with adapter			M10 x 1.0					ZP3M-T(32/40/50)RBFS-A10-□			—		
			M16 x 1.5					—			ZP3M-T(63/80/100)RBFS-A16-□		
⑥ Mounting nut (Single unit)			M14 x 1.0					ZPNA-M14			—		
			M16 x 1.5					—			RBQ16J		


Product part no.	<p>ZP3M - Y ① RB FS - ② - ③ - □</p> <p>Y: Lateral vacuum inlet Cup diameter Cup material Vacuum inlet Connection thread Mesh filter</p>	
Component parts	<p>ZP3M-Y(32, 40, 50)RBFS-A14-B5-□</p> <p>③ Mounting nut</p> <p>① Adapter assembly (Vacuum inlet: Lateral) (With mounting nut)</p> <p>② Cup with adapter</p> <p>ZP3M-Y(63, 80, 100)RBFS-A16-B01-□</p> <p>③ Mounting nut</p> <p>① Adapter assembly (Vacuum inlet: Lateral) (With mounting nut)</p> <p>② Cup with adapter</p> <p>ZP3M-Y(32, 40, 50)RBFS-B8-B5-□</p> <p>① Adapter assembly (Vacuum inlet: Lateral)</p> <p>② Cup with adapter</p> <p>ZP3M-Y(63, 80, 100)RBFS-B12-B01-□</p> <p>① Adapter assembly (Vacuum inlet: Lateral)</p> <p>② Cup with adapter</p>	

				Symbol			Symbol	① Cup diameter					
								32	40	50	63	80	100
① Adapter assembly	② Connection thread	Male thread	M14 x 1.0	A14	③ Vacuum inlet	M5 x 0.8	B5	ZP3EA-YAL14			—		
			M16 x 1.5	A16		Rc1/8	B01	—			ZP3EA-YAL16		
		Female thread	M8 x 1.25	B8		M5 x 0.8	B5	ZP3EA-YB8			—		
			M12 x 1.75	B12		Rc1/8	B01	—			ZP3EA-YB12		
② Cup with adapter			M10 x 1.0				ZP3M-T(32/40/50)RBFS-A10-□			—			
			M16 x 1.5				—			ZP3M-T(63/80/100)RBFS-A16-□			
③ Mounting nut (Single unit)			M14 x 1.0				ZPNA-M14			—			
			M16 x 1.5				—			RBQ16J			

Suction Cup/ Oval Flat Shape with Non-slip Feature **ZP3M Series**

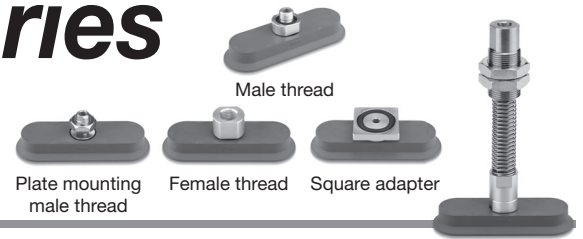

How to Order

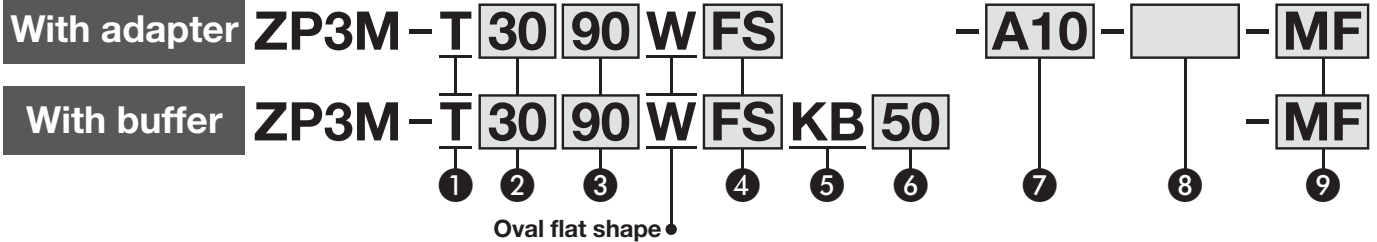

① Vacuum inlet direction

T	Vertical
---	----------

② ③ Cup size

Symbol		③Length			
② Breadth	16	● (16 x 50)	-	-	-
	30	-	● (30 x 90)	-	-
	40	-	-	● (40 x 80)	-
	50	-	-	-	● (50 x 100)

⑦ Connection thread / ⑧ Vacuum inlet

Mounting	Connection thread			Vacuum inlet			Cup size
	Type	Symbol	Size	Type	Symbol	Size	
Direct mounting	Male thread	A10	M10 x 1.0	-	—	Use the connection thread.	16 x 50, 30 x 90
		A16	M16 x 1.5				40 x 80, 50 x 100
	Female thread	BG02	G1/4				All sizes
		BG03	G3/8				
	Square adapter	S32	□31.8				
Plate mounting	Male thread	A10	M10 x 1.5	Female thread	B5	M5 x 0.8	
		A14	M14 x 1.5		B01	Rc1/8	
		AG02	G1/4		B01	Rc1/8	

* The adapter and cup are adhered to each other and cannot be disassembled.

Specifications

Cup Material

Material	FS61 (Fluoro-based rubber)
Colour of rubber	Green
Rubber hardness (Shore A: ±5°)	65
Operating temperature range*1	0 °C to 200 °C
Ambient temperature	0 °C to 150 °C

*1 Surface temperature of the workpiece to be adsorbed

Adapter Specifications

Mounting	Direct mounting				Plate mounting
	Male thread		Female thread	Square adapter	Male thread
Cup diameter	16 x 50, 30 x 90	40 x 80, 50 x 100	All sizes	All sizes	All sizes
Size	M10 x 1.0	M16 x 1.5	G1/4 G3/8	□31.8	M10 x 1.5 M14 x 1.5 G1/4
Vacuum inlet	Use the connection thread.				M5 x 0.8 Rc1/8

Buffer Specifications

Non-rotating specification	Cup diameter		16 x 50, 30 x 90			40 x 80, 50 x 100		
	Stroke [mm]		10	30	50	10	30	50
KB	Connection thread		M22 x 1.5			M26 x 1.5		
	Spring reactive force [N]	At 0 stroke	5.0			10.0		
		At full stroke	7.0	9.0	11.0	13.5	15.5	17.5

Cup Specifications

Part no.	Horizontal holding force [N]*1, *2		Minimum curvature radius for adsorption [mm]*3
	Without oil	With oil	
ZP3M-T1650WFS	42	10	10
ZP3M-T3090WFS	160	42	42
ZP3M-T4080WFS	174	59	46
ZP3M-T50100WFS	267	105	65

*1 These are actual measurement values when flat workpieces were adsorbed at a setting vacuum pressure of -60 kPa; however, they are not guaranteed values. (According to SMC's tests)

The values vary depending on the conditions (shape, surface roughness, oil type, oil amount, and other conditions) of the workpiece.

*2 The horizontal holding force in the breadth and length directions is the same.

*3 These are actual measurement values when cylindrical workpieces were adsorbed at a setting vacuum pressure of -85 kPa; however, they are not guaranteed values. (According to SMC's tests)

Mesh Filter Specifications

Mesh filter	60
Opening	250 μm

Dimensions/Models

With adapter Direct mounting type (Male thread)

ZP3M - T **3090** **W** **FS** - **A10** - **MF**


①

②

④

③ Connection thread
(Male thread)

		Cup size	
		16 x 50, 30 x 90	40 x 80, 50 x 100
A10	M10 x 1.0	○	—
A16	M16 x 1.5	—	○

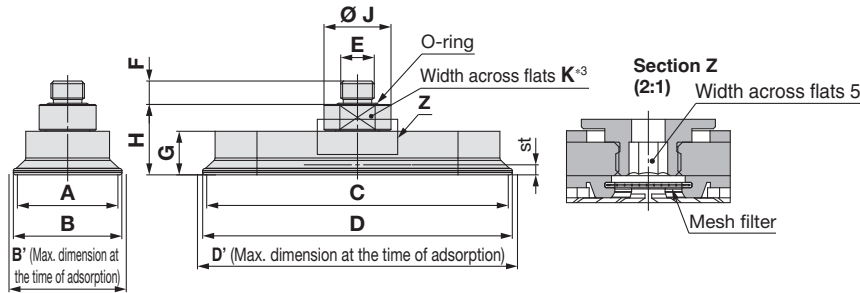

Model							A	B	B ^{*2}	C	D	D ^{*2}	E	F	G	H	J	K	st ^{*2}	Min. opening hole size of the adapter	Weight [g]
	Vacuum inlet direction	① Cup size	Form	② Material ^{*1}	③ Connection thread	④ Mesh filter															
ZP3M	T	1650	W	FS	A10	— MF	16	18	19	50	52	53.3	M10 x 1.0	7	17.3	25.5	20	17	3	Ø 5	24.0
		3090					30	32.4	35	90	92.4	95.5			48.5						
		4080			A16		40	42.4	45.2	80	82.4	85.5	M16 x 1.5	9	14	24	27	24	54.2		
		50100					50	52.6	56.1	100	102.6	106.7			89.1						

*1 FS: FS61 (Fluoro-based rubber)

*2 B', D': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

*3 The direction of width across flats K varies depending on the product.

With adapter Direct mounting type (Female thread)

ZP3M - T **3090** **W** **FS** - **BG02** - **MF**


①

②

④

③ Connection thread
(Female thread)

BG02	G1/4
BG03	G3/8

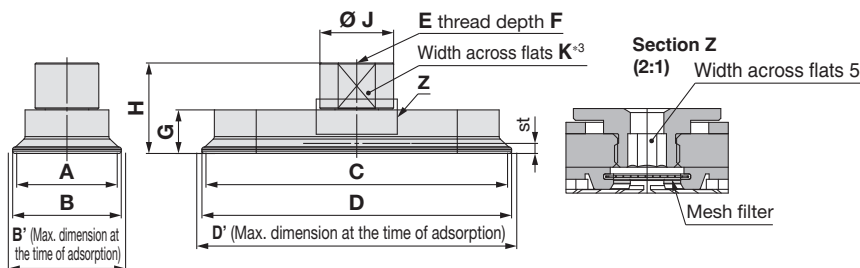

Model							A	B	B ^{*2}	C	D	D ^{*2}	E	F	G	H	J	K	st ^{*2}	Min. opening hole size of the adapter	Weight [g]
Vacuum inlet direction	① Cup size	Form	② Material *1	③ Connection thread	④ Mesh filter																
ZP3M	T	1650	W	FS	BG02	— MF	16	18	19	50	52	53.3	G1/4	8	17.3	31.5	22	19	3	Ø 5	27.4
					BG03								G3/8	9		32.5	25	22			29.9
		3090			BG02		30	32.4	35	90	92.4	95.5	G1/4	8	13	27	22	19	51.9		
					BG03								G3/8	9		28	25	22	54.4		
		4080			BG02		40	42.4	45.2	80	82.4	85.5	G1/4	8	14	28	22	19	45.9		
					BG03								G3/8	9		29	25	22	48.4		
		50100			BG02		50	52.6	56.1	100	102.6	106.7	G1/4	8	16	30	22	19	80.7		
					BG03								G3/8	9		31	25	22	83.3		

*1 FS: FS61 (Fluoro-based rubber)


*2 B', D': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

*3 The direction of width across flats K varies depending on the product.

ZP3M Series

Dimensions/Models

With adapter Direct mounting type (Square adapter)

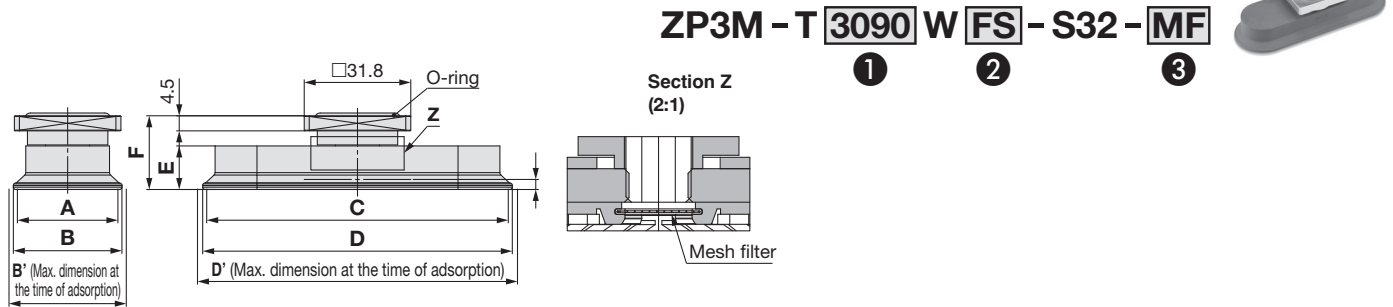


Model							A	B	B ^{1*2}	C	D	D ^{1*2}	E	F	st ^{*2}	Min. opening hole size of the adapter	Weight [g]
	Vacuum inlet direction	① Cup size	Form	② Material *1	Connection thread	③ Mesh filter											
ZP3M	T	1650	W	FS	S32	— MF	16	18	19	50	52	53.3	17.3	26.5	3	Ø 5	34.0
		3090					30	32.4	35	90	92.4	95.5	13	22			58.5
		4080					40	42.4	45.2	80	82.4	85.5	14	23	4		52.4
		50100					50	52.6	56.1	100	102.6	106.7	16	25	5		87.3

*1 FS: FS61 (Fluoro-based rubber)


*2 B', D': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

Square adapter mounting groove dimensions (Recommended)

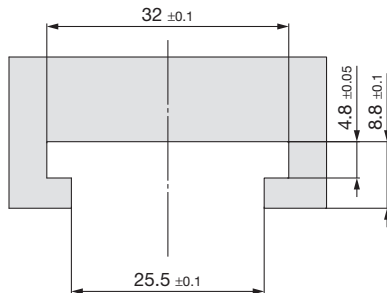

* For details on how to use the square adapter, refer to "Mounting" on page 26.

With adapter Plate mounting type (Male thread)

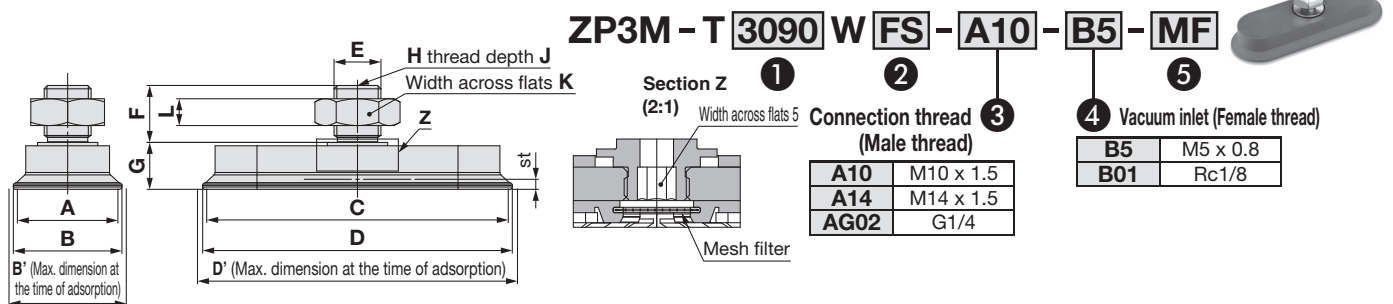

		Model							A	B	B ^{1*2}	C	D	D ^{1*2}	E	F	G	H	J	K	L	st *2	Min. opening hole size of the adapter	Weight [g]
	Vacuum inlet direction	① Cup size	Form	② Material *1	③ Connection thread	④ Vacuum inlet	⑤ Mesh filter																	
ZP3M	T	1650	W	FS	A10	B5	— MF	16	18	19	50	52	53.3	M10 x 1.5	15	18.5	M5 x 0.8	5	17	6	3	Ø 4.2	37.0	
					A14	B01								M14 x 1.5	17		Rc1/8	6.2	22	8		Ø 5	54.1	
					AG02	B01								G1/4	13		Rc1/8	6.2	17	5		Ø 4.2	35.3	
					A10	B5								M10 x 1.5	15		M5 x 0.8	5	17	6		Ø 4.2	61.5	
		3090			A14	B01		30	32.4	35	90	92.4	95.5	M14 x 1.5	17	14	Rc1/8	6.2	22	8	4	Ø 5	78.6	
					AG02	B01								G1/4	13		Rc1/8	6.2	17	5		Ø 5	59.8	
					A10	B5								M10 x 1.5	15		M5 x 0.8	5	17	6		Ø 4.2	55.4	
					A14	B01								M14 x 1.5	17		Rc1/8	6.2	22	8		Ø 5	72.6	
		4080			AG02	B01		40	42.4	45.2	80	82.4	85.5	G1/4	13	15	Rc1/8	6.2	17	5	5	Ø 4.2	90.3	
					A10	B5								M10 x 1.5	15		M5 x 0.8	5	17	6		Ø 4.2	107.5	
					A14	B01								M14 x 1.5	17		Rc1/8	6.2	22	8		Ø 5	88.6	
					AG02	B01								G1/4	13		Rc1/8	6.2	17	5				
		50100			A10	B5		50	52.6	56.1	100	102.6	106.7	M10 x 1.5	15	17	M5 x 0.8	5	17	6	5	Ø 4.2	90.3	
														M14 x 1.5	17		Rc1/8	6.2	22	8		Ø 5	107.5	
														G1/4	13		Rc1/8	6.2	17	5				

*1 FS: FS61 (Fluoro-based rubber)

*2 B', D': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

Dimensions/Models

With buffer Plate mounting type (Vacuum inlet direction: Vertical)

ZP3M - T 4080 W FS KB 50 - MF


2

4

5

3 Buffer specifications

KB	Non-rotating, With bushing
-----------	----------------------------

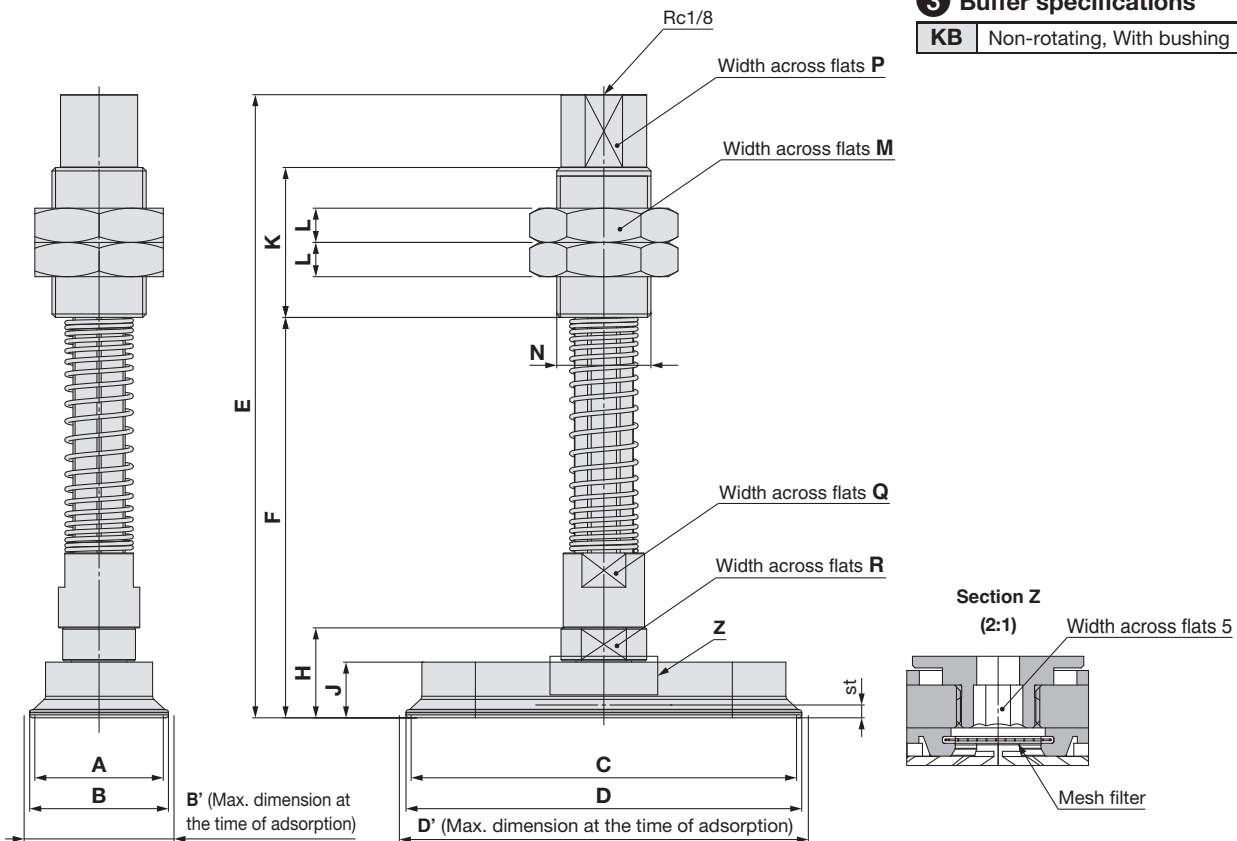

Model							A	B	B*±2	C	D	D*±2	E	F	H	J	K	L	M	N	P	Q	R	st*±2	Min. opening hole size	Weight [g]
Vacuum inlet direction	① Cup size	Form	② Material ±1	③ Buffer spec.	④ Buffer stroke	⑤ Mesh filter																				
ZP3M	T	1650	W	FS	KB	10	16	18	19	50	52	53.3	125	73	25.5	17.3	35	30	M22 x 1.5	18	16	17	3	Ø 3	256.3	
						30							150	98											282.3	
		3090				50							170	118	302.1											
						10							120.5	68.5	280.8											
						30							145.5	93.5	306.8											
						50							165.5	113.5	326.7											
						10							152	82	403.9											
						4080							30	177	107	439.9										
		50											197	127	467.6											
		10											154	84	438.7											
		30											179	109	474.8											
		50											199	129	502.5											
		50100											10	154	84	438.7										
						30							179	109	474.8											
		50100				50							199	129	502.5											
						50							199	129	502.5											

*1 FS: FS61 (Fluoro-based rubber)


*2 B', D': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

ZP3M Series


Construction

With adapter


ZP3M-T□WFS-A□

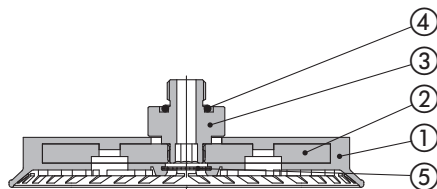


ZP3M-T□WFS-A□-B□

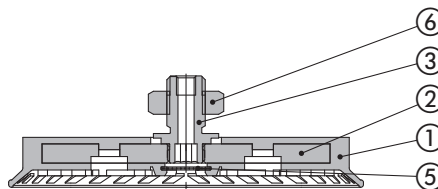

ZP3M-T□WFS-B□

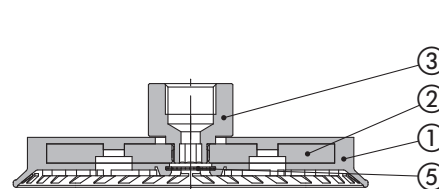

ZP3M-T□WFS-S32

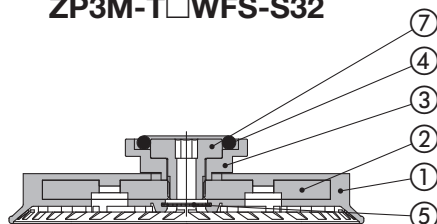


Component Parts

No.	Description	Material	Note
1	Cup	FS61 (Fluoro-based rubber)	—
2	Insert plate	Aluminum alloy	
3	Adapter	Aluminum alloy (Anodized)	ZP3M-T□WFS-A□ ZP3M-T□WFS-B□ ZP3M-T□WFS-S32
		Structural carbon steel (Electroless nickel plating)	ZP3M-T□WFS-A□-B□
4	O-ring	FKM	—
5	Mesh filter	Stainless steel	
6	Nut	Steel (Zinc chromated)	ZP3M-T□WFS-A10-B□ ZP3M-T□WFS-A14-B□
		Brass (Electroless nickel plating)	ZP3M-T□WFS-AG02-B□
7	Set screw	Aluminum alloy (Anodized)	—

* The parts 1, 2, and 3 are adhered to each other and cannot be disassembled.

With buffer

ZP3M-T□WFSKB□-□

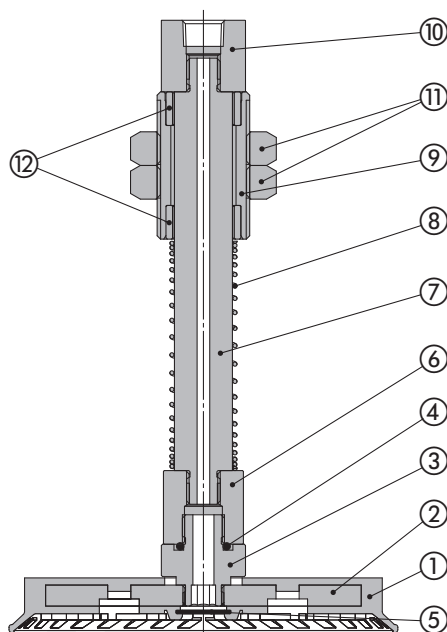

Component Parts

No.	Description	Material	Note
1	Cup	FS61 (Fluoro-based rubber)	—
2	Insert plate	Aluminum alloy	
3	Adapter	Aluminum alloy (Anodized)	
4	O-ring	FKM	
5	Mesh filter	Stainless steel	
6	Adapter	Aluminum alloy (Anodized)	
7	Piston rod	Stainless steel	
8	Return spring	Stainless steel	
9	Buffer body	Brass (Electroless nickel plating)	
10	Buffer adapter	Brass (Electroless nickel plating)	
11	Nut	Structural steel (Nickel plating)	
12	Bushing	—	

* The parts 1, 2, and 3 are adhered to each other and cannot be disassembled.

Replacement Parts: Mesh Filter Unit

Part no.	Cup size
ZPMF-60-D13	30 x 90, 40 x 80, 50 x 100

* The mesh filter cannot be mounted on cup size 16 x 50.



Replacement Parts: Mounting Nut

Product part no.	Mounting nut part no.
ZP3M-T□WFS-A10-B5	ZPNA-M10A
ZP3M-T□WFS-A14-B01	ZPNA-M14B
ZP3M-T□WFS-AG02-B01	ZPNA-G02

ZP3M Series

Mounting Bracket Assembly

Product part no.	<p>ZP3M - T ① W FS KB ② - □</p> <p>T: Vertical vacuum inlet</p> <p>Cup size</p> <p>Buffer stroke</p> <p>Cup material</p> <p>Mesh filter</p>
Component parts	<p>③ Mounting nut</p> <p>① Buffer assembly (Vacuum inlet: Vertical) (With mounting nut)</p> <p>② Cup with adapter</p>

		Symbol	① Cup size			
			1650	3090	4080	50100
① Buffer assembly (With mounting nut)	② Buffer stroke	10	ZP3EB-T1KB10		ZP3EB-T2KB10	
		30	ZP3EB-T1KB30		ZP3EB-T2KB30	
		50	ZP3EB-T1KB50		ZP3EB-T2KB50	
② Cup with adapter	M10 x 1.0		ZP3M-T(1650/3090)WFS-A10-□		—	
	M16 x 1.5		—		ZP3M-T(4080/50100)WFS-A16-□	
③ Mounting nut (Single unit)	M22 x 1.5		ZPNA-M22		—	
	M26 x 1.5		—		SN-032B	


[Buffer assembly part number example]

Product part no. **ZP3M - T4080WFS KB 10**


Buffer assembly **ZP3EB - T2 KB 10**

② Buffer stroke

Suction Cup/ Oval Bellows Shape with Non-slip Feature **ZP3M Series**

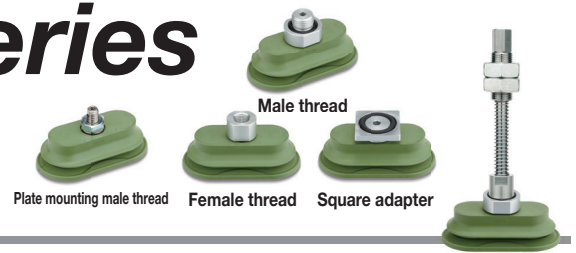

How to Order

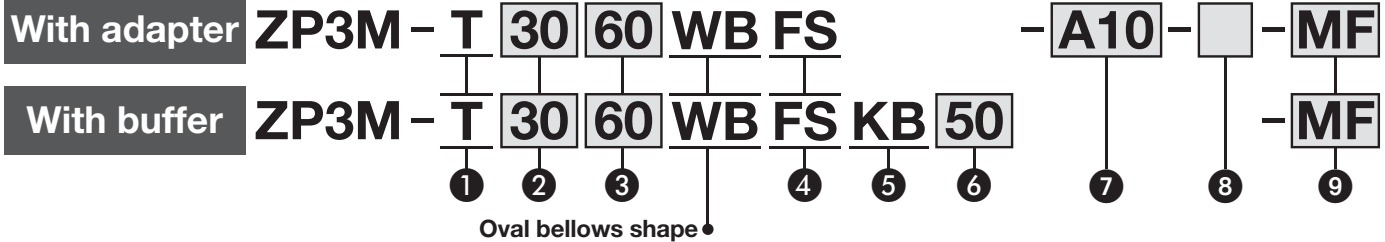

1 Vacuum inlet direction

T	Vertical
---	----------

2 3 Cup size

Symbol	Breadth	3 Length		
		60	80	110
	30	(30 x 60)	—	—
	40	—	(40 x 80)	—
	55	—	—	(55 x 110)

6 Buffer stroke

Stroke [mm]	Cup size All sizes
10	●
30	●
50	●

4 Material

Symbol	Material	Colour
FS	FS61 (Fluoro-based rubber)	Green

5 Buffer specifications

Symbol	Buffer specifications
KB	Non-rotating, With bushing

7 Connection thread / 8 Vacuum inlet

Mounting	7 Connection thread			8 Vacuum inlet			Cup size
	Type	Symbol	Size	Type	Symbol	Size	
Direct mounting	Male thread	A10	M10 x 1.0	—	—	Use the connection thread.	30 x 60
		A16	M16 x 1.5				40 x 80, 50 x 110
	Female thread	BG02	G1/4				All sizes
		BG03	G3/8				
Plate mounting	Male thread	S32	□31.8	Female thread	B5	M5 x 0.8	
		A10	M10 x 1.5		B01	Rc1/8	
		A14	M14 x 1.5		B01	Rc1/8	
		AG02	G1/4		B01	Rc1/8	

9 Mesh filter

—	None
MF	With mesh filter

Mesh filter unit

Part no.	Cup size All sizes
ZPMF-60-D13	●

* The adapter and cup are adhered to each other and cannot be disassembled.

Specifications

Cup Material

Material	FS61 (Fluoro-based rubber)
Colour of rubber	Green
Rubber hardness (Shore A: ±5°)	65
Operating temperature range*1	0 °C to 200 °C
Ambient temperature	0 °C to 150 °C

*1 The operating temperature range indicates the surface temperature of the workpiece to be adsorbed by the cup.

Adapter Specifications

Mounting	Direct mounting				Plate mounting
Connection	Male thread		Female thread	Square adapter	Male thread
Cup diameter	30 x 60	40 x 80, 55 x 110	All sizes	All sizes	All sizes
Size	M10 x 1.0	M16 x 1.5	G1/4 G3/8	□31.8	M10 x 1.5 M14 x 1.5 G1/4
Vacuum inlet	Use the connection thread.				M5 x 0.8 Rc1/8

Buffer Specifications

Cup size	30 x 60			40 x 80, 55 x 110		
Non-rotating specification	KB: Non-rotating, With bushing			KB: Non-rotating, With bushing		
Stroke [mm]	10	30	50	10	30	50
Connection thread	M22 x 1.5			M26 x 1.5		
Spring reactive force [N]	At 0 stroke At full stroke			At 0 stroke At full stroke		
	5.0 7.0			10.0 13.5		
	9.0			15.5		
	11.0			17.5		

Cup Specifications

Part no.	Horizontal holding force [N]*1		Minimum curvature radius for adsorption [mm]*2
	Without oil	With oil	
ZP3M-T3060WBFS	34	26	19.5
ZP3M-T4080WBFS	87	47	25
ZP3M-T55100WBFS	209	91	30

*1 These are actual measurement values when flat workpieces were adsorbed. They are not guaranteed values. (According to SMC's tests)

The values vary depending on the conditions (shape, surface roughness, oil type, oil amount, and other conditions) of the workpiece.


*2 These are actual measurement values when cylindrical workpieces were adsorbed at a setting vacuum pressure of -85 kPa; however, they are not guaranteed values. (According to SMC's tests)

Mesh Filter Specifications

Mesh filter	60
Opening	250 μm

Dimensions/Models

With adapter Direct mounting type (Male thread)

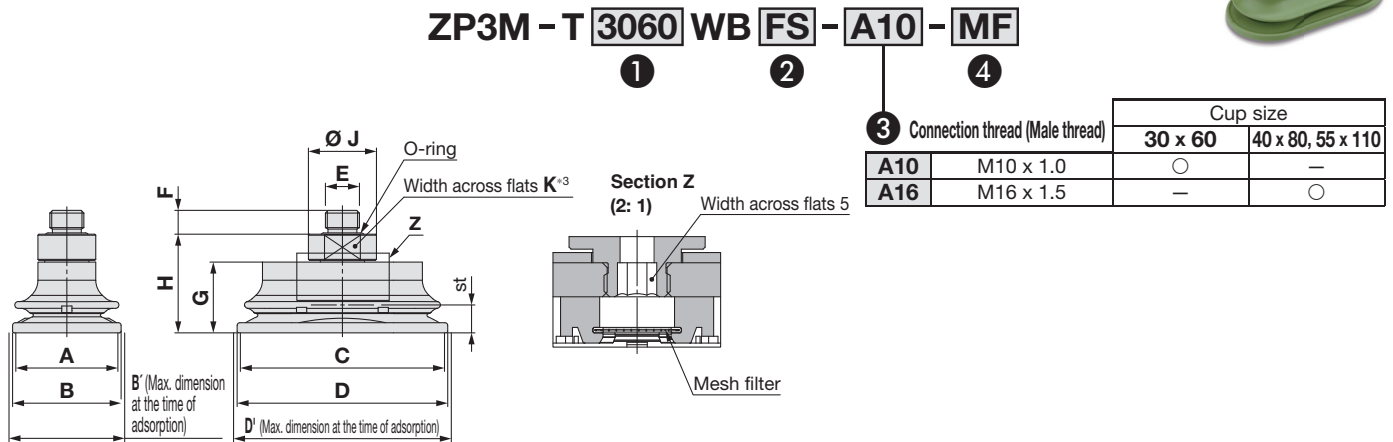


Model							A	B	B¹*2	C	D	D¹*2	E	F	G	H	J	K	st*2	Min. opening hole size of the adapter	Weight [g]
Vacuum inlet direction	① Cup diameter	Form	② Material *1	③ Connection thread	④ Mesh filter																
ZP3M	T	3060	WB	FS	A10	—	30	31.9	32.6	60	61.9	62.5	M10 x 1.0	7	20.8	29	20	17	7.5	Ø 5	31.0
		4080			A16	MF	40	42.3	44.8	80	82.3	83.8	M16 x 1.5	9	23.7	33.7	27	24	9.5		71.5
		55110					55	57.7	63.3	110	112.7	115.5			29.5	39.5			12.5		131.9

*1 FS: FS61 (Fluoro-based rubber)

*2 B', D': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

*3 The direction of width across flats K varies depending on the product.

With adapter Direct mounting type (Female thread)

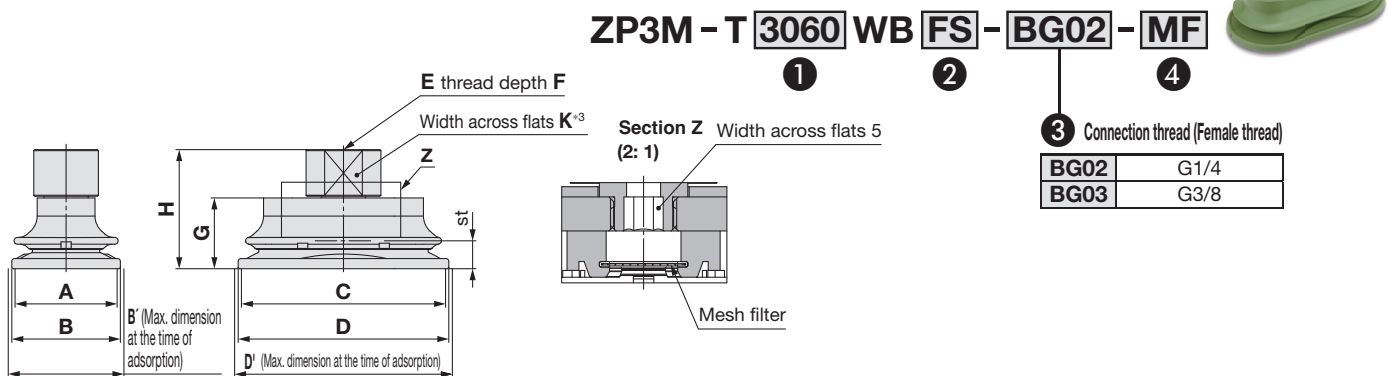

Model							A	B	B'※2	C	D	D'※2	E	F	G	H	J	K	st※2	Min. opening hole size of the adapter	Weight [g]
ZP3M	T	3060	WB	FS	BG02	MF	30	31.9	32.6	60	61.9	62.5	G1/4	8	20.8	35	22	19	7.5	Ø 5	34.3
					BG03								G3/8	9		36	25	22			36.9
		4080			BG02		40	42.3	44.8	80	82.3	83.8	G1/4	8	23.7	37.7	22	19	9.5		62.8
					BG03								G3/8	9		38.7	25	22			65.4
		55110			BG02		55	52.7	63.3	110	112.7	115.5	G1/4	8	29.5	43.5	22	19	12.5		123.2
					BG03								G3/8	9		44.5	25	22			125.7

*1 FS: FS61 (Fluoro-based rubber)

*2 B', D': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

*3 The direction of width across flats K varies depending on the product.

ZP3M Series

Dimensions/Models

With adapter Direct mounting type (Square adapter)





ZP3M - T **3060** WB **FS** - S32 - **MF**


①

②

③

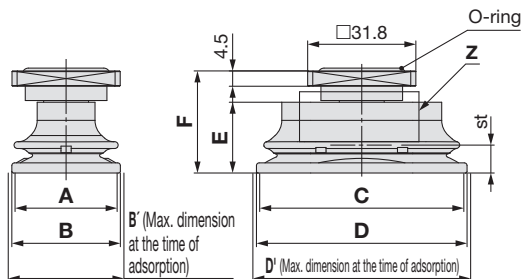

Square adapter mounting groove dimensions (Recommended)



* For details on how to use the square adapter, refer to "Mounting" on page 26.

Model							A	B	B'※2	C	D	D'※2	E	F	st※2	Min. opening hole size of the adapter	Weight [g]
ZP3M	T	Vacuum inlet direction	① Cup size	Form	② Material ※1	③ Mesh filter											
			3060	WB	FS	S32	MF	30	31.9	32.6	60	61.9	62.5	20.8	30	7.5	Ø 5
			4080	WB	FS	S32	MF	40	42.3	44.8	80	82.3	83.8	23.7	32.7	9.5	
			55110	WB	FS	S32	MF	55	57.7	63.3	110	112.7	115.5	29.5	38.5	12.5	
																	129.7

*1 FS: FS61 (Fluoro-based rubber)

*2 B', D': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

With adapter Plate mounting type (Male thread)



ZP3M - T **3060** WB **FS** - **A10** - **B5** - **MF**

①

②

③



④

Connection thread (Male thread)

A10	M10 x 1.5
A14	M14 x 1.5
AG02	G1/4

Vacuum inlet (Female thread)

B5	M5 x 0.8
B10	Rc1/8

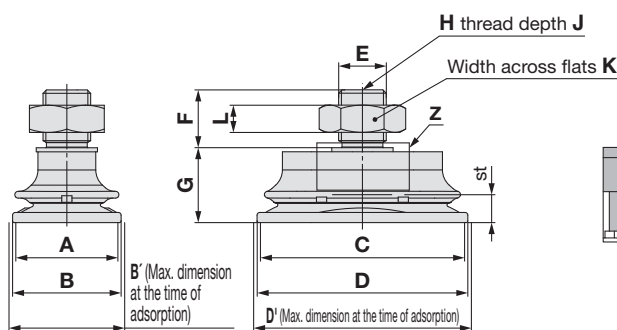

Replacement Parts: Nut Unit

③ Connection thread	Nut part no.
A10	ZPNA-M10A
A14	ZPNA-M14B
AG02	ZPNA-G02

Model							A	B	B'※2	C	D	D'※2	E	F	G	H	J	K	L	st※2	Min. opening hole size of the adapter	Weight [g]
ZP3M	T	Vacuum inlet direction	① Cup diameter	Form	② Material ※1	③ Connection thread																
						A10	B5	30	31.9	32.6	60	61.9	62.5	M10 x 1.5	15	22	M5 x 0.8	5	17	6	7.5	Ø 4.2
			3060	WB	FS	A14	B01							M14 x 1.5	17		Rc1/8	6.2	22	8		Ø 5
						AG02	B01							G1/4	13		Rc1/8	6.2	17	5		
						A10	B5							M10 x 1.5	15		M5 x 0.8	5	17	6		
						A14	B01							M14 x 1.5	17	24.7	Rc1/8	6.2	22	8	9.5	Ø 5
						AG02	B01							G1/4	13		Rc1/8	6.2	17	5		
						A10	B5							M10 x 1.5	15		M5 x 0.8	5	17	6		
			4080	WB	FS	A14	B01	40	42.3	44.8	80	82.3	83.8	M14 x 1.5	17	30.5	Rc1/8	6.2	22	8	12.5	Ø 5
						AG02	B01							G1/4	13		Rc1/8					
						A10	B5							M10 x 1.5	15		M5 x 0.8	5	17	6		
			55110	WB	FS	A14	B01	55	57.7	63.3	110	112.7	115.5	M14 x 1.5	17	30.5	Rc1/8	6.2	22	8	12.5	Ø 5
						AG02	B01							G1/4	13		Rc1/8					
						A10	B5							M10 x 1.5	15		M5 x 0.8	5	17	6		
						A14	B01							M14 x 1.5	17		Rc1/8	6.2	22	8		
						AG02	B01							G1/4	13		Rc1/8	6.2	17	5		

*1 FS: FS61 (Fluoro-based rubber)

*2 B', D': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

Dimensions/Models

With buffer Plate mounting type (Vacuum inlet direction: Vertical)


ZP3M - T **3060** **WB** **FS** **KB** **50** - **MF**

①

②

③ Buffer specifications

KB Non-rotating, With bushing

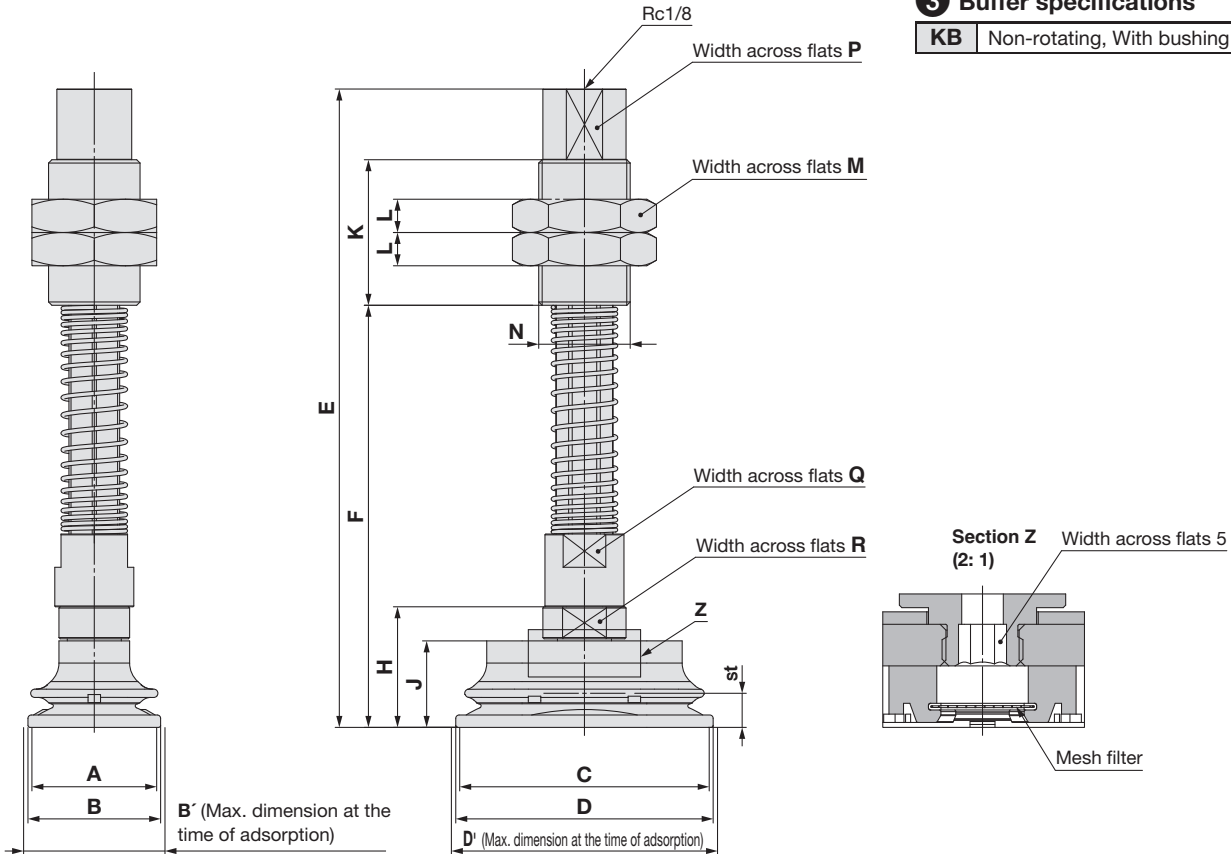

Model							A	B	B*2	C	D	D*2	E	F	H	J	K	L	M	N	P	Q	R	st*2	Min. opening hole size	Weight [g]
Vacuum inlet direction	① Cup diameter	Form	② Material *1	③ Buffer spec.	④ Buffer stroke	⑤ Mesh filter																				
ZP3M	T	3060	WB	FS	KB	10	MF	30	31.9	32.6	60	61.9	62.5	128.5	76.5	29	20.8	35	30	M22 x 1.5	18	16	17	7.5	Ø 3	263.2
						30								153.5	101.5											289.3
						50								173.5	121.5											309.1
						10								161.7	91.7											464.8
						30								186.7	116.7											500.9
						50								206.7	136.7											528.6
		55100	WB	FS	KB	10	MF	40	42.3	44.8	80	82.3	83.8	167.5	97.5	33.7	23.7	50	32	M26 x 1.5	21	24	24	9.5	Ø 4	525.2
						30								192.5	122.5											561.3
						50								212.5	142.5											588.9
						10								161.7	91.7											464.8
						30								186.7	116.7											500.9
						50								206.7	136.7											528.6

*1 FS: FS61 (Fluoro-based rubber)


*2 B', D': Maximum cup diameter at the time of adsorption, st: The stroke is a guide value at the setting vacuum pressure of -90 kPa.

ZP3M Series


Construction

With adapter


ZP3M-T□WBFS-A□




ZP3M-T□WBFS-A□-B□



ZP3M-T□WBFS-B□



ZP3M-T□WBFS-S32




Component Parts

No.	Description	Material	Note
1	Cup	FS61 (Fluoro-based rubber)	—
2	Insert plate	Aluminum alloy	—
3	Adapter	Aluminum alloy (Anodized)	ZP3M-T□WBFS-A□ ZP3M-T□WBFS-B□ ZP3M-T□WBFS-S32
		Structural carbon steel (Electroless nickel plating)	ZP3M-T□WBFS-A□-B□
4	O-ring	FKM	—
5	Mesh filter	Stainless steel	—
6	Nut	Steel (Zinc chromated)	ZP3M-T□WBFS-A10-B□ ZP3M-T□WBFS-A14-B□
		Brass (Electroless nickel plating)	ZP3M-T□WBFS-AG02-B□
7	Set screw	Aluminum alloy (Anodized)	—

* The parts 1, 2, and 3 are adhered to each other and cannot be disassembled.

With buffer

ZP3M-T□WBFSKB□-□

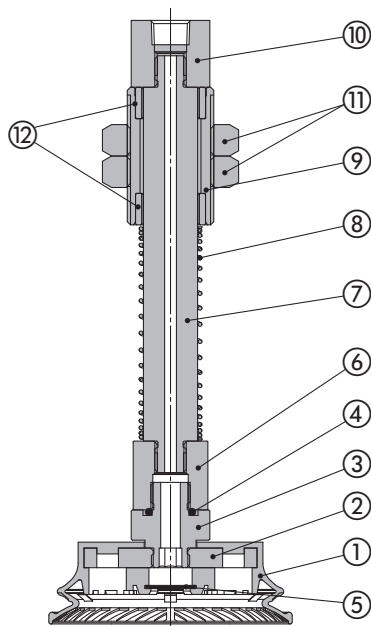

Component Parts

No.	Description	Material	Note
1	Cup	FS61 (Fluoro-based rubber)	—
2	Insert plate	Aluminum alloy	—
3	Adapter	Aluminum alloy (Anodized)	—
4	O-ring	FKM	—
5	Mesh filter	Stainless steel	—
6	Adapter	Aluminum alloy (Anodized)	—
7	Piston rod	Stainless steel	—
8	Return spring	Stainless steel	—
9	Buffer body	Brass (Electroless nickel plating)	—
10	Buffer adapter	Brass (Electroless nickel plating)	—
11	Nut	Structural steel (Nickel plating)	—
12	Bushing	—	—

* The parts 1, 2, and 3 are adhered to each other and cannot be disassembled.

Replacement Parts: Mesh Filter Unit

Part no.	Cup size
ZPMF-60-D13	30 x 60, 40 x 80, 55 x 110

ZP3M Series

Mounting Bracket Assembly

Product part no.	<p>ZP3M - T ① WB FS KB ② - □</p> <p>T: Vertical vacuum inlet Cup size Cup material Mesh filter Buffer stroke</p>
Component parts	<p>③ Mounting nut</p> <p>① Buffer assembly (Vacuum inlet: Vertical) (With mounting nut)</p> <p>② Cup with adapter</p>

		Symbol	① Cup size		
			3060	4080	55110
① Buffer assembly (With mounting nut)	② Buffer stroke	10	ZP3EB-T1KB10	ZP3EB-T2KB10	
		30	ZP3EB-T1KB30	ZP3EB-T2KB30	
		50	ZP3EB-T1KB50	ZP3EB-T2KB50	
② Cup with adapter	M10 x 1.0		ZP3M-T3060WBFS-A10-□	—	
	M16 x 1.5		—	ZP3M-T(4080/55110)WBFS-A16-□	
③ Mounting nut (Single unit)	M22 x 1.5		ZPNA-M22	—	
	M26 x 1.5		—	SN-032B	

[Buffer assembly part number example]

Product part no.	ZP3M - T4080WBFS	KB	10
Buffer assembly	ZP3EB - T2	KB	10
		② Buffer stroke	



ZP3M Series

Suction Cup/Specific Product Precautions

Be sure to read this before handling the products. Refer to the back cover for safety instructions. For vacuum equipment precautions, refer to the “Handling Precautions for SMC Products” and the “Operation Manual” on the SMC website: <https://www.smc.eu>

Design

1. Before use, please check the transfer conditions with the customer's actual equipment.

The transfer ability varies depending on the workpiece material, the friction between the cup and workpiece, moment, wind, vibration, etc. Testing with the customer's actual equipment is necessary.

2. In cases where the workpieces are heavy or dangerous objects, etc., take measures to address a possible loss of adsorption force (installation of a drop prevention guide, etc.).

3. The oil, chemical, and other substances adhered to the workpiece may not be suitable for the cup material.

Before using this product, sufficiently verify the workpieces in your operating environment.

Mounting

1. When mounting the product, tighten with the tightening torque shown in the table below.

If excessive or insufficient tightening torque is applied, sealing failure or loose screws may result.

When using a product equipped with a buffer, if the buffer is tightened to a torque beyond the appropriate tightening torque range, the buffer may malfunction.

With Adapter (Male thread type)

Model	Connection thread size	Proper tightening torque [N·m]
ZP3M-T□(R, RB, W, WB)FS-A10-□	M10 x 1.0	8 to 10
ZP3M-T□(R, RB, W, WB)FS-A16-□	M16 x 1.5	13 to 15
ZP3M-T□(R, RB)FS-AG02-□	G1/4	8 to 12

With Adapter (Female thread type)

Model	Connection thread size	Proper tightening torque [N·m]
ZP3M-T□RFS-B14-□	M14 x 1.0	11 to 13
ZP3M-T□(R, RB, W, WB)FS-BG02-□	G1/4	8 to 12
ZP3M-T□(R, RB, W, WB)FS-BG03-□	G3/8	15 to 20

Plate Mounting: With Adapter (Male thread type)

Model	Connection thread size	Proper tightening torque [N·m]
ZP3M-T□(W, WB)FS-A10-B5-□	M10 x 1.5	8 to 10
ZP3M-T□(W, WB)FS-A14-B01-□	M14 x 1.5	11 to 13
ZP3M-T□(W, WB)FS-AG02-B01-□	G1/4	8 to 12


With Buffer

Model	Connection thread size	Proper tightening torque [N·m]
ZP3M-(T/Y)□(R, RB)FSJB□-□	M18 x 1.5	28 to 32
	M22 x 1.5	45 to 50
ZP3M-(T/Y)□(R, RB)FSKB□-□	M22 x 1.5	45 to 50
	M26 x 1.5	62 to 68
ZP3M-T□(W, WB)FSKB□-□	M22 x 1.5	45 to 50
	M26 x 1.5	62 to 68

Mounting

2. How to use the square adapter

Use the square adapter by inserting it to an attachment you prepare. If it is difficult to insert the square adapter, apply grease to the O-ring. Prepare retaining measures by yourself.



Handling

1. Depending on the type of oil or foreign matter, the mesh filter may be clogged at an early stage.

Before using this product, sufficiently verify the mesh filter in your operating environment.

2. Periodically inspect the mesh filter.

An adsorbing malfunction may be caused by the clogging of the mesh filter.

3. When the suction cup is pressed, make sure it stays within the stroke range.

If this product is used with a stroke exceeding the maximum stroke, the cup may be broken or may reach the end of its service life earlier.

4. Suction cups are consumable. Please replace them when cracks or deformation is confirmed during periodic maintenance.

5. The workpiece size must be equal to or greater than the minimum curvature radius for adsorption.

If the workpiece size is smaller than the minimum curvature radius for adsorption, an adsorbing malfunction may occur.

6. As the adapter and cup are adhered to each other, they cannot be disassembled.

7. When adsorbing a plane, the cup skirt may be entrained depending on the workpiece with rough friction surface. Before using this product, sufficiently verify the adsorbing condition.

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “Caution,” “Warning” or “Danger.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC) ¹⁾, and other safety regulations.

Danger:

Danger indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

Warning:

Warning indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

Caution:

Caution indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

- 1) ISO 4414: Pneumatic fluid power – General rules and safety requirements for systems and their components.
ISO 4413: Hydraulic fluid power – General rules and safety requirements for systems and their components.
IEC 60204-1: Safety of machinery – Electrical equipment of machines. (Part 1: General requirements)
ISO 10218-1: Robots and robotic devices – Safety requirements for industrial robots – Part 1: Robots.
etc.

Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalogue information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

4. Our products cannot be used beyond their specifications. Our products are not developed, designed, and manufactured to be used under the following conditions or environments.

Use under such conditions or environments is not covered.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Use for nuclear power, railways, aviation, space equipment, ships, vehicles, military application, equipment affecting human life, body, and property, fuel equipment, entertainment equipment, emergency shut-off circuits, press clutches, brake circuits, safety equipment, etc., and use for applications that do not conform to standard specifications such as catalogues and operation manuals.
3. Use for interlock circuits, except for use with double interlock such as installing a mechanical protection function in case of failure. Please periodically inspect the product to confirm that the product is operating properly.

Caution

We develop, design, and manufacture our products to be used for automatic control equipment, and provide them for peaceful use in manufacturing industries.

Use in non-manufacturing industries is not covered.

Products we manufacture and sell cannot be used for the purpose of transactions or certification specified in the Measurement Act.

The new Measurement Act prohibits use of any unit other than SI units in Japan.

Limited warranty and Disclaimer/Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”. Read and accept them before using the product.

Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first. ²⁾ Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalogue for the particular products.
- 2) Vacuum pads are excluded from this 1 year warranty.
A vacuum pad is a consumable part, so it is warranted for a year after it is delivered. Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Safety Instructions

Be sure to read “Handling Precautions for SMC Products” (M-E03-3) before using.

Revision History		
Edition B	- A bowl bellows shape (Ø 50, Ø 63, and Ø 80) has been added. - The number of pages has been increased from 12 to 20.	BZ
Edition C	- An oval flat shape (16 x 50, 30 x 90, 40 x 80, and 50 x 100) has been added. - The number of pages has been increased from 20 to 28.	DO



SMC Corporation (Europe)

Austria	+43 (0)2262622800	www.smc.at	office.at@smc.com
Belgium	+32 (0)33551464	www.smc.be	info@smc.be
Bulgaria	+359 (0)2807670	www.smc.bg	sales.bg@smc.com
Croatia	+385 (0)13707288	www.smc.hr	sales.hr@smc.com
Czech Republic	+420 541424611	www.smc.cz	office.at@smc.com
Denmark	+45 70252900	www.smc.dk	smc.dk@smc.com
Estonia	+372 651 0370	www.smcee.ee	info.ee@smc.com
Finland	+358 207513513	www.smc.fi	smc.fi@smc.com
France	+33 (0)164761000	www.smc-france.fr	supportclient.fr@smc.com
Germany	+49 (0)61034020	www.smc.de	info.de@smc.com
Greece	+30 210 2717265	www.smchellas.gr	sales@smchellas.gr
Hungary	+36 23513000	www.smc.hu	office.hu@smc.com
Ireland	+353 (0)14039000	www.smcautomation.ie	technical.ie@smc.com
Italy	+39 03990691	www.smcitalia.it	mailbox.it@smc.com
Latvia	+371 67817700	www.smc.lv	info.lv@smc.com

Lithuania	+370 5 2308118	www.smclt.lt	info.lt@smc.com
Netherlands	+31 (0)205318888	www.smc.nl	info@smc.nl
Norway	+47 67129020	www.smc-norge.no	post.no@smc.com
Poland	+48 22 344 40 00	www.smc.pl	office.pl@smc.com
Portugal	+351 214724500	www.smc.eu	apoiocliente.pt@smc.com
Romania	+40 213205111	www.smcromania.ro	office.ro@smc.com
Russia	+7 (812)3036600	www.smc.eu	sales@smcru.com
Slovakia	+421 (0)413213212	www.smc.sk	sales.sk@smc.com
Slovenia	+386 (0)73885412	www.smc.si	office.si@smc.com
Spain	+34 945184100	www.smc.eu	post.es@smc.com
Sweden	+46 (0)86031240	www.smc.nu	order.se@smc.com
Switzerland	+41 (0)523963131	www.smc.ch	helpcenter.ch@smc.com
Turkey	+90 212 489 0 440	www.smcturkey.com.tr	satis@smcturkey.com.tr
UK	+44 (0)845 121 5122	www.smc.uk	sales.gb@smc.com
South Africa	+27 10 900 1233	www.smcza.co.za	Sales.za@smc.com