


Compact Digital Pressure Switch

ZSE10(F)/ISE10 Series





Low profile **9.8 mm**

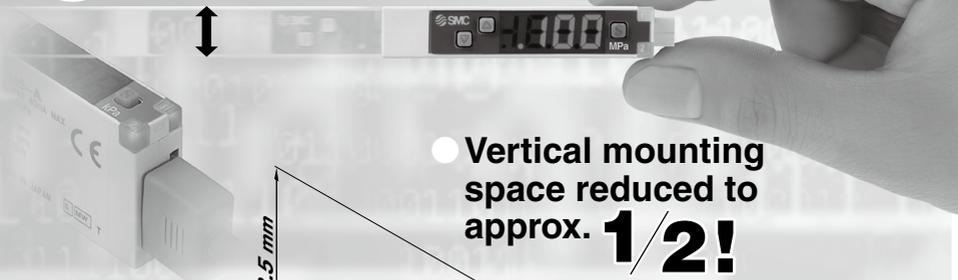

Vertical mounting space reduced to approx. **1/2!**


Reduced in depth!

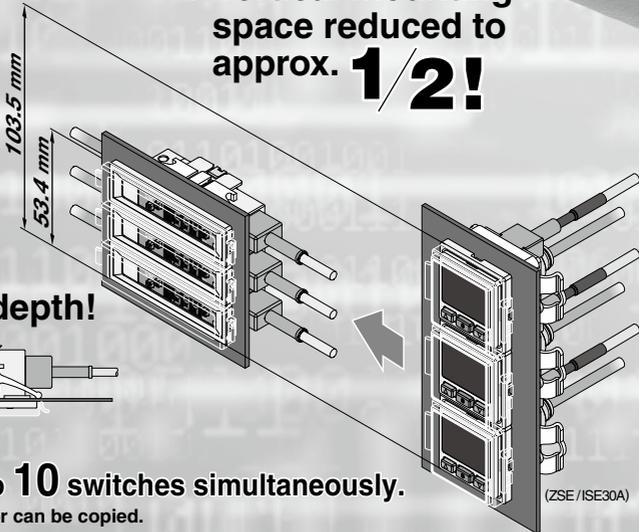


Can copy to up to **10** switches simultaneously.

The set values of the sensor can be copied.

- Reducing setting labor
- Minimizing risk of mistakes in setting

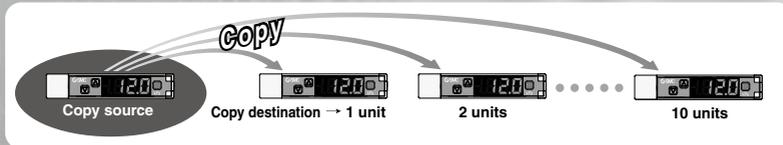

3-step setting

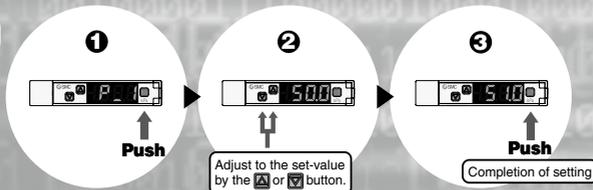


| |
|-------|
| ZSE20 |
| ISE20 |
| ZSE30 |
| ISE30 |
| ZSE40 |
| ISE40 |
| ZSE10 |
| ISE10 |
| ISE70 |
| ZSE80 |
| ISE80 |
| PS |
| ISA3 |
| ISA2 |
| ISE35 |
| PSE |
| IS |
| ISG |
| ZSM1 |


Improved visibility from multiple directions

The vacuum suction and burst pressure can be checked at a glance by indicator lights.

Multi-angle indicator

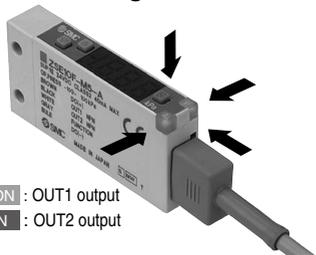


Green light ON : OUT1 output
Red light ON : OUT2 output

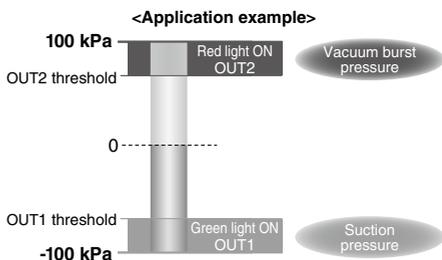


Mounting

Direct mounting




Panel mounting


Can be mounted closely in vertical direction.
One opening for all!




DIN rail mounting



Piping is possible from two directions.

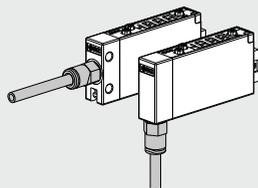

Pressure range of the positive pressure type expanded to vacuum area.

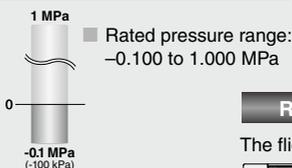

Standardized 2-output type.

- NPN or PNP open collector 2 outputs
- NPN or PNP open collector 1 output + Analog output (1 to 5 V)

Resolution conversion function

The flickering on the display can be eliminated.



(Only the displayed value is changed, and there is no effect on the accuracy.)

Secret code setting function


A function to prevent operation by anyone other than the designated operator while the keys are locked.



The set-value can be checked while the keys are locked.)

Power-saving function

The display can be turned off to save the power consumption.



(Power consumption reduced by up to 20%)


| Series | ZSE10 (vacuum pressure) | ZSE10F (compound pressure) | ISE10 (positive pressure) |
|----------------------|---|------------------------------------|--|
| Rated pressure range | 0.0 to -101.0 kPa | -100.0 to 100.0 kPa 100 kPa | -0.100 to 1.000 MPa 1 MPa 0 -0.1 MPa (-100 kPa) |
| Set pressure range | 10.0 to -105.0 kPa | -105.0 to 105.0 kPa | -0.105 to 1.050 MPa |
| Withstand pressure | 500 kPa | 500 kPa | 1.5 MPa |
| Min. unit setting | 0.1 kPa | 0.1 kPa | 0.001 MPa |
| Output | NPN or PNP open collector 2 outputs NPN or PNP open collector 1 output + Analog output (voltage) | | |

Compact Digital Pressure Switch

(RoHS)

ZSE10(F)/ISE10 Series

How to Order

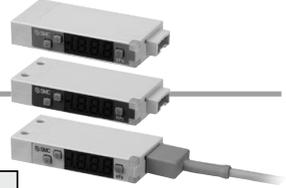

| |
|-------|
| ZSE20 |
| ISE20 |
| ZSE30 |
| ISE30 |
| ZSE40 |
| ISE40 |
| ZSE10 |
| ISE10 |
| ISE70 |
| ZSE80 |
| ISE80 |
| PS |
| ISA3 |
| ISA2 |
| ISE35 |
| PSE |
| IS |
| ISG |
| ZSM1 |

For positive pressure

Rated pressure range
ISE10 -0.100 to 1.000 MPa

ISE10 - M5 - A - M

For vacuum/
compound pressure

ZSE10 - M5 - B - M

Rated pressure range

| | |
|--------|-------------------|
| ZSE10 | 0.0 to -101.0 kPa |
| ZSE10F | -100.0 to 100 kPa |

Option 3

| Symbol | Calibration certificate | Note |
|--------|-------------------------|------|
| NII | | |
| K | | ○ |

Note) All texts in both English and Japanese.

Option 2

| NII | None |
|-----|--|
| D | Panel mount adapter + Front protective cover |
| R | DIN rail adapter |

Note 5) Not available for piping specifications of 01 and N01.
Note 6) Not available for piping specifications of M5R, 01 and N01.
Note 7) The DIN rail needs to be prepared by the customer.

Piping specifications

| M5 | M5 female thread/Side ported | 01* | R1/8/Side ported |
|-----|------------------------------|------|--------------------|
| | | | |
| M5R | M5 female thread/Rear ported | N01* | NPT1/8/Side ported |
| | | | |

* Made to Order

Note 1) For piping specifications 01 and N01, the tight mounting or direct mounting cannot be made since the fitting interferes with the piping.

Note 2) When using the tight mounting or direct mounting, select an appropriate fitting while referring to the dimensions (pages 72 and 73).

Output specifications

| | |
|----|--|
| A | NPN open collector 2 outputs |
| B | PNP open collector 2 outputs |
| C* | NPN open collector 1 output + Analog voltage |
| E* | PNP open collector 1 output + Analog voltage |

* Made to Order

Unit specifications

| | |
|-----|---|
| NII | With unit switching function |
| M | Fixed SI unit |
| P | With unit switching function (Initial value psi) |

Note 3) Under the New Measurement Law, sales of switches with the unit switching function are not allowed for use in Japan.

Note 4) Unit: kPa, MPa

Option 1

| | |
|-----|--|
| NII | Without lead wire |
| G | Lead wire with connector (Lead wire length: 2 m) With connector cover |

Options/Part No.

When optional parts are required separately, use the following part numbers to place an order.

| Part no. | Option |
|----------|--|
| ZS-39-5G | Lead wire with connector (with connector cover) (5 cores, 2 m) |
| ZS-39-B | Panel mount adapter |
| ZS-39-D | Panel mount adapter + Front protective cover |
| ZS-39-R | DIN rail adapter |

| Part no. | Option |
|-----------|------------------------|
| ZS-39-01 | Front protective cover |
| ZS-39-N1* | R1/8 piping adapter |
| ZS-39-N2* | NPT1/8 piping adapter |

* Made to Order

ZSE10(F)/ISE10 Series

Refer to pages 11 and 12 for Pressure Switch Precautions. For details about the Specific Product Precautions, refer to the Operation Manual on the SMC website, <http://www.smcworld.com> Click [here](#) for details.

Specifications

| Model | | ZSE10 (vacuum pressure) | ZSE10F (compound pressure) | ISE10 (positive pressure) |
|------------------------------|---------------------------------------|--|----------------------------|----------------------------|
| Rated pressure range | | 0.0 to -101.0 kPa | -100.0 to 100.0 kPa | -0.100 to 1.000 MPa |
| Display/Set pressure range | | 10.0 to -105.0 kPa | -105.0 to 105.0 kPa | -0.105 to 1.050 MPa |
| Withstand pressure | | 500 kPa | 500 kPa | 1.5 MPa |
| Display/Minimum unit setting | | 0.1 kPa | 0.1 kPa | 0.001 MPa |
| Fluid | | Air, Non-corrosive gas, Non-flammable gas | | |
| Power supply voltage | | 12 to 24 VDC \pm 10%, Ripple (p-p) 10% or less (With power supply polarity protection) | | |
| Current consumption | | 40 mA or less | | |
| Switch output | | NPN or PNP open collector 2 outputs | | |
| Maximum load current | | 80 mA | | |
| Maximum applied voltage | | 28 V (With NPN output) | | |
| Residual voltage | | 2 V or less (With load current of 80 mA) | | |
| Response time | | 2.5 ms or less (Response time selections with anti-chattering function: 20, 100, 500, 1000, 2000 ms) | | |
| Short circuit protection | | Yes | | |
| Repeat accuracy | | \pm 0.2% F.S. \pm 1 digit | | |
| Hysteresis | Hysteresis mode | Variable (0 or above) ^{Note)} | | |
| | Window comparator mode | | | |
| Analog output | Output voltage (Rated pressure range) | 1 to 5 V \pm 2.5% F.S. | | 0.6 to 5 V \pm 2.5% F.S. |
| | Linearity | \pm 1% F.S. | | |
| | Output impedance | Approx. 1 k Ω | | |
| Display | | 3 1/2 digit, 7-segment indicator, 1-color display (Red) | | |
| Display accuracy | | \pm 2% F.S. \pm 1 digit (at 25°C \pm 3°C ambient temperature) | | |
| Indicator light | | Lights up when output is turned ON. OUT1: Green OUT2: Red | | |
| Environment | Enclosure | IP40 | | |
| | Operating temperature range | Operating: -5 to 50°C, Stored: -10 to 60°C (No freezing or condensation) | | |
| | Operating humidity range | Operating and stored: 35 to 85% RH (No condensation) | | |
| | Withstand voltage | 1000 VAC for 1 minute between terminals and housing | | |
| | Insulation resistance | 50 M Ω or more (500 VDC measured via megohmmeter) between terminals and housing | | |
| Temperature characteristics | | \pm 2% F.S. (at 25°C in an operating range of -5 to 50°C) | | |
| Lead wire with connector | | Oilproof heavy-duty vinyl cable 5 cores, ϕ 3.5, 2 m, Conductor area: 0.15 mm ² (AWG26) Insulator O.D.: 1.0 mm | | |
| Standards | | CE/UKCA marking, UL/CSA (E216656) | | |

Note) If the applied pressure fluctuates around the set-value, the hysteresis must be set to a value more than the fluctuating width, otherwise chattering will occur.

Piping Specifications

| Model | | M5 | M5R | O1 | N01 |
|----------------------|--|--|---------------------------|-----------------------|-------------------------|
| Port size | | M5 x 0.8 (Side ported) | M5 x 0.8 (Rear ported) | R1/8 (Side ported) | NPT1/8 (Side ported) |
| Wetted part material | Sensor pressure receiving area | Sensor pressure receiving area: Silicon | | | |
| | Piping port | C3604 (Electroless nickel plating) O-ring: HNBR | | | |
| Weight | With lead wire with connector (5 cores, 2 m) | 55 g | | 63 g | |
| | Without lead wire with connector | 15 g | | 23 g | |

Functions (Refer to pages 76 and 77 for details.)

| | |
|---|--|
| Copy function | The settings of the copy source can be copied to the copy destination. |
| Auto-preset function | This function is to calculate a rough set-value automatically based on the on-going operation. |
| Display calibration function | The scattering of the indicated value can be eliminated. |
| Peak display function | Can retain the maximum pressure value displayed during measurement. |
| Bottom display function | Can retain the minimum pressure value displayed during measurement. |
| Keylock function (Selectable secret code) | Key operation can be locked to prevent any incorrect function of the operation switch. |
| Zero-clear function | The pressure display can be set at zero when the pressure is open to the atmosphere. |
| Anti-chattering function | Prevents possible malfunction due to sudden fluctuations in the primary pressure by adjusting the response time. |
| Display unit switching function | Can convert the display value. |
| Power-saving mode | Reduces power consumption. |
| Display resolution conversion function | Changes the display resolution from the default value 1000 to 100. The flickering on the display can be eliminated. |
| kPa MPa conversion function | The unit can be changed between kPa and MPa. |

Set Pressure Range and Rated Pressure Range

Set the pressure within the rated pressure range.

The set pressure range is the range of pressure that is possible in setting.


The rated pressure range is the range of pressure that satisfies the specifications (accuracy, linearity, etc.) on the switch.

Although it is possible to set a value outside the rated pressure range, the specifications will not be guaranteed even if the value stays within the set pressure range.

| Switch | | Pressure range | | | | |
|-----------------------|---------------|----------------|---------|---------|---------|----------|
| | | -100 kPa | 0 | 100 kPa | 500 kPa | 1 MPa |
| For vacuum pressure | ZSE10 | -101 kPa | 0 | | | |
| | | -105 kPa | 10 kPa | | | |
| For compound pressure | ZSE10F | -100 kPa | 100 kPa | | | |
| | | -105 kPa | 105 kPa | | | |
| For positive pressure | ISE10 | -100 kPa | | | | 1 MPa |
| | | -105 kPa | | | | 1.05 MPa |
| | | | | | | |

Analog Output


Voltage output

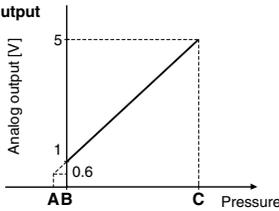


| Range | Rated pressure range | A | B | C |
|-----------------------|----------------------|----------|----------|----------|
| For vacuum pressure | 0.0 to -101.0 kPa | — | 0 | -101 kPa |
| For compound pressure | -100.0 to 100.0 kPa | — | -100 kPa | 100 kPa |
| For positive pressure | -0.100 to 1,000 MPa | -0.1 MPa | 0 | 1 MPa |

Internal Circuits and Wiring Examples


-A NPN (2 outputs)

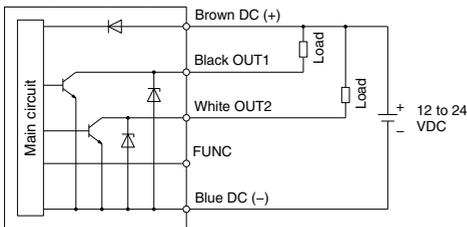


-B PNP (2 outputs)

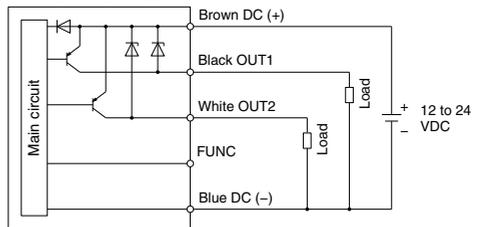

-C NPN (1 output) + Analog voltage output

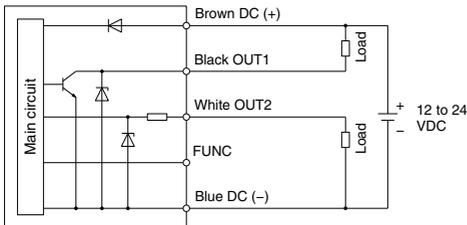

-E PNP (1 output) + Analog voltage output

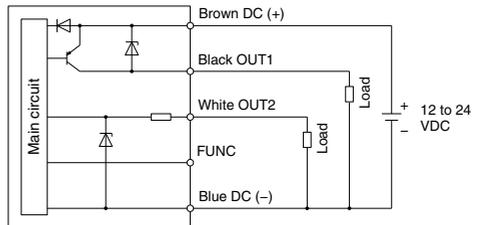


* The FUNC terminal is connected when using the copy function. (Refer to "Copy function" on page 76.)

ZSE20
ISE20
ZSE30
ISE30
ZSE40
ISE40
ZSE10
ISE10
ISE70
ZSE80
ISE80
PS
ISA3
ISA2
ISE35
PSE
IS
ISG
ZSM1


ZSE10(F)/ISE10 Series

Dimensions (For details about lead wires, refer to the product specifications.)


ZSE10(F)/ISE10-M5-□-□□□□□

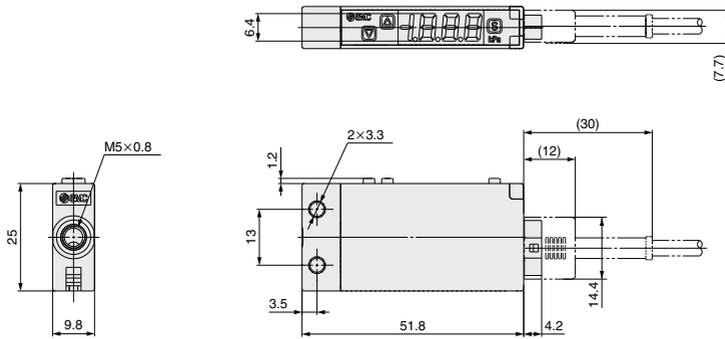


ZSE10(F)/ISE10-M5R-□-□□□□□

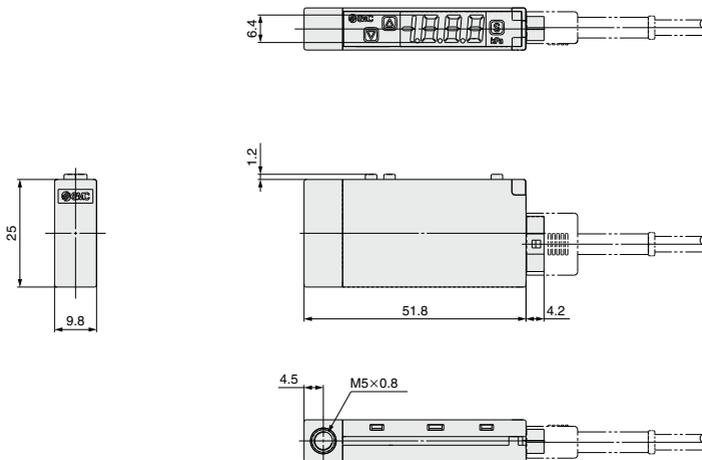

ZSE10(F)/ISE10-01-□-□□□□

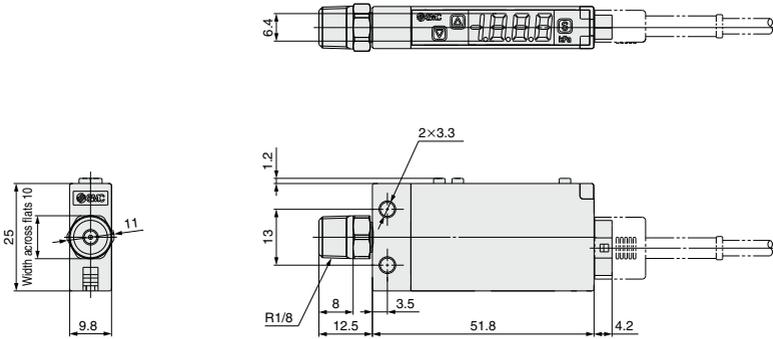

ZSE10(F)/ISE10-N01-□-□□□□

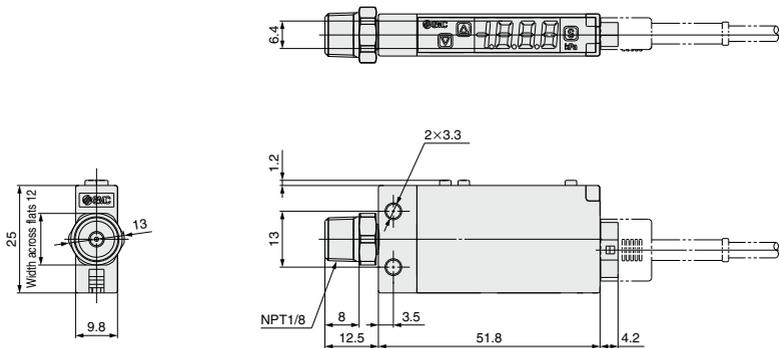


| |
|-------|
| ZSE20 |
| ISE20 |
| ZSE30 |
| ISE30 |
| ZSE40 |
| ISE40 |
| ZSE10 |
| ISE10 |
| ISE70 |
| ZSE80 |
| ISE80 |
| PS |
| ISA3 |
| ISA2 |
| ISE35 |
| PSE |
| IS |
| ISG |
| ZSM1 |

ZSE10(F)/ISE10 Series

Dimensions


ZSE10(F)/ISE10-M5-□-□□□D□

Panel mount adapter + Front protective cover

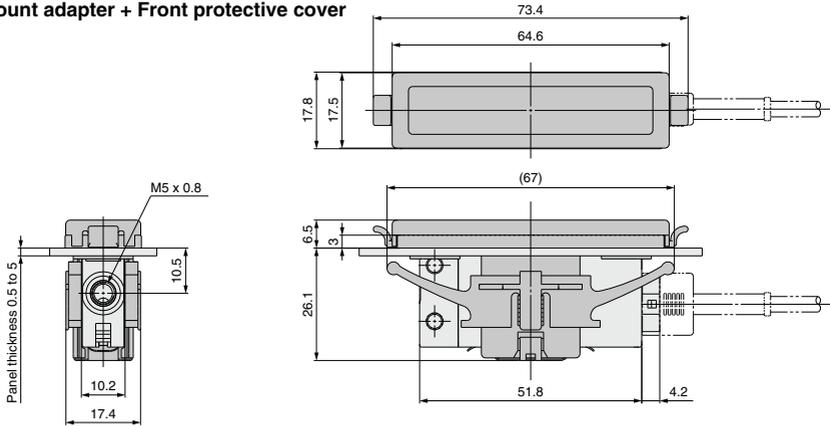


ZSE10(F)/ISE10-M5R-□-□□□D□

Panel mount adapter + Front protective cover

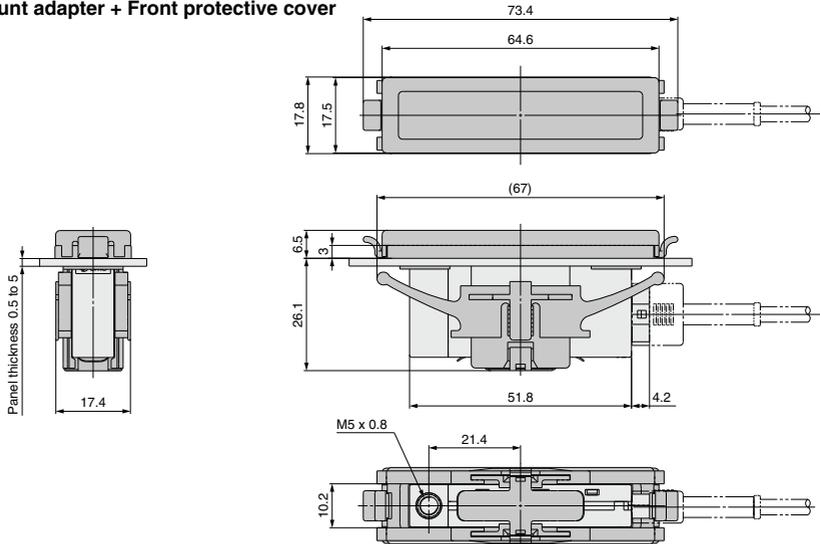

Lead wire with connector ZS-39-5G





ZSE10(F)/ISE10 Series

Function Details

A Copy function (F97)

The set values of the sensor can be copied. This can reduce setting labor and minimize the risk of setting mistakes.

Can copy to up to 10 switches simultaneously.
(Maximum transmission distance 4 m)

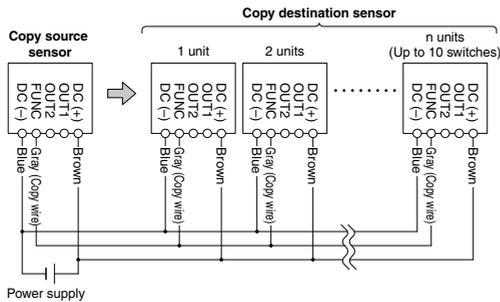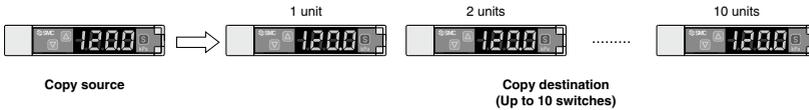


- 1) Connect the power supply and copy line as shown in the left figure.
- 2) All sensors are set to copy destination when first purchased. (Default condition is the sensor to be copied to.)
- 3) Press the **[S]** button on the source sensor to start copying.

B Auto-preset function (F5)

Auto-preset function, when selected in the initial setting, calculates and stores the set-value from the measured pressure. The optimum set-value is determined automatically by repeating vacuum and break with the target workpiece several times.

Suction Verification

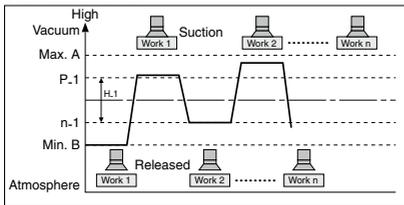


Formula for Obtaining the Set-Value

| P ₁ or P ₂ | H ₁ or H ₂ |
|----------------------------------|----------------------------------|
| $P_{1 (P_2)} = A - (A-B)/4$ | $H_{1 (H_2)} = I (A-B)/2$ |
| $n_{1 (n_2)} = B + (A-B)/4$ | |

C Display calibration function (F6)

Fine adjustment of the indicated value of the pressure sensor can be made within the range of $\pm 5\%$ of the read value. (The scattering of the indicated value can be eliminated.)

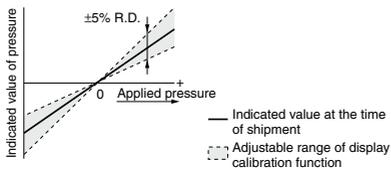

Note) When the display calibration function is used, the set pressure value may change ± 1 digit.

D Peak/Bottom value indication

This function constantly detects and updates the maximum (minimum) value and allows to hold the maximum (minimum) pressure value.

When the **[M]** buttons are simultaneously pressed for 1 second or longer, while "holding", the hold value will be reset.

E Keylock function

Prevents operation errors such as accidentally changing setting values.

F Zero-clear function

This function clears and resets the zero value on the display of measured pressure.

For the pressure switch with analog output, the analog output shifts according to the indication. The indicated value can be adjusted within $\pm 7\%$ F.S. of the pressure when ex-factory. (ZSE10F (for compound pressure) $\pm 3.5\%$ F.S.)

The \square in () shows the function code number. Refer to the Operation Manual for the details of operation procedures and function codes. Click [here](#) for details.

G Error indication function

| Error name | Error code | Description | Action |
|------------------------|------------|--|---|
| Overcurrent error | Er1 | Load current of 80 mA or more is applied to the switch output (OUT1). | Eliminate the cause of the over current by turning off the power supply, and then turn on it again. |
| | Er2 | Load current of 80 mA or more is applied to the switch output (OUT2). | |
| Zero-clear error | Er3 | During zero-clear operation, pressure over $\pm 7\%$ F.S. is applied. (ZSE10F (compound) $\pm 3.5\%$ F.S.) After 1 s, the mode will reset to measurement mode. $\pm 1\%$ F.S. of the zero-clear range varies between individual products. | Perform zero-clear operation again after restoring the applied pressure to an atmospheric pressure condition. |
| Applied pressure error | HHH | Supply pressure exceeds the maximum set pressure. | Reset applied pressure to a level within the set pressure range. |
| | LLL | Supply pressure is below the minimum set pressure. | |
| System error | Er0 | Internal data error | Turn off the power supply and then turn on it again. If the failure cannot be solved, please contact SMC for investigation. |
| | Er4 | | |
| | Er6 | | |
| | Er7 | | |
| | Er8 | | |
| | Er9 | | |

If the failure cannot be solved after the above instructions are performed, please contact SMC for investigation.


H Anti-chattering function (F3)

A large bore cylinder or ejector consumes a large volume of air in operation and may experience a temporary drop in the supply pressure. This function prevents detection of such temporary drops in the supply pressure as an error.

| Available response time settings |
|---|
| 20 ms, 100 ms, 500 ms, 1000 ms, 2000 ms |

<Principle>

This function averages pressure values measured during the response time set by the user and then compares the average pressure value with the pressure set point value to output the result on the switch.

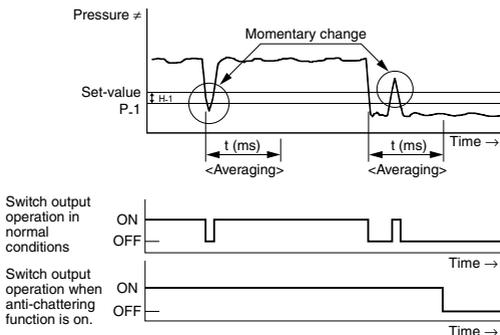

I Display unit switching function (F0)

Display units can be switched with this function.

| Display unit Min. unit setting | PA | | GF | bAr | PSI | inH | mmH |
|-----------------------------------|-----|-------|---------------------|-------|------|------|------|
| | kPa | MPa* | kgf/cm ² | bar | psi | inHg | mmHg |
| ZSE10 (vacuum pressure) | 0.1 | 0.001 | 0.001 | 0.001 | 0.01 | 0.1 | 1 |
| ZSE10F (compound pressure) | 0.1 | 0.001 | 0.001 | 0.001 | 0.02 | 0.1 | 1 |
| ISE10 (positive pressure) | 1 | 0.001 | 0.01 | 0.01 | 0.1 | / | / |

* The ZSE10 (vacuum pressure) and ZSE10F (compound pressure) will have different setting and display resolution when the unit is set to MPa.

J Power-saving mode (F80)

Power-saving mode can be selected.

It shifts to the power-saving mode without button operation for 30 seconds. It is set to the normal mode (Power-saving mode is OFF.) when ex-factory. (Decimal points and operation indicator light (only when the switch output is turned ON.) blink in the power-saving mode.)

K Setting of secret code (F81)

Users can select whether a secret code must be entered to release key lock. At the time of shipment from the factory, it is set such that the secret code is not required.

ZSE20
ISE20
ZSE30
ISE30
ZSE40
ISE40
ZSE10
ISE10
ISE70
ZSE80
ISE80
PS
ISA3
ISA2
ISE35
PSE
IS
ISG
ZSM1