
Air Management System

Monitoring compressed air condition via IO-Link and reduction of air consumption (RoHS)

 C TAB US
*1 Refer to the "How to Order" page of each series for details on compliant models.



AMS30X/40X -X2044 -X2045

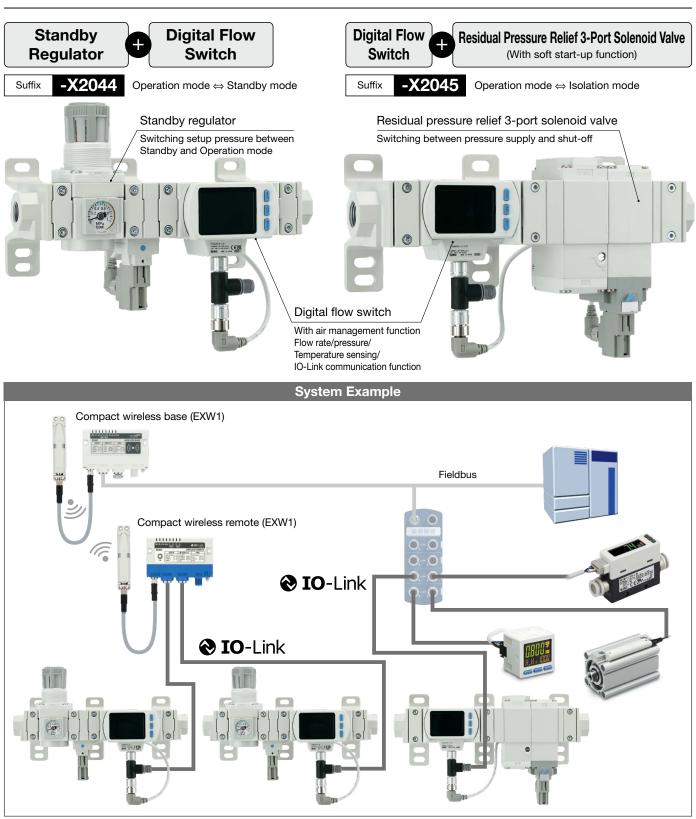

AMS30X/40X-X2044 -X2045

Input Process Data

		1
Bit offset	Item	Note
0	Standby SW (OUT1)*1	0: OFF 1: ON
1	Control output (OUT2)*2	0: OFF 1: ON
2	Isolation SW*3	0: OFF 1: ON
3	Accumulated pulse output	0: OFF 1: ON
8	Standby signal	0: OFF 1: ON
9	Force standby signal	0: OFF 1: ON
15	Force mode ^{*4}	0: OFF 1: ON
16	Accumulated flow SW1	0: OFF 1: ON
17	Accumulated flow SW2	0: OFF 1: ON
18	Flow rate SW1	0: OFF 1: ON
19	Flow rate SW2	0: OFF 1: ON
20	Temperature SW1	0: OFF 1: ON
21	Temperature SW2	0: OFF 1: ON
22	Pressure SW1	0: OFF 1: ON
23	Pressure SW2	0: OFF 1: ON

Bit offset	Item	Note				
24	Flow rate unit	0: L 1: ft3				
25	Flow rate criteria	0: STD 1: nor				
26	Flow rate diagnosis	0: Normal 1: HHH				
27	Temperature diagnosis	0: Normal 1: HHH/LLL				
28	Pressure diagnosis	0: Normal 1: HHH/LLL				
29	Fixed output	0: Normal output 1: Fixed output				
30	Error	0: Normal 1: Abnormal				
31	System error	0: Normal 1: Abnormal				
32 to 47	Measured pressure value	Signed 16 bit				
48 to 63	Measured temperature value	Signed 16 bit				
64 to 79	Measured flow rate value	Signed 16 bit				
80 to 95	Accumulated flow rate lower limit	Lippignod 20 hit				
96 to 111	Accumulated flow rate upper limit	Unsigned 32 bit				

*1 Judgment by Standby flow rate & Standby delay

*2 Judgment by Standby SW & Standby signal or Force Standby signal (Operational signal of Standby Regulator or Residual pressure exhaust valve) AMS30X/40X-X2045: switch Operation mode and Isolation mode by Control output (OUT2)

*3 Judgment by Control output and Isolation delay

*4 During Force mode except [F41] AMS mode


Bit offset	111	110	109	108	107	106	105	104	103	102	101	100	99	98	97	96
Item						A	ccumula	ted flow r	ate uppe	r limit (Pl	D)					
Bit offset	95	94	93	92	91	90	89	88	87	86	85	84	83	82	81	80
Item		Accumulated flow rate lower limit (PD)														
Bit offset	79	78	77	76	75	74	73	72	71	70	69	68	67	66	65	64
Item	Measured flow rate value (PD)															
Bit offset	63	62	61	60	59	58	57	56	55	54	53	52	51	50	49	48
Item	Measured temperature value (PD)															
Bit offset	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32
Item							Measu	ured pres	sure valu	e (PD)					-	
Bit offset	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
	System		Fixed	Pressure							Temperature					
Item	error	Error	output	diagnosis		diagnosis		unit	2	1	2	1	2	1	flow 2	flow 1
Bit offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Item	Force mode		R	eservatio	n		Force standby signal	Standby signal		Reser	vation		Accumulated pulse output	Isolation SW	Control output	Standby SW
															OUT2	OUT1

Output Process Data

Bit offset		Ite	em		Note											
0	S	Standby s	ignal		0: OFF 1: ON											
1	F	orce star	ndby sign	nal	0: (OFF 1:0	NC									
								-								
Bit offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
															Force	

Air Management System IO-Link compatible AMS30X/40X -X2044 -X2045

How to Order

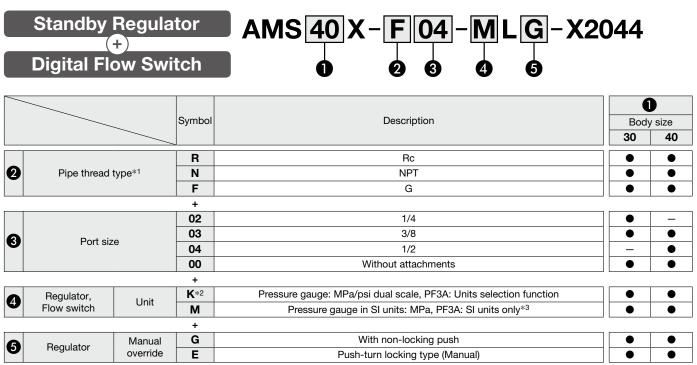

*1 For port size "00", specify thread of the standby regulator (ARS)

*2 Applies to overseas destinations only

*3 Fixed units/Instantaneous flow: L/min, Accumulated flow: L, Pressure: kPa, MPa, Temperature: °C

Including the connection cable and Y connector for standby regulator

Digital Flow Switch +

Residual Pressure Relief 3-Port Solenoid Valve (With soft start-up function)

MLG-X2045 AMS 40 X-04 F 5

			Symbol	Body 30	/ size 40	
			R	Rc	•	•
0	Pipe thread type*1		Ν	NPT	•	•
			F	G	•	•
			+			
				1/4		—
3	Port size		03	3/8		
0			04 1/2		-	
			00	Without attachments	•	
			+			
•	Flow switch	switch Unit		Units selection function	•	
4	FIOW SWITCH	Unit	M SI units only ^{*3}			
			+			
6	Residual pressure	Manual	G	•		
0	relief valve	override	E	Push-turn locking type (Manual)	•	

*1 For 3 port size "00," the 2 pipe thread type symbol will be "R."

*2 Applies to overseas destinations only

*3 Fixed units/Instantaneous flow: L/min, Accumulated flow: L, Pressure: kPa, MPa, Temperature: °C

* Including the connection cable and Y connector for residual pressure relief valve




RoHS




Accessories

Cable for connection component (For IO-Link Device)

EX9-AC 005 -SSPS (With connector on both sides (Socket/Plug))

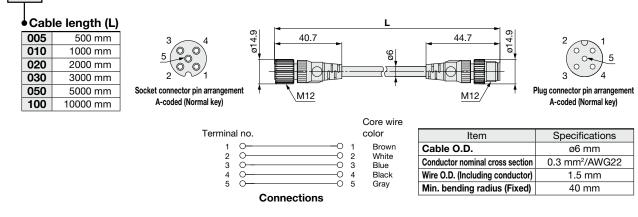

EX9-AC 005 -SAPA (With connector on both sides (Socket/Plug))

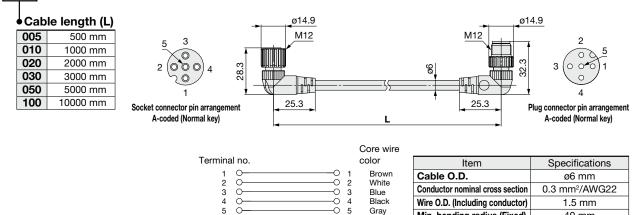

Connections

Gray

Min. bending radius (Fixed)

40 mm

Silencer **Compact resin type**



Click here for details.



AN30-03




Air Management System IO-Link compatible AMS30X/40X -X2045

Specifications: -X2044



Standby	Regulator 🛨 Dig	gital Flow Switch						
	Model	AMS30X-X2044	AMS40X-X2044					
Commonweat	Standby regulator	AR30S	AR40S					
Component	Digital flow switch	PF3A801H-X105	PF3A802H-X105					
Port size		1/4, 3/8	3/8, 1/2					
Fluid*1		A	ir					
Rated flow ran	ge	10 to 1000 L/min	20 to 2000 L/min					
Ambient and fl	uid temperatures	0 to 50°C (No freezing and condensation)						
Proof pressure)	1.0	MPa					
Max. operating) pressure	0.7 MPa						
Supply pressu	re range	0.3 to 0.7 MPa						
Standby press	ure range	0.2 to 0.4 MPa						
Power supply	voltage	24 VDC	C±10%					
Current consu	mption	170 mA	or less					
Input/Output		IO-Link, output for	standby regulator					
Type of actuat	on	N.O. (Norn	nally open)					
Enclosure		IP65 (Electrical equipment part only)						
Weight		1400 g	2000 g					

*1 Air quality grade is JIS B 8392-1:2012 [6:6:4] and ISO 8573-1:2010 [6:6:4]. Mount an air filter with a nominal filtration rating of 5 μm or less on the inlet side of the product.

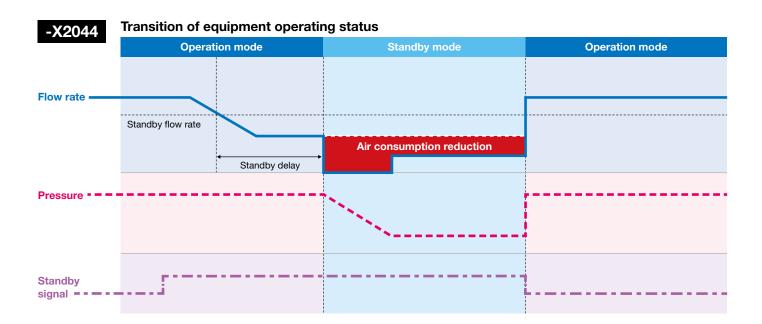


AMS30X/40X-X2044 -X2045

Specifications: -X2045



Bigitai i iow c	Switch Tesidual Flessur						
	Model	AMS30X-X2045	AMS40X-X2045				
Component	Digital flow switch	PF3A801H-X105	PF3A802H-X105				
Component	Residual pressure relief valve	VP546E-X661	VP746E-X661				
Port size		1/4, 3/8	3/8, 1/2				
Fluid*1		A	ir				
Rated flow rar	nge	10 to 1000 L/min	20 to 2000 L/min				
Ambient and f	luid temperatures	0 to 50° C (No freezing and condensation)					
Proof pressure)	1.0	MPa				
Max. operating	g pressure	0.7 MPa					
Supply pressu	re range	0.2 to 0.7 MPa					
Power supply	voltage	24 VDC ±10%					
Current consu	mption	170 mA	or less				
Input/Output		IO-Link, output for resid	lual pressure relief valve				
Type of actuat	ion	N.O. (Norn	nally open)				
Enclosure		IP65 (Electrical equipment part only)					
Weight		1500 g 2400 g					

*1 Air quality grade is JIS B 8392-1:2012 [6:6:4] and ISO 8573-1:2010 [6:6:4]. Mount an air filter with a nominal filtration rating of 5 μm or less on the inlet side of the product.

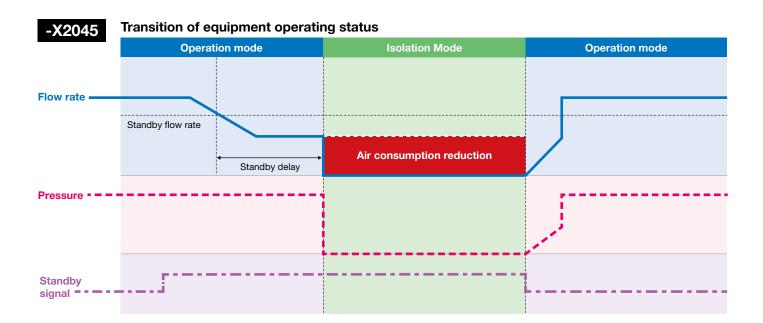

Digital Flow Switch 🕂 Residual Pressure Relief 3-Port Solenoid Valve (With soft start-up function

Air Management System IO-Link compatible AMS30X/40X -X2045

Standby Regulator (\pm) **Digital Flow Switch** Dimensions: Combination of N.O. (Normally open) J Е F G 85 U S ۵ œ \square ≥ OUT σ IN ſ E Φ 0 ш σ Connection cable for standby regulator Part no.: EXA1-AC002-SAPA-X4 * Included parts <u>2 x P</u> (Port size) Branch connector Part no.: LEC-CGD AMS30/40X-00-L0-X2044 Included parts (Without attachments) Pin M12, 4-pin, Description plug, A-coded no. Α F DC24V 1 E: Push-turn 2 OUT2 locking type 3 DC0V 4 OUT1(C/Q) 2 Φ Γ Bracket dimensions Ρ **B***1 **D***1 Model Α Е J Μ F G Q R S т U V w AMS30X-00-0L0-X2044 1/4.3/8 200.6 122 247.6 86.5 29.1 30 85.2 104.2 35 7 14 54.5 6 47 42.5 AMS40X-00-0L0-X2044 273.6 3/8.1/2 205.6 91.5 32.6 126.5 36 103.2 105.2 40 9 18 65 7 55 50


Model	Р	Α	F
AMS30X-000-L0-X2044	_	185.2	83.1
AMS40X-00-0L-X2044	_	203.2	100.6

*1 The dimension of B and D is the length when the regulator knob is unlocked.

AMS30X/40X-X2045

Dimensions: Combination of Digital Flow Switch + Residual Pressure Relief 3-Port Solenoid Valve (With soft start-up function)

N.O. (Normally open)

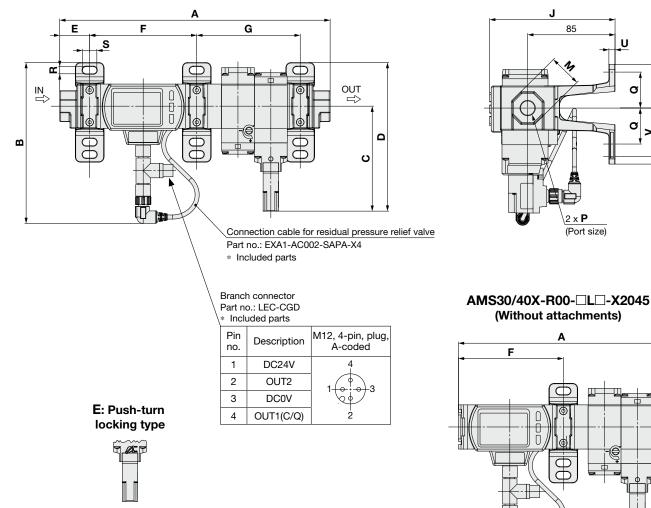

Model	Р	•	В	С	D	Е	J	м	Bracket dimensions								
Model	P	A			U				F	G	Q	R	S	Т	U	V	W
AMS30X-00-0L0-X2045	1/4·3/8	263.1	156.6	102.1	144.6	29.1	122	30	104.2	100.7	35	7	14	54.5	6	47	42.5
AMS40X-□□-□L□-X2045	3/8.1/2	292.6	164.9	118.8	168.8	32.6	124	36	105.2	122.2	40	9	18	65	7	55	50
Model	Р	Α	F														
AMS30X-R00-□L□-X2045	_	200.7	102.1														

▲ Safety Instructions	Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.

SMC Corporation https://www.smcworld.com

_

AMS40X-R00-□L□-X2045

222.1

102.5

U

C

C ≻ 2