D-sub Connector

Type 10 Side Ported


25A-JSY1000/3000 Series

CE UK ROHS



Internal Pilot

How to Order Manifolds



Series

1	JSY1000
3	JSY3000

2 Type


10	Side ported

Valve stations

F : D-sul	b connector	(25 pins)		
Symbol	Stations Note			
02	2 stations			
i	:	Double wiring*1		
12	12 stations	-		
02	2 stations	Charified leveut*2		
•	:	Specified layout*2 (Up to 16 solenoids available)		
16	16 stations	(Op to 10 soleriolds available)		

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- * This also includes the number of blanking plates.

3 Connector type



4 Connector entry direction

1: Upward	2: Lateral

6 P, E port entry

U	U side (2 to 10 stations)
D	D side (2 to 10 stations)
В	Both sides (2 to 16 stations)

SUP/EXH block assembly

Nil	Internal pilot		
S	Internal pilot,		
	Built-in silencer		

* The 3/5(E) port is plugged for the built-in silencer type.

8A, B port size (Metric/One-touch fitting)

Symbol		A, B port	JSY1000	JSY3000	
C4		ø4	•	_	
C6	Straight	ø6	•	•	
C8	Stra	ø8	_	•	
CM*1		Straight port, mixed sizes	•	•	8
P, E port size (One-touch fittings)		ø8	ø10		

- *1 Indicate the sizes on the manifold specification sheet for "CM."
- The JSY1000 manifold pitch for C4 is 6.5 mm, and 9 mm for C6. When CM is selected, the manifold pitch is different depending on the selected fitting.

9 Mounting and Option

Symbol	Mounting	
Nil	Direct mounting	
D□	DIN rail mounting	

DIN Rail Option

Nil	DIN rail mounting (With DIN rail)		
0	DIN rail mounting (Without DIN rail)		
3	For 3 stations	On a life or large the large of the con-	
	÷	Specify a length longer that that of the standard rail.	
16	For 16 stations	iliai oi ilie siailuatu tall.	

- * Enter the number of stations inside \square when it is larger than the number of valve stations. (Refer to "DIN Rail Option" shown
- Refer to the Web Catalog for details on securing the DIN rail mounting type manifold.



^{*} The 25A- series specifications and dimensions are the same as those of the standard model.

Example (25A-JJ5SY3-10F1 2-position double (24 VDC) 25A-JSY3100-5U (2 sets)

- 25A-JJ5SY3-10F1-05D-C8 ···1 set (Type 10 5-station manifold base part no.)


 * 25A-JSY3100-5U ···············2 sets (2-position single part no.)
- * 25A-JSY3200-5U3 sets (2-position double part no.)
 - → The asterisk denotes the symbol for the assembly. Prefix it to the part numbers of the valve, etc.
- · For the valve arrangement, the valve closest to the D side is considered the 1st station.
- Under the manifold part number, state the valves to be mounted in order starting with the 1st station as shown in the figure. If the arrangement becomes too complicated, specify the details on a manifold specification sheet.

Internal Pilot

Manifold base (5 stations) 25A-JJ5SY3-10F1-05D-C8

How to Order Valves (With mounting screw)

Refer to the **Web Catalog** for valve specifications.

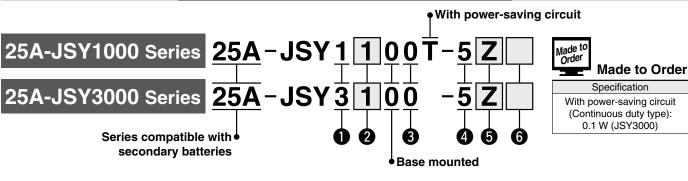

1 Series

00.	100
1	JSY1000
3	JSY3000

3 Pilot valve exhaust method

<u> </u>	 varvo extrauet metroa
0	Pilot valve individual exhaust

4 Rated voltage

5	24 VDC

⚠ Caution

If the JSY3000 series is to be continuously energized, please be sure to select the power-saving circuit (continuous duty type) specification. Refer to "Made to Order."

For the JSY1000 series, only the power-saving circuit specification is available.

2 Type of actuation


1	2-position	Single
2	2-position	Double
3		Closed center
4	3-position	Exhaust center
5		Pressure center
Α	4	N.C./N.C.
	4-position dual 3-port	N.O./N.O.
С	dual 3-port	N.C./N.O.

5 Light/surge voltage suppressor and common specification

Symbol	With light	Surge voltage suppressor	Common specification
U	U		Non-polar
Z	•	•	Positive common
NZ			Negative common

- Only "Z" and "NZ" types are available for the JSY1000 series.
- When the non-polar common specification type is selected, take measures to prevent surge voltage. For details, refer to the Web Catalog.

6 Manual override




- Push-turn locking lever type "E" is not available for the JSY1000.
- * When ordering a valve individually, the base gasket is not included.

Since the base gasket is attached to the manifold, please order the base gasket separately if it is needed for maintenance. Refer to the **Web Catalog** for base gasket part numbers.

Refer to page 24 for mounting screw part numbers.

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.



SMC

Air Cylinders Control

Related Products

Rotary Actuators

Vacuum Equipment Air Grippers

aration Val

Air Preparation Equipment

> Clean Air Filters

Modular F.R.L./ Pressure Control Equipment

Flow Control Equipment/ Fittings

Detection Switches

luid Control Do

Process Gas Fluid Equipment Equi

Electric Pi Actuators E

Switches

Terminal Block Box


Type 10 Side Ported

25A-JSY1000/3000 Series

(E UK ROHS

Internal Pilot

How to Order Manifolds



1 JSY1000 3 JSY3000

2 Typ	е
10	Side ported

3 Wiring

Uning		
Т	Terminal block box	_

4 Valve stations

T: Terminal block box			
Symbol	Stations	Note	
02	2 stations		
	:	Double wiring*1	
10	10 stations		
02	2 stations	Cracifical lava 4*2	
:	:	Specified layout*2 (Up to 16 solenoids available)	
16	16 stations	(Op to 10 soleriolds available)	

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- *3 This also includes the number of blanking plates.

5 P, E port entry

	_ :
U	U side (2 to 10 stations)
D	D side (2 to 10 stations)
В	Both sides (2 to 16 stations)

6 SUP/EXH block assembly

Nil	Internal pilot
S	Internal pilot, Built-in silencer

- * The 3/5(E) port is plugged for the built-in silencer type.
- * When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

A, B port size (Metric/One-touch fitting)

7., 2 port 5125 (monte, one todan mang)					
Symbol		A, B port	JSY1000	JSY3000	
C4		ø4	•	_	
C6	Straight	ø6	•	•	
C8	Stra	ø8	_	•	0 900 99
CM*1		Straight port, mixed sizes	•	•	9
P, E port size (One-touch fittings)		ø8	ø10		

- *1 Indicate the sizes on the manifold specification sheet for "CM."
- * The JSY1000 manifold pitch for C4 is 6.5 mm, and 9 mm for C6. When CM is selected, the manifold pitch is different depending on the selected fitting.

13 Mounting and Option

	<u> </u>
Symbol	Mounting
Nil	Direct mounting
D□	DIN rail mounting

- * Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" shown below.)
- Refer to the Web Catalog for details on securing the DIN rail mounting type manifold.


DIN Rail Option

Nil	DIN rail mounting (With DIN rail) DIN rail mounting (Without DIN rail)	
0		
3	For 3 stations	On a sife of Language Income Alana
	:	Specify a length longer than that of the standard rail.
16	For 16 stations	that of the standard fall.



^{*} The 25A- series specifications and dimensions are the same as those of the standard model.

How to Order Manifold Assembly

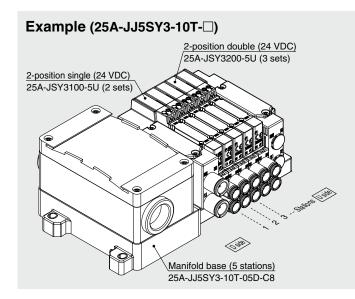


- 25A-JJ5SY3-10T-05D-C8 1 set (Type 10 5-station manifold base part no.) * 25A-JSY3100-5U2 sets (2-position single part no.)
- 25A-JSY3200-5U3 sets (2-position double part no.)
 - The asterisk denotes the symbol for the assembly. Prefix it to the part numbers of the valve, etc.
- For the valve arrangement, the valve closest to the D side is considered the
- Under the manifold part number, state the valves to be mounted in order starting with the 1st station as shown in the figure. If the arrangement becomes too complicated, specify the details on a manifold specification

Internal Pilot

How to Order Valves (With mounting screw)

Refer to the **Web Catalog** for valve specifications.

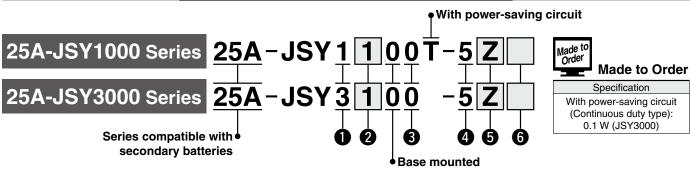

Series

O 001100		
1	JSY1000	
3	JSY3000	

3 Pilot valve exhaust method

0	Pilot valve individual exhaust

nated		eu voltage
		24 VDC

∕ Caution

If the JSY3000 series is to be continuously energized, please be sure to select the power-saving circuit (continuous duty type) specification. Refer to "Made to Order."

For the JSY1000 series, only the power-saving circuit specification is available.

Type of actuation


1	2-position	Single	
2		Double	
3		Closed center	
4	3-position	Exhaust center	
5		Pressure center	
Α	4-position dual 3-port	N.C./N.C.	
В		N.O./N.O.	
С	dual 5-port	N.C./N.O.	

5 Light/surge voltage suppressor and common specification

Symbol	With light	Surge voltage suppressor	Common specification
U			Non-polar
Z	Z	•	Positive common
NZ			Negative common
		•	

- * Only "Z" and "NZ" types are available for the JSY1000 series.
- When the non-polar common specification type is selected, take measures to prevent surge voltage. For details, refer to the Web Catalog.

6 Manual override



- Push-turn locking lever type "E" is not available for the JSY1000.
- When ordering a valve individually, the base gasket is not included.


Since the base gasket is attached to the manifold, please order the base gasket separately if it is needed for maintenance.

Refer to the Web Catalog for base gasket part numbers.

Refer to page 24 for mounting screw part numbers.

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.



多SMC

18 ®

Air Cylinders Related Products

Rotary Actuators

Air Grippers Equipment

Preparation Equipment A

Air Filters

Modular F Pressure (

Detection Switches

Control Equipment Fluid

Gas Equipment Process

> Actuators Electric

> > Switches


25A-JSY1000/3000 Series

(E UK ROHS



Internal Pilot

How to Order Manifolds



Series compatible with secondary batteries

Series

1	JSY1000
3	JSY3000

2 Type		oe e
	10	Side ported

SI unit (Output polarity, Protocol, Number of outputs, Communication connector)

Symbol (Ou Positive common (NPN)	tput polarity) Negative common (PNP)	Protocol	Number of outputs	Communication connector	
0	*1	Without	SI unit		
QA	QAN	DeviceNet™	32	M12	
QB	QBN	Devicemet	16	IVI 12	
NA	NAN	PROFIBUS	32	M12	
NB	NBN	DP	16		
VA	VAN	CC-Link	32	M12	
VB	VBN	CC-LITIK	16	IVITZ	
DA	DAN	EtherCAT	32	M12	
DB	DBN	EllielCAT	16	IVITZ	
FA	FAN	PROFINET	32	M12	
FB	FBN	FNOFINET	16	IVITZ	
EA	EAN	EtherNet/IP™	32	M12	
EB	EBN	Ellelivel/IF	16		

- Without SI unit, the output polarity is decided by the SI unit used. Ensure a match with the common specification of the valves to be used.
- DIN rail cannot be mounted without SI unit.

5 P, E port entry

	_ :
U side (2 to 10 stations) D side (2 to 10 stations)	

6 SUP/EXH block assembly

Nil	Internal pilot
S	Internal pilot, Built-in silencer

- The 3/5(E) port is plugged for the built-in silencer type.
- When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

Valve stations

In the case of the 32-output SI unit

Symbol	Stations	Note
02	2 stations	
:	:	Double wiring*1
16	16 stations	

In the case of the 16-output SI unit

Symbol	Stations	Note
02	2 stations	
:	:	Double wiring*1
08	8 stations	
02	2 stations	0
i	:	Specified layout*2 (Up to 16 solenoids available)
16	16 stations	(Op to 16 soleriolds available)

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- * This also includes the number of blanking plates.
- For the product without the SI unit (S0), note the maximum number of solenoids of the SI unit that will be mounted. If the lavout is specified, indicate it on the manifold specification sheet.

A. B port size (Metric/One-touch fitting)

<u> </u>		(_
Symbol		A, B port	JSY1000	JSY3000	
C4		ø4	•	_	
C6	- Straight	ø6	•	•	
C8		ø8	_	•	
CM*1		Straight port, mixed sizes	•	•	08
P, E port size (One-touch fittings)			ø8	ø10	

- *1 Indicate the sizes on the manifold specification sheet for "CM."
- The JSY1000 manifold pitch for C4 is 6.5 mm, and 9 mm for C6. When CM is selected, the manifold pitch is different depending on the selected fitting.

8 Mounting and Option

Symbol	Mounting
Nil Direct mounting	
D□	DIN rail mounting

- Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" shown below.)
- Refer to the Web Catalog for details on securing the DIN rail mounting type manifold.
- DIN rail mounting (D□) is not available for the product without the SI unit (S0).

DIN Rail Option

	The state of the s			
Nil	DIN rail mounting (With DIN rail)			
0	DIN rail mounting (Without DIN rail)			
3	For 3 stations	0		
:	:	Specify a length longer that that of the standard rail.		
16	For 16 stations	that of the standard rail.		

- Refer to L3 of the dimensions for the DIN rail length and order separately. (Refer to the Web Catalog for the DIN rail part number.)
- * The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

For details on the EX260 Integrated Type (For Output) Serial Transmission System, refer to the Web Catalog and the Operation Manual. For the part numbers of the SI units to be mounted, refer to the Web Catalog. Please download the Operation Manual via the SMC website: https://www.smcworld.com



How to Order Manifold Assembly


Example (25A-JJ5SY3-10SNAN-□) 2-position double (24 VDC) 25A-JSY3200-5U (3 sets) 2-position single (24 VDC) 25A-JSY3100-5U (2 sets) Manifold base (5 stations) 25A-JJ5SY3-10SNAN-05D-C8

- 25A-JJ5SY3-10SNAN-05D-C8 ··· 1 set (Type 10 5-station manifold base part no.) * 25A-JSY3100-5U ------2 sets (2-position single part no.) 25A-JSY3200-5U3 sets (2-position double part no.)
 - The asterisk denotes the symbol for the assembly. Prefix it to the part numbers of the valve, etc.
- · For the valve arrangement, the valve closest to the D side is considered the
- Under the manifold part number, state the valves to be mounted in order starting with the 1st station as shown in the figure. If the arrangement becomes too complicated, specify the details on a manifold specification

Internal Pilot

How to Order Valves (With mounting screw)

Refer to the **Web Catalog** for valve specifications.

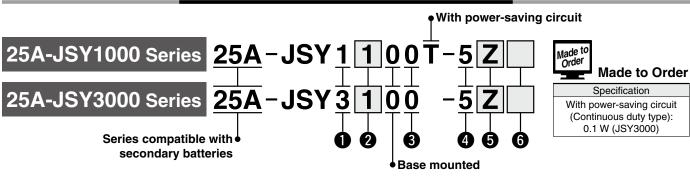

Series

1	JSY1000
3	JSY3000

3 Pilot valve exhaust method

0	Pilot valve individual exhaust

4 Rated voltage

5	24 VDC
---	--------

If the JSY3000 series is to be continuously energized, please be sure to select the power-saving circuit (continuous duty type) specification. Refer to "Made to Order."

For the JSY1000 series, only the power-saving circuit specification is available.

2 Type of actuation


ı	2-position	Single	
2	2-position	Double	
3		Closed center	
4	3-position	Exhaust center	
5		Pressure center	
Α	4-position dual 3-port	N.C./N.C.	
В		N.O./N.O.	
С	duai o-port	N.C./N.O.	

5 Light/surge voltage suppressor and common specification

	Symbol	With light	Surge voltage suppressor	Common specification
	U	•	•	Non-polar
	Z			Positive common
	NZ			Negative common

- * Select "U" or "Z" for the valve when the SI unit output polarity is Nil (positive common). Select "U" or "NZ" for the valve when the SI unit output polarity is N (negative common).
- Only "Z" and "NZ" types are available for the JSY1000 series.
- When the non-polar common specification type is selected, take measures to prevent surge voltage. For details, refer to the Web Catalog.

6 Manual override



- Push-turn locking lever type "E" is not available for the JSY1000.
- When ordering a valve individually, the base gasket is not included.


Since the base gasket is attached to the manifold, please order the base gasket separately if it is needed for maintenance.

Refer to the Web Catalog for base gasket part numbers

Refer to page 24 for mounting screw part numbers.

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.



Switches

20


25A-JSY1000/3000 Series

(E UK RoHS



Internal Pilot

How to Order Manifolds



Series

	1	JSY1000
	3	JSY3000

2 Туре

Side ported

3 SI unit

0	Without SI unit	
Q	DeviceNet™ (Positive common NPN)	
V	CC-Link (Positive common NPN)	

* Ensure a match with the common specification of the valve to be used.

Valve stations

Symbol	Stations	Note		
02	2 stations	Double wiring*1		
•	:			
08	8 stations			
02	2 stations	Considered laws which		
÷	:	Specified layout*2 (Up to 16 solenoids available)		
16	16 stations			

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- * This also includes the number of blanking

5 P, E port entry

U	U side (2 to 10 stations)
D	D side (2 to 10 stations)
В	Both sides (2 to 16 stations)

6 SUP/EXH block

Nil	Internal pilot
S	Internal pilot, Built-in silencer

* The 3/5(E) port is plugged for the built-in silencer type.

A, B port size (Metric/One-touch fitting)

Symbol	A, B port		JSY1000	JSY3000	
C4	Straight	ø4	•	_	
C6		ø6	•	•	
C8		ø8	_	•	
CM*1		Straight port, mixed sizes	•	•	O
	P, E port size	(One-touch fittings)	ø8	ø10	
. d I localita	-4 - 41!		- I + f: "ONA "		-

- *1 Indicate the sizes on the manifold specification sheet for "CM."
- * The JSY1000 manifold pitch for C4 is 6.5 mm, and 9 mm for C6. When CM is selected, the manifold pitch is different depending on the selected fitting.

Mounting and Option

	<u> </u>
Symbol	Mounting
Nil	Direct mounting
D	DIN rail mounting

- * Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" shown below.)
- * Refer to the Web Catalog for details on securing the DIN rail mounting type manifold.

DIN Rail Option

Nil	DIN rail mounting (With DIN rail)			
0	DIN rail	DIN rail mounting (Without DIN rail)		
3	For 3 stations	Consider a longeth longer thou		
:	1	Specify a length longer than that of the standard rail.		
16	For 16 stations	that of the standard rail.		

* If the DIN rail must be mounted without an SI unit, select D0. Refer to L3 of the dimensions for the DIN rail length and order separately. (Refer to the Web Catalog for the DIN rail part number.)


* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

For details on the EX120 Integrated Type (For Output) Serial Transmission System, refer to the Web Catalog and the Operation Manual. For the part numbers of the SI units to be mounted, refer to the Web Catalog. Please download the Operation Manual via the SMC website: https://www.smcworld.com



How to Order Manifold Assembly

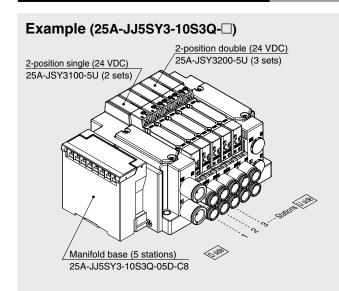

- 25A-JJ5SY3-10S3Q-05D-C8 ··1 set (Type 10 5-station manifold base part no.)


 * 25A-JSY3100-5U ············2 sets (2-position single part no.)

 * 25A-JSY3200-5U ··········3 sets (2-position double part no.)
- ──►The asterisk denotes the symbol for the assembly. Prefix it to the part numbers of the valve, etc.
- · For the valve arrangement, the valve closest to the D side is considered the 1st station.
- Under the manifold part number, state the valves to be mounted in order starting with the 1st station as shown in the figure. If the arrangement becomes too complicated, specify the details on a manifold specification sheet.

Internal Pilot

How to Order Valves (With mounting screw)

Refer to the **Web Catalog** for valve specifications.

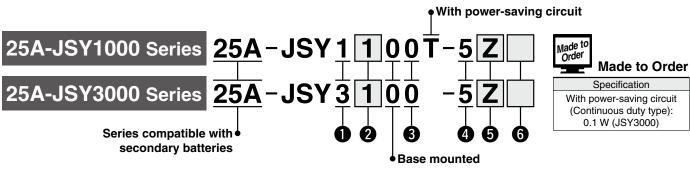

1 Series

O OCITION	
1	JSY1000
3	JSY3000

3 Pilot valve exhaust method

0	Pilot valve individual exhaust

4 Rated voltage

	<u> </u>
5	24 VDC

⚠ Caution

If the JSY3000 series is to be continuously energized, please be sure to select the power-saving circuit (continuous duty type) specification.

For the JSY1000 series, only the power-saving circuit specification is available.

2 Type of actuation


1	2-position	Single
2	2-position	Double
3		Closed center
4	3-position	Exhaust center
5		Pressure center
Α	4	N.C./N.C.
В	4-position dual 3-port	N.O./N.O.
С	duai 5-port	N.C./N.O.

5 Light/surge voltage suppressor and common specification

S	Symbol	With light	Surge voltage suppressor	Common specification
	U	•	•	Non-polar
	Z		_	Positive common

- Only "Z" and "NZ" types are available for the JSY1000 series.
- * When the non-polar common specification type is selected, take measures to prevent surge voltage. For details, refer to the Web Catalog.

6 Manual override



- Push-turn locking lever type "E" is not available for the JSY1000.
- * When ordering a valve individually, the base gasket is not included.


Since the base gasket is attached to the manifold, please order the base gasket separately if it is needed for maintenance.

Refer to the **Web Catalog** for base gasket part numbers.

Refer to page 24 for mounting screw part numbers.

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.



Air Cylinders Control Valv

red ucts Air (

Rotary Related Actuators Products

Air Grippers A

Vacuum Equipment

Air Preparation Equipment

Clean Air Filters

Modular F.R.L./ Pressure Control Equipment

Detection Switches

Iuid Control Equipment

Process Gas Fluid Equip

Electric Pr Actuators E

Auto El Switches Act


22

25A-JSY1000/3000 Series Manifold Options

■ Blanking plate assembly

(With two mounting screws)

Used when valve additions are expected or for maintenance. A structure is in place on the blanking plate to prevent the mounting screws from sliding.



How to Order Blanking Plate Assembly

25A-JSY 3 1M-26P-1A

Series
1 JSY1000
3 JSY3000


SI Unit Part Nos

Description	SI unit part no.	Note
	EX260-SPR1-X117	PROFIBUS DP M12 connector, 32 outputs, Negative common (PNP)
	EX260-SPR2-X117	PROFIBUS DP M12 connector, 32 outputs, Positive common (NPN)
	EX260-SPR3-X117	PROFIBUS DP M12 connector, 16 outputs, Negative common (PNP)
	EX260-SPR4-X117	PROFIBUS DP M12 connector, 16 outputs, Positive common (NPN)
	EX260-SDN1-X117	DeviceNet® M12 connector, 32 outputs, Negative common (PNP)
	EX260-SDN2-X117	DeviceNet® M12 connector, 32 outputs, Positive common (NPN)
	EX260-SDN3-X117	DeviceNet® M12 connector, 16 outputs, Negative common (PNP)
	EX260-SDN4-X117	DeviceNet® M12 connector, 16 outputs, Positive common (NPN)
	EX260-SEC1-X117	EtherCAT M12 connector, 32 outputs, Negative common (PNP)
	EX260-SEC2-X117	EtherCAT M12 connector, 32 outputs, Positive common (NPN)
	EX260-SEC3-X117	EtherCAT M12 connector, 16 outputs, Negative common (PNP)
EX260 SI unit	EX260-SEC4-X117	EtherCAT M12 connector, 16 outputs, Positive common (NPN)
EA260 SI UIII	EX260-SMJ1-X117	CC-Link M12 connector, 32 outputs, Negative common (PNP)
	EX260-SMJ2-X117	CC-Link M12 connector, 32 outputs, Positive common (NPN)
	EX260-SMJ3-X117	CC-Link M12 connector, 16 outputs, Negative common (PNP)
	EX260-SMJ4-X117	CC-Link M12 connector, 16 outputs, Positive common (NPN)
	EX260-SPN1-X117	PROFINET M12 connector, 32 outputs, Negative common (PNP)
	EX260-SPN2-X117	PROFINET M12 connector, 32 outputs, Positive common (NPN)
	EX260-SPN3-X117	PROFINET M12 connector, 16 outputs, Negative common (PNP)
	EX260-SPN4-X117	PROFINET M12 connector, 16 outputs, Positive common (NPN)
	EX260-SEN1-X117	EtherNet/IP™ M12 connector, 32 outputs, Negative common (PNP)
	EX260-SEN2-X117	EtherNet/IP™ M12 connector, 32 outputs, Positive common (NPN)
	EX260-SEN3-X117	EtherNet/IP™ M12 connector, 16 outputs, Negative common (PNP)
	EX260-SEN4-X117	EtherNet/IP™ M12 connector, 16 outputs, Positive common (NPN)
EX120 SI unit	EX120-SMJ1-X220	CC-Link (Terminal block, 16 outputs, Positive common (NPN))
EA 120 SI WIII	EX120-SDN1-X220	DeviceNet® (Terminal block, 16 outputs, Positive common (NPN))

One-touch Fittings Part Nos.

	,				
	Series	25A-JSY1000		25A-JSY3000	Note
Port size		6.5 mm pitch	6.5 mm pitch 9 mm pitch		Note
	ø4	25A-KQSY10-C4-X1336	_	_	
A, B port	ø6	_	25A-KQSY11-C6-X1336	25A-KQSY30-C6	The west supplies for 4 siece
	ø8	_	<u> </u>		The part number is for 1 piece. (Sales unit: 10 pcs.)
P, E port	ø8	25A-KQSY30-C8-X1336		_	(Sales utilt. 10 pcs.)
F, E port	ø10	_		25A-KQSY31-C10-X1336	

How to Order Individual SUP/EXH Spacer Assembly

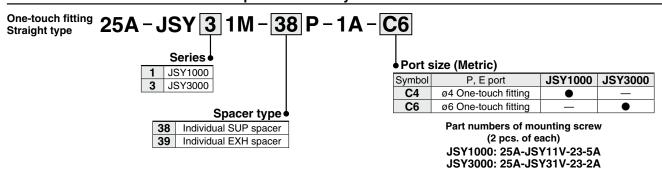



Manifold Options 25A-JSY1000/3000 Series


Manifold Parts Nos./For the 25A-JJ5SY1-10, 25A-JJ5SY3-10

Description	25A-J:	25A-JSY3000	
Description	6.5 mm pitch	9 mm pitch	25A-3513000
Tie-rod for additional stations	JSY11M-49P-4-1-A	JSY11M-49P-3-1-A	JSY31M-49P-2-1-A
Tie-rou for additional stations	(6.5 mm pitch)	(9 mm pitch)	(11.5 mm pitch)
Tie-rod	JSY11M-49P-4-□-A	JSY11M-49P-3-□-A	JSY31M-49P-2-□-A
rie-rou	(6.5 mm pitch)	(9 mm pitch)	(11.5 mm pitch)
Valve mounting screw	25A-JSY	11V-23-4A	25A-JSY31V-23-1A
valve mounting screw	(M1.4 x 21.5)		(M2 x 25)
Clamp bracket	25A-JSY11M-15P-1A (Refer to the table below.)		25A-SY30M-15-1A
(for connector connecting base)	25A-JSY11M-15P-2A	25A-3 1 30W-15-1A	

Table. 25A-JSY1000 series clamp bracket

Wiring (JSY1000 series)		25A-JSY11M-15P-1A	25A-JSY11M-15P-2A
F	D-sub connector	•	_
Т	Terminal block box	_	•
S□□	EX260	•	_
S3	EX120	•	_

Manifold Parts Nos.

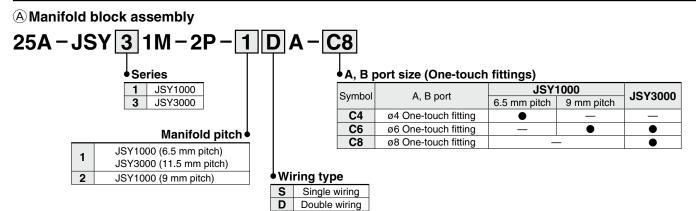

Air Cylinders Control Valves

Related /

Rotary Actuators

Air Grippers

Vacuum Equipment

Air Preparation Equipment


> Clean Air Filters


Modular F.R.L./
Pressure Contro
Equipment

Flow Control Equipment/ Fittings

25A-JSY1000/3000 Series

Manifold Parts Nos.



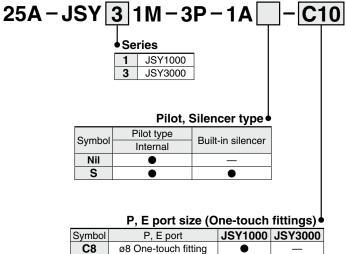

Nil Direct mounting		
DIN rail mounting (Without DIN rail)		
D00*1 DIN rail mounting (Without DIN rail)		
*1 Part number only for the 25A-JSY1000		

♦ Mounting

*1 Part number only for the 25A-JSY1000 Part number is different depending on the wiring. Refer to Table 1.

Table 1. JSY1000 series DIN rail mounting

Symbol	Wiring	
D0	D-sub connector (F type) EX260 (S □□ type) EX120 (S3 type)	
D00	Terminal block box (T type)	

Clamp bracket

C10


00

Series		Part no.	
25A-JSY1000	For D0	25A-JSY11M-15P-1A	
25A-J511000	For D00	25A-JSY11M-15P-2A	
25A-JSY3000		25A-SY30M-15-1A	

ø10 One-touch fitting

Plug

■ Cover, Silencer cover for SUP/EXH (end) block assembly

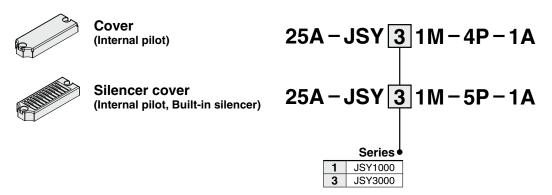


Manifold Options 25A-JSY1000/3000 Series


Manifold Parts Nos.

© SUP/EXH block assembly

For D-sub connector

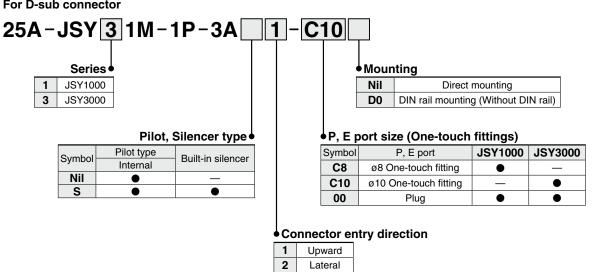


For the terminal block box or EX260

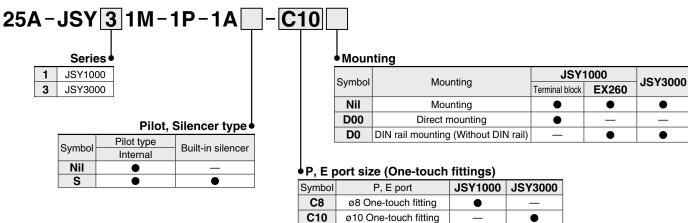

Plug

For EX120

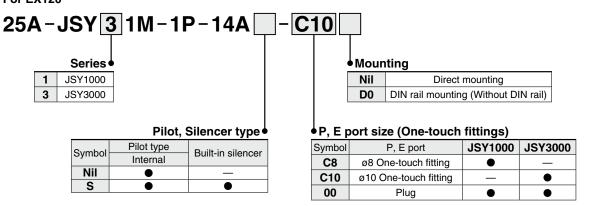

00

Air Cylinders Related Products

Rotary Actuators

Air Grippers

Vacuum Equipment

Air Preparation Equipment

Air Filters

Modular F.R.L./ Pressure Control Equipment

Detection Switches

Fluid Control Equipment

Process Gas | Equipment

Electric Actuators


Auto Switches



^{*} Refer to page 25 for clamp bracket part numbers.

25A-JSY1000/3000 Series

How to Order Pilot Valves

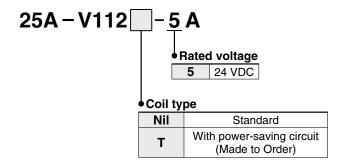

Pilot cover

25A-SY30V-25AS (For 25A-JSY3000)

* The pilot valve of the 25A-JSY1000 series cannot be replaced.

Type 40 Side Ported

Non Plug-in Metal Base


25A-JSY1000/3000 Series

(E UK ROHS



Internal Pilot

How to Order Manifolds



6 Thread type

Nil Rc

Series JSY1000 JSY3000

2 Typ	oe e
40	Side ported

Valve stations

	•			
Symbol	Stations			
02	2 stations			
:	:			
20	20 stations			

4 P. E port entry

• ,	<u> </u>		
U	U side*1		
D	D side*1		
В	Both sides		

*1 Plugs are mounted on the opposite side of the selected ports.

6 A, B port size Thread piping

Symbol	A, B port	JSY1000	JSY3000
M3	M3 x 0.5	•	_
M5	M5 x 0.8	•	•
01	1/8	_	•


One-touch fitting (Metric)

S	ymbol	A, B port	JSY1000	JSY3000	
Fixed	C4	ø4	•	_	60
ιĚ	C6	ø6	_	•	GOE
Φ	KC4	ø4	•	_	Type 40 (Side ported)
Replaceable	KC6	ø6	•	•	(Side ported)
lepla	KC8	ø8	_	•	
ш.	M*1	A, B ports mixed	_	•	
	P, E port size (Thread piping)		1/8	1/4	

^{*1} When ports are mixed sizes, indicate the piping specifications on the manifold specification sheet.

For details, refer to the Web Catalog.


How to Order Manifold Assembly

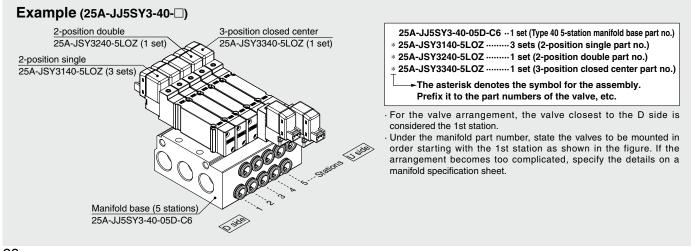

^{*} The 25A- series specifications and dimensions are the same as those of the standard model.

Internal Pilot

How to Order Valves (With two mounting screws)

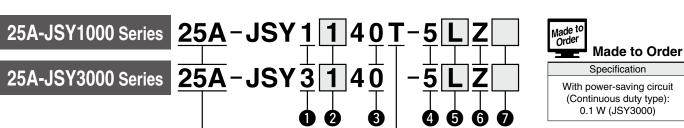

Series compatible with secondary batteries

♦With power-saving circuit

Series

• • • • • • • • • • • • • • • • • • • •		
1	JSY1000	
3	JSY3000	

2 Type of actuation

1	2-position single		
2	2-position double		
3	3-position closed center		
4	3-position exhaust center		
5	3-position pressure center		
Α	Dual 3-port (N.C./N.C.)		
В	Dual 3-port (N.O./N.O.)		
С	Dual 3-port (N.C./N.O.)		

3 Pilot valve exhaust method

Pilot valve individual exhaust

4 Rated voltage

5 24 VDC

6 Light/surge voltage suppressor


7	With light/surge voltage
_	suppressor

5 Electrical entry

	L plug connector		M plug connector	
	L	LO	M	MO
JSY1000	L: With lead wire (300 mm)	LO: Without connector	M: With lead wire (300 mm)	MO: Without connector
JSY3000	L: With lead wire (300 mm)	LO: Without connector	M: With lead wire (300 mm)	MO: Without connector

* Refer to the Web Catalog for the lead wire length of L and M plug connectors.

Manual override

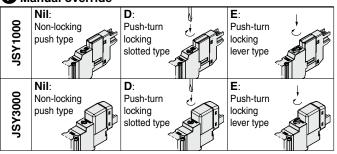

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

⚠ Caution

If the JSY3000 series is to be continuously energized, please be sure to select the power-saving circuit (continuous duty type) specification. Refer to "Made to Order."

For the JSY1000 series, only the power-saving circuit specification is available.

Directional Control Valves

Air Cylinders

Related Products

Rotary Actuators

Vacuum Equipment Air Grippers

Air Preparation \
Equipment Eq

ean A

Modular F.R.L./ Pressure Control Equipment


Auto Switches

25A-JSY1000/3000 Series Manifold Options

■ Blanking plate assembly

(With two mounting screws)

Used when valve additions are expected or for maintenance. A structure is in place on the blanking plate to prevent the mounting screws from sliding.



How to Order Blanking Plate Assembly

25A-JSY 3 1M-26-1A

1 JSY1000 3 JSY3000


Valve Mounting Screw Part No.

	<u> </u>		
Description	Pari	Note	
Description	25A-JJ5SY1	25A-JJ5SY3	Note
Round head combination screw	25A-JSY11V-23-4A	25A-JSY31V-23-4A	Part numbers shown on the left are for 10 valves. (20 pcs.)

One-touch Fittings Part Nos.


	Port size Ø4 One-touch fitting (Straight type)		Port size	25A-JSY1000	25A-JSY3000
			9	25A-KQSY10-C4-X1336	_
	A, B port	Metric size	ø6 One-touch fitting (Straight type)	25A-KQSY11-C6-X1336	25A-KQSY30-C6
			ø8 One-touch fitting (Straight type)	_	25A-KQSY30-C8-X1336

How to Order Individual SUP/EXH Spacer Assembly

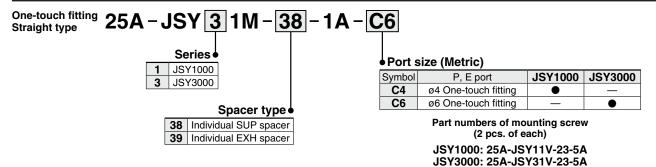

How to Order Pilot Valves

For 25A-JSY3000

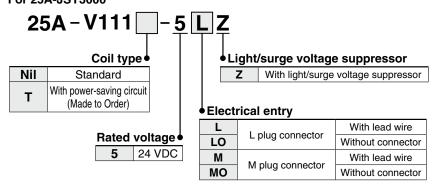

 $[\]ast\,$ For the 25A-JSY1000, the pilot valve is the same as that of the standard model.



Type 10
Side Ported

Type 11
Bottom Ported


Plug-in Connector Connecting Base

D-sub Connector

25A-SY5000/7000 Series CANUS



How to Order Manifolds



 Series compatible with secondary batteries


Series

5	SY5000		
7	SY7000		


2 Type

U .,	PC
10	Side ported
11	Bottom ported

3 Connector type



4 Connector entry direction



5 Valve stations

F: D-sub connector (25 pins)				
Symbol	Stations	Note		
02	2 stations			
:	:	Double wiring*1		
12	12 stations			
02	2 stations			
:	:	(Up to 24 solenoids		
24	24 stations	available)		

*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations.

The use of a 2-position single solenoid will result in an unused control signal. If

this is not desired, order with a specified layout.

- *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- * The blanking plate assembly is included in this number.

6 P, E port entry

_	<u>, , , </u>	E port criting
	U	U side (2 to 10 stations)
	D	D side (2 to 10 stations)
	В	Both sides (2 to 24 stations)

SUP/EXH block assembly

O • • • • • • • • • • • • • • • • • • •		
Nil	Internal pilot	
S	Internal pilot,	
5	Built-in silencer	
R	External pilot	

* The 3/5(E) port is plugged for the built-in silencer type.

8 A, B port size (Metric)

Symbol			A, B port Type 10/ Side ported		Type 11/ Bottom ported		
			SY5000	SY7000	SY5000	SY7000	
C4		ø4	•	_	•	_	
C6	<u>+</u>	ø6	•	•	•	•	
C8	Straight	ø8	•	•	•	•	
C10	itra	ø10	_	•	_	•	
C12	(0)	ø12	_	•	_	•	o lease
CM*1	Straight port, mixed sizes		•	•	•	•	
(0	P, E port size (One-touch fittings)			ø12	ø10	ø12	

- *1 Indicate the sizes on the manifold specification sheet for "CM."
- * The direction of P, E port fittings is the same as for the A, B port.

9 Mounting

Symbol	Mounting	Option Name plate Station number		
Symbol	iviouriting	Name plate	Station number	
Nil	Direct mounting	_	_	
AA		•	•	
BA	Iniounting	•	_	
D	DIN:	_	_	
A□	DIN rail mounting	•	•	
В□	inounting		_	

DIN Rail Option

Nil	Direct mounting		
0	Without DIN rail (with brack		
3	For 3 stations	Specify a longer rail	
:	i	than the total length	
24	For 24 stations	of specified stations.	

- * Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" above.)
- Only direct mounting is available for the type 11 bottom-ported type.
 - * The 25A- series specifications and dimensions are the same as those of the standard model.

Manual override

Push-turn

Slide locking

locking

slotted

type

type

Nil: Non-locking

E:

push type


Push-turn

locking

lever

type

How to Order Valves (With mounting screw)

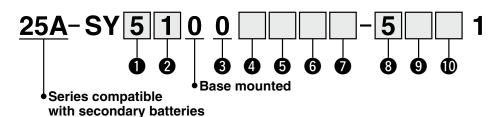

Series

2

3

4

5

A

B

C

ĺ	5	SY5000
ĺ	7	SY7000

2-position single 2-position double

3-position closed center

3-position exhaust center

3-position pressure center

4-position dual 3-port valve (N.C./N.C.)

4-position dual 3-port valve (N.O./N.O.)

4-position dual 3-port valve (N.C./N.O.)

Type of actuation

6 Pilot valve option

Nil	Standard (0.7 MPa)
В	Quick response type (0.7 MPa)

• Con type		
	Nil	Standard
	Т	With power-saving circuit (Continuous duty type

- energized for long periods of time.
- power-saving circuit is selected. For details, refer to the standard product catalog.

Coil type

T	T With power-saving circuit (Continuous duty type)		
* Be sure to select the power-saving circuitype if the valve is to be continuously			

Be careful of the energizing time when the

Caal turna

U 5e	ai type	
0		Rubber seal

Rated voltage

o Hateu voltage		
5	24 VDC	
6	12 VDC	

Pilot type

T not type		
Nil		nternal pilot
R		External pilot

When selecting the external pilot specification for the 4-position dual 3-port valve, pay attention to the pilot pressure. For details, refer to the valve specifications of the standard SY series product in the Web Catalog.

Back pressure check valve (Built-in valve type)

	unt in taite type,
Nil	None
Н	Built-in

 The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.


9 Light/surge voltage suppressor and common specification

and common specification		
Nil	Without light/surge voltage suppressor (Non-polar)	
R With surge voltage suppress (Non-polar)		
U	With light/surge voltage suppressor (Non-polar)	
s	With surge voltage suppressor (Positive common)	
Z	With light/surge voltage suppresso (Positive common)	
NS With surge voltage suppres (Negative common)		
NZ	With light/surge voltage suppressor (Negative common)	

Only "Z" and "NZ" types are available with a power-saving circuit.

> * The 25A- series specifications and dimensions are the same as those of the standard model.

> > For details, refer to the Web Catalog.




34®

D-sub Connector

25A-SY5000/7000 Series 593 us



How to Order Manifolds

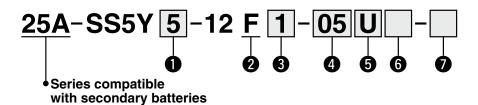


Series

ype 12 op Ported

5	SY5000
7	SY7000

2 Connector type



3 Connector entry direction

1: Upward	2: Lateral

4 Valve stations

F: D-sub connector (25 pins)			
Symbol	Stations	Note	
02	2 stations		
:		Double wiring*1	
12	12 stations		
02	2 stations	Specified layout*2	
:		Specified layout*2 (Up to 24 solenoids	
24	24 stations	` available)	

*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not

desired, order with a specified layout.

- *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- * The blanking plate assembly is included in this number.

6 P. E port entry

U*1	U side (2 to 10 stations)
D*1	D side (2 to 10 stations)
В	Both sides (2 to 24 stations)

*1 **6** For type "S," SUP/EXH block assembly with a built-in silencer, choose "U" or "D" for P port entry.

6 SUP/EXH block assembly

Nil	Internal pilot	
s	Internal pilot, Built-in silencer	

* The P and E ports are only available on the U and D sides for the built-in silencer type. The 3/5(E) port is plugged. The silencer exhaust port is located on the opposite side of the P and E port entry. (Example: When the P and E port entry is on the D side, the silencer exhaust port is on the U side.)

Mounting


Nil	Direct mounting		
D	DIN rail mounting (With DIN rail)		
D0	DIN rail mounting (Without DIN rail)		
D3	For 3 stations	Specify a length longer than that of the standard rail	
÷	:		
D24	For 24 stations		

* The 25A- series specifications and dimensions are the same as those of the standard model.



Auto Switches

How to Order Valves (With mounting screw)

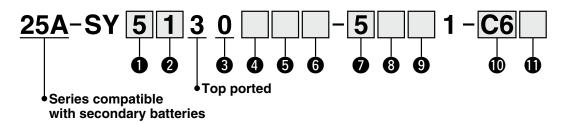

Series

<u> </u>		
	5	SY5000
	7	SY7000

6 Pilot valve option

Nil	Standard (0.7 MPa)
В	Quick response type (0.7 MPa)

2 Type of actuation

1	2-position single
2	2-position double
3	3-position closed center
4	3-position exhaust center
5	3-position pressure center
Α	4-position dual 3-port valve (N.C./N.C.)
В	4-position dual 3-port valve (N.O./N.O.)
С	4-position dual 3-port valve (N.C./N.O.)

6 Coil type

Nil	Standard
Т	With power-saving circuit (Continuous duty type)

- * Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time. * Be careful of the energizing time when the
- power-saving circuit is selected. For details, refer to the standard product catalog.

A Seal type

9 3e	ai type	
0		Rubber seal

Rated voltage

<u> </u>	tou voitage
5	24 VDC
6	12 VDC

Back pressure check valve

(Built-III valve type)		
	Nil	None
	Н	Built-in

The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

8 Light/surge voltage suppressor and common specification

Nil	Without light/surge voltage suppressor (Non-polar)
R	With surge voltage suppressor (Non-polar)
U	With light/surge voltage suppressor (Non-polar)
s	With surge voltage suppressor (Positive common)
Z	With light/surge voltage suppressor (Positive common)
NS	With surge voltage suppressor (Negative common)
NZ	With light/surge voltage suppressor (Negative common)

* Only "Z" and "NZ" types are available with a power-saving circuit.

Manual override

Nil: Non-locking push type	D: Push-turn locking slotted type
E: Push-turn locking lever type	F: Slide locking type

A, B port size

Thread piping

	Symbol Port size		Applicable series	
	02	1/4	SY7000	


touch fitting (Motric)

One-touch fitting (Metric)			
Symbol	A, B port	SY5000	SY7000
C4	ø4	•	_
C6	ø6	•	•
C8	ø8	•	•
C10	ø10	_	•
C12	ø12	_	•

Thread type

Till cad type	
Nil	Rc
F	G
N	NPT
Т	NPTF

* The 25A- series specifications and dimensions are the same as those of the standard model.



ype 10 Side Ported Type 11 **Bottom Ported**

Plug-in Connector Connecting Base


Terminal Block Box

25A-SY5000/7000 Series CANUS





How to Order Manifolds



Series compatible with secondary batteries

Series

5	SY5000
7	SY7000

2 Type

10	Side ported
11	Bottom ported

Valve stations

	Stations	Note
02	2 stations	
:	:	Double wiring*1
10	10 stations	_
02	2 stations	Specified layout*2
:	:	(Up to 20 solenoids available)
20	20 stations	(Up to 20 soleholds available)

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid
 - will result in an unused control signal. If this is not desired, order with a specified layout.
- *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- The blanking plate assembly is included in this number.

4 P, E port entry

U	U side (2 to 10 stations)
D	D side (2 to 10 stations)
В	Both sides (2 to 20 stations)

5 SUP/EXH block assembly

Nil Internal pilot		
S	Internal pilot, Built-in silencer	
R	External pilot	

- The 3/5(E) port is plugged for the builtin silencer type.
- When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

7 Mounting

	Symbol	Mounting	Option		
			Name plate	Station number	
	Nil	Direct mounting	_	_	
	AA		•	•	
	BA		•	_	
	D□	DIN rail mounting	_	_	
	A		•	•	
	В□		•	_	

- * Enter the number of stations inside \square when it is larger than the number of valve stations. (Refer to "DIN Rail Option" below.)
- Only direct mounting is available for the type 11 bottom-ported type.

DIN Rail Option

Nil	Direct mounting			
0	Without DIN rail (with bracket)			
3	For 3 stations Specify a longer rail			
:	:	than the total length of		
20	For 20 stations	specified stations.		

A R port size (Metric)

A, B port size (Metric)							
Symbol A, B port		Type 10/ Side ported		Type 11/ Bottom ported			
			SY5000	SY7000	SY5000	SY7000	
C4		ø4	•	_	•	_	
C6	.	ø6	•	•	•	•	
C8	ligh	ø8	•	•	•	•	
C10	Straight	ø10	_	•	_	•	
C12	(0)	ø12	_	•	_	•	0 1985
CM*1		Straight port, mixed sizes	•	•	•	•	
P, E port size (One-touch fittings)		ø10	ø12	ø10	ø12		

- *1 Indicate the sizes on the manifold specification sheet for "CM."
- * The direction of P, E port fittings is the same as for the A, B port.

* The 25A- series specifications and dimensions are the same as those of the standard model.



Manual override

Push-turn locking

Slide locking

slotted

type

type

Nil: Non-locking

E:

push type


Push-turn

locking

lever

type

How to Order Valves (With mounting screw)

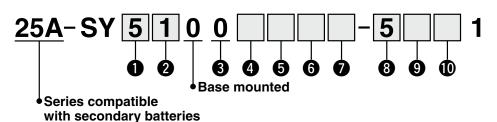

Series

2

3

4

5

Α

B

C

<u> </u>			
5	SY5000		
7	SY7000		

2-position single

2-position double

3-position closed center

3-position exhaust center

3-position pressure center

4-position dual 3-port valve (N.C./N.C.)

4-position dual 3-port valve (N.O./N.O.)

4-position dual 3-port valve (N.C./N.O.)

Type of actuation

6 Pilot valve option

Nil	Standard (0.7 MPa)
В	Quick response type (0.7 MPa)

Coil type				
Nil		Standard		
	Т	With power-saving circuit (Continuous duty type)		

- * Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.
- * Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

U 5e	ai type	
0		Rubber seal

Rated voltage

O Hatca Voltage		ica voltage
	5	24 VDC
	6	12 VDC

4 Pilot type

Nil	Internal pilot
R	External pilot

* When selecting the external pilot specification for the 4-position dual 3-port valve, pay attention to the pilot pressure. For details, refer to the valve specifications of the standard SY series product in the Web Catalog.

Back pressure check valve (Built-in valve type)

	unt in taite type,
Nil	None
Н	Built-in

The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.


9 Light/surge voltage suppressor and common specification

and common specification		
Nil	Without light/surge voltage suppressor (Non-polar)	
R	With surge voltage suppressor (Non-polar)	
U	With light/surge voltage suppressor (Non-polar)	
s	With surge voltage suppressor (Positive common)	
Z	With light/surge voltage suppressor (Positive common)	
NS	With surge voltage suppressor (Negative common)	
NZ	With light/surge voltage suppressor (Negative common)	

* Only "Z" and "NZ" types are available with a power-saving circuit.

> * The 25A- series specifications and dimensions are the same as those of the standard model.

> > For details, refer to the Web Catalog.





38®


Terminal Block Box

Type 12 Top Ported

25A-SY5000/7000 Series 543 us



How to Order Manifolds

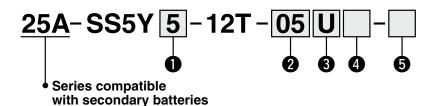

Series

5	SY5000
7	SY7000

3 P, E port entry

	U*1	U side (2 to 10 stations)
	D*1	D side (2 to 10 stations)
	В	Both sides (2 to 20 stations)

2 Valve stations

Symbo	Stations	Note	
02	2 stations		
:		Double wiring*1	
10	10 stations	_	
02	2 stations	Charified lavout*2	
:	:	Specified layout*2	
20	20 stations	(Up to 20 solenoids available)	

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations.
 - The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- * The blanking plate assembly is included in this number.

4 SUP/EXH block assembly

		.,_,,,			
	Nil	Internal pilot			
	S	Internal pilot, Built-in silencer			

- * The P and E ports are only available on the U and D sides for the built-in silencer type. The 3/5(E) port is plugged. The silencer exhaust port is located on the opposite side of the P and E port entry. (Example: When the P and E port entry is on the D side, the silencer exhaust port is on the U side.)
- * When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.


5 Mounting

Nil	Di	rect mounting	
D	DIN rail mounting (With DIN rail)		
D0		N rail mounting (ithout DIN rail)	
D3	For 3 stations	Specify a length	
:		longer than that of	
D20	For 20 stations	the standard rail.	

* The 25A- series specifications and dimensions are the same as those of the standard model.



How to Order Valves (With mounting screw)

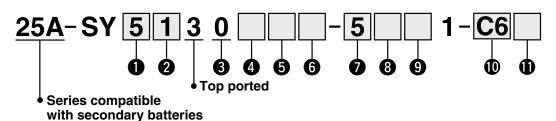

Series

Seal type

• • • • • • • • • • • • • • • • • • • •	
5	SY5000
7	SY7000

5 Pilot valve option

Nil	Standard (0.7 MPa)
В	Quick response type (0.7 MPa)

2 Type of actuation

1	2-position single	
2	2-position double	
3	3-position closed center	
4	3-position exhaust center	
5	3-position pressure center	
Α	4-position dual 3-port valve (N.C./N.C.)	
В	4-position dual 3-port valve (N.O./N.O.)	
С	4-position dual 3-port valve (N.C./N.O.)	

6 Coil type

Nil	Standard
Т	With power-saving circuit (Continuous duty type)

- * Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.
- * Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

Rated voltage

<u> </u>	tou voitage
5	24 VDC
6	12 VDC

Back pressure check valve

(Dulit-III valve type)		
Nil	None	
Н	Built-in	

Rubber seal

The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

8 Light/surge voltage suppressor and common specification

Nil Without light/surge voltage suppre (Non-polar)			
R	With surge voltage suppressor (Non-polar)		
U	With light/surge voltage suppressor (Non-polar)		
S With surge voltage suppres (Positive common)			
Z	With light/surge voltage suppressor (Positive common)		
NS With surge voltage suppres (Negative common) NZ With light/surge voltage suppre (Negative common)			

* Only "Z" and "NZ" types are available with a power-saving circuit.

A, B port size

Manual override

Push-turn

Slide locking

locking

slotted

type

type

Nil: Non-locking

E:

push type

Push-turn

locking

lever

type

Thread piping

	Symbol	Port size	Applicable series
	02	1/4	SY7000


One-touch fitting (Metric)

One	One-touch fitting (Metric)				
Symbol	A, B port	SY5000	SY7000		
C4	ø4	•	_		
C6	ø6	•	•		
C8	ø8	•	•		
C10	ø10	_	•		
C12	ø12	_	•		

Thread type

<u> </u>	· oaa typo
Nil	Rc
F	G
N	NPT
Т	NPTF

* The 25A- series specifications and dimensions are the same as those of the standard model.



Type 10
Side Ported

Type 11
Bottom Ported


Plug-in Connector Connecting Base

Lead Wire

25A-SY5000/7000 Series 593 us



How to Order Manifolds



Series compatible with secondary batteries

Series

5 SY5000 7 SY7000

3 Number of cores (Lead wire)

L1	34 cores
L2	17 cores
L3	9 cores

2 Type

<u> </u>	
10	Side ported
11	Bottom ported

4 Lead wire length

—		
1	0.6 m	
2	1.5 m	
3	3 m	

5 Valve stations

(L	.1	□)
_	-	~ .

Symbol	Stations	Note	
02	2 stations		
:	:	Double wiring*1	
16	16 stations		
02	2 stations	Specified layout*2	
:	:	(Up to 32 solenoids	
24	24 stations	available)	

(L3□)

	Stations	
02	2 stations	
:	::	Double wiring*1
04	4 stations	
02	2 stations	Specified layout*2
:	::	(Up to 8 solenoids
08	8 stations	available)

(L2□)

Symbol	Stations	Note
02	2 stations	
:	:	Double wiring*1
08	8 stations	
02	2 stations	Specified layout*2
:	:	(Up to 16 solenoids
16	16 stations	available)

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- * The blanking plate assembly is included in this number.

6 P, E port entry

U	U side (2 to 10 stations)
D	D side (2 to 10 stations)
В	Both sides (2 to 24 stations)

SUP/EXH block assembly

Nil	Internal pilot
S	Internal pilot, Built-in silencer
R	External pilot

- * The 3/5(E) port is plugged for the built-in silencer type.
- * When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

3 A, B port size (Metric)

Cumbal			Type 10/Side ported		Type 11/Bottom ported		
Symbol			SY5000	SY7000	SY5000	SY7000	
C4		ø4	•		•	_	DE
C6	<u>.</u> _	ø6	•	•	•	•	
C8	lgh.	ø8	•	•	•	•	
C10	Straight	ø10	_	•	_	•	
C12	(0)	ø12	_	•	_	•	o long
CM*1		Straight port, mixed sizes	•	•	•	•	
(0	P, E port size (One-touch fittings)			ø12	ø10	ø12	

- *1 Indicate the sizes on the manifold specification sheet for "CM."
- * The direction of P, E port fittings is the same as for the A, B port.

Mounting

Symbol	Mounting	Option		
Symbol	Mounting	Name plate	Station number	
Nil	Diversit	_	_	
AA	Direct mounting	•	•	
BA	mounting	•	_	
D□	DIM	_	_	
A□	DIN rail mounting	•	•	
B□	mounting	•	_	

- * Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" below.)
- * Only direct mounting is available for the type 11 bottom-ported type.

DIN Rail Option

Nil	Direct mounting			
0	Without DIN rail (with bracket)			
3	For 3 stations	Specify a longer rail than		
i	:	the total length of specified		
24	For 24 stations	stations.		

* The 25A- series specifications and dimensions are the same as those of the standard model.

Manual override

Push-turn

Slide locking

locking

slotted

type

type

Nil: Non-locking

E: Push-turn


locking

lever

type

push type

How to Order Valves (With mounting screw)

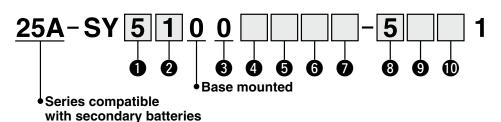

Series

5	SY5000
7	SY7000

6 Pilot valve option

Nil	Standard (0.7 MPa)
В	Quick response type (0.7 MPa)

2 Type of actuation

1	2-position single		
2	2-position double		
3	3-position closed center		
4	3-position exhaust center		
5	3-position pressure center		
Α	4-position dual 3-port valve (N.C./N.C.)		
В	B 4-position dual 3-port valve (N.O./N.O		
С	4-position dual 3-port valve (N.C./N.O.)		

Coil type

	71
Nil	Standard
Т	With power-saving circuit (Continuous duty type

- energized for long periods of time.
- power-saving circuit is selected. For details, refer to the standard product catalog.

		with power-saving circuit (Continuous duty type)
*	Be su	ure to select the power-saving circuit
		if the valve is to be continuously

Be careful of the energizing time when the

A Soal type

U 36	ai type	
0		Rubber seal

Rated voltage

O Hated Voltage		
5	24 VDC	
6	12 VDC	

4 Pilot type

Nil	Internal pilot
R	External pilot

* When selecting the external pilot specification for the 4-position dual 3-port valve, pay attention to the pilot pressure. For details, refer to the valve specifications of the standard SY series product in the Web Catalog.

Back pressure check valve (Built-in valve type)

	ant in taite type,
Nil	None
Н	Built-in

 The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

9 Light/surge voltage suppressor and common specification

and common specification		
Nil	Without light/surge voltage suppressor (Non-polar)	
R	With surge voltage suppressor (Non-polar)	
U	With light/surge voltage suppressor (Non-polar)	
S	With surge voltage suppressor (Positive common)	
Z	With light/surge voltage suppressor (Positive common)	
NS	With surge voltage suppressor (Negative common)	
NZ	With light/surge voltage suppressor (Negative common)	

* Only "Z" and "NZ" types are available with a power-saving circuit.

> * The 25A- series specifications and dimensions are the same as those of the standard model.

> > For details, refer to the Web Catalog.




42 B

Lead Wire

25A-SY5000/7000 Series 573 us



How to Order Manifolds



Series compatible with secondary batteries

Series

ype 12 op Ported

<u> </u>		
5	SY5000	
7	SY7000	

Number of cores (Lead wire)

	,
L1	34 cores
L2	17 cores
L3	9 cores

3 Lead wire length

_		
	1	0.6 m
	2	1.5 m
	3	3 m

4 Valve stations

<u> </u>		
Symbol	Stations	Note
02	2 stations	
:	:	Double wiring*1
16	16 stations	_
02	2 stations	Specified lavout*2

Oyllibui	Stations	Note		
02	2 stations			
:	:	Double wiring*1		
16	16 stations	_		
02	2 stations	Specified layout*2		
:	:	(Up to 32 solenoids		
24	24 stations	available)		
(I 2 🗆)				

Symbol	Stations	Note
02	2 stations	
:	:	Double wiring*1
04	4 stations	
02	2 stations	
:	:	(Up to 8 solenoids
08	8 stations	available)

(L3□)

(L1□)

	Stations	Note
02	2 stations	
:	:	Double wiring*1
08	8 stations	_
02	2 stations	Specified layout*2
:	:	(Up to 16 solenoids
16	16 stations	available)

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- * The blanking plate assembly is included in this number.

6 P. E port entry

D *1 D side (2 to		U side (2 to 10 stations)
		D side (2 to 10 stations)
		Both sides (2 to 24 stations)

*1 6 For type "S," SUP/EXH block assembly with a built-in silencer, choose "U" or "D" for P port entry.

6 SUP/EXH block assembly

<u> </u>		
Nil	Internal pilot	
S	Internal pilot, Built-in silencer	

- * The P and E ports are only available on the U and D sides for the built-in silencer type. The 3/5(E) port is plugged. The silencer exhaust port is located on the opposite side of the P and E port entry. (Example: When the P and E port entry is on the D side, the silencer exhaust port is on the U side.)
- * When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

Mounting


• meaning			
Nil	Direct mounting		
D	DIN rail mounting (With DIN rail)		
D0	DIN rail mounting (Without DIN rail)		
D3	For 3 stations Specify a length		
	:	longer than that of the standard rail.	
D24	For 24 stations		

* The 25A- series specifications and dimensions are the same as those of the standard model.



Auto Switches

How to Order Valves (With mounting screw)

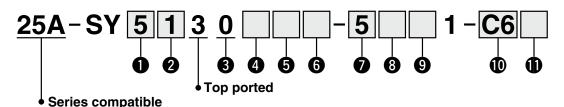

Series

• •••••		
5	SY5000	
7	SY7000	

with secondary batteries

2 Type of actuation

1	2-position single	
2	2-position double	
3	3-position closed center	
4	3-position exhaust center	
5	3-position pressure center	
Α	4-position dual 3-port valve (N.C./N.C.)	
В	4-position dual 3-port valve (N.O./N.O.)	
С	4-position dual 3-port valve (N.C./N.O.)	

Seal type

Ocal type			
		Rubber seal	

4 Back pressure check valve (Built-in valve type)

Nil None		None
	Н	Built-in
*	The built-in valve type back pressure	

check valve is not available for the 3-position type or the SY7000.

5 Pilot valve option

Nil	Standard (0.7 MPa)	
В	Quick response type (0.7 MPa)	

6 Coil type

	Nil	Standard		
T With power-say		Nith power-saving circuit (Continuous duty type)		
	_			

- * Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.
- * Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

Rated voltage

5	24 VDC
6	12 VDC

8 Light/surge voltage suppressor and common specification

Nil	Without light/surge voltage suppressor (Non-polar)
R	With surge voltage suppressor (Non-polar)
U	With light/surge voltage suppressor (Non-polar)
s	With surge voltage suppressor (Positive common)
Z	With light/surge voltage suppressor (Positive common)
NS	With surge voltage suppressor (Negative common)
NZ	With light/surge voltage suppressor (Negative common)

* Only "Z" and "NZ" types are available with a power-saving circuit.

9 Manual override

Nil: Non-locking push type	D: Push-turn locking slotted type	
E: Push-turn locking lever type	F: Slide locking type	

(I) A, B port size

Thread piping


Symbol	Port size	Applicable series
02	1/4	SY7000
_		

One-touch fitting (wethe)					
Symbol	A, B port	SY5000	SY7000		
C4 Ø4 C6 Ø6		•	_		
		•	•		
C8	ø8	•	•		
C10	ø10	_	•		
C12	ø12		•		

Thread type

• Illioud type		
Nil	Rc	
F	G	
N	NPT	
Т	NPTF	

* The 25A- series specifications and dimensions are the same as those of the standard model.



ype 10 Side Ported Type 11 **Bottom Ported**


Plug-in Connector Connecting Base

25A-SY5000/7000 Series 530 us





How to Order Manifolds



Series compatible with secondary batteries

Series

5	SY5000
7	SY7000

2 Type

G iy	pe
10	Side ported
11	Bottom ported

SI unit specifications

(Output polarity, Protocol, Number of outputs, Communication connector)

(output polarity) i rotobolj rialiibor or outputoj obililialiioution obililoutor)				
Symbol (Output polarity)			Number	Communication
Positive common (NPN)	Negative common (PNP)	Protocol	of outputs	connector
()	Without	SI unit	
QA	QAN	DeviceNet®	32	M12
QB	QBN	Devicemen	16	IVI 12
NA	NAN	PROFIBUS	32	M12
NB	NBN	DP	16	IVITZ
VA	VAN	∃ CC-Link ⊢	32	M12
VB	VBN		16	
DA	DAN	EtherCAT	32	M12
DB	DBN	EllielCAT	16	IVI I Z
FA	FAN	PROFINET	32	M12
FB	FBN	INCITINE	16	IVITZ
EA	EAN	EtherNet/IP™	32	M12
EB	EBN	Luicine/iF ····	16	IVITZ
_	KAN	IO-Link	32	M12

- Without SI unit, the output polarity is decided by the SI unit used. Ensure a match with the common specification of the valves to be used.
- DIN rail cannot be mounted without SI unit.
- For IO-Link, only the negative common (PNP) type and the 32 outputs type are available.

4 Valve stations

In the case of the 32-output SI unit

Symbol	Stations	Note
02	2 stations	
:	:	Double wiring*1
16	16 stations	
02	2 stations	Charified lavourt*2
:	:	Specified layout*2 (Up to 32 solenoids available
24	24 stations	

In the case of the 16-output SI unit

Symbol	Stations	Note	
02	2 stations		
:	:	Double wiring*1	
08	8 stations		
02	2 stations	Specified layout*2 (Up to 16 solenoids available)	
:	:		
16	16 stations		

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations.
 - The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- The blanking plate assembly is included in this number.
- For the model without the SI unit (S0). note the maximum number of solenoids of the SI unit that will be mounted. If the layout is specified, indicate it on the manifold specification sheet.

6 P. E port entry

<u> </u>	_ port or	
U	U side (2 to 10 stations)	
D	D side (2 to 10 stations)	
В	Both sides (2 to 24 stations)	

6 SUP/EXH block assembly

Nil	Internal pilot	
S	Internal pilot, Built-in silencer	
R	External pilot	

- The 3/5(E) port is plugged for the builtin silencer type.
- When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

Mounting

	Symbol	Mounting	Option Name plate Station number	
			Name plate	Station number
	Nil	Direct mounting	_	
	AA		•	•
	BA		•	_
	D□	DIN rail mounting	_	_
	A		•	•
	В□	mounting	•	_

- * Enter the number of stations inside \square when it is larger than the number of valve stations. (Refer to "DIN Rail Option" below.)
- Only direct mounting is available for the type 11 bottom-ported type.

DIN Rail Option

Nil	Direct mounting		
0	Without DIN rail (with bracket)		
3	For 3 stations Specify a longer rail		
i		than the total length of	
24	For 24 stations		

A. B port size (Metric)

9	A, B port size (Metrio)						
Cumbal		A B port	Type 10/Side ported Type 11/		Type 11/Bo	ttom ported	
Symbol		A, B port	SY5000	SY7000	SY5000	SY7000	
C4		ø4	•	_	•	_	
C6		ø6	•	•	•	•	
C8	ig	ø8	•	•	•	•	
C10	Straight	ø10	_	•	_	•	
C12	رق	ø12	_	•	_	•	9 19 MS
CM*1		Straight port, mixed sizes	•	•	•	•	
P, E port size (One-touch fittings)		ø10	ø12	ø10	ø12		

*1 Indicate the sizes on the manifold specification sheet for "CM."

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

For details on the EX260 Integrated Type (For Output) Serial Transmission System, refer to the Web Catalog and the Operation Manual. For the part numbers of the SI units to be mounted, refer to page 53 in this catalog. Please download the Operation Manual via the SMC website: https://www.smcworld.com



Manual override

Push-turn locking

Slide locking

slotted

type

type

Nil:

E:

Non-locking

push type


Push-turn

locking

lever

type

How to Order Valves (With mounting screw)

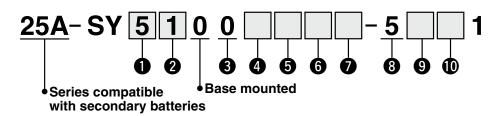

Series

5	SY5000
7	SY7000

6 Pilot valve option

Coil type				
	Nil	Standard		
	Т	With power-saving circuit (Continuous duty type		

Standard (0.7 MPa)

Quick response type (0.7 MPa)

- * Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.
- * Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

2 Type of actuation

1	2-position single	
2	2-position double	
3	3-position closed center	
4	3-position exhaust center	
5	3-position pressure center	
Α	4-position dual 3-port valve (N.C./N.C.)	
В	4-position dual 3-port valve (N.O./N.O.)	
С	4-position dual 3-port valve (N.C./N.O.)	

8 Rated voltage

5	24 VDC

Pilot type

3 Seal type

T not type		
Nil	Internal pilot	
R	External pilot	

Rubber seal

When selecting the external pilot specification for the 4-position dual 3-port valve, pay attention to the pilot pressure. For details, refer to the valve specifications of the standard SY series product in the Web Catalog.

Back pressure check valve (Built-in valve type)

	unit in vario typo,
Nil	None
Н	Built-in

* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.


Light/surge voltage suppressor and common specification

and common specimoation			
R	With surge voltage suppressor (Non-polar)		
U	With light/surge voltage suppressor (Non-polar)		
s	With surge voltage suppressor (Positive common)		
Z	With light/surge voltage suppressor (Positive common)		
NS	With surge voltage suppressor (Negative common)		
NZ	With light/surge voltage suppressor (Negative common)		

- Select "R," "U," "S," or "Z" for the valve when the SI unit output polarity is Nil (positive common). Select "R," "U," "NS," or "NZ" for the valve when the SI unit output polarity is N (negative common).
- Only "Z" and "NZ" types are available with a power-saving circuit.

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.





Air Grippers

Air Filters

Modular F.R.L./ Pressure Control

Detection Switches

Fluid Control Equipment


46®

25A-SY5000/7000 Series CANUS





How to Order Manifolds

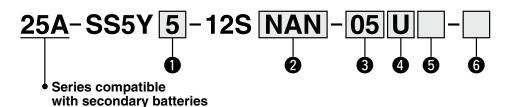

Series

ype 12

5	SY5000
7	SY7000

SI unit specifications

(Output polarity, Protocol, Number of outputs, Communication connector)

Symbol (Ou	tput polarity)		Number	Communication
Positive common	Negative common	Protocol		connector
(NPN)	(PNP)		outputs	OUTITION
()	Without SI unit		
QA	QAN	DeviceNet®	32	M12
QB	QBN	Devicemen	16	IVI I Z
NA	NAN	PROFIBUS	32	M12
NB	NBN	DP	16	IVIIZ
VA	VAN	CC-Link	32	M12
VB	VBN	CC-LINK	16	IVITZ
DA	DAN	EtherCAT	32	M12
DB	DBN	EllierCAT	16	IVI I Z
FA	FAN	PROFINET	32	M12
FB	FBN	PROFINEI	16	IVI I Z
EA	EAN	EtherNet/IP™	32	M12
EB	EBN	Eulenvel/IF	16	IVI I Z
_	KAN	IO-Link	32	M12

- * Without SI unit, the output polarity is decided by the SI unit used. Ensure a match with the common specification of the valves to be used.
- DIN rail cannot be mounted without SI
- For IO-Link, only the negative common (PNP) type and the 32 outputs type are àvailable.

Valve stations

In the case of the 32-output SI unit

Symbol	Stations	Note
02	2 stations	
:	:	Double wiring*1
16	16 stations	-
02	2 stations	Charified lavourt*2
:	:	Specified layout*2 (Up to 32 solenoids available)
24	24 stations	(Op to 32 solelloids available)

In the case of the 16-output SI unit

Symbol	Stations	Note
02	2 stations	
:	:	Double wiring*1
08	8 stations	
02	2 stations	Cracified lavourt*2
:		Specified layout*2 (Up to 16 solenoids available)
16	16 stations	

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- The blanking plate assembly is included in this number.
- For the model without the SI unit (S0). note the maximum number of solenoids of the SI unit that will be mounted. If the layout is specified, indicate it on the manifold specification sheet.

A P E port entry

<u> </u>	_ port order,
U*1	U side (2 to 10 stations)
D *1	D side (2 to 10 stations)
В	Both sides (2 to 24 stations)

*1 5 For type "S," SUP/EXH block assembly with a built-in silencer, choose "U" or "D" for P port entry.

5 SUP/EXH block assembly

Nil	Internal pilot	
S	Internal pilot, Built-in silencer	

- The P and E ports are only available on the U and D sides for the built-in silencer type. The 3/5(E) port is plugged. The silencer exhaust port is located on the opposite side of the P and E port entry. (Example: When the P and E port entry is on the D side, the silencer exhaust port is on the U side.)
- When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

6 Mounting

	<u> </u>		
Nil	Direct mounting		
D	DIN rail mounting (With DIN rail)		
D0	DIN rail mounting (Without DIN rail		
D3	For 3 stations Specify a length		
÷	:	longer than that of	
D24	For 24 stations	the standard rail.	

- If the DIN rail must be mounted without an SI unit, select D0. Then, refer to L3 of the dimensions for the DIN rail length and order separately.
- * The 25A- series specifications and dimensions are the same as those of the standard model.


For details, refer to the Web Catalog.

For details on the EX260 Integrated Type (For Output) Serial Transmission System, refer to the Web Catalog and the Operation Manual. For the part numbers of the SI units to be mounted, refer to page 53 in this catalog. Please download the Operation Manual via the SMC website: https://www.smcworld.com



Auto Switches

How to Order Valves (With mounting screw)

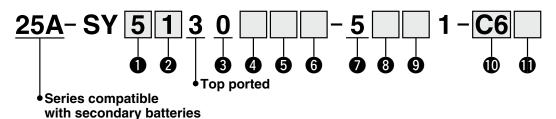

Series

5	SY5000
7	SY7000

2 Type of actuation

1	2-position single	
2	2-position double	
3	3-position closed center	
4	3-position exhaust center	
5	3-position pressure center	
Α	4-position dual 3-port valve (N.C./N.C.)	
В	4-position dual 3-port valve (N.O./N.O.)	
С	4-position dual 3-port valve (N.C./N.O.)	

Seal type

<u> </u>	<u> </u>	ai typc		
()		Rubber seal	

4 Back pressure check valve (Built-in valve type)

Nil	None
Н	Built-in

* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

6 Pilot valve option

Nil	Standard (0.7 MPa)		
В	Quick response type (0.7 MPa)		

6 Coil type

Nil	Standard	
Т	With power-saving circuit (Continuous duty type)	

- * Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.
- Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

Rated voltage


5	24	VE	C
---	----	----	---

8 Light/surge voltage suppressor and common specification

R	With surge voltage suppressor (Non-polar)
U	With light/surge voltage suppressor (Non-polar)
s	With surge voltage suppressor (Positive common)
Z	With light/surge voltage suppressor (Positive common)
NS	With surge voltage suppressor (Negative common)
NZ	With light/surge voltage suppressor (Negative common)

- Select "R," "U," "S," or "Z" for the valve when the SI unit output polarity is NiI (positive common). Select "R," "U," "NS," or "NZ" for the valve when the SI unit
- output polarity is N (negative common). Only "Z" and "NZ" types are available with a power-saving circuit.

Manual override



10 A, B port size

Thread piping

	aa pipiiig	
Symbol	Port size	Applicable series
02	1/4	SY7000


One-touch fitting (Metric)

One-touch fitting (wethe)						
Symbol	A, B port	SY5000	SY7000			
C4	ø4	•	_			
C6	ø6	•	•			
C8	ø8	•	•			
C10	ø10	_	•			
C12	ø12	_	•			

Thread type

Timoda typo				
Nil	Rc			
F	G			
N	NPT			
Т	NPTF			

* The 25A- series specifications and dimensions are the same as those of the standard model.




Type 10 Side Ported Type 11 **Bottom Ported**

Plug-in Connector Connecting Base





How to Order Manifolds



Series compatible with secondary batteries

Series

<u> </u>				
5	SY5000			
7	SY7000			

2 Type

10	Side ported
11	Bottom ported

SI unit

<u> </u>				
0	Without SI unit			
V	CC-Link (Positive common NPN)			

Only a terminal block plate is mounted for the valve without SI unit. For SI unit part numbers, refer to page 53. **5** P. E port entry

U	U side (2 to 10 stations)
D	D side (2 to 10 stations)
В	Both sides (2 to 16 stations)

6 SUP/EXH block assembly

Nil	Internal pilot			
S	S Internal pilot, Built-in silencer			
R	External pilot			

- The 3/5(E) port is plugged for the builtin silencer type.
- When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

8 Mounting

Cumbal	Mounting	Option			
Symbol		Name plate	Station number		
Nil	6	_	_		
AA	Direct mounting	•	•		
BA	mounting	•	_		
D□	DIM	_	_		
A□	DIN rail mounting	•	•		
В□	mounting	•	_		

- Enter the number of stations inside \square when it is larger than the number of valve stations. (Refer to "DIN Rail Option" below.)
- Only direct mounting is available for the type 11 bottom-ported type.

DIN Rail Option

Nil	Direct mounting				
0	Without DIN rail (with bracket)				
3	For 3 stations	Specify a longer rail than the total length of			
i	i	than the total length of			
16	For 16 stations	specified stations.			

4 Valve stations

Symbol	Stations	Note
02	2 stations	
:	:	Double wiring*1
08	8 stations	
02	2 stations	0
:	:	Specified layout*2 (Up to 16 solenoids available)
16	16 stations	(Op to 16 soleriolds available)

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a
- specified layout. *2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- The blanking plate assembly is included in this number.

<u>v</u>	A, B port (Metric)						
Symbol	Symbol A, B port			e 10/ ported	Type Bottom		
			SY5000	SY7000	SY5000	SY7000	
C4		ø4	•	_	•	_	
C6	.	ø6	•	•	•	•	
C8	igh	ø8	•	•	•	•	
C10	Straight	ø10	_	•		•	
C12	(0)	ø12	_	•	_	•	O DESTRUCTION OF THE PARTY OF T
CM*1		Straight port, mixed sizes	•	•	•	•	
P, E port size (One-touch fittings)		ø10	ø12	ø10	ø12		

- *1 Indicate the sizes on the manifold specification sheet for "CM."
- * The direction of P, E port fittings is the same as for the A, B port.

* The 25A- series specifications and dimensions are the same as those of the standard model.


For details, refer to the Web Catalog.

For details on the EX126 Integrated Type (For Output) Serial Transmission System, refer to the **Web Catalog** and the Operation Manual. For the part numbers of the SI units to be mounted, refer to page 53 in this catalog. Please download the Operation Manual via the SMC website: https://www.smcworld.com



Auto Switches

How to Order Valves (With mounting screw)

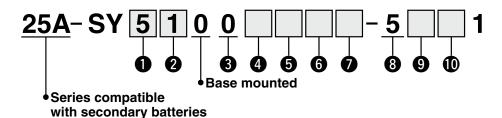

Series

2

3

4

5

A

B

5	SY5000
7	SY7000

2-position single 2-position double

3-position closed center

3-position exhaust center

3-position pressure center

4-position dual 3-port valve (N.C./N.C.)

4-position dual 3-port valve (N.O./N.O.)

4-position dual 3-port valve (N.C./N.O.)

Type of actuation

6 Pilot valve option

Nil	Standard (0.7 MPa)
В	Quick response type (0.7 MPa)

Coil type

• con type		
Nil	Standard	
Т	With power-saving circuit (Continuous duty type	
	Nil	

- * Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.
- * Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

U Se	al type		
0		Rubber seal	_

U na	ieu voitage
5	24 VDC

Pilot type

<u> </u>	or typo
Nil	Internal pilot
R	External pilot

When selecting the external pilot specification for the 4-position dual 3-port valve, pay attention to the pilot pressure. For details, refer to the valve specifications of the standard SY series product in the Web Catalog.

Back pressure check valve (Built-in valve type)

	(Same in tarre type)	
Nil	None	
Н	Built-in	

The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

Light/surge voltage suppressor and common specification

and common specimeation		
R	With surge voltage suppressor (Non-polar)	
U	With light/surge voltage suppressor (Non-polar)	
s	With surge voltage suppressor (Positive common)	
Z	With light/surge voltage suppressor (Positive common)	

* Only "Z" type is available with a powersaving circuit.

> * The 25A- series specifications and dimensions are the same as those of the standard model.

Manual override

Push-turn locking

Slide locking

slotted

type

type

Nil: Non-locking

E:

push type

Push-turn

locking

lever

type

For details, refer to the Web Catalog.

Air Grippers

Equipment Vacuum

Air

Modular F.R.L./ Pressure Control

ype 12

Plug-in Connector Connecting Base

25A-SY5000/7000 Series CANUS





How to Order Manifolds



Series compatible with secondary batteries

Series

5	SY5000
7	SY7000

2 SI unit

0	Without SI unit
V	CC-Link (Positive common NPN)

* Only a terminal block plate is mounted for the valve without SI unit. For SI unit part numbers, refer to page 53.

3 Valve stations

Symbol	Stations	Note
02	2 stations	
:		Double wiring*1
08	8 stations	
02	2 stations	Cracified lavourt*2
:	:	Specified layout*2 (Up to 16 solenoids available)
16	16 stations	(Op to 10 solerious available)

- *1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations.
 - The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- The blanking plate assembly is included in this number.

4 P. E port entry

	_ port order,
U*1	U side (2 to 10 stations)
D*1	D side (2 to 10 stations)
В	Both sides (2 to 16 stations)

*1 5 For type "S," SUP/EXH block assembly with a built-in silencer, choose "U" or "D" for P port entry.

5 SUP/EXH block assembly

Nil	Internal pilot
S	Internal pilot, Built-in silencer

- The P and E ports are only available on the U and D sides for the built-in silencer type. The 3/5(E) port is plugged. The silencer exhaust port is located on the opposite side of the P and E port entry. (Example: When the P and E port entry is on the D side, the silencer exhaust port is on the U side.)
- When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

6 Mounting

Nil	Direct	mounting
D	DIN rail mount	ing (With DIN rail)
D0	DIN rail mountin	g (Without DIN rail)
D3	For 3 stations	Specify a length
÷	:	longer than that of
D16	For 16 stations	the standard rail.

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

For details on the EX126 Integrated Type (For Output) Serial Transmission System, refer to the **Web Catalog** and the Operation Manual. For the part numbers of the SI units to be mounted, refer to page 53 in this catalog. Please download the Operation Manual via the SMC website: https://www.smcworld.com




Rotary Actuators

Detection Switches

Auto Switches

How to Order Valves (With mounting screw)

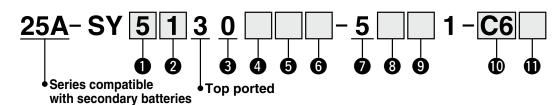

U Series		ries
	5	SY5000
	7	SY7000

2 Type of actuation

• ,	P
1	2-position single
2	2-position double
3	3-position closed center
4	3-position exhaust center
5	3-position pressure center
Α	4-position dual 3-port valve (N.C./N.C.)
В	4-position dual 3-port valve (N.O./N.O.)
С	4-position dual 3-port valve (N.C./N.O.)

i iabboi coai	

Back pressure check valve (Built-in valve type)

(Bant III		ant in valve type,
	Nil	None
	Н	Built-in

Ruhher seal

* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

Pilot valve option

Nil	Standard (0.7 MPa)
R	Quick response type (0.7 MPa)

6 Coil type

	ii typo
Nil	Standard
T	With power-saving circuit (Continuous duty type)

- * Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.
- Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

Rated voltage


5	24 VDC
o o	24 100

8 Light/surge voltage suppressor and common specification

R	With surge voltage suppressor (Non-polar)					
U	With light/surge voltage suppressor (Non-polar)					
S	With surge voltage suppressor (Positive common)					
Z	With light/surge voltage suppressor (Positive common)					

* Only "Z" type is available with a power-saving circuit.

9 Manual override



A, B port size

Thread piping

Symbol	Port size	Applicable series
02	1/4	SY7000

One-touch fitting (Metric)

		,	
Symbol	A, B port	SY5000	SY7000
C4 C6	ø4	•	_
C6	ø6	•	•
C8	ø8	•	•
C10	ø10	_	•
C12	ø12	_	•

Thread type

_	
Nil	Rc
F	G
N	NPT
Т	NPTF

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

. Caution

Tightening torque for mounting screw M3: 0.8 N·m


Manifold Options

■Blanking plate assembly

(With mounting screw) Used when valve additions are expected or for maintenance. A structure is in place on the blanking plate to prevent the mounting screws from sliding.



How to Order Blanking Plate Assembly

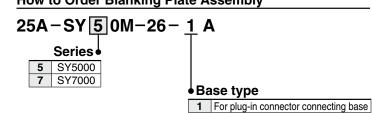

* The 25A- series specifications and dimensions are the same as those of the standard model.

SI Unit Part Nos.

Description	SI unit part no.	Note
	EX260-SPR1-X117	PROFIBUS DP M12 connector, 32 outputs, Negative common (PNP)
	EX260-SPR2-X117	PROFIBUS DP M12 connector, 32 outputs, Positive common (NPN)
	EX260-SPR3-X117	PROFIBUS DP M12 connector, 16 outputs, Negative common (PNP)
	EX260-SPR4-X117	PROFIBUS DP M12 connector, 16 outputs, Positive common (NPN)
	EX260-SDN1-X117	DeviceNet® M12 connector, 32 outputs, Negative common (PNP)
	EX260-SDN2-X117	DeviceNet® M12 connector, 32 outputs, Positive common (NPN)
	EX260-SDN3-X117	DeviceNet® M12 connector, 16 outputs, Negative common (PNP)
	EX260-SDN4-X117	DeviceNet® M12 connector, 16 outputs, Positive common (NPN)
	EX260-SEC1-X117	EtherCAT M12 connector, 32 outputs, Negative common (PNP)
	EX260-SEC2-X117	EtherCAT M12 connector, 32 outputs, Positive common (NPN)
	EX260-SEC3-X117	EtherCAT M12 connector, 16 outputs, Negative common (PNP)
	EX260-SEC4-X117	EtherCAT M12 connector, 16 outputs, Positive common (NPN)
EX260 SI unit	EX260-SMJ1-X117	CC-Link M12 connector, 32 outputs, Negative common (PNP)
	EX260-SMJ2-X117	CC-Link M12 connector, 32 outputs, Positive common (NPN)
	EX260-SMJ3-X117	CC-Link M12 connector, 16 outputs, Negative common (PNP)
	EX260-SMJ4-X117	CC-Link M12 connector, 16 outputs, Positive common (NPN)
	EX260-SPN1-X117	PROFINET M12 connector, 32 outputs, Negative common (PNP)
	EX260-SPN2-X117	PROFINET M12 connector, 32 outputs, Positive common (NPN)
	EX260-SPN3-X117	PROFINET M12 connector, 16 outputs, Negative common (PNP)
	EX260-SPN4-X117	PROFINET M12 connector, 16 outputs, Positive common (NPN)
	EX260-SEN1-X117	EtherNet/IP™ M12 connector, 32 outputs, Negative common (PNP)
	EX260-SEN2-X117	EtherNet/IP™ M12 connector, 32 outputs, Positive common (NPN)
	EX260-SEN3-X117	EtherNet/IP™ M12 connector, 16 outputs, Negative common (PNP)
	EX260-SEN4-X117	EtherNet/IP™ M12 connector, 16 outputs, Positive common (NPN)
	EX260-SIL1-X117	IO-Link M12 connector, 32 outputs, Negative common (PNP)
EX126 SI unit	EX126D-SMJ1-X220	CC-Link (Terminal block, 16 outputs, Positive common (NPN))


Valve Mounting Screw Part No.


Description	Part no.		Note
Description	SY5000	SY7000	Note
Round head combination screw	SY5000-223-1A	SY7000-224-1A	Part numbers shown on the left are for 10 valves. (SY5000: 20 pcs./SY7000: 30 pcs.)

One-touch Fittings Part Nos.

		Port size	25A-SY5000	25A-SY7000	
		ø4 One-touch fitting (Straight type)	90-VVQ1000-51A-C4	_	
	Metric	ø6 One-touch fitting (Straight type)	90-VVQ1000-51A-C6	25A-KJH06-17-X1607	
A, B port	size	ø8 One-touch fitting (Straight type)	90-VVQ1000-51A-C8	90-VVQ2000-51A-C8	
port	Size	SIZE	ø10 One-touch fitting (Straight type)	_	90-VVQ2000-51A-C10
		ø12 One-touch fitting (Straight type)	_	25A-KQ2H12-17-X1607	
P, E	Metric	ø10 One-touch fitting (Straight type)	90-VVQ2000-51A-C10	_	
port	size	ø12 One-touch fitting (Straight type)	_	90-VVQ4000-50B-C12	


Manifold Options



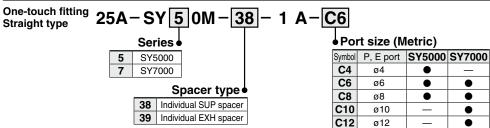

Part numbers of mounting screw SY5000: SY5000-223-2A (2 pcs. of each) SY7000: SV1000-136-12A (3 pcs. of each)


How to Order Individual SUP/EXH Block Assembly

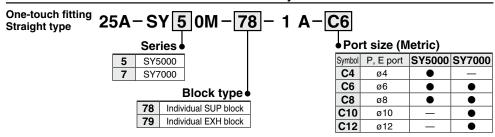




Manifold Options 25A-SY5000/7000 Series

Manifold Parts Nos.

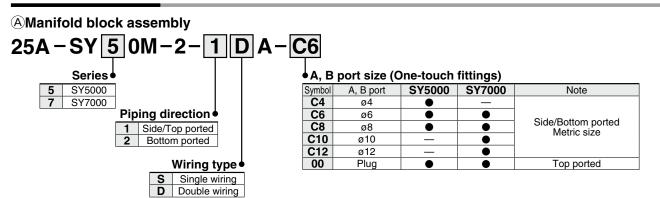

BSUP/EXH block assembly

1)D-sub connector <IP40>

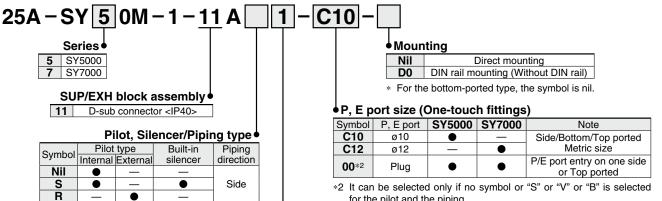

for the pilot and the piping.

					• •	nnector entry air	eci
		l —	_				1
_				5		Upward	
•		_		Bottom	2	Lateral	
2	l <u>—</u>		_		_	Latoral	J

Top

Clamp bracket assembly Part no. Series 25A-SY5000/7000 25A-SY50M-15-3A

*1 For silencer (supply side) E port is plugged.


2)Terminal block box

VP

В

BS

BR

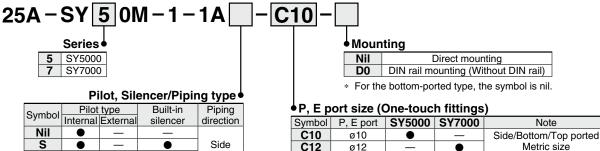

Symbol	Pilot	type External	Built-in	Piping
Symbol	Internal	External	silencer	direction
Nil	•	_	_	
S	•	_	•	Side
R	-		_	
V	•	_	_	Ton
VP	•	_	●*3	Тор
В	•	_	_	
BS	•	_	•	Bottom
BR	_	•	_	

^{*3} For silencer (supply side)

00*4	Plug	•	•	P/E port entry on one side or Top ported		
*4 It can be selected only if no symbol or "S" or "V" or "B" is selected for the pilot and the piping.						

E port is plugged.

Terminal block box housing assembly

25A-VVQC1000-T0-1

Clamp bracket assembly for terminal block box

25A-SY30M-15-6A

* Part number is for one assembly.

Clamp bracket assembly

Series	Part no.	
25A-SY5000/7000	25A-SY50M-15-3A	

^{*} Part number is for one assembly.

Flow Control Equipment/ Fittings

Detection Switches

Fluid Control Equipment

54®



ø12

Related Products Rotary Actuators

Air Cylinders

Air Grippers Equipment Vacuum

ir Preparation Equipment

A Clean Air Filters

Modular F.R.L./ Pressure Control Equipment

Process Gas | Equipment


Electric Actuators

Switches

Part number is for one assembly.

Manifold Parts Nos.

BR

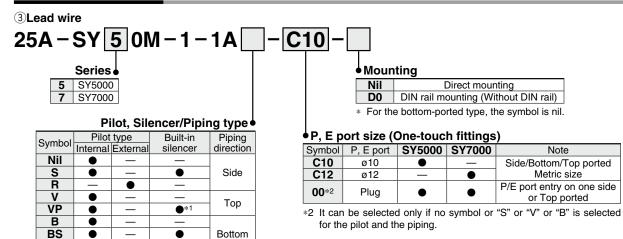


^{*1} For silencer (supply side) E port is plugged.


Clamp bracket assembly

	•
Series	Part no.
25A-SY5000/7000	25A-SY50M-15-3A

^{*} Part number is for one assembly.

Lead wire connector block assembly



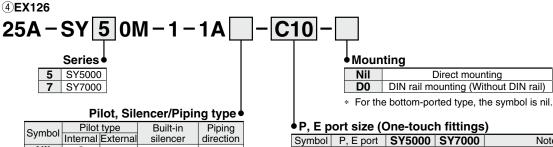

Internal	External	silencer	direction
		Olloriooi	uncollon
	_	_	
•	_	•	Side
_		_	
	_	_	Ton
	_	●*3	Тор
•	_	_	
	_	•	Bottom
_		_	
	• • • • •	• - • • - • • - • • - • • • • • • • • •	

^{*3} For silencer (supply side) E port is plugged.

Terminal block plate assembly

25A-VVQC1000-74A-2

Clamp bracket assembly for EX126 SI unit

25A-SY30M-15-6A

* Part number is for one assembly.

Clamp bracket assembly

Series	Part no.
25A-SY5000/7000	25A-SY50M-15-3A


^{*} Part number is for one assembly.

^{*4} It can be selected only if no symbol or "S" or "V" or "B" is selected for the pilot and the piping.

Manifold Options 25A-SY5000/7000 Series

25A-SY50M-15-3A

Manifold Parts Nos.

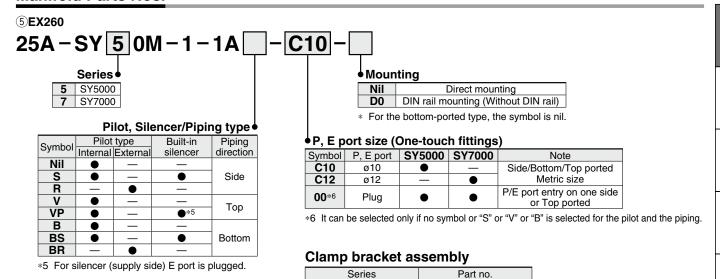

25A-SY5000/7000

Vacuum Equipment Air Grippers

* Part number is for one assembly.

Air Cylinders

Related Products

Rotary Actuators


Air Preparation Equipment

Modular F.R.L./ Clean
Pressure Control
Equipment Air Filters

Flow Control N Equipment/ Pr Fittings


Auto Switches



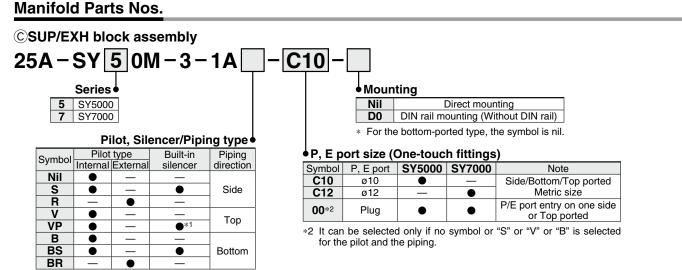

^{*1} For silencer (supply side)
E port is plugged.

■ Cover assembly/Silencer cover assembly/Port block assembly for SUP/EXH (end) block assembly

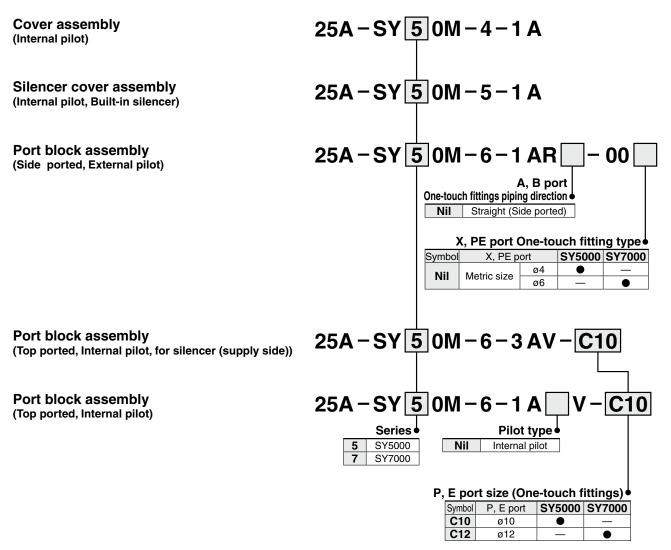


■ Name plate bracket assembly (For SY5000 only)

25A-SY50M-85-1A


^{* &}quot;B" for the bottom-ported type can be selected for the SY5000/7000 series.

25A-SY5000/7000 Series Valve Replacement Parts

How to Order Pilot Valves

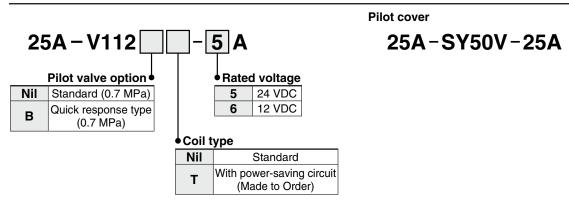

How to Order Port Block Assembly

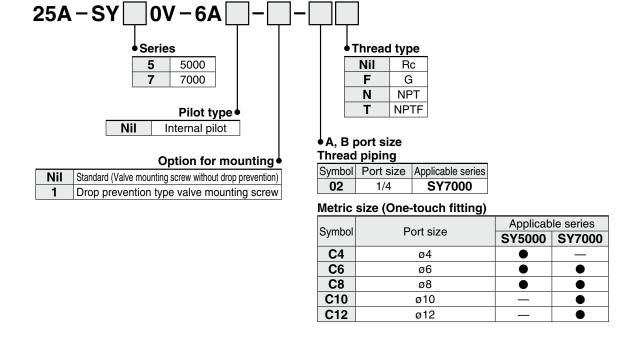

Body Cover Assembly

* Used when the top-ported type is changed to the side or bottom-ported type

		Part no.	
5	Series	Standard (Valve mounting screw without drop prevention)	Drop prevention type valve mounting screw
SY5000	Internal pilot	25A-SY50V-16A	25A-SY50V-16A-1
315000	External pilot	25A-SY50V-16AR	25A-SY50V-16AR-1
SY7000	Internal pilot	25A-SY70V-16A	25A-SY70V-16A-1
317000	External pilot	25A-SY70V-16AR	25A-SY70V-16AR-1


 $[\]ast\,\,$ The part number is not indicated on the product.



Auto Switches

25A-SY5000/7000 Series With Residual Pressure Release Valve

How to Order (With mounting screw)

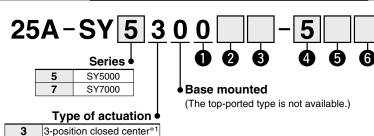


*1 Only the closed center type is available.

With residual pressure release valve

With residual pressure release valve*2

*2 Mounting screw types, hexagon socket head cap screw B and drop prevention type K, H are not available.



Seal type

Rubber seal

2 Pilot valve option

Nil Standard (0.7 MPa)	
В	Quick response type (0.7 MPa)

3 Coil type

Nil	Standard	
Т	With power saving circuit (Continuous duty type)	

- * Be sure to select the power saving circuit type if the valve is to be continuously energized for long periods of time.
- Be careful of the energizing time when the power saving circuit is selected. Refer to the Web Catalog for details.

4 Rated voltage

5	24 VDC
6	12 VDC
* Tho ar	anlicable rated voltage verice depending

on the manifold wiring type. Refer to the "How to Order Manifolds" pages.

5 Light/surge voltage suppressor and common specification

Symbol	With light	Surge voltage suppressor	Common specification
Nil			
1411		_	
R	_		Non-polar
U	•	•	
S	_		Positive
Z	•		common
NS	_		Negative
NZ	•		common

* Only "Z" and "NZ" types are available with a power saving circuit.

6 Manual override





Table 1. Valve mounting screw

SY5000	SY7000
SY5000-221-9A	SY7000-221-14A
(2 pcs.)	(3 pcs.)

Made to Order






1 With Safety Slide Locking Manual Override

A safety lock is added to the slide locking manual override.



♦ Entry is the same as 25A-standard products. Specifications and performance are the same as standard products.



Symbol

-X350

2-Position Single Solenoid Valve with Built-in Return Spring


A 2-position single solenoid valve with a spring built into the main valve The main valve returns to origin (the OFF position) via the spring when it is not pressurized.


♠ Entry is the same as 25A-standard products. Specifications and performance are the same as standard products.


* For the external pilot type, exhaust the external pilot (X) port and the main pressure simultaneously.


If the main pressure cannot be exhausted due to the system specifications, please contact SMC separately.

* The manual option is only applicable to the non-locking push type.









Plug-in Single Unit/Sub-plate Type [IP67 Compliant]


(Side ported, Bottom ported, Top ported)

CA CA US



How to Order

In the case of (Valve) + (Sub-plate) (Built-in valve type part no.)

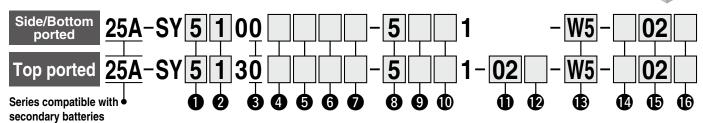

_

1 Sei	ries
5	SY5000
7	SY7000

Type of actuation

1	0	Single	
2	2-position	Double	
3		Closed center	
4	3-position	Exhaust center	
5		Pressure center	
Α	4 manisian	N.C./N.C.	
В	4-position dual 3-port	N.O./N.O.	
С	duai 5-poit	N.C./N.O.	

8 Rated voltage

5	24 VDC
6	12 VDC

9 Light/surge voltage suppressor and common specification

Symbol	With light	Surge voltage suppressor	Common specification
Nil	_	_	
R	_		Non-polar
U	•		
S	_		Positive
Z	•		common
NS	_		Negative
NZ	•		common

* Only "Z" and "NZ" types are available with a power saving circuit.

A. B port thread type (Thread piping)

W A, I	o port uneau type (Tineau piping
Nil	Rc
F	G

Wiring specifications (Sub-plate)

<u> </u>	mg opeemeations (our plate)
WO	Without M12 connector cable
W5	With M12 connector cable (3000 mm)

* When ordering a product with M12 connector cable, the connector cable is included.

Port location (Sub-plate)

Port size (Sub-plate)

Port size

1/4

Thread type (Sub-plate)

Symbol

02

03

Nil	Side ported
В	Bottom ported
V *1	Top ported (1P. 5EA, 3EB port; Side ported)

*1 Only available for the valve piping type "3" top ported

Applicable series

SY5000

SY7000

3 Seal type

• • • • • • • • • • • • • • • • • • •	
0	Rubber seal

4 Pilot type

Nil	Internal pilot
R	External pilot

Back pressure check valve (Built-in valve type)

Nil	None
Н	Built-in

* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

6 Pilot valve option


Nil Standard (0.7 MPa)	
B Quick response type (0.7 MPa	

Coil type

Nil	Standard
Т	With power saving circuit (Continuous duty type)

- Be sure to select the power saving circuit type if the valve is to be continuously energized for long periods of time.
- Be careful of the energizing time when the power saving circuit is selected. For details, refer to the standard product catalog.

Manual override



A, B port size (* Top-ported valve only)

Thread piping

Symbol	Port size	Applicable series
02	1/4	SY7000

Metric size (One-touch fitting)


Symbol	A, B port	SY5000	SY7000
C4 C6 C8	ø4	•	_
C6	ø6	•	•
C8	ø8	•	•
C10	ø10	_	•
C12	ø12	_	•

- * The 25A- series specifications and dimensions are the same as those of the standard model.
- * When mounting a special order (including Made-to-Order specification) valve or manifold option (spacer, etc.) on the sub-plate, add the valve part number or spacer part number under the sub-plate part number to place an order. For details, refer to the ordering example on page 57-4.

How to Order

In the case of Sub-plate (Sub-plate single unit part no.)

* Without valve





Valve mounting screws are not included.

Series compatible with secondary batteries

1 Series

Conce	
5	SY5000
7	SY7000

Wiring specifications

<u> </u>	
WO	Without M12 connector cable
W5	With M12 connector cable (3000 mm)

- * Refer to the table below for connector cable part numbers.
- When ordering a product with M12 connector cable, the connector cable is included.

Port location (Sub-plate)

O i dit iddation (dub plate)		
Nil	Side ported	
В	Bottom ported	
V	Top ported [1(P), 5(EA), 3(EB) port: Side ported]	

Sub-plate thread type

Sul Sul	b-plate tilleau type
Nil	Rc
F	G

4 Port size (Sub-plate)

Symbol	Port size	Applicable series
02	1/4	SY5000
03	3/8	SY7000

How to Order when mounting a special order (including Made-to-Order specification) valve on the sub-plate (Ordering example: X350)

25A-SY50M-27-1-W5-02······1 set (Sub-plate single unit part no.) *25A-SY5100-5U1-X350·······1 set (Built-in return spring specification)


Ordering example when mounting a manifold option (spacer, etc.)

25A-SY50M-27-1-W5-02 ······ 1 set (Sub-plate single unit part no.)

*25A-SY5400-5U1 ············ 1 set (3-position exhaust center part no.)


*25A-SY50M-39-1A-C6 ········· 1 set (Individual EXH spacer part no.)

Sub-plate Parts Nos.

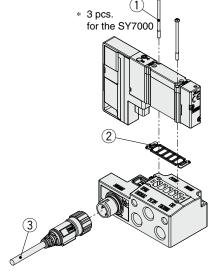

No.	Description	Part no. SY5000 SY7000		Note
INO.	Description			Note
1	Round head combination screw	SY5000-223-1A (M3 x 32.5)	SY7000-224-1A (M3 x 36.5)	Part numbers shown on the left are for 10 valves (20 pcs.). (30 pcs. for the SY7000)
2	Base gasket (for sub-plate)	SY50M-11-1A	SY70M-11-1A	Part numbers shown on the left are for 10 valves (10 pcs.).
3	M12 waterproof connector cable	90-ZS-37-A-X258		Cable length: 3000 mm

5-Port Solenoid Valve **Body Ported/Single Unit** 25A-SY5000/7000 Series

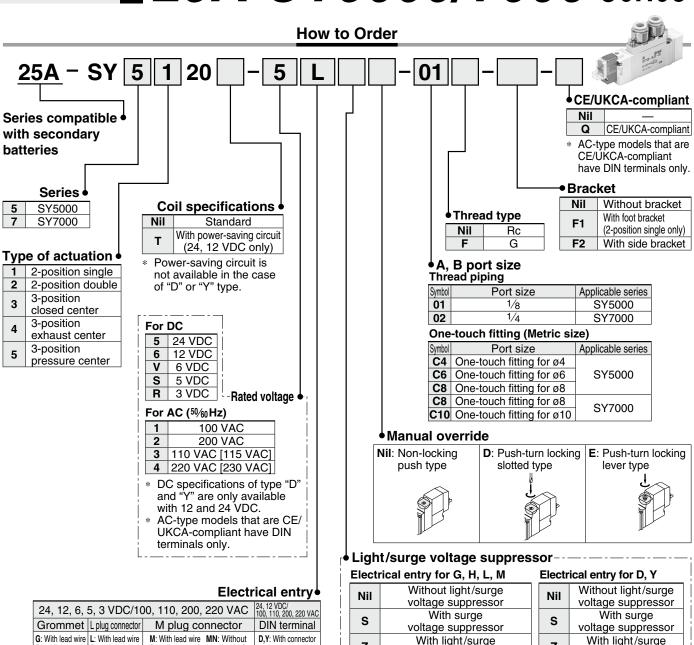

24, 12, 6,	24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC			24, 12 VDC/ 100, 110, 200, 220 VAC
Grommet	L plug connector	M plug co	nnector	DIN terminal
	L: With lead wire (Length 300 mm)	M: With lead wire (Length 300 mm)		D,Y: With connector
H: With lead wire (Length 600 mm)		LO: Without connector	MO: Without connector	·

- "LN," "MN" type: with 2 sockets.
- "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).
- Refer to the standard products for the lead wire length of L and M plug connectors and the connector assembly with cover for L and M plug connector.

Nil Without light/surge voltage suppressor S With surge voltage suppressor Z With light/surge voltage suppressor
S With surge voltage suppressor Voltage suppressor With light/surge voltage suppressor
voltage suppressor With light/surge voltage suppressor
z Voltage suppressor voltage suppressor voltage suppressor
voltage suppressor
voltage suppressor
NACCO II
With surge voltage suppressor
(Non-polar type)
With light/surge voltage suppresso
(Non-polar type)

- There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.
- For "R" and "U," DC voltage is only available
- Power-saving circuit is only available in the "Z" type.


Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor

- There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.
- When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.
 - * The 25A- series specifications and dimensions are the same as those of the standard model.



5-Port Solenoid Valve **Base Mounted/Single Unit**



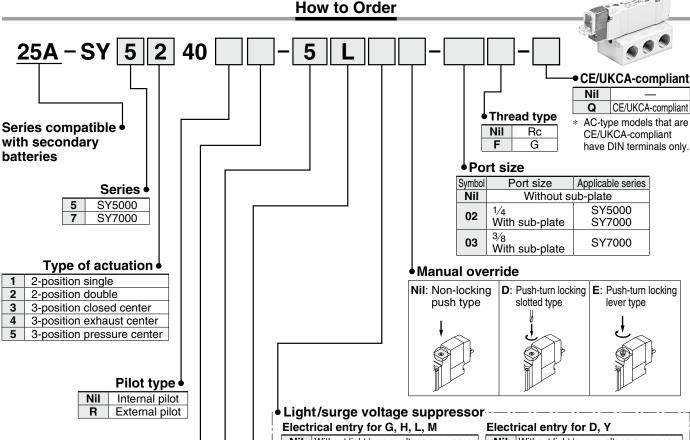

Coil specifications

	•
Nil	Standard
Т	With power-saving circuit (24, 12 VDC only)
	(24, 12 VDC only)

Power-saving circuit is not available in the case of "D" or "Y" type.

Rated voltage

	For DC
5	24 VDC
6	12 VDC
٧	6 VDC
S	5 VDC
R	3 VDC

For AC (50/60Hz)

1	100 VAC
2	200 VAC
3	110 VAC [115 VAC]
4	220 VAC [230 VAC]

- * DC specifications of type "D" and "Y" are only available with 12 and
- AC-type models that are CE/UKCAcompliant have DIN terminals only.

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
R	With surge voltage suppressor (Non-polar type)
U	With light/surge voltage suppressor (Non-polar type)

- There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.
- Power-saving circuit is only available in the "Z" type.
- For "R" and "U," DC voltage is only available.

		nour chary for B, 1
	Nil	Without light/surge voltage suppressor
S With surge voltage suppressor (No		With surge voltage suppressor (Non-polar type)
		With light/surge voltage suppressor (Non-polar type)

There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.


Electrical entry

24, 12, 6	24, 12, 6, 5, 3 VDC / 100, 110, 200, 220 VAC				
Grommet	L plug connector	M plug connector		DIN terminal	
	L: With lead wire (Length 300 mm)	M: With lead wire (Length 300 mm)		D,Y: With connector	
H: With lead wire (Length 600 mm)		LO: Without connector	MO: Without connector		

- "LN," "MN" type: with 2 sockets.
- "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).
- Refer to the standard products for the lead wire length of L and M plug connectors and the connector assembly with cover for L and M plug connector.
- * The 25A- series specifications and dimensions are the same as those of the standard model.

туре 20

5-Port Solenoid Valve Body Ported Manifold Bar Stock Type/Individual Wiring 25A-SY5000/7000 Series

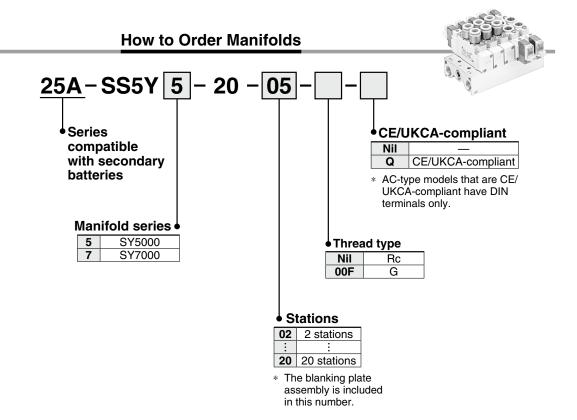


* The 25A- series specifications and dimensions are the same as those of the standard model. However, the blanking plate assembly has different dimensions. Refer to page 67.



Auto Switches

How to Order Valves

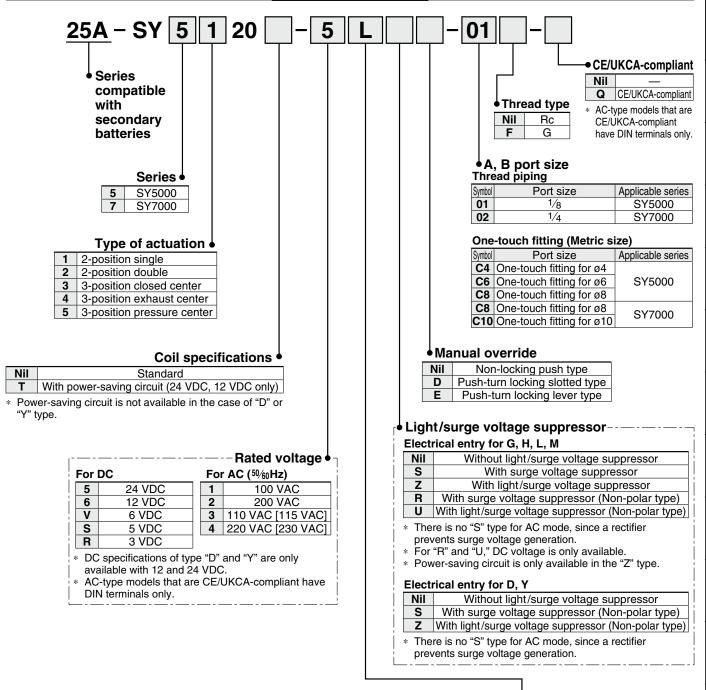

24, 12, 6	100, 110, 200, 220 VAC				
Grommet	Grommet L plug connector M plug connector				
G: With lead wire	L: With lead wire	M: With lead wire	D: With connector		
(Length 300 mm)	(Length 300 mm)	(Length 300 mm)	Y: With connector		
H: With lead wire	LN: Without lead wire	MN: Without lead wire			
(Length 600 mm)	LO : Without connector	MO: Without connector			


- * "LN," "MN" type: with 2 sockets.
- * "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).
- Refer to the standard products for the lead wire length of L and M plug connectors and the connector assembly with cover for L and M plug connector.
 - * The 25A- series specifications and dimensions are the same as those of the standard model.


Electrical entry






5-Port Solenoid Valve Base Mounted Manifold Bar Stock Type/Individual Wiring 25A-SY5000/7000 Series

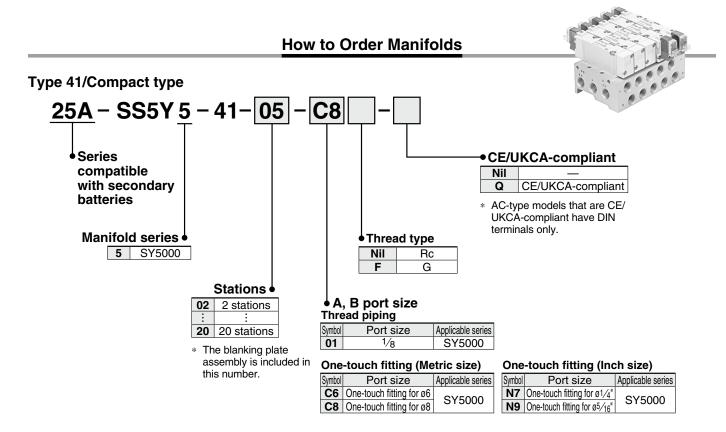

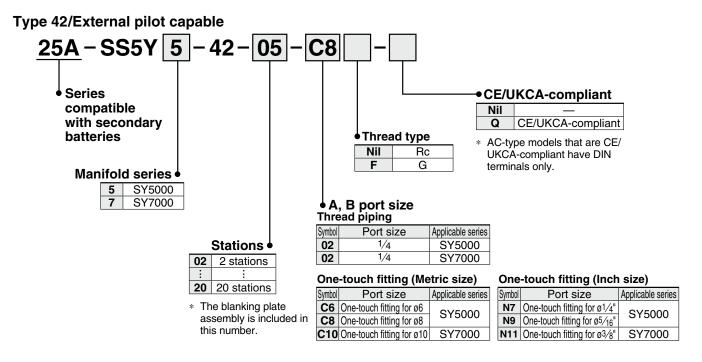

* The 25A- series specifications and dimensions are the same as those of the standard model. However, the blanking plate assembly has different dimensions. Refer to page 67.

How to Order Valves

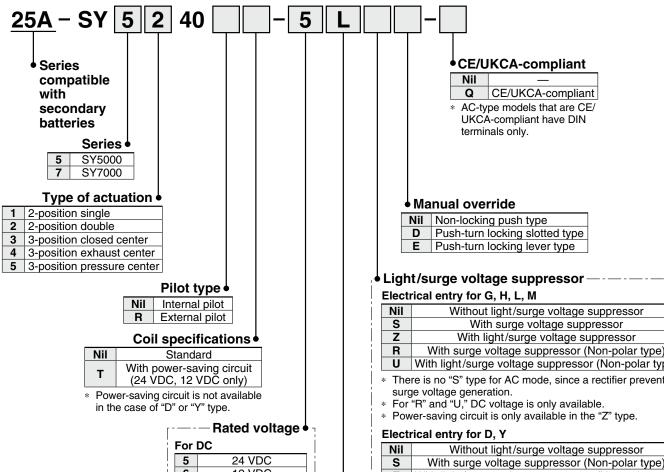

5	24 VDC		
6	12 VDC		
٧	6 VDC		
S 5 VDC			
R	3 VDC		
E A O (FO / 11-)			

For AC (50/60 Hz)

1	100 VAC		
2	200 VAC		
3	110 VAC [115 VAC]		
4	220 VAC [230 VAC]		

- * DC specifications of type "D" and "Y" are only available with 12 and 24 VDC.
- AC-type models that are CE/UKCA-compliant have DIN terminals only.

ĺ	Nil	Without light/surge voltage suppressor
	S	With surge voltage suppressor
	Z	With light/surge voltage suppressor
ĺ	R	With surge voltage suppressor (Non-polar type)
ļ	U	With light/surge voltage suppressor (Non-polar type)

* There is no "S" type for AC mode, since a rectifier prevents

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor (Non-polar type)
Z	With light/surge voltage suppressor (Non-polar type)

* There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.

Electrical entry

24, 12, 6	24, 12 VDC/ 100, 110, 200, 220 VAC		
Grommet	L plug connector	M plug connector	DIN terminal
G: With lead wire (Length 300 mm) H: With lead wire (Length 600 mm)	L: With lead wire (Length 300 mm) LN: Without lead wire LO: Without connector	M: With lead wire (Length 300 mm) MN: Without lead wire MO: Without connector	D: With connector Y: With connector

- * "LN," "MN" type: with 2 sockets.
- "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).
- * Refer to the standard products for the lead wire length of L and M plug connectors and the connector assembly with cover for L and M plug connector.

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

Air Cylinders

Related Products

Rotary Actuators

Air Grippers

Equipment Vacuum

Preparation Ä

Air Filters Clean

Modular F.R.L./ Pressure Control Equipment


Detection Switches

Fluid Control Equipment Fluid

Process Gas Equipment

Actuators Electric Auto Switches

How to Order Pilot Valve Assembly (With two mounting screws)

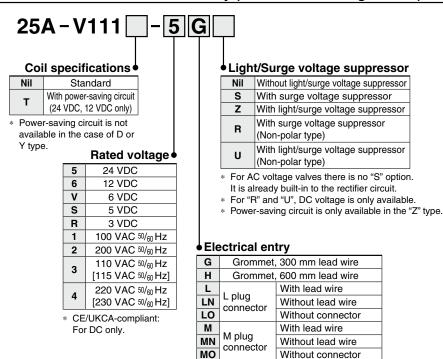

DIN terminal type 25A - V115 - 5 D Rated voltage

5	24 VDC	
6 12 VDC		
1	100 VAC 50/60 Hz	
2	200 VAC 50/60 Hz	
3	110 VAC 50/60 Hz	
3	[115 VAC 50/ ₆₀ Hz]	
4	220 VAC 50/60 Hz	
4	[230 VAC 50/60 Hz]	

* DC specifications of type D and Y is only available with 12 and 24 VDC.

Light/Surge voltage suppressor

Nil	Nil Without light/surge voltage suppress		
s	With surge voltage suppressor		
	(Non-polar type)		
z	With light/surge voltage suppressor		
	(Non-polar type)		

- * DOZ and YOZ are not available.
- * For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

►Electrical entry

D	DIN terminal	With connector	
DO	(Type D)	Without connector	
Υ	DIN terminal (Type Y)	With connector	
YO		Without connector	

Do not replace V111 (G, H, L, M) to V115 (DIN terminal) and vice versa when replacing pilot valve assembly only.

* Since V111 and V115 are CE/UKCA-compliant as standard, the suffix "-Q" is not necessary.



Bar Stock Type/Individual Wiring 25A-SY5000/7000 Series

One-touch Fittings Part Nos. for Body Ported

Port size			25A-SY5000	25A-SY7000
	Metric size	ø4 One-touch fitting (Straight type)	90-VVQ1000-51A-C4	
Culindar part		ø6 One-touch fitting (Straight type)	90-VVQ1000-51A-C6	
Cylinder port		ø8 One-touch fitting (Straight type)	90-VVQ1000-51A-C8	90-VVQ2000-51A-C8
		ø10 One-touch fitting (Straight type)		90-VVQ2000-51A-C10

Gasket Assembly Part Nos.


Valve model	Manifold type	25A-SY5000	25A-SY7000
Body ported	Type 20	SY5000-GS-3	SY7000-GS-3
Base mounted	Type 41/42	SY5000-GS-4 (-Q)	SY7000-GS-4 (-Q)

Applicable series

Bracket Assembly Part Nos.

Description	Part no.	
Bracket (For F1)	25A-SX ₇ 000-16-2A (With mounting screw)	
Bracket (For F2)	25A-SX ₇ 000-16-1A (With mounting screw)	

Port Block Assembly Part Nos.

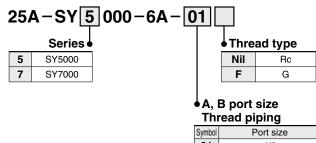

One	touch fitting (Mot	rio oizo)
02	1/4	25A-SY7000
01	1/8	25A-SY5000

One-touch fitting (Metric size)

Symbol	Port size	Applicable series	
C4	One-touch fitting for ø4		
C6	One-touch fitting for ø6	25A-SY5000	
C8	One-touch fitting for ø8		
C8	One-touch fitting for ø8	25A-SY7000	
C10	One-touch fitting for ø10	25A-517000	

Directional
Control Valve

Air Cylinders

Related Products

Rotary Actuators

Air Grippers

Vacuum Equipment

Air Preparation Equipment

Clean Air Filter

Modular F.R.L./ Pressure Control Equipment

low Control Equipment/ F Fittings

Detection Switches

Fluid Control Equipment

Process Gas F Equipment

Electric Actuators

Auto Switches


 $[\]ast\,$ The gasket assembly includes 10 sets of a gasket and mounting screws.

Manifold Options

■Blanking plate assembly

(Mounting screw: 2 pcs., with gasket)

It is used by attaching on the manifold block for being prepared for removing a valve for maintenance reasons or planning to mount a spare valve, etc.

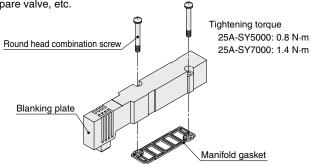


How to Order


⚠ Caution

When mounted on a type 20 manifold, only the P port is plugged. In addition, it cannot be used for the type 20 CE/UKCA-compliant manifold.

Dimensions


Manifold type/For type 20






Dimensions [mm]					
Series	Manifold type	W 1	W2	H1	H2
25A-SY5000	Type 20	33.3	69.6	44.5	15.2
25A-SY7000	Type 20	39.4	76.4	41.1	18.3

Manifold type/For type 41/42

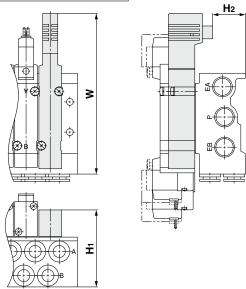

Dimensions [mm]				
Series	Manifold type	W	H ₁	H ₂
25A-SY5000	Type 41	106.4	51	21.7
25A-515000	Type 42	107.6	56	26.7
25A-SY7000	Type 42	118.1	55.6	32.8

Plug-in Unit/Base Mounted F Kit (D-sub connector kit) 25A-VQ2000 Series

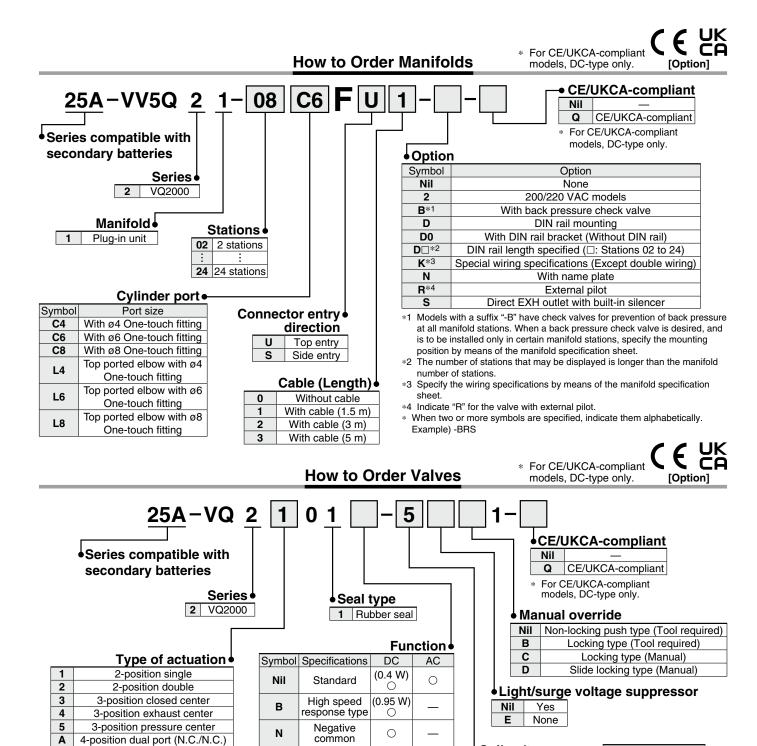

⚠ Caution

Α

Use the standard (DC) specification when continuously energizing for long periods of time.

4-position dual port (N.O./N.O.)

4-position dual port (N.C./N.O.)

The 25A- series specifications and dimensions are the same as those of the standard model.

3

4

5

6

100 VAC (50/60 Hz)

200 VAC (50/60 Hz)

110 VAC (50/60 Hz)

220 VAC (50/60 Hz)

24 VDC

12 VDC

For details, refer to the Web Catalog.

CE/UKCA-compliant



External

pilot

indicate them alphabetically.

When two or more symbols are specified,

Plug-in Unit/Base Mounted T Kit (Terminal block box kit) 25A-VQ2000 Series

How to Order Manifolds

* For CE/UKCA-compliant models, DC-type only.

♦CE/UKCA-compliant

CE/UKCA-compliant

Air Cylinders

Related Products

Rotary Actuators

Air Grippers


Equipment

Ä

Air Filters

ressure Contro

Flow Control Equipment/ Fittings

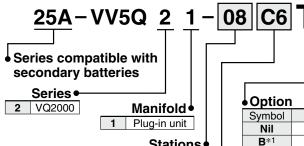

Stations • 02 2 stations 20 20 stations Cylinder port

Symbol	pol Port size	
C4	With ø4 One-touch fitting	
C6	With ø6 One-touch fitting	
C8	With ø8 One-touch fitting	
L4	Top ported elbow with ø4 One-touch fitting	
L6	Top ported elbow with ø6 One-touch fitting	

Top ported elbow with ø8 One-touch fitting

Option		A-compliant models, DC-type only.
Symbol	Option	
Nil	None	*1 Models with a suffix "-B" have ch
B*1	With back pressure check valve	prevention of back pressure at a
D	DIN rail mounting	stations. When a back pressure
D0	With DIN rail bracket (Without DIN rail)	desired, and is to be installed on manifold stations, specify the mo
D □*2	DIN rail length specified (□: Stations 02 to 20)	by means of the manifold specific *2 The number of stations that may is longer than the manifold numb
K *3	Special wiring spec. (Except double wiring)	*3 Specify the wiring specifications the manifold specification sheet.
N	With name plate	*4 Indicate "R" for the valve with ext
R*4	External pilot	* When two or more symbols are sp
S	Direct EXH outlet with built-in silencer	indicate them alphabetically. Example) -BRS
w	Enclosure: Dust-tight, Water-jet-proof (IP65)	Specify the mounting position by r manifold specification sheet.

- *1 Models with a suffix "-B" have check valves for prevention of back pressure at all manifold stations. When a back pressure check valve is desired, and is to be installed only in certain manifold stations, specify the mounting position by means of the manifold specification sheet.
- *2 The number of stations that may be displayed is longer than the manifold number of stations.
- Specify the wiring specifications by means of the manifold specification sheet.
- *4 Indicate "R" for the valve with external pilot.
- When two or more symbols are specified, indicate them alphabetically.
- Example) -BRS
- Specify the mounting position by means of the manifold specification sheet.



* For CE/UKCA-compliant models, DC-type only.



Series compatible with Series VQ2000 secondary batteries

△ Caution Use the standard (DC)

specification when

continuously energizing

for long periods of time.

Type of actuation

25A-VQ 2

1	2-position single	
2	2-position double	
3	3-position closed center	
4	3-position exhaust center	
5	3-position pressure center	
Α	4-position dual port (N.C./N.C.)	
В	4-position dual port (N.O./N.O.)	
С	4-position dual port (N.C./N.O.)	

Seal type 1 Rubber seal

Function •

Symbol	Specifications	DC	AC
Nil	Standard	(0.4 W)	0
В		(0.95 W)	
-	response type	0	
N	Negative		
IN	common	0	
R	External		
n	pilot		

 When two or more symbols are specified, indicate them alphabetically. Combination of "B" and "K" is not possible.

CE/UKCA-compliant CE/UKCA-compliant For CE/UKCA-compliant models, DC-type only.

Enclosure

Nil	Dustproof		
w	Dust-tight/Water-jet-proof type		
VV	(IP65)		

Manual override

l	Nil	Non-locking push type (Tool required)
	В	Locking type (Tool required)
	С	Locking type (Manual)
	D	Slide locking type (Manual)

Light/surge voltage suppressor

Nil	Yes
Е	None

• C	oil voltage	CE/UKCA-compliant
1	100 VAC (50/60 Hz)	_
3	110 VAC (50/60 Hz)	
5	24 VDC	•
6	12 VDC	•

The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

SMC


Detection Switches Fluid Control Equipment

Process Gas Equipment

Electric Actuators

Auto Switches

Plug-in Unit/Base Mounted L Kit (Lead wire) 25A-VQ2000 Series

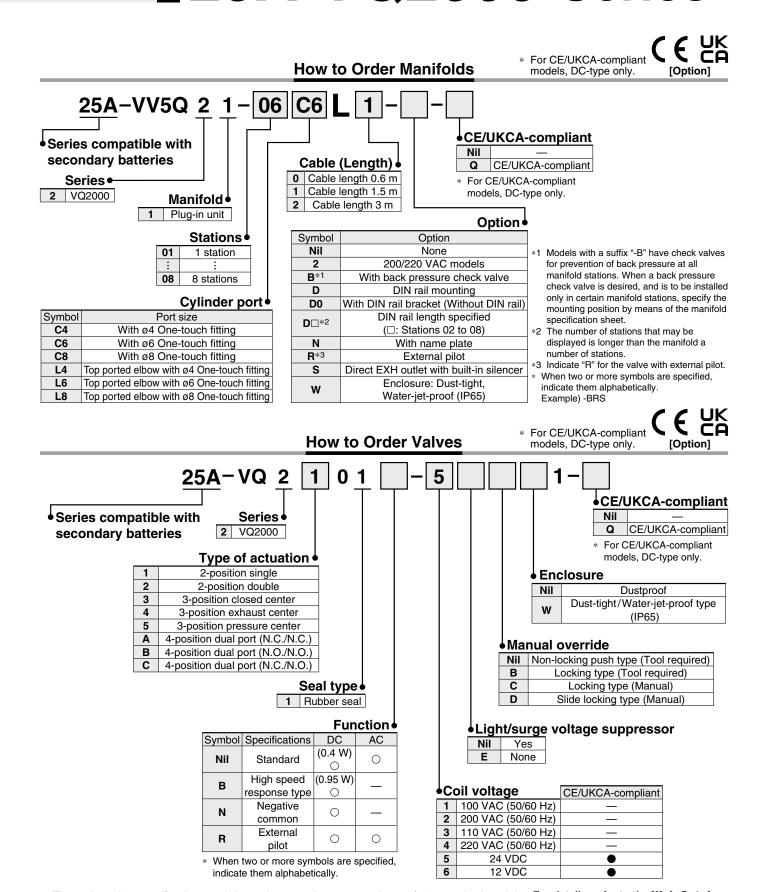

^{*} The 25A- series specifications and dimensions are the same as those of the standard model. For details, refer to the Web Catalog. **SMC**

Plug-in Unit/Base Mounted S Kit (Serial transmission) 25A-VQ2000 Series

How to Order Manifolds

* Refer to "SI Unit Part Nos." when ordering the CE/ UKCA-compliant SI unit.


CE/UKCA-compliant

Option •

CE/UKCA-compliant

Refer to "SI Unit Part Nos." when

ordering the CE/UKCA-compliant SI unit.

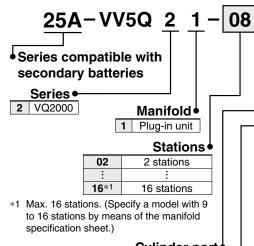

	Cylinder port•
Symbol Port size	
C4	With ø4 One-touch fitting
C6	With ø6 One-touch fitting
C8	With ø8 One-touch fitting
L4	Top ported elbow with ø4 One-touch fitting
L6	Top ported elbow with ø6 One-touch fitting
L8	Top ported elbow with ø8 One-touch fitting

SI unit specifications

Symbol	Protocol	Stations
0	Without SI unit	_
Q	DeviceNet®	Max.16
V	CC-Link	stations

Option
None
With back pressure check valve
DIN rail mounting
DIN rail length specified
(□: Stations 02 to 16)
Special wiring specifications
(Except double wiring)
With name plate
With external pilot
Direct EXH outlet
with built-in silencer
Enclosure: Dust-tight,
Water-jet-proof (IP65)

SI Unit Part Nos.

Symbol	Protocol	SI unit part no.
Q	DeviceNet®	EX120-SDN1-X220
V	CC-Link	EX120-SMJ1-X220


- *1 Models with a suffix "-B" have check valves for prevention of back pressure at all manifold stations. When a back pressure check valve is desired, and is to be installed only in certain manifold stations, specify the mounting position by means of the manifold specification sheet.
- *2 The number of stations that may be displayed is longer than the manifold number of stations.
- *3 Specify the wiring specifications by means of the manifold specification sheet.
- *4 Indicate "R" for the valve with external pilot.
- *5 Refer to "Dimensions" of the standard products for SI unit and valve, in case of "W" (Dust-tight, Water-
- When two or more symbols are specified, indicate them alphabetically. Example) -BRS.

SI Unit Part Nos. (With option W)

Sym	bol	Protocol	SI unit part no.
Q		DeviceNet®	EX124D-SDN1-X220
V		CC-Link	EX124D-SMJ1-X220

How to Order Valves



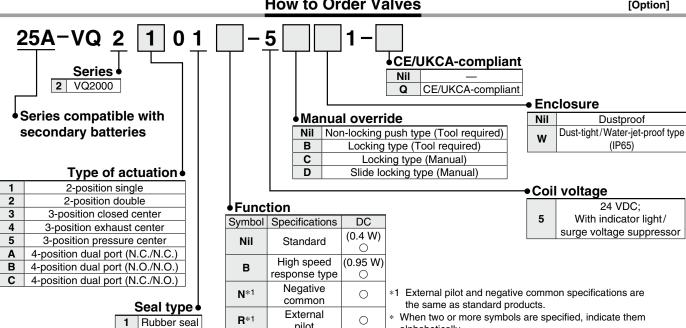

* The 25A- series specifications and dimensions are the same as those of the standard model. For details, refer to the Web Catalog.

alphabetically.

pilot



Air Cylinders

Related Products

Rotary Actuators

Air Grippers Equipment

Preparation Ä

Air Filters

Detection Switches

Fluid Control Equipment Fluid


Process Gas Equipment


Actuators

Auto Switches

Sub-plate Single Unit 25A-VQ2000 Series

How to Order



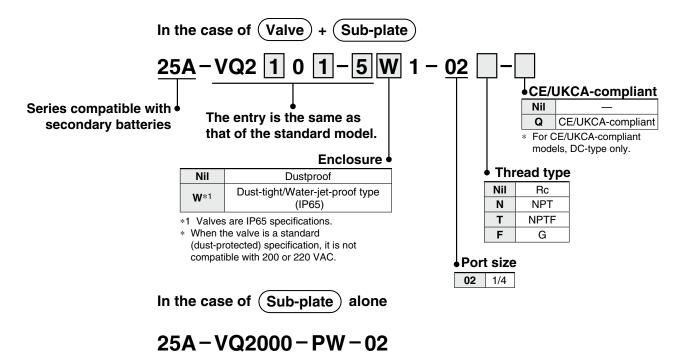

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

73


25A-VQ2000 Series

Manifold Options

Blanking plate assembly

25A-VVQ2000V-10A-1

It is used by attaching on the manifold block for being prepared for removing a valve for maintenance reasons or planning to mount a spare valve, etc.



* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

SI Unit Part Nos.

Description	SI unit part no.	Note
EX124 SI unit	EX124D-SMJ1-X220	CC-Link
	EX124D-SDN1-X220	DeviceNet®
EX120 SI unit	EX120-SMJ1-X220	CC-Link (VQ2000/Without option "W")
	EX120-SDN1-X220	DeviceNet® (VQ2000/Without option "W")

One-touch Fittings Part Nos.

Port size		One-touch fitting part no.	
		ø4 One-touch fitting (Straight type)	90-VVQ1000-51A-C4
Cylinder port	t Metric size	ø6 One-touch fitting (Straight type)	90-VVQ1000-51A-C6
		ø8 One-touch fitting (Straight type)	90-VVQ1000-51A-C8
1 (P), 3 (R) port	Metric size	ø10 One-touch fitting (Straight type)	90-VVQ2000-51A-C10


Air Cylinders Control Valve



Plug-in/Plug Lead: Single Unit

Base Mounted

25A-VQ4000 Series

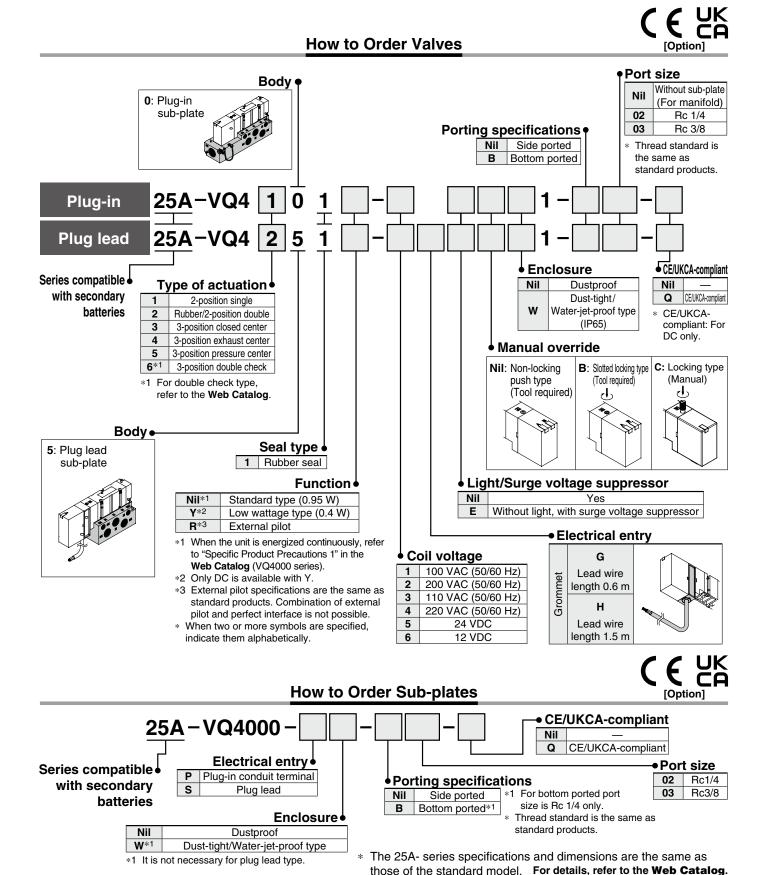


75

Plug-in Unit/Base Mounted F Kit (D-sub connector kit)

25A-VQ4000 Series




How to Order Manifolds

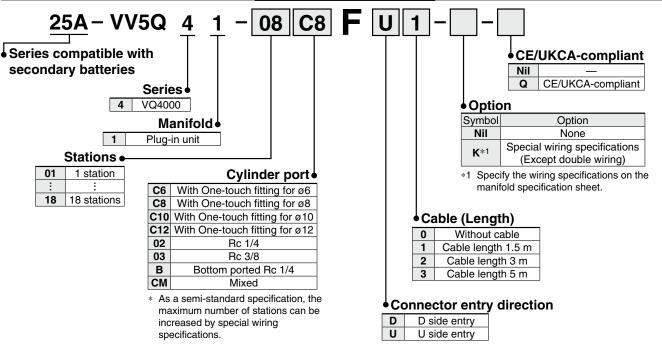

How to Order Valves



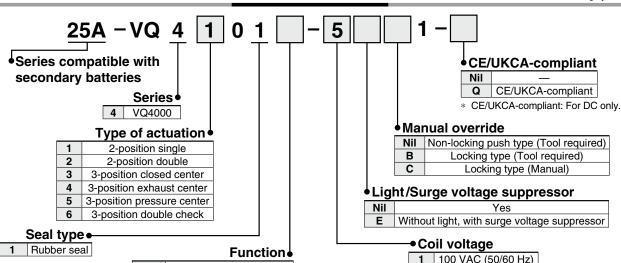

Nil*1	Standard (0.95 W)
Y *2	Low wattage type (0.4 W)
R*3	External pilot

- *1 When the unit is energized continuously, refer to "Specific Product Precautions 1" in the **Web Catalog** (VQ4000 series).
- *2 Only DC is available with Y.
- *3 External pilot specifications are the same as standard products. Combination of external pilot and perfect interface is not possible.
- * When two or more symbols are specified, indicate them alphabetically.

2	200 VAC (50/60 Hz)
3	110 VAC (50/60 Hz)
4	220 VAC (50/60 Hz)
5	24 VDC
6	12 VDC

 The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

Directional ontrol Valves

Air Cylinders

Related Products

Air Grippers Actuators

Equipment /

Air Preparation Equipment

> ciean vir Filters

Modular F.R.L./ Pressure Control Equipment

Flow Control Equipment/ Fittings

Detection Switches

Fluid Control Equipment

Process Gas | Equipment


Electric Actuators

Auto Switches

Plug-in Unit/Base Mounted T Kit (Terminal block box kit) 25A-VQ4000 Series

How to Order Manifolds



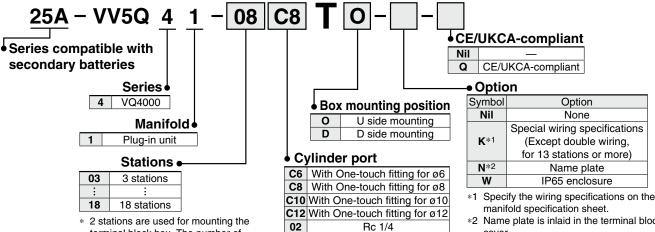

03

В

CM


- terminal block box. The number of stations is the number of manifold valves plus 2 stations for the terminal block box. For 13 stations or more. specify the wiring specifications by means of the manifold specification
- As a semi-standard specification, the maximum number of stations can be increased by special wiring specifications.

Rc 3/8

Bottom ported Rc 1/4

Mixed

- *2 Name plate is inlaid in the terminal block cover.
- * When two or more symbols are specified, indicate them alphabetically. Example) -KM

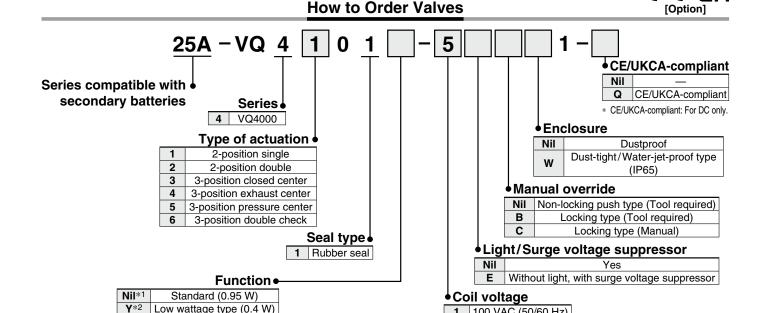

- When the unit is energized continuously, refer to "Specific Product Precautions 1" in the Web Catalog (VQ4000 series).
- *2 Only DC is available with Y.

R*3

Low wattage type (0.4 W)

External pilot

- *3 External pilot specifications are the same as standard products. Combination of external pilot and perfect interface is not possible.
- When two or more symbols are specified, indicate them alphabetically.
- * The 25A- series specifications and dimensions are the same as those of the standard model.

100 VAC (50/60 Hz)

200 VAC (50/60 Hz)

110 VAC (50/60 Hz)

220 VAC (50/60 Hz)

24 VDC

12 VDC

3

4

5


6



Plug-in Unit/Base Mounted L Kit (Lead wire cable) 25A-VQ4000 Series


How to Order Manifolds



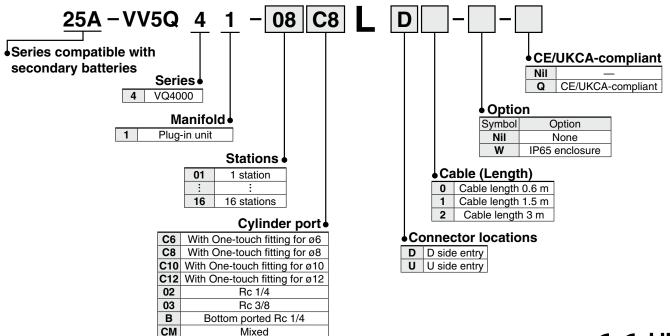

How to Order Valves



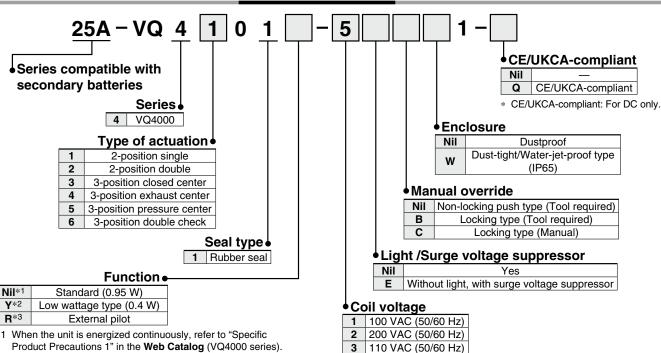

- *2 Only DC is available with Y.
- *3 External pilot specifications are the same as standard products. Combination of external pilot and perfect interface is not possible.
- * When two or more symbols are specified, indicate them alphabetically.
- 6 12 VDC * The 25A- series specifications and dimensions are the same as

220 VAC (50/60 Hz)

24 VDC

SMC

4

5

those of the standard model. For details, refer to the Web Catalog. 78

Air Cylinders

Related Products

Rotary Actuators

Air Grippers Equipment

Air Preparation

Detection Switches

Fluid Control Equipment

Process Gas Equipment

Actuators


Auto Switches

Plug-in Unit/Base Mounted S Kit (Serial transmission unit) 25A-VQ4000 Series




* Refer to "SI Unit Part Nos." when ordering the CE/ UKCA-compliant SI unit.



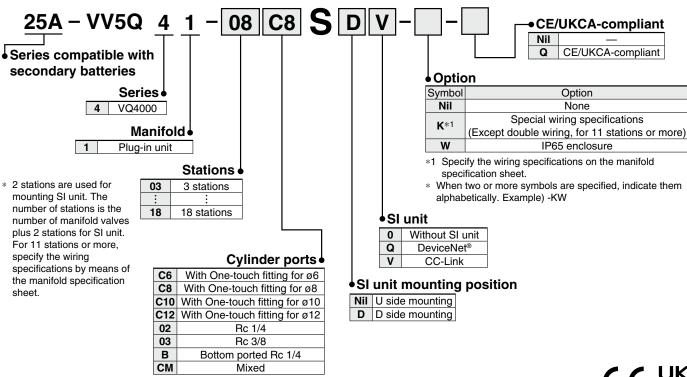

How to Order Valves

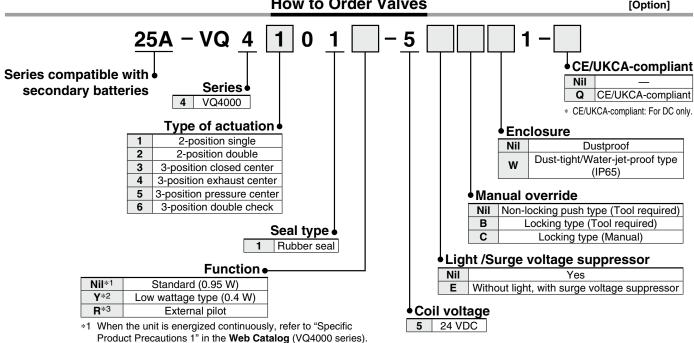

*3 External pilot specifications are the same as standard products. Combination of external pilot and perfect interface is not possible. * The 25A- series specifications and dimensions

For details, refer to the Web Catalog.

are the same as those of the standard model.



*2 Only DC is available with Y.


alphabetically.

When two or more symbols are specified, indicate them


Plug Lead Unit/Base Mounted C Kit (Connector kit)

25A-VQ4000 Series



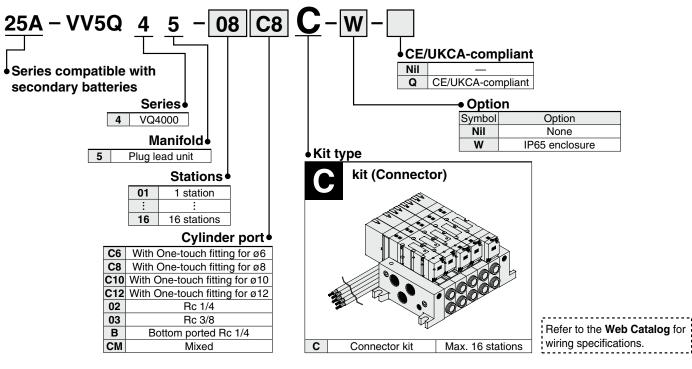

How to Order Valves

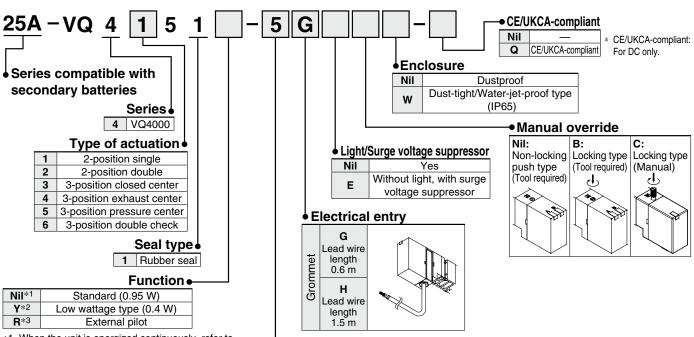

- *1 When the unit is energized continuously, refer to "Specific Product Precautions 1" in the Web Catalog (VQ4000 series).
- *2 Only DC is available with Y.
- *3 External pilot specifications are the same as standard products. Combination of external pilot and perfect interface is not possible.
- When two or more symbols are specified, indicate them alphabetically.
- I
 100 VAC (50/60 Hz)
 4
 220 VAC (50/60 Hz)

 2
 200 VAC (50/60 Hz)
 5
 24 VDC

 3
 110 VAC (50/60 Hz)
 6
 12 VDC
 - * The 25A- series specifications and dimensions are the same as those of the standard model. For details, refer to the **Web Catalog**.




25A-VQ4000 Series

Manifold Options

Blanking plate assembly

25A-VVQ4000-10A-1 (Plug-in type) 25A-VVQ4000-10A-5 (Plug lead type)

It is used by attaching on the manifold block for being prepared for removing a valve for maintenance reasons or planning to mount a spare valve, etc.



* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

SI Unit Part Nos.

Description	SI unit part no.	Note
EX124 SI unit	EX124D-SMJ1-X220	CC-Link/D side mounting
	EX124D-SDN1-X220	DeviceNet®/D side mounting
	EX124U-SMJ1-X220	CC-Link/U side mounting
	EX124U-SDN1-X220	DeviceNet®/U side mounting


One-touch Fittings Part Nos

One-touch i fittings i ait itos.						
	Р	One-touch fittings part no.				
		ø6 One-touch fitting (Straight type)	90-VVQ4000-50B-C6			
Cylinder port	Cylinder port Metric size	ø8 One-touch fitting (Straight type)	90-VVQ4000-50B-C8			
Cylinder port		ø10 One-touch fitting (Straight type)	90-VVQ4000-50B-C10			
		ø12 One-touch fitting (Straight type)	90-VVQ4000-50B-C12			



Plug-in Unit 25A-SQ2000 Series

How to Order Manifolds

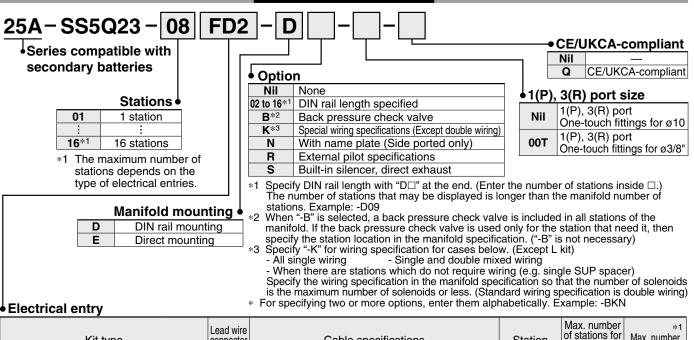

Electrical entry						
Kit type		Lead wire connector location	Cable specifications	Station	Max. number of stations for special wiring specifications	*1 Max. number of solenoids
The electric parts are made of copper. D-sub D side connector kit D saldes steel Body Salarless steel	FD0 FD1 FD2 FD3	D side	D-sub connector (25P) kit, without cable D-sub connector (25P) kit, with 1.5 m cable D-sub connector (25P) kit, with 3.0 m cable D-sub connector (25P) kit, with 5.0 m cable	1 to 12 stations	16 stations	24
Terminal block box kit	TD0	D side	Terminal block box kit	1 to 10 stations	16 stations	16
kit Mounting screw: Stainless steel	LD0 LU0	D side U side	Lead wire kit with 0.6 m cable			
	LD1 LU1	D side U side	Lead wire kit with 1.5 m cable	1 to 12 stations	_	_
One-touch fitting Body: Stainless steel	LD2 LU2	D side U side	Lead wire kit with 3.0 m cable			
Mounting screw:Stainless steel The electric parts are made	SDQ	D side	DeviceNet [®]	1 to 8 stations	16 stations	16
of copper. One-touch fitting Body: Stainless steel Serial transmission kit EX140 integrated-type (for output) serial transmission system*2	SDV	D Side	CC-Link	1 to 8 stations	16 stations	16

^{*1} The maximum number of stations should not be more than the maximum number of solenoids. (The number of solenoids are counted as: 1 for single solenoids and 2 for type 3P and 4P double solenoids.)

SI unit part nos.

Symbol	Protocol type	SI unit part no.	Page
SDQ	DeviceNet®	EX140-SDN1-X220	0.4
SDV	CC-Link	EX140-SMJ1-X220	84

Blanking plate assembly


25A-SSQ2000-10A-3

* The 25A- series specifications and dimensions are the same as those of the standard model.



^{*2} Refer to the **Web Catalog** for the details of EX140 integrated-type (for output) serial transmission system. Refer to "SI unit part nos." below when ordering the CE/UKCA-compliant SI unit.

How to Order Valves

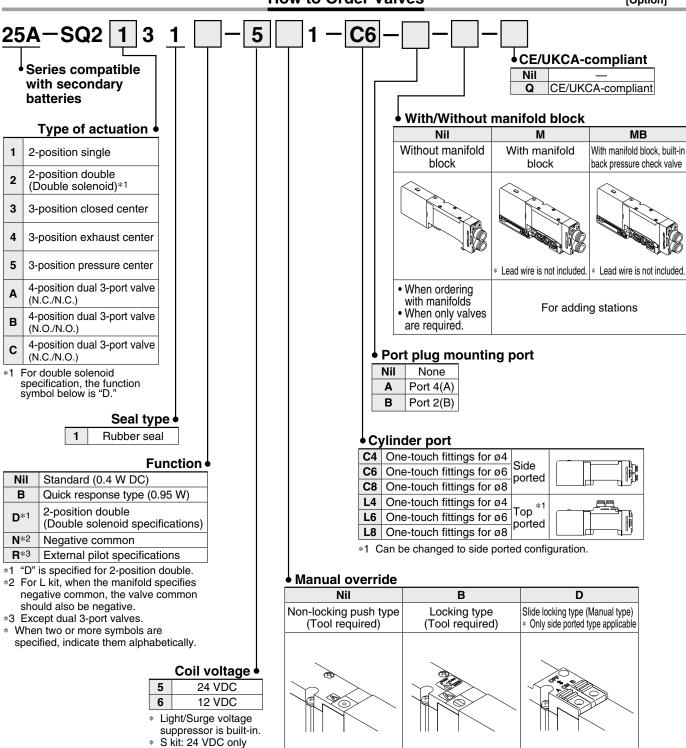

SI Unit Part Nos.

Description	SI unit part no.	Note
EV440.01	EX140-SMJ1-X220	CC-Link
EX140 SI unit	EX140-SDN1-X220	DeviceNet®

One-touch Fittings Part Nos.

		Port size	One-touch fittings part no.
		ø4 One-touch fitting (Straight type)	90-VVQ1000-51A-C4
Cylinder port	Metric size	ø6 One-touch fitting (Straight type)	90-VVQ1000-51A-C6
		ø8 One-touch fitting (Straight type)	90-VVQ1000-51A-C8
1 (P), 3 (R) port	Metric size	ø10 One-touch fitting (Straight type)	90-VVQ2000-51A-C10


SMC

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the \boldsymbol{Web} $\boldsymbol{Catalog}.$

Plug Lead Unit 25A-SQ2000 Series

How to Order Manifolds

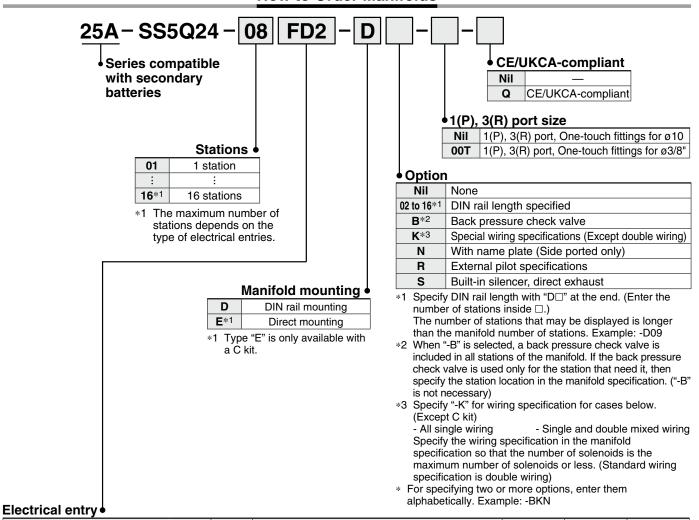

Kit type		Lead wire connector location	Cable specifications		Max. number of stations for special wiring specifications	*1 Max. number of solenoids
Rounting screw: Stainless steel	FD0		D-sub connector (25P) kit, without cable			
The electric Uside	FD1	D side	D-sub connector (25P) kit, with 1.5 m cable	1 to 12 stations	16 stations	24
	FD2	D side	D-sub connector (25P) kit, with 3.0 m cable	1 to 12 stations	10 Stations	24
D-sub connector kit One-touch fitting Body: Stainless steel	FD3		D-sub connector (25P) kit, with 5.0 m cable			
C kit Mounting screw: Stainless steel One-touch fitting Body: Stainless steel	С	_	Connector kit	1 to 16 stations		_

^{*1} The maximum number of stations should not be more than the maximum number of solenoids. (The number of solenoids are counted as: 1 for single solenoids and 2 for type 3P and 4P double solenoids.)

* Refer to the Web Catalog for manifold spare parts.

Blanking plate assembly

25A-SSQ2000-10A-4


* The 25A- series specifications and dimensions are the same as those of the standard model.





Auto Switches

How to Order Valves

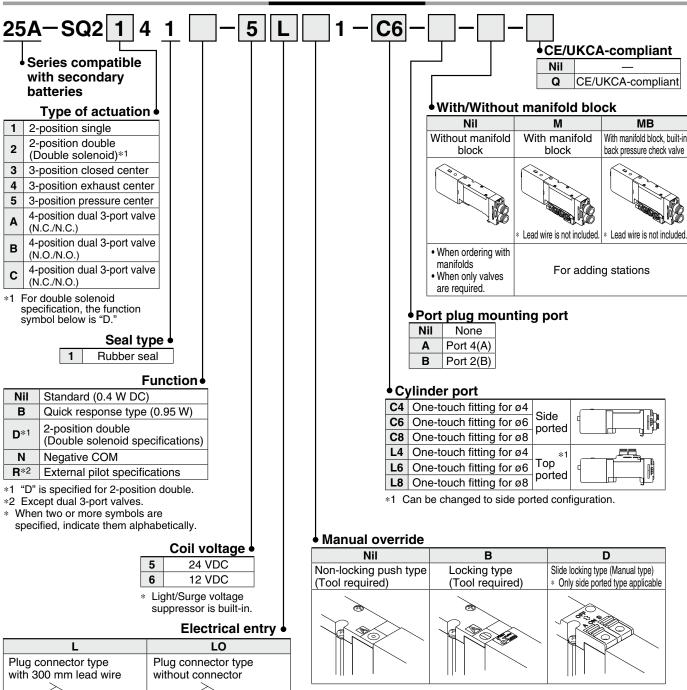

*1 Indicate "LO" when ordering centralized wiring type manifolds, F, P, and J kits, since the lead wire will be attached to the manifold side.

For F, P, J kit manifolds*1

One-touch Fittings Part Nos.

		Port size	One-touch fittings part no.
		ø4 One-touch fitting (Straight type)	90-VVQ1000-51A-C4
Cylinder port	Metric size	ø6 One-touch fitting (Straight type)	90-VVQ1000-51A-C6
		ø8 One-touch fitting (Straight type)	90-VVQ1000-51A-C8
1 (P), 3 (R) port	Metric size	ø10 One-touch fitting (Straight type)	90-VVQ2000-51A-C10


* The 25A- series specifications and dimensions are the same as those of the standard model.

Base Mounted

Plug Lead Unit

5-Port Solenoid Valve 25A-VQZ1000 Series Single Unit (€ UK

How to Order Valves

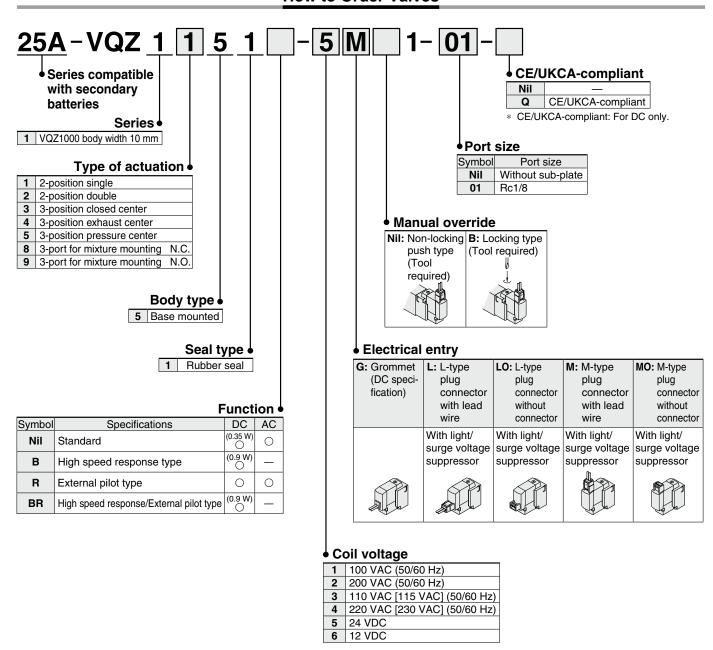



Use standard (DC) specification for continuous duty.

* The 25A- series specifications and dimensions are the same as those of the standard model.



Base Mounted

Plug Lead Unit


5-Port Solenoid Valve

25A-VQZ1000 Series

Manifold Connector Kit

C E UK


How to Order Manifolds

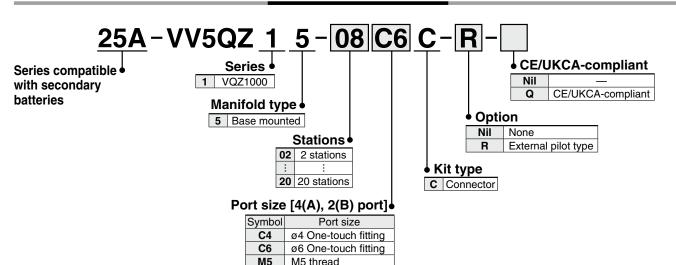

Mixture of port sizes

CM*1

How to Order Valves

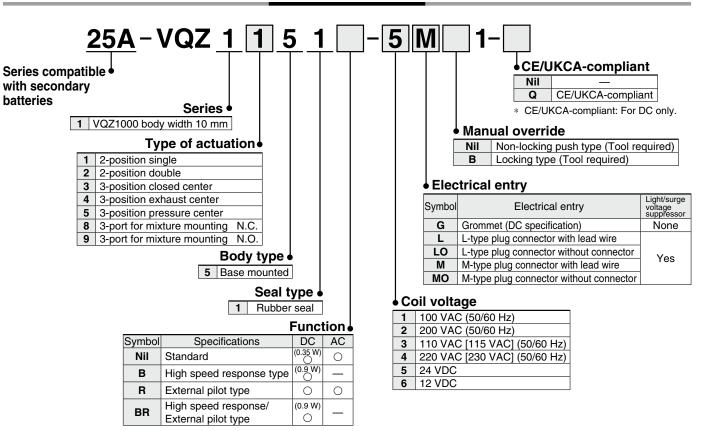

⚠ Caution

Use standard (DC) specification for continuous duty.

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

Related Products

Air Grippers Actuators

Vacuum Equipment

Air Preparation Equipment

Air Filters

Modular F.R.L./ Pressure Control Equipment

Flow Control Equipment/ Fittings

Detection Switches

Fluid Control Equipment

Process Gas Fl

Electric | Actuators |

Auto Switches

88


^{*1} Specify port mixture/with port plug by the manifold specification sheet. Port mixture and port plug are available only for One-touch fitting type.

Body Ported

Plug Lead Unit

5-Port Solenoid Valve 25A-VQZ1000 Series Single Unit (€ CH

How to Order Valves

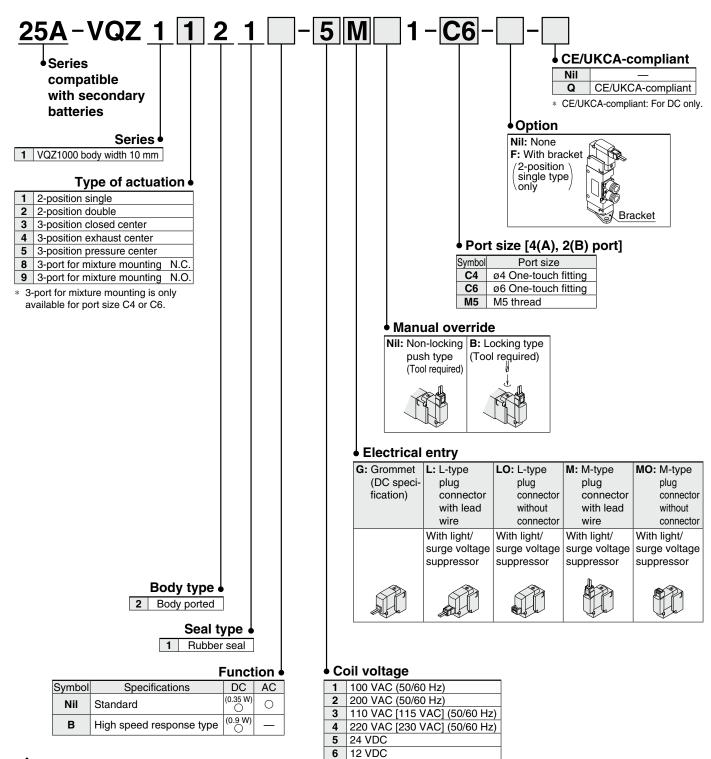



Use standard (DC) specification for continuous duty.

* The 25A- series specifications and dimensions are the same as those of the standard model.



Body Ported

Plug Lead Unit


5-Port Solenoid Valve

25A-VQZ1000 Series


Manifold Connector Kit





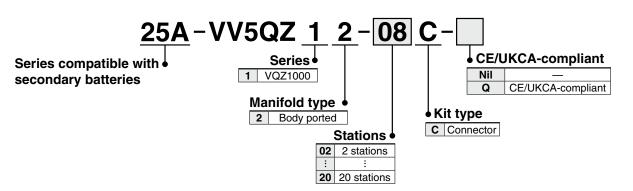

How to Order Valves

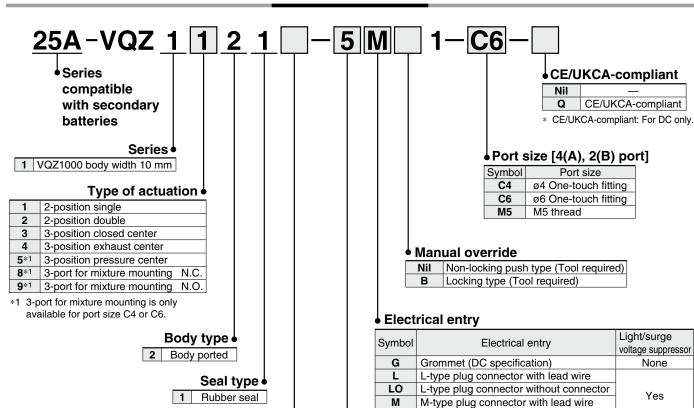

⚠ Caution

Symbol

Use standard (DC) specification for continuous duty.

Specifications

High speed response type

Standard

1 100 VAC (50/60 Hz)
2 200 VAC (50/60 Hz)
3 110 VAC [115 VAC] (50/60 Hz)
4 220 VAC [230 VAC] (50/60 Hz)
5 24 VDC
6 12 VDC

M-type plug connector without connector

Function •

AC

0

DC

(0.35 W)

Related Air Cylinders

Air Grippers Actuators

Vacuum Equipment Ai

Air Preparation Equipment

> Clean Air Filters

Modular F.K.L./
Pressure Control
Equipment

Equipment/ F

Detection Switches

Fluid Control | Equipment |

Process Gas Fluid Equipment Equ

Electric F Actuators


es Actua

Auto Switches

^{*} The 25A- series specifications and dimensions are the same as those of the standard model.

Plug-in Unit Base Mounted 25A-VQ1000/2000 Series Double check block (Separated)

How to Order

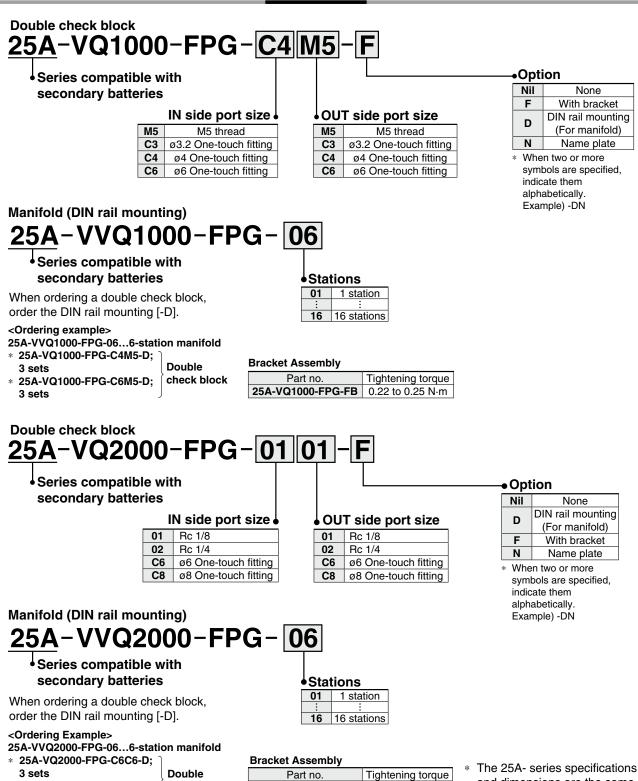

and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

0.8 to 1.0 N·m

25A-VQ2000-FPG-FB

25A-VQ2000-FPG-C8C8-D;

3 sets

check block

Air Cylinders

Related Products

Rotary Actuators Air Grippers

Equipment

Auto Switches


Rubber Seal 3-Port/Pilot Poppet Type 25A-VP342/542/742 Series



How to Order

* Only DIN and conduit terminal types are available for AC mode.

Refer to the electrical entry for details.

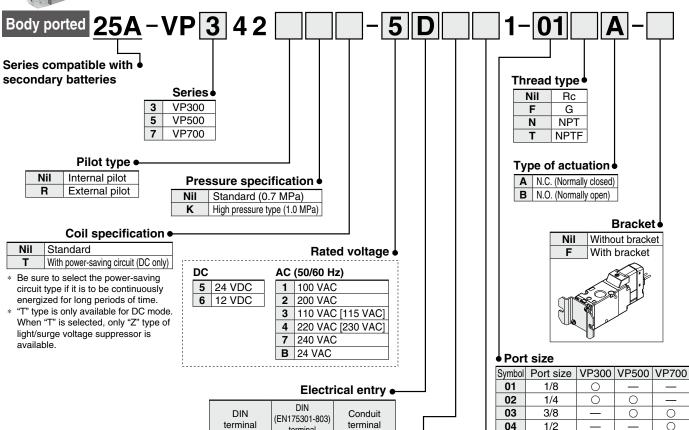


terminal terminal terminal [IP65 compatible] [IP65 compatible] [IP65 compatible] D: With connector Y: With connector CE/UKCA- DC

Nil: Non-locking push type	D: Push-turn locking slotted type	E: Push-turn locking lever type

1	Light/surge voltage suppressor							
Ligh	DC	AC						
Nil	Without light/surge voltage suppressor	0	0					
S	0	*1						
Z	Z With light/surge voltage suppressor							
R	With surge voltage suppressor (Non-polar)	0	_					
U	With light/surge voltage suppressor (Non-polar)	0	_					

- *1 There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.
- * The 25A- series specifications and dimensions are the same as those of the standard model.

Rubber Seal 3-Port/Pilot Poppet Type 25A-VP344/544/744 Series

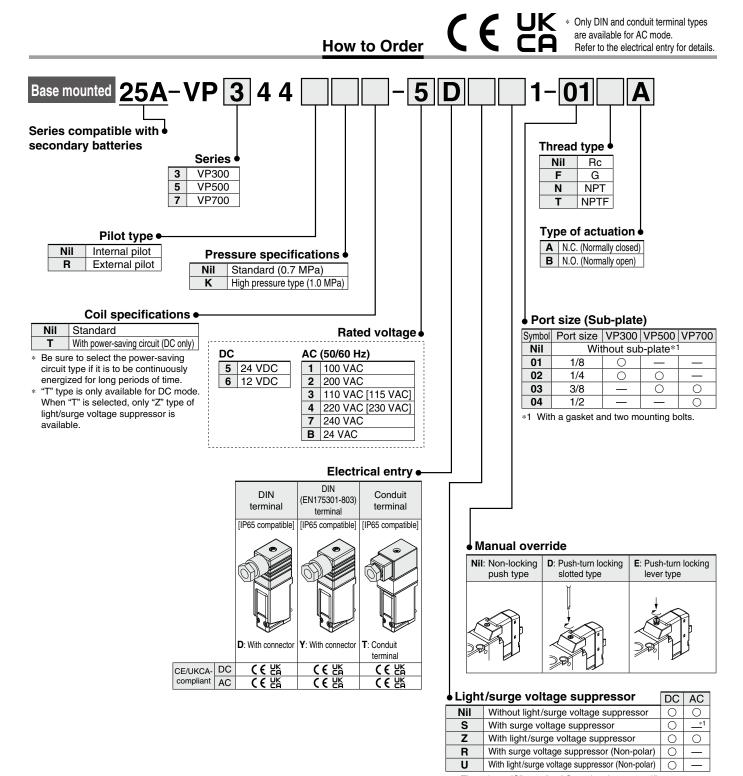

^{*1} There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.




^{*} The 25A- series specifications and dimensions are the same as those of the standard model.

Auto Switches

3-Port Solenoid Valve/Residual Pressure Release Valve with Detection of Main Valve Position 25A-VP500/700-X536, X538, X555

Safety Standard ISO 13849-1 Certified

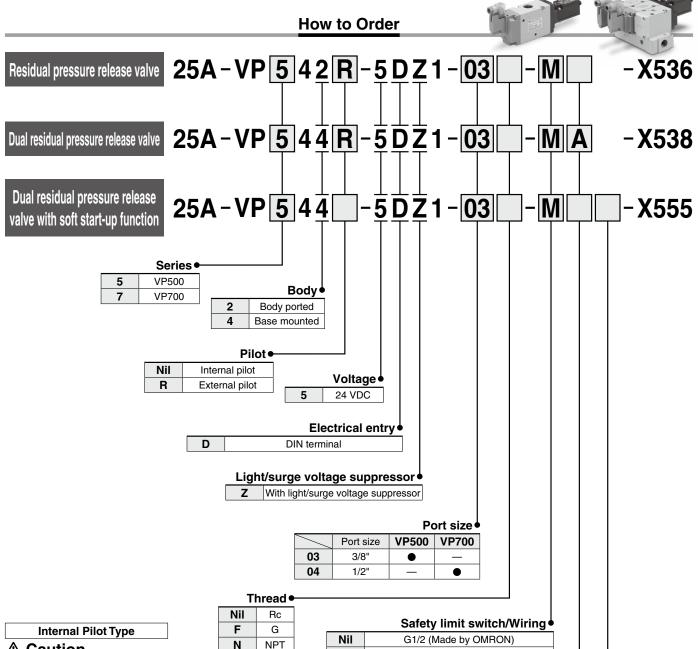

⚠ Caution

Valve may not operate properly when air supply to P port is not adequate and the supply pressure to the valve is lower than 0.25 MPa, the minimum operating pressure. Be careful with insufficient supply pressure.

Piping for External Pilot Type

∕ Caution

The product may not operate when the external pilot pressure is insufficient due to simultaneous operation or restricted air piping. In this case, use the check valve (AKH series) with the external pilot port, change the piping size or adjust the set pressure to provide a constant pressure of 0.25 MPa or more.

	- · · · , · · · · · · · · · · · · · · ·
Nil	G1/2 (Made by OMRON)
M	M12 connector (Made by OMRON)
S1	M12 connector (Made by Rockwell Automation)

With check valve (Only external pilot) •

	Check	Applicable		Threac	t
	valve	tube O.D.	Rc	G	NPT
Nil	None	_	•	•	•
Α	Vac	ø6	•	_	_
В	Yes	ø1/4"	_		•

^{*} For the internal pilot, the symbol is nil.

* The 25A- series specifications and dimensions are the same as those of the standard model. For details, refer to the Web Catalog.

Variable throttle

ø1 fixed orifice

ø1.5 fixed orifice

ø2 fixed orifice

◆ Throttle

10

15

20*1

*1 VP700 only


3-Port Solenoid Valve Direct Operated Poppet Type

25A-VT317 Series

Rubber Seal

* CE/UKCA-compliant: For DIN terminal type.


How to Order

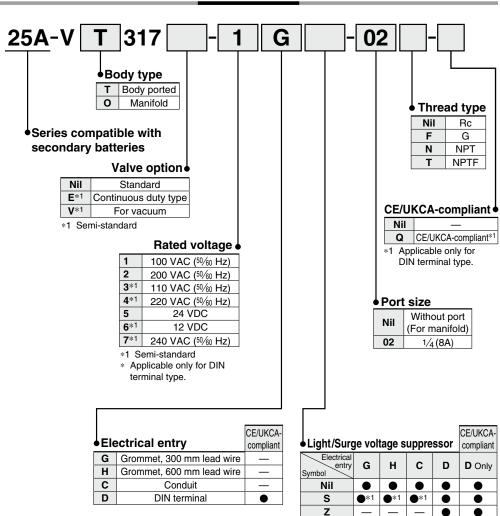

S: With surge voltage suppressor

*1 Refer to the figure below.

Z: With light/surge voltage suppressor



Manifold

Model	Applicable manifold type	Accessory
VO317(-Q)	Common or individual exhaust	O-ring (KA00066, 4 pcs.)*1 Bolts (XT012-25C#1, 2 pcs.)

^{*1} It is not applied to "Continuous duty type." Refer to the accessories in the Web Catalog.



^{*} The 25A- series specifications and dimensions are the same as those of the standard model.

3-Port Solenoid Valve **Direct Operated Poppet Type** 25A-VG342 Series **Rubber Seal**

Low power consumption

4.8 W DC (Standard type) 2 W DC (Energy-saving type)

No lubrication required Possible to use in vacuum or under low pressures


External pilot Vacuum: Up to -101.2 kPa Low pressure: 0 to 0.2 MPa

Changeable actuation: N.C., N.O., or external pilot

Can be used as a selector or divider valve (External pilot)





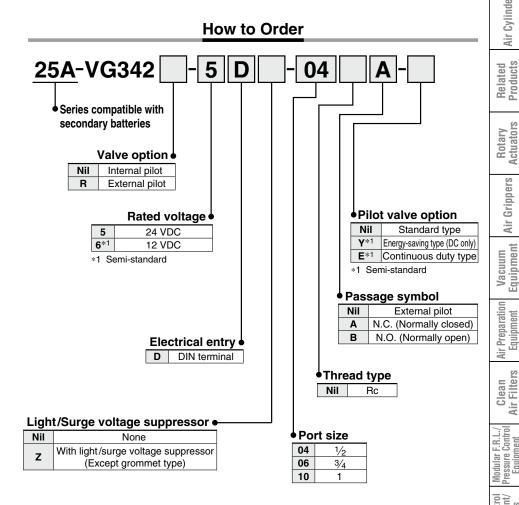

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

Detection Switches Fluid Control Equipment Process Gas | Equipment Electric Actuators Auto Switches


Air Cylinders

Air Grippers

Equipment

5-Port Air Operated Valve 25A-SYA5000/7000 Series

How to Order

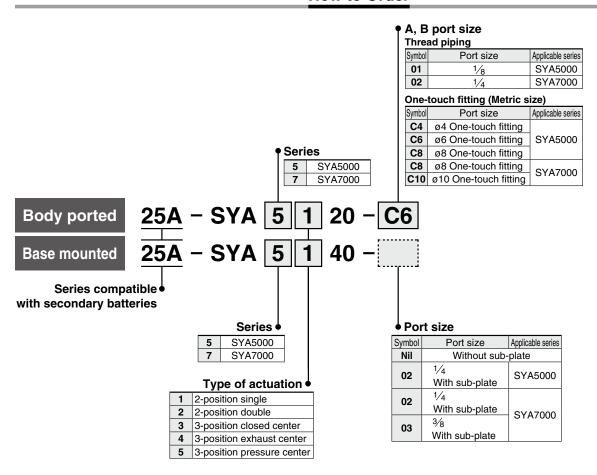

How to Order Manifold Base

Same manifolds as the SY series (Non plug-in type) are prepared. (For 20, 41 and 42 Types)

25A-SS5YA₇⁵ Fill the same as 25A-SS5Y ₇⁵.

(Refer to pages 61 and 63.)

 Specify the part numbers for valves and options together beneath the manifold base part number.

<Example>


 When single body ported air operated valves are ordered, manifold mounting screws and gaskets are not included. Order them separately if necessary.
 (For details, refer to page 66.)

^{*} The 25A- series specifications and dimensions are the same as those of the standard model.





3-Port Air Operated Valve 25A-SYJA500/700 Series

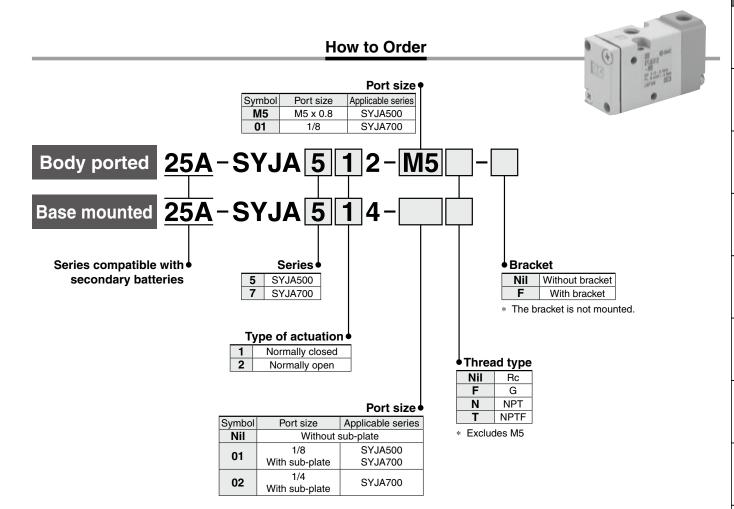

* The 25A- series specifications and dimensions are the same as those of the standard model.

25A-SYJA500/700 Series

Manifold Type for the SYJA500

Type 20

How to Order 25A - SS3YJA5 - 20 - 05

Stations

02 2 stations

: :
20 20 stations


Applicable valve 25A-SYJA5□2

Applicable blanking plate assembly 25A-SYJ500-10-1A

* For more than 6 stations, supply air to both sides of P port and exhaust air from both sides of R port.

Type 40

How to Order




Applicable valve 25A-SYJA5□4

Applicable blanking plate assembly 25A-SYJ500-10-3A

* For more than 9 stations, supply air to both sides of P port and exhaust air from both sides of R port.

Type 41

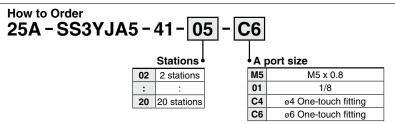


Applicable valve 25A-SYJA5□4

Applicable blanking plate assembly 25A-SYJ500-10-3A

* For more than 9 stations, supply air to both sides of P port and exhaust air from both sides of R port.

Manifold Type for the SYJA700

Type 20/21

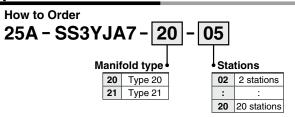


Applicable valve 25A-SYJA7□2

Applicable blanking plate assembly 25A-SYJ700-10-1A

* If there are more than 6 stations for type 20, or more than 9 stations for type 21, supply air to both sides of P port and exhaust air from both sides of R port.

Type 40/41

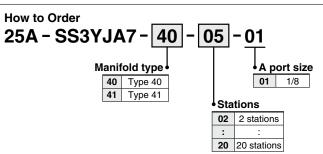

Applicable valve 25A-SYJA7□4

Applicable blanking plate assembly 25A-SYJ700-10-2A

* If there are more than 6 stations for type 40, or more than 9 stations for type 41, supply air to both sides of P port and exhaust air from both sides of R port.

Type 42

Applicable valve 25A-SYJA7□4

Applicable blanking plate assembly 25A-SYJ700-10-2A

^{*} For more than 9 stations, supply air to both sides of P port and exhaust air from both sides of R port.




RoHS


Finger Valve


25A-VHK A Series




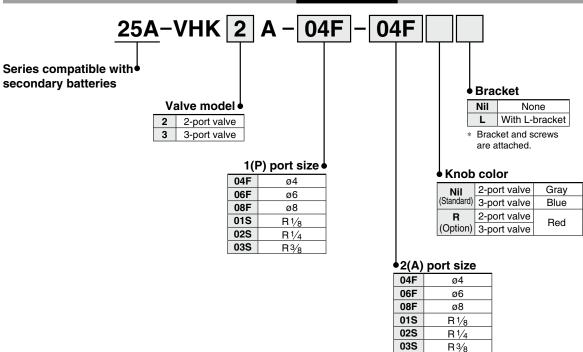

Standard Type







1(P): One-touch fitting 2(A): One-touch fitting

2(A)	Z(A): One-touch litting				
	2(A)	Applicable tubing O.D. [mm]			
1(P)		ø4	ø6	ø8	
opplicable tubing O.D. [mm]	ø4	•			
able t D. [mr	ø6	•	•		
	ø8		•	•	

1(P): Male thread 2(A): One-touch fitting

	2(A)	Applicable tubing O.D. [mm]		
1(P)		ø4	ø6	ø8
В	1/8	•	•	•
Port size R	1/4		•	•
Por	3/8		•	•

1(P): One-touch fitting 2(A): Male thread

2(A)		Port size R		
1(P)		1/8	1/4	3/8
Applicable tubing O.D. [mm]	ø4	•		
able t D. [mr	ø6	•	•	•
Applic O.	ø8	•	•	•

* The 25A- series specifications and dimensions are the same as those of the standard model.


OSHA Standard Compliant Pressure Relief 3-Port Valve with Locking Holes

Single Action


25A-VHS20/30/40/50-D Series

Double Action

25A-VHS20W/30W/40W/50W-D Series



How to Order



Option/Semi-standard: Select one each for **a to f**.

 $\cdot \text{Option/Semi-standard symbol:} \\$

When more than one specification is required, indicate in alphanumeric order.

RoHS

Example) 25A-VHS30-N03-BS-RZ-D

_	_							(
	Symbol		Symbol	Description		Body size						
Symb		,	2 Coonplicit		20	30	40	50				
\equiv				Nil	Cinale astion		•	1	•	•		
2		Ha	ndle operation	W	Single action Double action		-	•				
				+	Double action							
				Nil	Rc*1		•	•	•	•		
8		Pir	pe thread type	N	NPT		•	•	•	•		
			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	F	G		•	•	•	•		
				+								
				01	1/8		•	_		_		
		Port size		02	1/4		•	•	•	_		
A				03	3/8		_	•	•	_		
U	9			04	1/2		_	_	•	_		
			06	3/4		_	_	•	•			
				10	1			_	_			
				+					_			
		a	Mounting	Nil	Without mounting option		•	•	•	_		
			В	With bracket		•	•	•	•			
6	Option			+	AACAbaarah allamaan		_					
		b	Silencer	Nil	Without silencer		•	•	•	•		
				With built-in silencer (for EXH port)		•		•				
				+ Nil	Red		•	•	•	•		
		С	c Handle color	K	Black		•					
				+	Diack							
	5	d				Nil	Resin		•	•	•	•
da	da		Handle material	M	Metal		•	•	•	•		
6	star			+								
	<u>=</u>	Semi-standard a	e Flow direction	Nil	Flow direction: Left to right		•	•	•	•		
	Ser			R	Flow direction: Right to left		•	•	•	•		
				+								
		f	Pressure unit	Nil	Product label in SI units: MPa		•	•	•	•		
Z *2 Product label in ir		Product label in imperial units: psi		<u>)*3</u>	○*3	○*3	○*3					

^{*1} The pipe thread type for the EXH port is G.

Option/Part Nos.

option in art reor							
Ontional appoifications	Model						
Optional specifications	25A-VHS20-D	25A-VHS30-D	25A-VHS40-D	25A-VHS40-06-D	25A-VHS50-D		
Bracket assembly*1	25A-VHS24P-180AS	25A-VHS34P-180AS	25A-VHS44P-180AS	25A-VHS44P-180AS	25A-VHS54P-180AS		
Silencer assembly*2	VHS24P-190AS	VHS34P-190AS	VHS44P-190AS	VHS54P-190AS	VHS54P-190AS		

^{*1} The assembly consists of a bracket A/B and 2 mounting screws.



^{*2} For the pipe thread type: NPT only. This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

^{*3} \bigcirc : For the pipe thread type: NPT only

^{*2} The assembly consists of the element assembly and an O-ring.

^{*} The 25A- series specifications and dimensions are the same as those of the standard model.


Conforming to OSHA Standard

Pressure Relief 3-Port Valve with Locking Holes (Single Action)

25A-VHS20/30/40/50 Series



How to Order

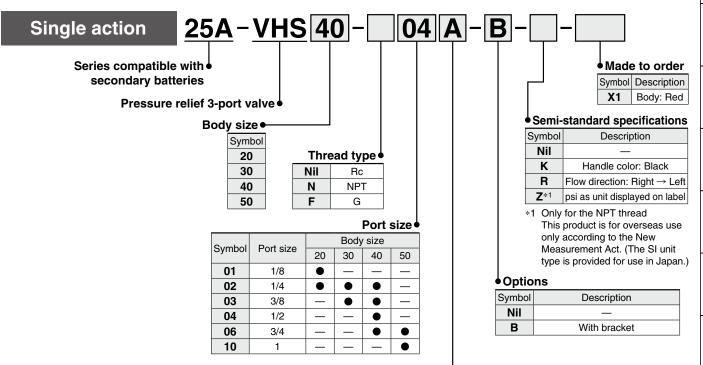

Handle/Bonnet material

Symbol	Material
Α	Flame-resistant PBT
В	Aluminum

Option Part Nos.

Model	Bracket assembly part no.*1
25A-VHS20	VHS20PW-180AS-6
25A-VHS30	VHS30PW-180AS-6
25A-VHS40	VHS40PW-180AS-6
25A-VHS40-06	VHS40PW-180-06AS-6
25A-VHS50	VHS50PW-180AS-6

^{*1} Bracket/1 pc., Mounting screw/2 pcs.

OSHA standard (Occupational Safety and Health Administration Department of Labor)

For safety control, OSHA rule requires energy sources for certain equipment be turned off or disconnected and that the device either be locked or labelled with a warning tag.

* The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.

Air Cylinders Contr

Related Products

> Kotary Actuators

Vacuum Equipment Air Grippers

Air Preparation Equipment

lar F.R.L./ re Control ipment Air

ow Control quipment/ Fittings

Detection Switches

Fluid Control Equipment

Process Gas Equipment

Electric Actuators


Auto Switches

Conforming to OSHA Standard

Pressure Relief 3-Port Valve with Locking Holes (Double Action)

25A-VHS2510/3510/4510/5510 Series



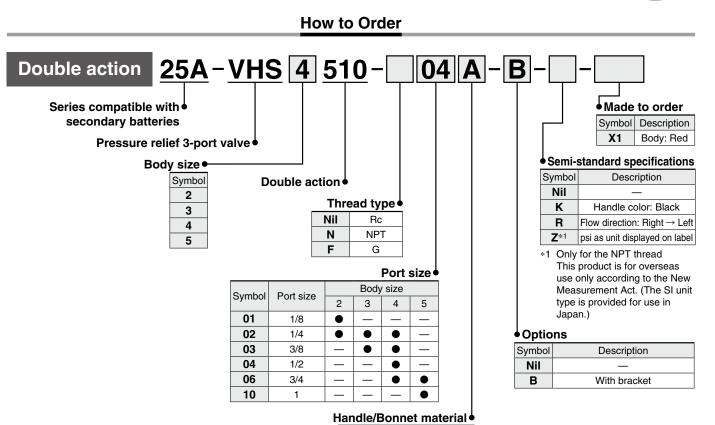

Symbol

В

Option Part Nos.

Model	Bracket assembly part no.*1			
25A-VHS2510	VHS20PW-180AS-6			
25A-VHS3510	VHS30PW-180AS-6			
25A-VHS4510	VHS40PW-180AS-6			
25A-VHS4510-06	VHS40PW-180-06AS-6			
25A-VHS5510	VHS50PW-180AS-6			

^{*1} Bracket/1 pc., Mounting screw/2 pcs.

OSHA standard (Occupational Safety and Health Administration Department of Labor)

For safety control, OSHA rule requires energy sources for certain equipment be turned off or disconnected and that the device either be locked or labelled with a warning tag.

Material
Flame-resistant PBT

Aluminum

* The 25A- series specifications and dimensions are the same as those of the standard model.

