

# **3-Color Display**

RoHS

# **Digital Flow Switch for Water**

IP65

**IO**-Link



# Max. 53%<sup>1</sup> reduction

Weight [g]								
PF3W7-Z	PF3W7							
166 42%	reduction 285							
184 45%	reduction 335							
248 53%	reduction 530							
748 13%	reduction 860							
	PF3W7-Z  166 42%  184 45%  248 53%							

\*1 40 L/min, With temperature sensor



PF3W7-L Series)

Output specification variations have been added.

#### **PF3W7-Z**:

Analog voltage 2-output type (flow rate + temperature)

Analog current 2-output type (flow rate + temperature)





#### **Variations**

	Rated flow	F	Port size					
Туре	range [L/min]	None	Flow adjustment valve	Temperature sensor	Flow adjustment valve + Temperature sensor	Rc, NPT, G	Applicable fluid	
	0.5 to 4		•		•	3/8		
	2 to 16	•	•	•	•	3/8, 1/2	Water,	
CG.	5 to 40	•	•	•	•	1/2, 3/4	Ethylene glycol aqueous solution	
Integrated Remote sensor	10 to 100	•	_	•	_	3/4, 1		

PF3W-Z/L Series



# ■3-color/2-screen display





- Sub screen\*3

  Set value


  Accumulated value

  Peak/Bottom value

  Line name


  Fluid temperature\*2
- \*1 Main screen shows the instantaneous flow rate only. \*2 Fluid temperature can be displayed only when the digital flow switch with a temperature sensor is selected.
- \*3 Sub screen can be turned off. Mode display can be selected for IO-Link compatible type.

# Compatible with the temperature sensor & flow adjustment valve

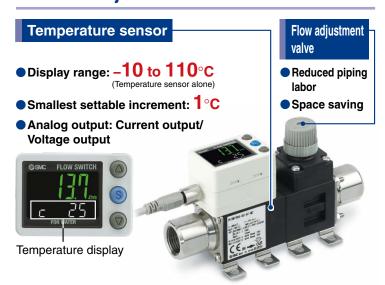

- Fluid temperature: 0 to 90°C
- Ethylene glycol aqueous solution can be used.

Example) Flow control of the circulating fluid in a chiller

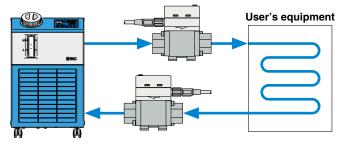


Non-grease

# New Compatible with the analog 2-output

type (flow rate + temperature)


Enables the monitoring of flow rate and temperature conditions not only at the installation site but also remotely

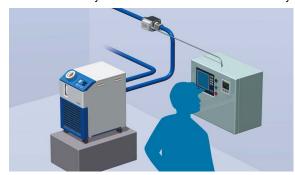




Display can be rotated in increments of 45° to suit the installation conditions. Easy operation, improved visibility


- Counterclockwise 90°
- Clockwise 225°

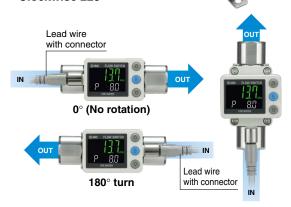

90° turn

45° increments

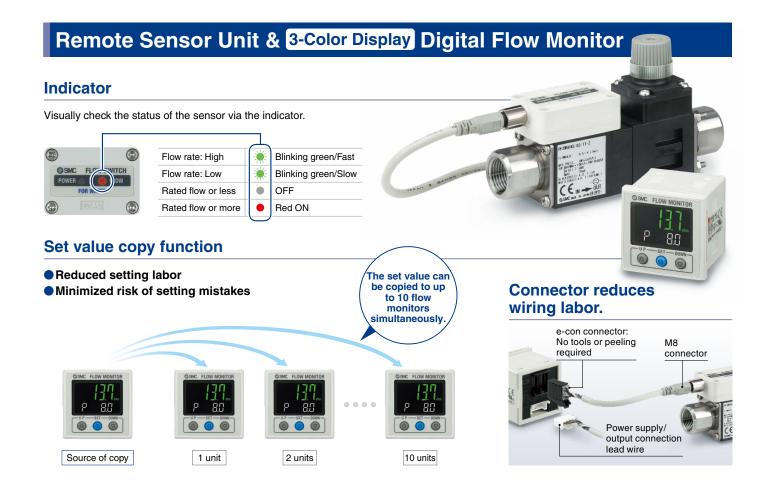

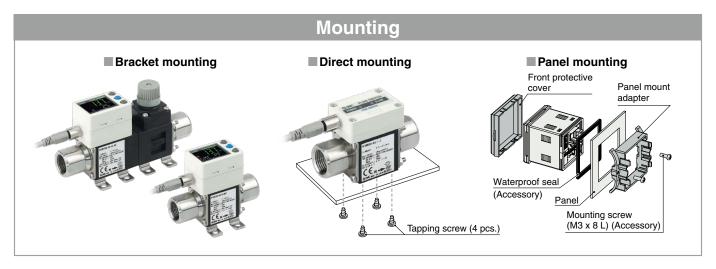

			Rated flow	Flo	w adjustme	nt valve/Tei	mperature sensor	Port size		
	Applicab	le fluid	range [L/min]	None	Flow adjustment valve	Temperature sensor	Flow adjustment valve + Temperature sensor	Rc, NPT, G	For details, refer to Web Catalog.	
	Flow range: 250 L type	Water Ethylene glycol aqueous solution	50 to 250	•	_	•	_	1 1/4, 1 1/2		
PVC piping		Deionized water	10 to 100	•	_	_	_	25 A	SEPHINE CONT.	
type		Chemical liquids	30 to 250	•	_	_	_	30 A	計學法學	

# 3-Screen Display

# **4-Channel Flow Monitor**


# PFG200 Series

# Up to 4 flow sensors can be connected!





It is possible to change the settings while checking the measured value.



Input Range Selection


#### **Visualization of Settings**






# **Visualization of Settings**


Item and set value are displayed together. Easy to confirm the displayed item

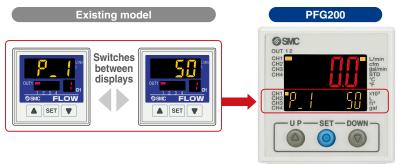


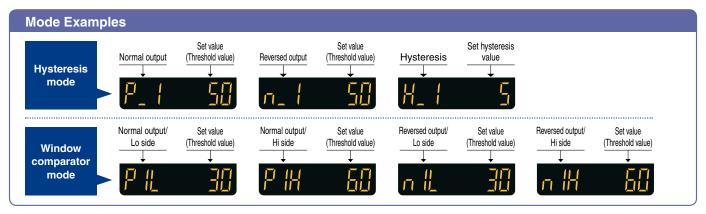

# **Easy Screen Switching**

It is possible to change the settings while checking the measured value.

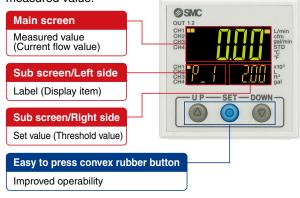


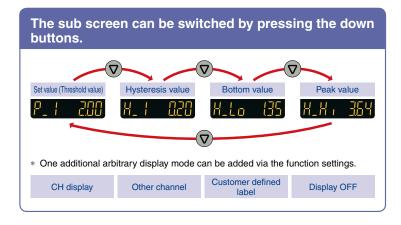


### Simple 3-Step Setting


After selecting the channel, when the SET button is pressed and the set value (P\_1) is displayed, the set value (threshold value) can be set.

When the SET button is pressed and the hysteresis (H\_1) is being displayed, the hysteresis value can be set.

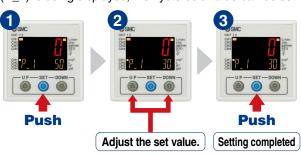

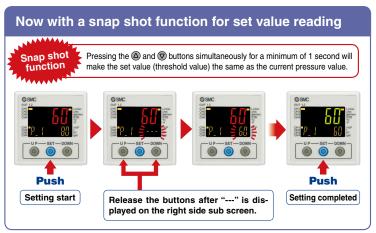


# **Centralized Control Saves Installation Space.**

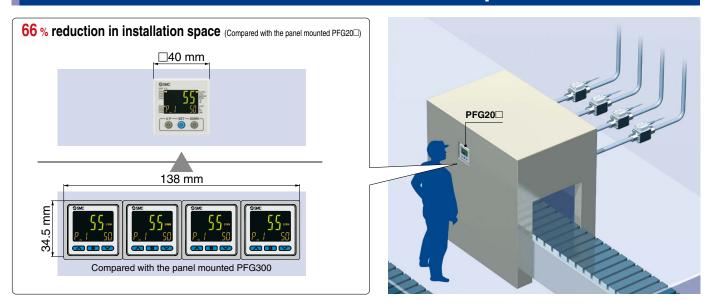


# **Accumulated Flow Measurement**

A single product can manage the accumulated flow in four lines.

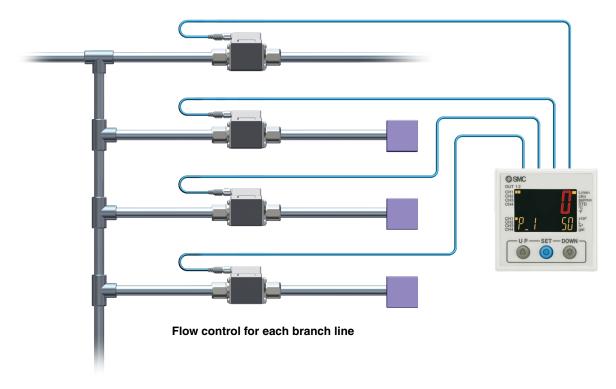



# **Input Range Selection (for Pressure/Flow rate)**



The sensor input range can be set to the required value and displayed. (Voltage input: 1 to 5 V) Pressure switch/Flow switch can be displayed.

#### A is displayed for 1 V. B is displayed for 5 V.

The range can be set as required.

Refer to page 32 for the specification of the sensors which can be connected.

For the individual specifications of each connectable sensor, refer to the Web Catalog.

#### ■ For Pressure Sensor for General Fluids / PSE56□


	Α	В
PSE560	0.000	1.000
PSE561	0	-101
PSE562	0	101
PSE563	-101	101





#### **Connectors**

Connection and removal of wiring is easy.

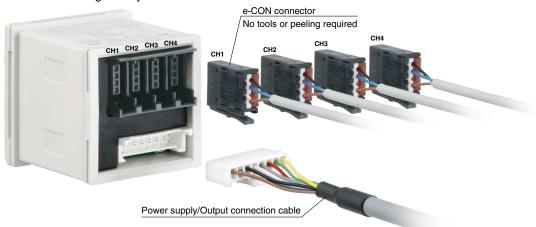

### **Functions**

#### ■ Peak/Bottom value indication function

This function constantly detects and updates the max. (min.) flow when the power is supplied, and allows to hold the max. (min.) flow value.

#### ■ Key-lock function

This function prevents operation errors such as accidentally changing setting values.

#### ■ External input function

The accumulated value, peak value, and bottom value can be reset remotely.

#### ■ Error display function

This function displays error location and content when a problem or error has occurred.

#### ■ Delay time setting

The time from when the instantaneous flow reaches the set value to when the switch output operates can be set.

#### ■ Zero-cut setting

When the flow display value is close to zero, this function forces the display to zero.

#### Selection of power-saving mode

Power-saving mode can be selected. It shifts to power-saving mode automatically when there is no button operation for 30 seconds.

#### Setting of security code

Users can select whether a security code must be entered to release the key lock.

#### Accumulated value hold

The accumulated value is not cleared even when the power supply is turned OFF.

#### ■Snap shot function

The current flow rate value can be stored to the switch output ON/OFF set point.

#### Output check function

It is possible to check the switch output operation and process data value.

#### ■ Channel to channel copy function

The set values can be copied to other channel.

#### ■ Channel select function


Flow value for the selected channel is displayed.

#### ■ Channel scan function

Flow values for each channel are displayed in turn every 2 seconds.



# **Hub Function**

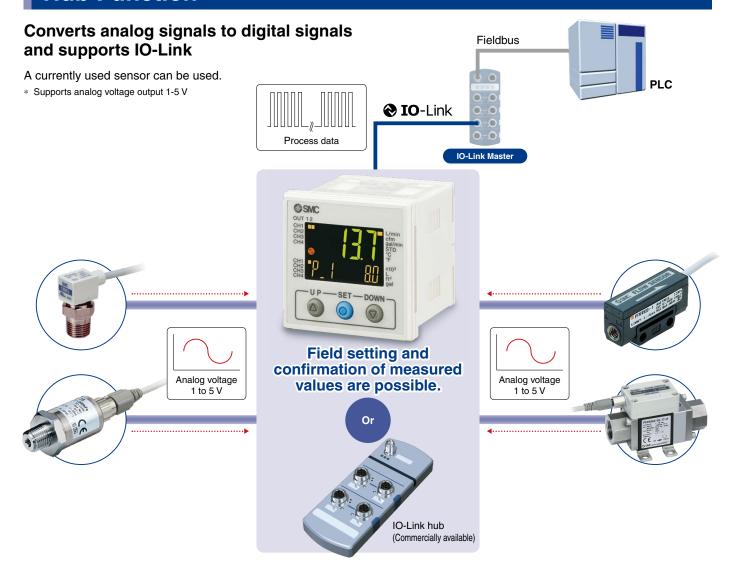

#### **Process Data**


rocess	Dala																
Bit offset	79	78	77	76	75	74	73	72	71	70	69	68	67	66	65	64	
Item				-		CH1 me	easure	d value	: 16-bit	signed	l intege	er					-
Bit offset	63	62	61	60	59	58	57	56	55	54	53	52	51	50	49	48	Measurement data of
Item					(	CH2 me	easure	d value	: 16-bit	signed	l intege	er					sensors for 4 channels ar
Bit offset	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	combined and cyclically
Item					. (	CH3 me	easure	d value	: 16-bit	signed	lintege	er					sent as a process data.
Bit offset	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
Item					. (	CH4 me	easure	d value	: 16-bit	signed	lintege	er					
Bit offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Item	Error	System error	Fixed output	Reservation	CH4 diagnosis	CH3 diagnosis	CH2 diagnosis	CH1 diagnosis	CH4 OUT2	CH4 OUT1	СНЗ ООТ2	СНЗ ОПТ1	CH2 OUT2	CH2 OUT1	CH1 OUT2	CH1 OUT1	Each channel has 2 outputs*1.
	<b>l</b>	l .		<u> </u>			0	0	 								
	I																
Diagnosi item	_	ernal pro				agnosis item	· Out	put ove	ercurre	nt	Diagno item	_		•		its are exc r and lowe	ceeded. er limits are exceeded
Impleme	nt dia	gnost	ic bits	in the	e proc	ess da	ata.										

 $<sup>\</sup>ast 1~$  During SIO mode, only CH1 has 2 switch outputs. CH2-4 has one output each.

### **IO-Link Compatible**

p. **15** 

### Supports the IO-Link communication protocol



#### Configuration File (IODD File\*1)

• Manufacturer • Product part no. • Set value

\*1 IODD File:

IODD is an abbreviation of IO Device Description. This file is necessary for setting the device and connecting it to a master. Save the IODD file on the PC to be used to set the device prior to use.

Read the device data.

- Switch ON/OFF signal and analog value
- Device information:
- Manufacturer, Product part number, Serial number, etc.
- Normal or abnormal device status
- Cable breakage



0



interface technology between the sensor/ actuator and the I/O terminal that is an

international standard, IEC61131-9.

IO-Link Compatible Device:
Digital Flow Switch for Water

#### Implement diagnostic bits in the process data.

The diagnostic bit in the cyclic process data makes it easy to find problems with the equipment.

It is possible to find problems with the equipment in real time using the cyclic (cycle) data and to monitor such problems in detail with the noncyclic (aperiodic) data.

#### **Process Data**

**Device** 

settings can

the master.


be set by

Threshold

Operation mode, etc.

value


Bit offset	Item	Note
0	OUT1 output	0: OFF 1: ON
1	OUT2 output	0: OFF 1: ON
8	Diagnosis (flow rate)	0: OFF 1: ON
9	Diagnosis (temperature)	0: OFF 1: ON
15	Diagnosis (error)	0: OFF 1: ON
16 to 31	Measured temperature value	Signed 16 bit
32 to 47	Measured flow rate value	Signed 16 bit



Internal product malfunction

Temperature sensor failure

Bit offset	47	46	45	44	43	42	41		39	38	37	36	35	34	33	32
Item		Measured flow rate value (PD)														
Bit offset	31	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16														
Item	Measu	Measured temperature value (PD) * The area is not used when the product without temperature sensor								or is sel	ected.					
Bit offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Item	Error	Error Reservation						Flow rate			Reser	vation			OUT2	OUT1
	Diagnosis	Diagi	nosis							Switch	output					



#### **Display function**

Displays the output communication status and indicates the presence of communication data









#### **Operation and Display**

Communication with master	IO-Link status indicator light		٤	Status	Screen display*2	Description					
	<b>*</b> 1		_	Operate	ModE ofE	Normal communication status (readout of measured value)					
			Normal	Start up	ModE Strt	At the start of communication					
				Preoperate		At the start of communication					
Yes	**1	IO-Link mode	Abnormal	Version does not match	Er 15	The IO-Link version does not match that of the master. The master uses version 1.0.					
	(Flashing)			ormal	ormal	ormal	ormal	Lock	ModE LoE	Backup and restore required due to data storage lock.	
No		Abno		Abno				Abn	Communication disconnection	ModE oPE ModE Strt ModE PrE	Normal communication was not received for 1 second or longer.
	OFF		SIC	O mode		General switch output					

\*1 In IO-Link mode, the IO-Link indicator will be ON or flashing. \*2 When the lower line (sub screen) is set to mode display

# CONTENTS

3-Color Display	Digital Flow Switch for Water PF3W-Z Series
-----------------	---

3-Color Display IO-Link Compatible

Digital Flow Switch for Water PF3W7-L Series

3-Color Display Digital Flow Monitor for Water PF3W3 Series

3-Screen Display 4-Channel Flow Monitor PFG200 Series




3-Color	Display

#### **Digital Flow Switch for Water PF3W-Z Series**

How to Order ·····	p. 11
Specifications	p. 12
Temperature Sensor Specifications	p. 12
Remote Sensor Unit	
How to Order ·····	p. 13
Specifications	p. 14
Temperature Sensor Specifications	p. 14



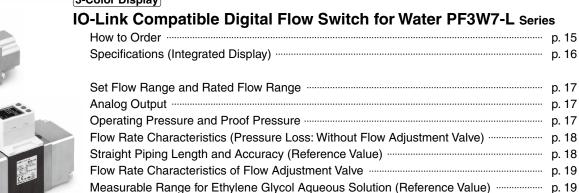





#### **Digital Flow Monitor for Water PF3W3 Series**

Specifications	p. 28
Temperature Sensor Specifications	p. 28
Analog Output	p. 28
Internal Circuits and Wiring Examples	p. 29
Dimensions	p. 30

Available Flow Range p. 19 Wetted Parts Construction p. 19



#### 3-Screen Display 4-Channel Flow Monitor PFG200 Series

	How to Order	p. 31
	Specifications	p. 32
	Applicable Flow Sensors	p. 33
	Internal Circuits and Wiring Examples	p. 33
	Dimensions	p. 36
PF	3W-Z/L Series Function Details	p. 37



Safety Instructions .....

#### **Integrated Display**




# 3-Color Display Digital Flow Switch for Water RoHS



# PF3W7-Z Series







Integrated display

#### Rated flow range (Flow range)

Symbol	Rated flow range
04	0.5 to 4 L/min
20	2 to 16 L/min
40	5 to 40 L/min
11	10 to 100 L/min

#### 3 Flow adjustment valve

Cumbal	With/without flow	Rated flow range				
Symbol	With/without flow adjustment valve	04	20	40	11	
Nil	Without	•	•	•	•	
S	With	•	•	•	_	

- \* 100 L/min type with a flow adjustment valve is not available.
- \* The flow adjustment valve of this product is not suitable for applications which require the constant adjustment of the flow rate.

#### 4 Thread type


Nil	Rc
N	NPT
F	G*1

\*1 ISO 228 compliant

#### 6 Port size

Symbol	Port	F	Rated flo	w range	е
Syllibol	size	04	20	40	11
03	3/8	•	•	_	_
04	1/2	_	•	•	_
06	3/4	_	_	•	•
10	1/1	_	_	_	•

#### Lead wire (Option)

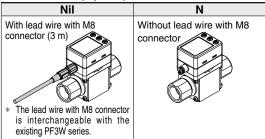

#### 8 Integrated display/Unit specification

Symbol Instantaneous flow		Accumulated flow	Temperature
M L/min		L	°C
G	gal/min	gal	°C
F	gal/min	gal	°F
J	L/min	L	°F

- Under the New Measurement Act, units other than SI (symbol "M") cannot be used in Japan.
- \* G, F, J: Made to order

Reference: 1 [L/min] ↔ 0.2642 [gal/min] 1 [gal/min] ↔ 3.785 [L/min] °F = 9/5°C + 32

#### Brackets (Option)

Nil	None					
R	With brackets  * Brackets are interchangeable with the existing PF3W series.					

#### 6 Output specification/Temperature sensor

Symbol	OUT1	OL	JT2	Temperature
Syllibol	Flow rate	Flow rate	Temperature	sensor
Α	NPN	NPN	_	
В	PNP	PNP	_	
С	NPN	Analog 1 to 5 V	_	
D	NPN	Analog 4 to 20 mA	_	None
E	PNP	Analog 1 to 5 V	_	None
F	PNP	Analog 4 to 20 mA	_	
G NPN		External input*1	_	
Н	PNP	External input*1	_	
AT	NPN	(NPN) <u>♣</u> *	<sup>2</sup> → NPN	
BT	PNP	(PNP) <u>∗</u> *	·2→ PNP	
СТ	NPN	(Analog 1 to 5 V) 🚓	Analog 1 to 5 V	\A/:4b
DT	NPN	(Analog 4 to 20 mA)	$\stackrel{\cdot 2}{\longrightarrow}$ Analog 4 to 20 mA	With temperature
ET PNP		(Analog 1 to 5 V) $\stackrel{*2}{\longleftrightarrow}$ Analog 1 to 5 V		sensor
FT	PNP	(Analog 4 to 20 mA)		3011301
JT*4	Analog 1 to 5 V*3	— Analog 1 to 5 V*3		
KT*4	Analog 4 to 20 mA*3		Analog 4 to 20 mA*3	

- \*1 External input: The accumulated value, peak value, and bottom value can be reset.
- \*2 For units with a temperature sensor, OUT2 can only be set as either temperature output or flow rate output. The setting when shipped is for temperature output.
- \*3 For the analog 2-output type, the analog output is as follows: OUT1 = flow rate and OUT2 = temperature.
- \*4 Output types "JT" and "KT" are not UL (CSA) compliant.

#### Calibration certificate (Only for flow rate)

Nil None				
	Α	With calibration certificate		

\* The certificate is written in both Japanese and English. Units with a temperature sensor can only display the flow rate.

#### Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.

	Description	Part no.	Qty.	Note	
		ZS-40-K	1	For PF3W704/720/504/520	With 4 tapping screws (3 x 8)
	Bracket*1	ZS-40-L	1	For PF3W740/540	With 4 tapping screws (3 x 8)
		ZS-40-M	1	For PF3W711/511	With 4 tapping screws (4 x 10)
	Lead wire with M8 connector	ZS-40-A	1	Lead wire length: 3 m	

- \*1 For units with a flow adjustment valve, 2 brackets are required.
- \* Interchangeable with the existing PF3W series



# Integrated Display 3-Color Display Digital Flow Switch for Water PF3W7-Z Series

For flow switch precautions and specific product precautions, refer to the Operation Manual on the SMC website.



#### Specifications (Integrated Display)

Model		PF3W704	PF3W720	PF3W740	PF3W711		
Applicable fluid			ylene glycol aqueous solution				
Detection method				n vortex			
Rated flow range			0.5 to 4 L/min	2 to 16 L/min	5 to 40 L/min	10 to 100 L/min	
			0.35 to 5.50 L/min	1.7 to 22.0 L/min	3.5 to 55.0 L/min	7 to 140 L/min	
Display flow range				(Flow under 1.7 L/min is displayed as "0.0.")			
Set flow range			0.35 to 5.50 L/min	1.7 to 22.0 L/min	3.5 to 55.0 L/min	7 to 140 L/min	
Smallest settable increment			0.01 L/min		_/min	1 L/min	
Conversion of accumulate		e width: 50 ms)	0.05 L/pulse	0.1 L/pulse	0.5 L/pulse	1 L/pulse	
Fluid temperatu	re			0 to 90°C (No freezi			
Display unit					nin, Accumulated flow: L		
Accuracy				Display value: ±3% F.S.			
Repeatability					F.S.* <sup>2</sup>		
Temperature ch				±5% F.S. (25			
Operating press		je*3			MPa		
Proof pressure					MPa		
Pressure loss (withou	ıt flow adjus	tment valve)			at the max. flow		
Accumulated flo	w range	*4		999.9 L		9999 L	
	ow runge	'	By 0.1 L	By 0.5 L		1 L	
Switch output					n collector output		
		d current		80			
		lied voltage	28 VDC				
	Internal voltage drop		NPN: 1 V or less (at load current of 80 mA) PNP: 1.5 V or less (at load current of 80 mA)				
Response time*2, 5 Output protection Output Flow rate mode Temperature		0.5 s/1 s/2 s					
		Short-circuit protection					
			Select from Hysteresis, Window comparator, Accumulated output, or Accumulated pulse output modes.				
		Select from Hysteresis mode or Window comparator mode.					
_		se time*6	0.5 s/1 s/2 s (linked with the switch output)				
Analog output	Voltage		_	Voltage output: 1 to 5 V Output impedance: 1 kΩ			
	Current	output	Output current: 4 to 20 mA Max. load impedance: 300 $\Omega$ for 12 VDC, 600 $\Omega$ for 24 VDC				
Hysteresis			Variable				
External input			Voltage free input: 0.4 V or less (reed or solid state), input for 30 ms or longer				
Display method			2-screen display (Main screen: 4-digit, 7-segment, 2-color, Red/Green Sub screen: 6-digit, 11-segment, White) Display values updated 5 times per second				
Indicator light	-14		Output 1, Output 2: Orange 12 to 24 VDC ±10%				
Power supply v							
Current consun			50 mA or less				
	Enclosu		IP65				
Environmental		nperature range	0 to 50°C (No freezing or condensation)				
resistance		numidity range d voltage*7			peration, Storage: 35 to 85% R.H. (No condensation) 1000 VAC for 1 min between terminals and housing		
			50 MO or mor				
Insulation resistance Standards and regulations							
		113	CE/UKCA marking, UL (CSA) PPS, Stainless steel 304, FKM, SCS13				
Wetted parts material*8			Non-g				
Piping port size	*9		3/8	3/8, 1/2	1/2, 3/4	3/4, 1	
Without temperature sensor/Without flow adjustment valve		153 g	171 g	228 g	720 g		
₩ith temperature sens			166 g	184 g	248 g	748 g	
With temperature sens Without temperature sens With temperature sens			241 g	259 g	429 g		
With temperature sen			254 g	272 g	449 g	_	
With lead wire with connector			+85 g				

- \*1 Refer to the "Measurable Range for Ethylene Glycol Aqueous Solution" graph on page 19. Measurement is possible as long as the fluid does not corrode the wetted parts and the viscosity is 3 mPa·s (3 cP) or less. Be aware that water leakage may occur due to internal seal shrinkage or swelling depending on the type of fluid. If 0.5 s is selected for the response time of the switch output, the repeatability will be  $\pm 3\%$  F.S.
- The operating pressure range, proof pressure, and available flow range vary depending on the fluid temperature. Refer to the graphs on pages 17 and 19. It is cleared when the power supply is turned OFF. The hold function can be selected. (Intervals of 2 or 5 mins can be selected.)
- If the 5-min interval is selected, the life of the memory element (electronic parts) is limited to 1 million times. (If energized for 24 hours, life is calculated as 5 mins x 1 million = 5 million mins = about 9.5 years.) Therefore, if using the hold function, calculate the memory life for your operating conditions, and use within this life. The response time when the set value is 90% in relation to the step input (The response time is 7 s when it is output by the temperature sensor.) The response time until the set value reaches 90% in relation to the step input (The response time is 7 s when it is analog output by the temperature sensor.) When the temperature sensor is used, it will be 250 VAC.
- \*8 For details, refer to the "Wetted Parts Construction" on page 19.
- \*9 When the piping diameter or piping passage is restricted, the specifications may not be satisfied.


  \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

#### Temperature Sensor Specifications

Rated temperature range	0 to 100°C*1
Set/Display temperature range	−10 to 110°C
Smallest settable increment	1°C
Display unit	°C
Display accuracy	±2°C
Analog output accuracy	±3% F.S.
Response time	7 s*2
Ambient temperature characteristics	±5% F.S.

<sup>\*1</sup> The rated temperature range refers solely to that of the temperature sensor. The fluid temperature range specification of the flow switch as a whole is 0 to 90°C

<sup>\*2</sup> The response time refers solely to that of the temperature sensor.

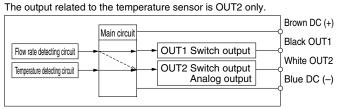

OUT2 can output either the temperature or flow rate by button operation.



#### **Remote Sensor Unit**




3-Color Display Digital Flow Switch for Water RoHS



# PF3W5-Z Series

#### **How to Order**





# Remote sensor unit

#### 2 Rated flow range (Flow range)

Symbol	Rated flow range
04	0.5 to 4 L/min
20	2 to 16 L/min
40	5 to 40 L/min
11	10 to 100 L/min

#### 3 Flow adjustment valve

Cymbol	With/without flow	F	Rated flo	w range	е
Symbol	adjustment valve	04	20	40	11
Nil	Without	•	•	•	•
S	With	•	•	•	_

- \* 100 L/min type with a flow adjustment valve is not available.
- The flow adjustment valve of this product is not suitable for applications which require the constant adjustment of the flow rate.

#### Thread type

	J I
Nil	Rc
N	NPT
F	G*1

\*1 ISO 228 compliant

#### 6 Port size

Symbol	Port	Rated flow range				
Symbol	size	04	20	40	11	
03	3/8	•	•	_	_	
04	1/2	_	•	•	_	
06	3/4	_	_	•	•	
10	1/1	_	_	_	•	

Nil	With lead wire with M8 connector (3 m)
N	Without lead wire with M8 connector

The lead wire with M8 connector is interchangeable with the existing PF3W series.

#### Lead wire (Option)

Calibration certificate

(Only for flow rate)

Nil

	other than SI (symbol "Nil") cannot b
	used in Japan.
*	G: Made to order
	Poforonco: 1 [I /min] ← 0.2642 [gal/min

The certificate is written in both Japanese and English.

With calibration certificate

Units with a temperature sensor can only display the flow rate.

#### 6 Output specification/Temperature sensor

Symbol	OUT1	OUT2	Temperature
Symbol	Flow rate	Temperature	sensor
1 Analog 1 to 5 V		_	None
2	Analog 4 to 20 mA	_	None
1T	Analog 1 to 5 V	Analog 1 to 5 V	With temperature sensor

To use in combination with the remote monitor (PFG200/PF3W3 series), select 1 to 5 V for the flow rate analog output (output symbol "-1" or "-1T").

#### Remote sensor unit/Unit printed on label

Symbol	Instantaneous flow	Temperature
Nil	L/min	°C
G*1	L/min (gal/min)	°C/°F

- \*1 Under the New Measurement Act, units

Reference: 1 [L/min] ← 0.2642 [gal/min] 1 [gal/min] ↔ 3.785 [L/min] °F = 9/5°C + 32

#### 9 Brackets (Option)

Nil	None
R	With brackets

Brackets are interchangeable with the existing PF3W series.

#### Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.

The first of the fact are required, eraci war are part rambere noted below.				
Description	Part no.	Qty.	Note	
	ZS-40-K	1	For PF3W704/720/504/520	With 4 tapping screws (3 x 8)
Bracket*1	ZS-40-L	1	For PF3W740/540	With 4 tapping screws (3 x 8)
	ZS-40-M	1	For PF3W711/511	With 4 tapping screws (4 x 10)
Lead wire with M8 connector	ZS-40-A	1	Lead wire length: 3 m	

<sup>\*1</sup> For units with a flow adjustment valve, 2 brackets are required.



<sup>\*</sup> Interchangeable with the existing PF3W series

For flow switch precautions and specific product precautions, refer to the Operation Manual on the SMC website.



3-Color Display Digital Flow Switch for Water

#### Specifications (Remote Sensor Unit)

Model		odel	PF3W504	PF3W520	PF3W540	PF3W511			
Applicable fluid			Water and Ethylene glycol aqueous solution (with a viscosity of 3 mPa⋅s [3 cP] or less)*1						
Detection method			Karman vortex						
Ra	ted flow rang	e	0.5 to 4 L/min	2 to 16 L/min	5 to 40 L/min	10 to 100 L/min			
Flu	id temperatu	ire		0 to 90°C (No freezi	ng or condensation)				
Ac	curacy		±3% F.S.						
Re	peatability		±2% F.S.						
Ter	nperature ch	aracteristics		±5% F.S. (25	°C standard)				
Op	erating press	sure range*2		0 to 1	MPa*2				
Pro	of pressure*	<sup>2</sup>		1.5	MРа				
Pres	sure loss (withou	ıt flow adjustment valve)		45 kPa or less a	at the max. flow				
		Response time*3		1	S				
An	alog output	Voltage output		Voltage output: 1 to 5 V	Output impedance: 1 kΩ				
		Current output	Output currer	Output current: 4 to 20 mA Max. load impedance: 300 $\Omega$ for 12 VDC, 600 $\Omega$ for 24 VDC					
Indicator light			For power supply status, flow rate indicator (Blinking speed changes in response to flow rate.), and other error indicator						
Power supply voltage			12 to 24 VDC ±10%						
Current consumption		nption	30 mA or less						
		Enclosure	IP65						
En	/ironmental	Operating temperature range	0 to 50°C (No freezing or condensation)						
	istance	Operating humidity range	Operation, Storage: 35 to 85% R.H. (No condensation)						
		Withstand voltage*4	1000 VAC for 1 min between terminals and housing						
		Insulation resistance	$50~\text{M}\Omega$ or more (500 VDC measured via megohmmeter) between terminals and housing						
Sta	ndards and I	regulations	CE/UKCA marking, UL (CSA)						
We	tted narte me	atorial*5		PPS, Stainless steel 304, FKM, SCS13					
Wetted parts material*5		ateriai		Non-g	rease				
Piping port size*6		<u>*</u> *6	3/8	3/8, 1/2	1/2, 3/4	3/4, 1			
	Without temperature ser	nsor/Without flow adjustment valve	138 g	156 g	213 g	705 g			
Ħ	With temperature sens	perature sensor/Without flow adjustment valve 151 g		169 g	233 g	728 g			
Weight	Without temperature se	ensor/With flow adjustment valve	226 g	244 g	414 g	_			
	With temperature sen	sor/With flow adjustment valve	239 g	257 g	434 g	_			
With lead wire with connector		re with connector	+85 g						

- \*1 Refer to the "Measurable Range for Ethylene Glycol Aqueous Solution" graph on page 19. Measurement is possible as long as the fluid does not corrode the wetted parts and the viscosity is 3 mPa·s (3 cP) or less. Be aware that water leakage may occur due to internal seal shrinkage or swelling depending on the type of fluid.
- \*2 The operating pressure range and proof pressure may change according to the fluid temperature. Refer to the graphs on page 17
- \*3 The response time until the set value reaches 90% in relation to the step input (The response time is 7 s when it is analog output by the temperature sensor.)
- \*4 When the temperature sensor is used, it will be 250 VAC.
- \*\* When the emperature sensor is used, it will be 250 VAC.
  \*5 For details, refer to the "Wetted Parts Construction" on page 19.
  \*6 When the piping diameter or piping passage is restricted, the specifications may not be satisfied.
  \* Products with tiny scratches, marks, or display color or brightness
- variations which do not affect the performance of the product are verified as conforming products.

#### Temperature Sensor Specifications

Rated temperature range	0 to 100°C*1
Analog output accuracy	±3% F.S.
Response time	7 s* <sup>2</sup>
Ambient temperature characteristics	+5% F.S

- \*1 The rated temperature range refers solely to that of the temperature sensor. The fluid temperature range specification of the flow switch as a whole is 0 to 90°C.
- \*2 The response time refers solely to that of the temperature sensor.






# **② IO-Link** Integrated Display (€ CR c Rusus

3-Color Display Digital Flow Switch for Water RoHS



# PF3W7-L Series

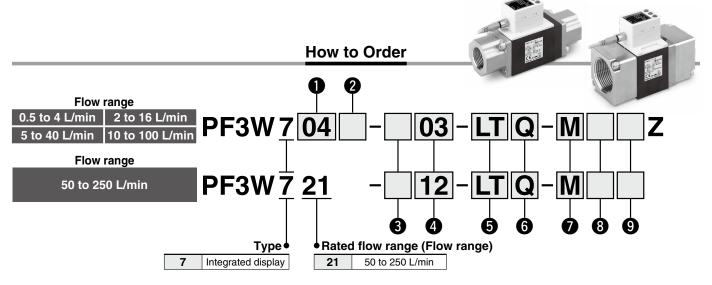

#### Rated flow range (Flow range)

<b>04</b> 0.5 to 4 L/min					
20	2 to 16 L/min				
40	5 to 40 L/min				
11	10 to 100 L/min				

#### 2 Flow adjustment valve

Cumbal	With/without flow	Rated flow range				
Symbol	With/without flow adjustment valve	04	20	40	11	
Nil	None	•	•	•	•	
S	Yes	•	•	•	_	

- 100 L/min type with a flow adjustment valve is not available.
- The flow adjustment valve of this product is not suitable for applications which require the constant adjustment of the flow rate.

Tillead type					
Nil	Rc				
N	NPT				
F	G*1				

\*1 ISO 228 compliant

#### 4 Piping port size

Cumbal	Port	Rated flow range				
Symbol	size	04	20	40	11	21
03	3/8	•	•	_	_	_
04	1/2	_	•	•	_	_
06	3/4	_	_	•	•	_
10	1	_	_	_	•	_
12	1-1/4	_	_	_	_	•
14	1-1/2	_	_	_	_	•

#### 6 Lead wire (Option)

Nil With lead wire with M8 connector (3 m)					
N	None				
Q With M12-M8 conversion lead wire (0.1 m					

- \*1 A 3 m lead wire is also available separately.
- \* The lead wire with M8 connector and the M12-M8 conversion lead wire are interchangeable with the existing PF3W series.

#### 5 Output specification/Temperature sensor

Symbol	OUT1	OUT2	Temperature
Symbol	Flow rate/Temperature	Flow rate/Temperature	sensor
L	IO-Link/Switch output (N/P) —		None
L2	IO-Link/Switch output (N/P)	Switch output (N/P)	None
LT	IO-Link/Switch output (N/P)	_	Yes
L2T	IO-Link/Switch output (N/P)	Switch output (N/P)	res

- \* Temperature output or flow output can be selected for the digital flow switch with a temperature sensor.
- The output specification of L, L2, and L2T should be ordered as made to order.

#### Integrated display/Unit specification

Symbol	Instantaneous flow	Temperature	
Nil	With display unit	°C	
M	L/min	L	°C

\* Under the New Measurement Act, units other than SI (symbol "M") cannot be used in Japan. Unit can be changed.

Instantaneous flow: L/min ↔ gal/min Accumulated flow : L ← gal

\* Reference: 1 [L/min] ← 0.2642 [gal/min] 1 [gal/min] ↔ 3.785 [L/min]

#### 8 Brackets (Option)

_	· · · · · ·
Nil	None
R	With brackets

Brackets are interchangeable with the existing PF3W series.

#### 9 Calibration certificate (Only for flow rate)

Nil	None		
Α	With calibration certificate		


The certificate is written in both Japanese and English. The integrated display type with a temperature sensor can only display the flow rate.

The temperature sensor is not calibrated.


### ZS-40-M12M8-A M12-M8 conversion

The lead wire with M8 connector and the M12-M8 conversion lead wire are interchangeable with the existing PF3W series.









<sup>\*</sup> For wiring, refer to the Operation Manual on the SMC website, https://www.smcworld.com

For flow switch precautions and specific product precautions, refer to the Operation Manual on the SMC website.



#### **Specifications (Integrated Display)**

	Model	PF3W704-L	PF3W720-L	PF3W740-L PF3W711-L PF		PF3W721-L
Accumulated flow range*1		999999999.9 L			999999999 L	
		Ву (	).1 L		By 1 L	
	Max. applied voltage			30 V (NPN output)		
output	Internal voltage drop		1.5 V c	r less (at load current of	80 mA)	
	Delay time*2	3.5 ms Variable from 0 to 60 s/0.01 s increments				
Switch	Output mode Flow rate	Select from Hysteresis, Window comparator, Accumulated output, Accumulated pulse output, Error output, or Switch output OFF modes.				
Power supply voltage	When used as a switch output device	12 to 24 VDC, including ripple (p-p) 10%				
Power sup	When used as an IO-Link device	18 to 30 VDC, including ripple (p-p) 10%				
Digital filter*3		Select from 0.5 s, 1.0 s, 2.0 s, 5.0 s, 10.0 s, 15.0 s, 20.0 s, or 30.0 s.				
Envi	ronment Withstand voltage		250 VAC for 1 min between external terminals and case			
Sta	andards and regulations		CI	E/UKCA marking, UL (CS	A)	

\*1 It is cleared when the power supply is turned OFF.

The hold function can be selected. If the 5-min interval is selected, the life of the memory element (electronic parts) is limited to 3.7 million times. (If energized for 24 hours, life is calculated as 5 mins x access times (3.7 million) = 18.5 million mins = about 35 years.) Therefore, if using the hold function, calculate the memory life for your operating conditions, and use within this life.

- \*2 Does not include the value of the digital filter
- \*3 The response time until the set value reaches 90% in relation to the step input (The response time is 7 s when it is output by the temperature sensor.)

#### **Communication Specifications (IO-Link mode)**

Communication Specifications (IO-Link mode)						
IO-Link type	Device					
IO-Link version	V1.1					
Communication speed	COM2 (38.4 kbps)					
Configuration file	IODD file*1					
Minimum cycle time	3.5 ms					
Process data length	Input data: 6 bytes, Output data: 0 byte					
On request data communication	Yes					
Data storage function	Yes					
Event function	Yes					
Vendor ID	131 (0 x 0083)					
Device ID*2	PF3W704					


- \*1 The configuration file can be downloaded from the SMC website, https://www.smcworld.com
- \*2 The device ID differs according to each product type (flow range, whether or not a temperature sensor is provided, etc.).

#### **Set Flow Range and Rated Flow Range**

### **⚠** Caution

#### Set the flow rate within the rated flow range.

The set flow range is the range of flow rate within which setting is possible. The rated flow range is the range within which the sensor specifications (accuracy, etc.) are satisfied. It is possible to set a value outside of the rated flow range if it is within the set flow range. However, the satisfaction of the specifications cannot be guaranteed.

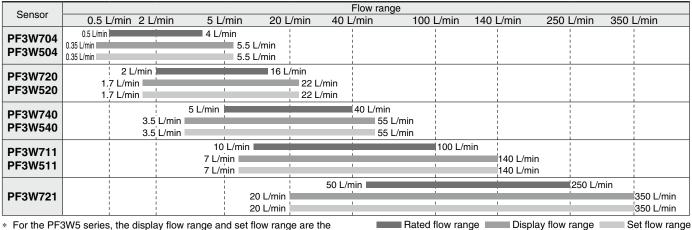


<sup>\*</sup> For the PF3W5 series, the display flow range and set flow range are the same as those of the flow monitor PF3W3 series.

#### **Analog Output**


#### Flow rate/Analog output


	A		100	2	50	C	
Voltage output	1 V	1.5 V	1.4 V	1.8	B V	5 V	
Current output	4 mA	6 mA	5.6 mA	7.2	mΑ	20 mA	
					Rated flow [L/mi		
IVI	Model			Min. N		Лах.	
PF3W	704/5	04	0.5			4	
PF3W	PF3W720/520			2		16	
PF3W740/540			5			40	
PF3W711/511			10			100	

В




#### Fluid temperature/Analog output






#### **Operating Pressure and Proof Pressure**


#### PF3W704(-L)/720(-L)/740(-L)/504/520/540




#### PF3W704S(-L)/720S(-L)/740S(-L)/504S/520S/540S



#### PF3W711(-L)/511




#### PF3W721(-L)






#### Flow Rate Characteristics (Pressure Loss: Without Flow Adjustment Valve)


#### PF3W704(-L)/504




#### PF3W720(-L)/520




#### PF3W740(-L)/540




#### PF3W711(-L)/511



#### PF3W721(-L)





#### Straight Piping Length and Accuracy (Reference Value)




- The smaller the piping size, the more the product is affected by the straight piping length.
- · Fluid pressure has almost no affect.
- Low flow rate lessens the effect of the straight piping length.
- Use a straight pipe that is 8 cm or longer in length to satisfy the ±3% F.S. specification. (11 cm or longer for the 100 L/min type)

#### Pressure: 0.3 MPa PF3W704(-L)/504 Piping diameter: Ø12






#### Pressure: 0.3 MPa **PF3W740(-L)/540** Piping diameter: Ø16








No data for 4 cm, or for under 5 cm, as these cannot be used due to piping dimensions.

#### Pressure: 0.3 MPa **PF3W720(-L)/520** Piping diameter: Ø12







### PF3W-Z/L Series

#### Flow Rate Characteristics of Flow Adjustment Valve


#### PF3W704S(-L)/504S




#### PF3W720S(-L)/520S



#### PF3W740S(-L)/540S




# Measurable Range for Ethylene Glycol Aqueous Solution (Reference Value)



#### **Available Flow Range**


For the analog current 2-output type (symbol: "KT") only (Includes the analog voltage 2-output type (symbol: "JT"), excludes other specifications)

#### PF3W704/720/740/711

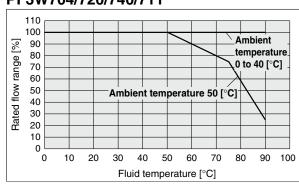

\* If the analog current 2-output type is installed in an environment with high temperatures, the temperature of the product may rise. In such a case, be sure to cool the product.

#### **Wetted Parts Construction**

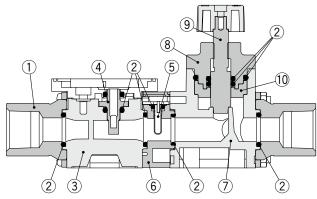

**Component Parts** 

P			
No.	Description	Material	Note
4	Attachment	Stainless steel 304	PF3W704/720/740/504/520/540
'	Attacriment	SCS13	Stainless steel 304 equivalent, PF3W711/511
2	Seal	FKM	
3	Body	PPS	
4	Sensor	PPS	
5	Temperature sensor	Stainless steel 304	
6	Temperature sensor body	PPS	
7	Flow adjustment valve body	PPS	
8	Flow adjustment valve cover	PPS	
9	Flow adjustment valve shaft	Stainless steel 304	
10	Shaft support	PPS	




#### Internal Circuits and Wiring Examples


#### PF3W7□□

-A(T)

NPN (2 outputs)

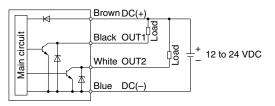


-B(T) PNP (2 outputs)

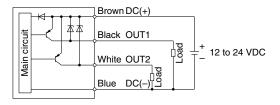


-C(T)/D(T)

C(T): NPN + Analog voltage output D(T): NPN + Analog current output

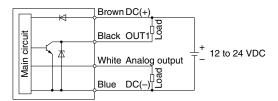


-E(T)/F(T)


E(T): PNP + Analog voltage output F(T): PNP + Analog current output

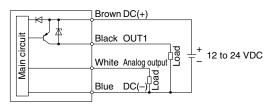

#### -G NPN + External input

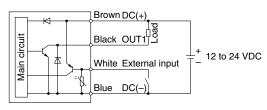


#### -H PNP + External input

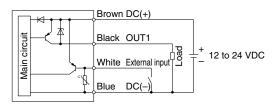

-JT/KT

JT: Analog voltage output + Analog voltage output KT: Analog current output + Analog current output

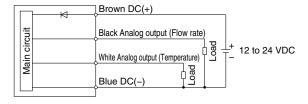

#### Accumulated pulse output wiring examples

-A(T)/C(T)/D(T)/G


A(T): NPN (2 outputs)

C(T), D(T): NPN + Analog output

G: NPN + External input



0 V ....  $\prod$ 50 ms 50 ms -B(T)/E(T)/F(T)/H B(T): PNP (2 outputs) E(T), F(T): PNP + Analog output H: PNP + External input

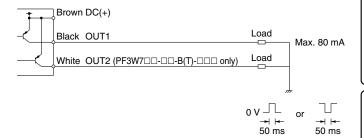

### PF3W-Z/L Series


#### **Internal Circuits and Wiring Examples**

#### PF3W5□□

-1/2


1: Analog voltage output

2: Analog current output

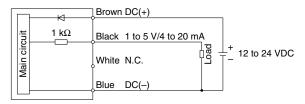


### -1T

1T: Analog voltage output + Analog voltage output

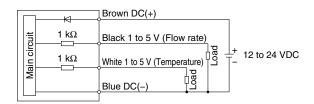


# PF3W7□□-L NPN output type

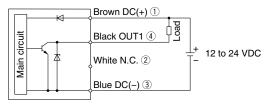

Max. 28 V, 80 mA

Internal voltage drop 1.5 V or less

#### PNP output type

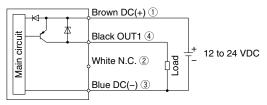


Max. 80 mA

Internal voltage drop 1.5 V or less

#### **PF3W7**□□-**L2**


#### NPN 2 output type

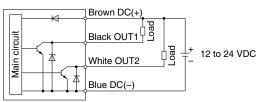

Max. 28 V, 80 mA

Internal voltage drop 1.5 V or less


#### PNP 2 output type

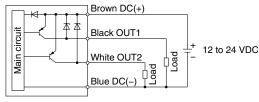

Max. 80 mA

Internal voltage drop 1.5 V or less

#### When used as an IO-Link device



 $\ast\,$  The numbers in the diagrams show the connector pin layout.

#### **Dimensions**

# PF3W704(-L)/720(-L)/740(-L)/711(-L)/721(-L)


Integrated display


Connector pin number

#### Example




Pin no.	Pin name
1	DC(+)
2	OUT2
3	DC(-)
4	OUT1







Piping port: G thread




Model	Port size G	GG		
PF3W704	3/8	23.9		
PF3W720	3/8	23.9		
PF3W720	1/2	26.9		
PF3W740	1/2	26.9		
PF3W/4U	3/4	31.9		






#### For PF3W711(-L)

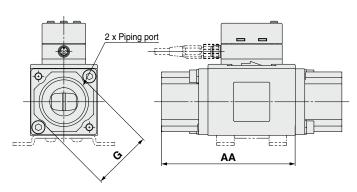

#### For PF3W721-L

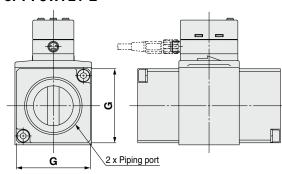



																						[mm]
Model	Port size	_	АА	В	D	Е	F	G	н		К		N	Р	Bracket dimensions							
Wodei	(Rc, NPT)	A	AA	P	שו	=	Г	l G	П	J	_ N	▎┖	IN	F	S	Т	U	٧	W	WX	Υ	Z
PF3W704(-L)	3/8	70	50	30	60	40.6	15.2	20.9	14	35	26	18	13.6	ø2.7 depth 14	24	22	32	40	50	4.5	5	1.5
PF3W720(-L)	2/0 1/0	78	54	30	60	40.6	15.0	20.9	18	39	30	18	12.6	and 7 donth 10	28	22	32	40	50	4.5	5	1.5
PF3W12U(-L)	3/8, 1/2	/ 0	54	30	60	40.6	15.2	23.9	10	39	30	10	13.0	ø2.7 depth 12	20	22	32	40	50	4.5	5	1.5
PF3W740(-L)	1/2. 3/4	98	71	38	68	48.6	19.2	23.9	28	49	35	28	16.0	ø2.7 depth 12	24	30	42	48	58	4.5	5	1.5
PF3W/4U(-L)	1/2, 3/4	90	/	36	00	40.0	19.2	29.9	20	49	33	20	10.6	02.7 deptil 12	34	30	42	40	36	4.5	5	1.5
PF3W711(-L)	3/4, 1	124	92	46	77	57.6	23.0	41	41	63	48	28	18.0	ø3.5 depth 14	44	36	48	58	70	5.5	7	2.0
	1 1/4, 1 1/2	104	74						31	52	39.5											
PF3W721-L	G1 1/4	108	76	56	91	71.6	28.5	54	33	54	41.5	25	27.5	ø3.5 depth 14	_	—	—	—	—	—	_	_
	G1 1/2	112	78						35	56	43.5											

# PF3W-Z/L Series


#### **Dimensions**

#### PF3W504/520/540/511 Remote sensor unit







Piping port: G thread



Model	Port size G	GG
PF3W504	3/8	23.9
PF3W520	3/8	23.9
PF3W32U	1/2	26.9
PF3W540	1/2	26.9
PF3W34U	3/4	31.9






																						[mm]
Model	Port size	_		В	DD		_		ш		К		N	Bracket dimensions								
Model	(Rc, NPT)	Α	AA	<b>D</b>	טט	E	-	G	Н	J		L	N	P	S	Т	U	٧	W	WX	Υ	Z
PF3W504	3/8	70	50	30	45.6	40.6	15.2	20.9	14	35	26	18	13.6	ø2.7 depth 14	24	22	32	40	50	4.5	5	1.5
PF3W520	3/8, 1/2	78	54	30	45.6	40.6	15.2	20.9	18	39	30	18	13.6	ø2.7 depth 12	20	22	32	40	50	4.5	5	1.5
PF3W3ZU	3/6, 1/2	/ 0	34	30	45.0	40.0	15.2	23.9	10	39	30	10	13.0	02.7 deptil 12	20	22	32	40	30	4.5	3	1.5
PF3W540	1/2. 3/4	98	71	38	53.6	48.6	19.2	23.9	28	40	25	28	16.0	ø2.7 depth 12	34	30	42	48	58	4.5	5	1.5
PF3W34U	1/2, 3/4	90	/ 1	30	55.6	40.0	19.2	29.9	20	49 35	35   28	28   16.8	10.0	02.7 deptil 12	34	30	42	40	56	4.5	5	1.5
PF3W511	3/4, 1	124	92	46	62.6	57.6	23.0	41	41	63	48	28	18.0	ø3.5 depth 14	44	36	48	58	70	5.5	7	2.0

#### **Dimensions**

PF3W704/720/740-□-□T PF3W704/720/740-L□T


Integrated display: With temperature sensor



		[mm]
Model	Α	AA
PF3W704/504-□-□T	81	50
PF3W720/520-□-□T	89	54
PF3W740/540-□-□T	109	71

PF3W711/721-□-□T PF3W711/721-L□T


Integrated display: With temperature sensor




		[mm]
Model	Α	AA
PF3W711/511-□-□T	135	92
PF3W721-□-□T	115	74
PF3W721-F12-□T	119	76
PF3W721-F14-□T	123	78

PF3W504/520/540-□-□T

Remote sensor unit: With temperature sensor



PF3W511-□-□T Remote sensor unit: With temperature sensor




**SMC** 

# PF3W-Z/L Series

#### **Dimensions**

PF3W704S(-L)/720S(-L)/740S(-L)
Integrated display: With flow adjustment valve


#### PF3W504S/520S/540S Remote sensor unit: With flow adjustment valve

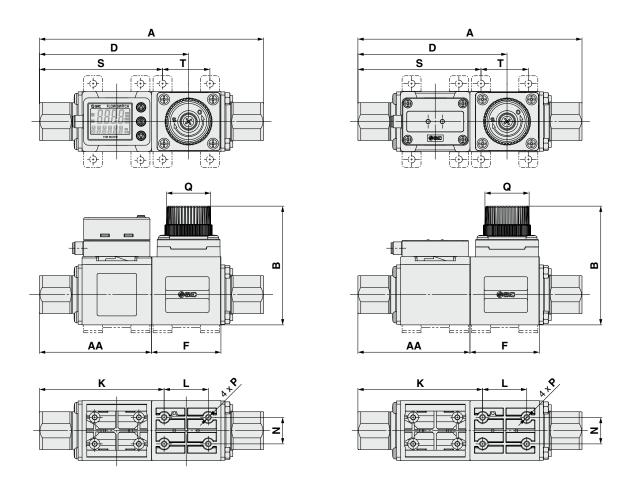



													[mm]
Model	_	AA	В	_	_	V		N	В	0	Number of	Bracket dimensions	
Model	A	AA	Ь	ע	Г	<b>^</b>	-	IN	F	Q	Q rotations	S	Т
PF3W704S(-L)/504S	104	50	63.6 (Max. 68.6)	70.2	34	58.5	18	13.6	ø2.7 depth 10	ø19	6	56.5	22
PF3W720S(-L)/520S	112	54	63.6 (Max. 68.6)	74.2	34	62.5	18	13.6	ø2.7 depth 10	ø19	6	60.5	22
PF3W740S(-L)/540S	142	71	75.25 (Max. 81)	94.5	44	79.0	28	16.8	ø2.7 depth 10	ø28	7	78.0	30

#### **Dimensions**

#### PF3W704S/720S/740S-□-□T Integrated display: With temperature sensor and flow adjustment valve

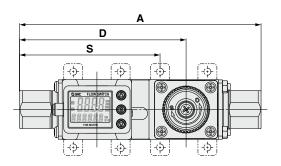


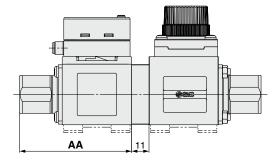


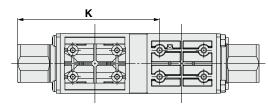


					[mm]
Model	Α	AA	D	K	s
PF3W704S/504S-□-□T	115	50	81.2	69.5	67.5
PF3W720S/520S-□-□T	123	54	85.2	73.5	71.5
PF3W740S/540S-□-□T	153	71	105.5	90.0	89.0

#### PF3W504S/520S/540S-□-□T Remote sensor unit: With temperature sensor and flow adjustment valve

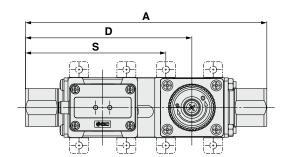

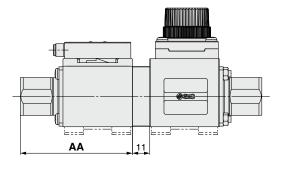

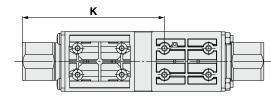

**Lead Wire Specifications** Nominal cross

section

Material

O.D.

O.D.

Sheath Material

Finished O.D.


Color

Conductor

#### **ZS-40-A** Lead wire with M8 connector

OUT1 Black

4

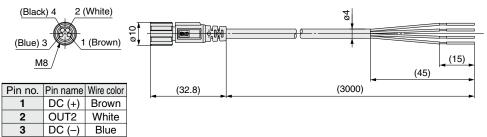

### Insulator

- \* 4-wire type lead wire with M8 connector used for the PF3W series
- \* For wiring, refer to the Operation Manual on the SMC website, https://www.smcworld.com



AWG 23

Approx. 0.7 mm

Heat-resistant PVC

Approx. 1.1 mm

Brown, White, Black, Blue

Heat- and oil-resistant PVC

ø4

# 



# PF3W3 Series



#### **How to Order**

# **PF3W30 A**

### Type •

3 Remote monitor unit

For remote sensor units, select the analog output 1 to 5 V type.


Applicable sensors: PF3W5□□-□□-1(T)

#### Output specification

Symbol	OUT1	OUT2
Α	NPN	NPN
В	PNP	PNP
С	NPN	Analog 1 to 5 V
D	NPN	Analog 4 to 20 mA
E	PNP	Analog 1 to 5 V
F	PNP	Analog 4 to 20 mA
G	NPN	External input
Н	PNP	External input
J	Analog 1 to 5 V	Analog 1 to 5 V
K	Analog 4 to 20 mA	Analog 4 to 20 mA

In combination with the remote sensor unit with a temperature sensor, only OUT2 can be set for temperature sensor output.

#### Lead wire

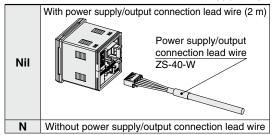

The lead wire does not come connected, but it is shipped together with the product.

#### Remote monitor unit/Unit specification

Symbol	Instantaneous flow	Accumulated flow	Temperature
M	L/min	L	°C
G	gal/min	gal	°C
F	gal/min	gal	°F
J	L/min	L	°F

- \* Under the New Measurement Act, units other than SI (symbol "M") cannot be used in Japan.
- G, F, J: Made to order

Reference: 1 [L/min] ← 0.2642 [gal/min]

- 1 [gal/min] ↔ 3.785 [L/min]
- °F = 9/5°C + 32

#### Calibration certificate (Only flow monitor)


Nil	None			
Α	With calibration certificate			

The certificate is written in both Japanese and English.

Nil	None				
	Sensor connector (1 pc.)				
С	Sensor connector (e-con)				

The connector does not come connected, but it is shipped together with the product.

#### Option 1

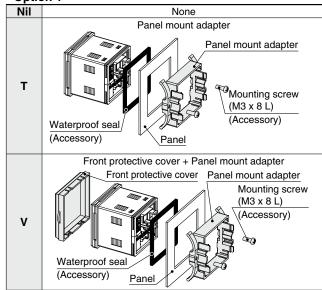

#### Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.

Description	Part no.	Note
Panel mount adapter	ZS-26-B	With waterproof seal and screws
Front protective cover + Panel mount adapter	ZS-26-C	With waterproof seal and screws
Front protective cover only	ZS-26-01	Separately order panel mount adapter, etc.
Power supply/output connection lead wire	ZS-40-W	Lead wire length: 2 m
Sensor connector (e-con)	ZS-28-CA-4	1 pc.
Lead wire with connector for copying	ZS-40-Y	A maximum of 10 units can be connected.



# 3-Color Display Digital Flow Monitor for Water **PF3W3** Series

For flow switch precautions and specific product precautions, refer to the Operation Manual on the SMC website.



#### **Specifications**

N	Model	PF3W30□					
Display flow ra	.n.a.o	0.35 to 4.50 L/min	1.7 to 18.0 L/min	3.5 to 45.0 L/min	7 to 112 L/min		
Display flow ra	inge	(Flow under 0.35 L/min is displayed as "0.00.")	(Flow under 1.7 L/min is displayed as "0.0.")	(Flow under 3.5 L/min is displayed as "0.0.")	(Flow under 7 L/min is displayed as "0.")		
Set flow range		0.35 to 4.50 L/min	1.7 to 18.0 L/min	3.5 to 45.0 L/min	7 to 112 L/min		
Smallest setta	ble increment	0.01 L/min	0.01 L/min 0.1 L/min				
Conversion of	accumulated pulse	0.05 L/pulse	0.1 L/pulse	0.5 L/pulse	1 L/pulse		
Display unit			Instantaneous flow: L/m	nin, Accumulated flow: L			
Accuracy				Analog output: ±0.5% F.S.			
Repeatability				6 F.S.			
Temperature c	haracteristics			5°C standard)			
Accumulated f	low range*1	999999		999999			
		By 0.1 L	By 0.5 L	Ву	1 L		
Switch output				n collector output			
	Max. load current		80				
	Max. applied voltage			/DC			
	Internal voltage drop	NPN: 1 V or les		PNP: 1.5 V or less (at load cu	irrent of 80 mA)		
	Response time*2	1 s/2 s					
	Output protection						
	Output Flow rate	Select from Hysteresis, Window comparator, Accumulated output, or Accumulated pulse output modes.					
	mode Temperature						
A I	Response time*3	1 s/2 s (linked with the switch output)					
Analog output	Voltage output Current output	Voltage output: 1 to 5 V Output impedance: 1 kΩ Output current: 4 to 20 mA Max. load impedance: 300 $\Omega$ for 12 VDC, 600 $\Omega$ for 24 VDC					
Hysteresis	Current output	Variable					
External input		Voltage f		or solid state), input for 30 ms	or longer		
Input/output		Voltage		copy mode	or longer		
Display metho	d	2-screen display (Main screen: 4-digit, 7-segment, 2-color, Red/Green Sub screen: 6-digit, 11-segment, White), Display values updated 5 times per second					
Indicator light		Output 1, Output 2: Orange					
Power supply	voltage	12 to 24 VDC ±10%					
Current consu		50 mA or less					
Connection		Power supply output 5P connector, sensor connection 4P connector (e-con)					
	Enclosure	IP40 (Only front face of the panel is IP65 when panel mount adapter and waterproof seal of optional parts are used.)					
F	Operating temperature range						
Environmental resistance	Operating humidity range		Operation, Storage: 35 to 8				
resistance	Withstand voltage		1000 VAC for 1 min between	een terminals and housing			
	Insulation resistance	50 M $\Omega$ or more (500 VDC measured via megohmmeter) between terminals and housing					
Standards and			CE/UKCA mar	king, UL (CSA)			
Weight Without pow	er supply/output connection lead wire	50 g					
With power	supply/output connection lead wire	100 g					


- \*1 It is cleared when the power supply is turned OFF. The hold function can be selected. (Intervals of 2 or 5 mins can be selected.) If the 5-min interval is selected, the life of the memory element (electronic parts) is limited to 1 million times. (If energized for 24 hours, life is calculated as 5 mins x 1 million = 5 million mins = about 9.5 years.) Therefore, if using the hold function, calculate the memory life for your operating conditions, and use within this life.
- \*2 The response time when the set value is 90% in relation to the step input (The response time is 7's when it is output by the temperature sensor.)
- \*3 The response time until the set value reaches 90% in relation to the step input (The response time is 7 s when it is analog output by the temperature sensor.)
- \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

#### Temperature Sensor Specifications

Rated temperature range	0 to 100°C*1
Set/Display temperature range	−10 to 110°C
Smallest settable increment	1°C
Display unit	°C
Analog output accuracy	±3% F.S.
Response time	7 s*2
Ambient temperature characteristics	±5% F.S.

- \*1 The rated temperature range refers solely to that of the temperature sensor. The fluid temperature range specification of the flow switch as a whole is 0 to 90°C.
- \*2 The response time refers solely to that of the temperature sensor.

#### The output related to the temperature sensor is OUT2 only.

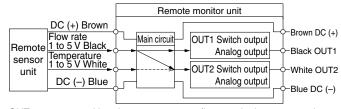


OUT2 can output either the temperature or flow rate by button operation.

#### **Analog Output**

#### Flow rate/Analog output

			В				
	Α	04/20/40	11	21	С	ľ	
Voltage output	1 V	1.5 V	1.4 V	1.5 V	5 V		
Current output	4 mA	6 mA	5.6 mA	5.9 mA	20 mA		
The values of B vary according to the range.							
Flow rate [I /min]						İ	

The raided of 2 raily according to ano railger						
Model	Flow rate [L/min]					
iviodei	Min.	Max.				
PF3W504	0.5	4				
PF3W520	2	16				
PF3W540	5	40				
PF3W511	10	100				




#### Fluid temperature/Analog output

	Α	В	Output						
oltage output	0.6 V	1 V	D	4-	 		_ /·	/	
urrent output	2.4 mA	4 mA	Č	+	 	/	´ i		
	С	n				<b>/</b>	- [		
oltage output	_	5.4 V				i	i		
		21.6 mA		ر ا		1	- 1		
e sure to	use in co	mbination	В	/		i	i		
		ensor unit	A ·f =	1		- 1	- [		
vith a tem	nperature	sensor.					i		
•			-10°C	0°C	1	00°¢	1	10°C	Fluid
									tempe


# **PF3W3** Series

#### **Internal Circuits and Wiring Examples**

#### -A NPN (2 outputs)

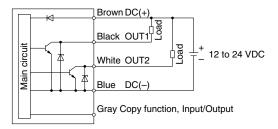


#### -B PNP (2 outputs)

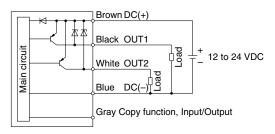


#### -C/D

C: NPN + Analog voltage output D: NPN + Analog current output

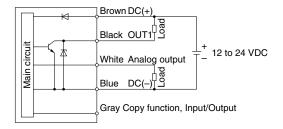


#### -E/F


E: PNP + Analog voltage output F: PNP + Analog current output

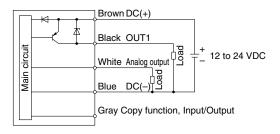

#### -G NPN + External input

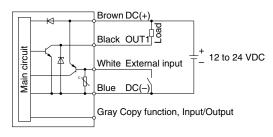


#### -H PNP + External input

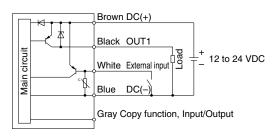

#### -J/K

J: Analog voltage output K: Analog current output

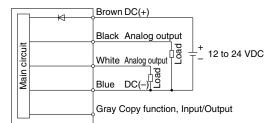

#### Accumulated pulse output wiring examples

-A/C/D/G


A: NPN (2 outputs)

C, D: NPN + Analog output

Black OUT1 Load
White OUT2 (PF3W30A only) Load
Blue DC(-)


Wax. 28 V
80 mA


-B/E/F/H B: PNP (2 outputs) E, F: PNP + Analog output G: PNP + External input




#### **Dimensions**








#### Front protective cover + Panel mount adapter

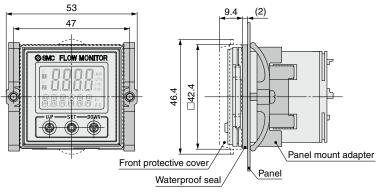


#### **Panel fitting dimensions**

Applicable panel thickness: 0.5 to 8 mm (Without waterproof seal) 0.5 to 6 mm (With waterproof seal)

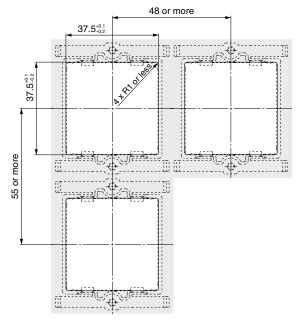

#### Sensor connector






Pin no.	Terminal	Connector no.	Lead wire color*1
1	DC (+)	1	Brown
2	N.C./IN	2	White (Not used/Temperature sensor 1 to 5 V input)
3	DC (-)	3	Blue
4	INPUT	4	Black (Flow rate sensor 1 to 5 V input)

\*1 When using the lead wire with M8 connector included with the PF3W5 series

#### Power supply/output connection lead wire



#### **Lead Wire Specifications**

Canduatas	Nominal cross section	AWG 26		
Conductor	O.D.	Approx. 0.5 mm		
Insulator	Material	Cross-linked vinyl		
	O.D.	Approx. 1.0 mm		
	Color	Brown, Blue, Black, White, Gray		
Sheath	Material	Oil- and heat-resistant vinyl		
Finishe	d O.D.	ø3.5		
	Insulator Sheath	Material O.D. Color		

<sup>\*</sup> For wiring, refer to the Operation Manual on the SMC website, https://www.smcworld.com



# 3-Screen Display 4-Channel Flow Monitor PFG200 Series RoHS

#### **How to Order**

# PFG200-M

#### Input/Output specification

Symbol	Description		
NPN 5 outputs + External input			
1 PNP 5 outputs + External input			
2*1	IO-Link + NPN 4 outputs or NPN 5 outputs (SIO mode)		
<b>3</b> *1	IO-Link + PNP 4 outputs or PNP 5 outputs (SIO mode)		

\*1 When the flow monitor is used as an IO-Link device, the total power supply current of the connected sensors should be 200 mA or less.

#### Unit specification

Nil	With unit selection function*2
M	SI units only*3


- \*2 Under the New Measurement Act, switches with the unit selection function are no longer allowed for use in Japan.
- \*3 Fixed unit: Instantaneous flow: L/min Accumulated flow: L

#### Option 1

	Option 1
Nil	None
Α	Panel mount adapter  Mounting screw (M3 x 8L) (Accessory)  Panel mount adapter  Panel
В	Front protection cover + Panel mount adapter  Mounting screw (M3 x 8L) (Accessory)  Panel mount adapter  Waterproof seal (Accessory)

 $\ast\,$  Options are not assembled, but shipped together.

#### Option 3

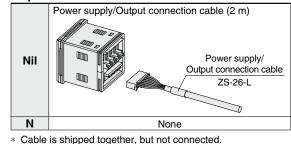

Option 2

Nil	None
4C	Sensor connector (4 pcs.) ∗ For PF2/3W5□

\* Connector is not connected, but shipped together.

#### **Options/Part Nos.**

When only optional parts are required, order with the part numbers listed below.

Description	Part no.	Note	
Power supply/Output connection cable	ZS-26-L	Length: 2 m	
For PF2W5□□, PF3W5□□	ZS-28-CA-4	1 pc., Finished O.D.: ø1.15 to ø1.35, Cover color: Blue	
Sensor connector (e-CON)	23-20-CA-4	T pc., Finished O.D., Ø1.15 to Ø1.55, Cover color. Blue	
Panel mount adapter	ZS-26-B	Mounting screw (M3 x 8 L, 2 pcs.), With waterproof seal	
Panel mount adapter + Front protection cover	ZS-26-C	Mounting screw (M3 x 8 L, 2 pcs.), With waterproof seal	
Front protection cover	ZS-26-01	_	
Power supply with M12 connector cable (Made to Order)	ZS-26-LM12	For use when using an M12 connector for IO-Link communication	



# 3-Screen Display 4-Channel Flow Monitor **PFG200** Series

For flow switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.



#### **Specifications**

Order								
	Series	D=2(0)1/1-04		Series	DE0(0)14544			
	olicable SMC flow sensor	PF2(3)W504	PF2(3)W520	PF2(3)W540	PF2(3)W511			
Rat	ed flow range	0.5 to 4 L/min	2 to 16 L/min	5 to 40 L/min	10 to 100 L/min			
Inst	antaneous flow rate	0.35 to 4.50 L/min	1.7 to 17.0 L/min	3.5 to 45.0 L/min	7 to 110 L/min			
_	olay/Set flow rate range	(Flow under 0.35 L/min is	(Flow under 1.7 L/min is	(Flow under 3.5 L/min is	(Flow under 7 L/min is			
		displayed as "0.00.")	displayed as "0.0.")	displayed as "0.0.")	displayed as "0.")			
	taneous flow rate display/Min. setting unit	0.05 L/min	0.1 L/min	0.5 L/min	1 L/min			
	nulated flow display/Set flow rate range	0 to 99,999,999.9 L						
	mulated flow display/Min. setting unit	0.1 L	1 L	1	L			
Accui	nulated pulse flow rate exchange value	0.05 L	0.1 L	0.5 L	1 L			
Uni	t	L/min, gal/min (depen	ds on selected range)	L/min, gal/min (depen	ids on selected range)			
	When used as a switch output device  When used as an IO-Link device		12 to 24 VDC ±10% with	n 10% ripple (p-p) or less				
×⊢				ing ripple (p-p) 10%*1				
	Current consumption			or less				
	Protection			protection				
	Power supply voltage for sensor*1			voltage] -1.5 V				
	Power supply current for sensor*2	Max. 110 mA (However, the total power sup		ss, and the total power supply current when u	sed as an IO-Link device is 200 mA or less).			
SC.	Display accuracy (Linearity)			S. Max.*4				
Accuracy	Repeatability		±3.0% F.	S. Max.* <sup>4</sup>				
Aç.	Temperature characteristics		±0.5% F.S. Max. (	(Reference: 25°C)				
<u></u>	Output type		NPN or PNP open coll	lector output: 5 outputs				
ğ	Output mode	Hysteresis mode, Window co		output, Accumulated pulse outp	out, Error output, Output OFF			
E	Switch operation		Normal output,	Reversed output				
output (SIO mode)	Max. load current			mA .				
Ħ	Max. applied voltage (NPN only)							
롹	nternal voltage drop (Residual voltage) 1.5 V or less (at load current of 80 mA)							
	Delay time*3	1.5 V or less (at load current of 80 mA)  5 ms or less, variable from 0 to 60 s/0.01 s increments						
	Hysteresis							
§-	Protection	Variable from 0*5 Over current protection						
ο.⊢	Input type Number of inputs	Voltage input: 1 to 5 VDC (Input impedance: 1 $M\Omega$ ) 4 inputs (Check the "Internal Circuits and Wiring Examples" on pages 33 to 35.)						
G	Connection method	4 inputs			55 10 55.)			
_ ≥	Protection method			ON a to a violation of OC 4 V/DC)				
	ernal input*8	1/-14	Over voltage protection (up					
-	·	VOIT	• • •	ed or solid state) for 30 ms or lo	nger			
_	Display type			CD av				
≥	Number of screens			screen, Sub screen x 2)				
<u> </u>	Display color			en, Sub screen: Orange				
ä	Number of display			igits (some digits are 11-segme				
Ľ	digits	Sub screen (Right): 5 digits (some digits are 11-segments, 7 segments for other)						
	Indicator light	Lights up when switch output is turned ON. OUT1, OUT2: Orange						
Ť	ital filter*6		Variable from 0 to 30 s/0.01 s increments					
aut	Enclosure			nel-mounted), Others: IP40				
= -	Withstand voltage			een terminals and housing				
<u>ō</u>	Insulation resistance	50 MΩ or mo		gohmmeter) between terminals	and housing			
≥ _	Operating temperature range		Operating: 0 to 50°C, Stored: -	,				
	Operating humidity range			5% RH (No condensation)				
	ndards			A marking				
==	Body		51 g (Excludes power s					
ei _	Power supply/Output cable							
_	e-CON (1 pc.)	2 g						
g)	O-Link type	Device						
	O-Link version			1.1				
녿	Communication speed		COM2 (3					
구	Configuration file		IODD	file*7				
읟	Minimum cycle time		4.8	ms				
io	Process data length		Input data: 10 bytes,	Output data: 0 bytes				
Communication (IO-Link	On request data communication			es				
Ē	Data storage function		Ye	es				
E	Event function			es				
ဒ	Vendor ID		131 (0					
	Check the power supply voltage range of the connected sensor							

- \*1 Check the power supply voltage range of the connected sensor. \*2 Over current on DC (+) side and DC (-) side of the sensor input connector results in breakage of the product.
- Value without digital filter (at 0 ms)
- \*4 The system accuracy when combined with an applicable flow sensor.
- \*5 If the applied pressure fluctuates around the set value, the hysteresis must be set to a value more than the amount of fluctuation, or chattering will occur.
- \*6 The response time indicates when the set value is 90% in relation to
- The configuration file can be downloaded from the SMC website, https://www.smcworld.com
- \*8 This setting is only possible for the PFG200/PFG201.
- \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.




# **PFG200** Series


#### **Applicable Flow Sensors**

Applicable SMC	Rated flow range [L/min]											
flow sensor	0.5	1	2	4	5	10	20	40	50	100	200	250
PF2(3)W504	0.5			4								
PF2(3)W520			2			16	1					
PF2(3)W540					5			40				
PF2(3)W511						10				100		
PF3W521									50			250

#### **Internal Circuits and Wiring Examples**




· NPN open collector 5 outputs + External input

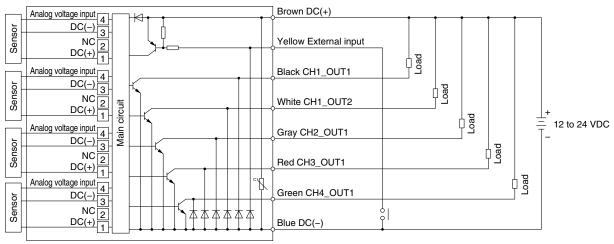


1

· PNP open collector 5 outputs + External input

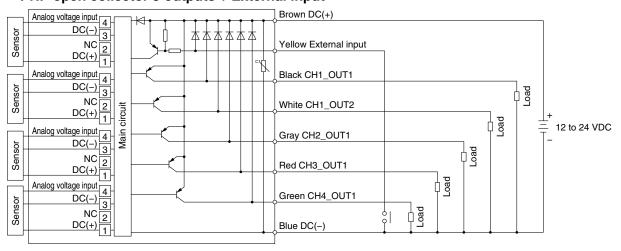


#### **Internal Circuits and Wiring Examples**




2

· IO-Link/NPN open collector 1 output + NPN open collector 4 outputs

#### When used as an IO-Link device

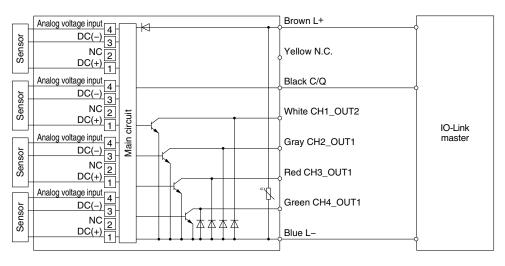


#### When used as a switch output device

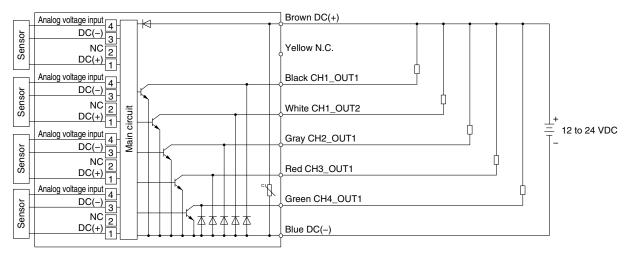

# PFG200 Series


#### **Internal Circuits and Wiring Examples**






· IO-Link/PNP open collector 1 output + PNP open collector 4 outputs


#### When used as an IO-Link device

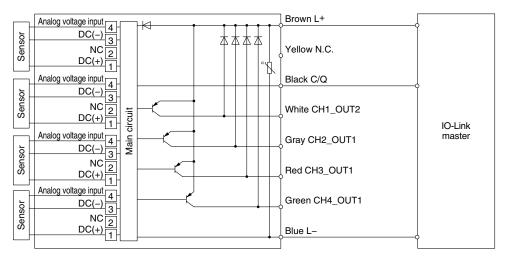



#### When used as a switch output device

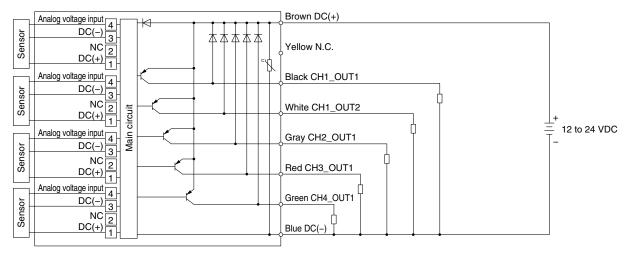

#### **Dimensions**

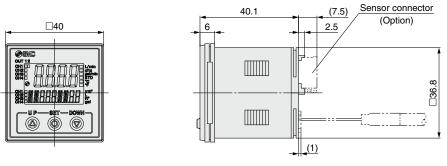








#### Connector (Option)










Pin no.	Tern	ninal			
1 111 110.	PFG200/PFG201	PFG202/PFG203			
1	DC (+)	L+			
2	DC (-)	L-			
3	CH1_OUT1	C/Q (CH1_OUT1)			
4	CH1_OUT2				
(5)	CH2_	OUT1			
6	CH3_OUT1				
7	CH4_	OUT1			
8	Auto-shift input	N.C.			


#### Power supply/Output connection cable (Accessory)

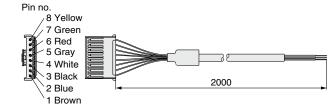


#### Power supply with M12 connector/Output cable (Made to Order)

For use when using an M12 connector for IO-Link communication Connector pin assignment Sheath O.D. ø3.5 2 White: CH1\_OUT2 1 Brown: L+ Connector size M12 4 White CH1\_OUT2 3 Black C/Q (CH1\_OUT1) 4 Black: C/Q (CH1\_OUT1) 42.5 100 2 Blue L Brown L+

#### Front protection cover + Panel mount adapter

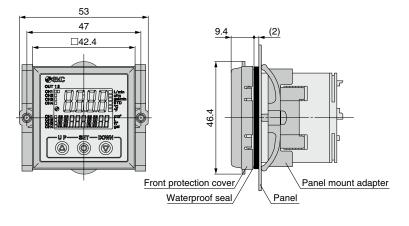

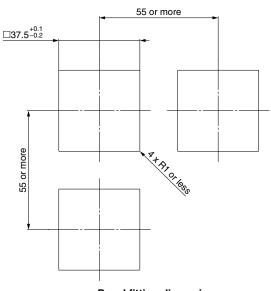

Panel fitting dimensions Applicable panel thickness:

### PF3W-Z/L Series

# **Function Details**

#### Integrated Display (PF3W7-Z Series) / IO-Link Compatible (PF3W7-L Series)

#### ■ Delay time setting (PF3W7-L series only)

The time from when the instantaneous flow reaches the set value to when the switch output operates can be set. Setting the delay time can prevent the switch output from chattering.

The total switching time is the switch operation time and the set delay time. (Default setting: 0 s)

0.00 s					
0.05 to 0.1 s (increment of 0.01 s)					
0.1 to 1.0 s (increment of 0.1 s)					
1 to 10 s (increment of 1 s)					
20 s					
30 s					
40 s					
50 s					
60 s					

#### ■ Output operation

The output operation can be selected from the following:

Output (hysteresis mode and window comparator mode) corresponding to instantaneous flow rate, output corresponding to accumulated flow, or accumulated pulse output.

 At the time of shipment from the factory, it is set to hysteresis mode and normal output.

#### ■ Display color

The display color can be selected for each output condition. The selection of the display color provides visual identification of abnormal values.

Green for ON, Red for OFF					
Red for ON, Green for OFF					
Red all the time					
Green all the time					

#### ■ Response time (Digital filter)

The response time (digital filter) can be set to suit the application. Setting the response time (digital filter) can reduce chattering of the switch output and flickering of the analog output and the display. The response time indicates when the set value is 90% in relation to the step input.

\* The temperature sensor output is fixed to 7 s.

Decrease time	Applicable model				
Response time (Digital filter)	Integrated display PF3W7-Z series	IO-Link compatible PF3W7-L series			
0.5	•	•			
1.0 (Default)	•	•			
2.0	•	•			
5.0	1	•			
10.0		•			
15.0		•			
20.0	_	•			
30.0	_	•			

#### ■ External input function (PF3W7-Z series only)

This function can be used only when the optional external input is present. The accumulated flow, peak value, and bottom value can be reset remotely.

**Accumulated value external reset:** A function to reset the accumulated flow value when an external input signal is applied.

In accumulated increment mode, the accumulated value will reset to and increase from zero.

In accumulated decrement mode, the accumulated value will reset to and decrease from the set value.

\* When the accumulated value is stored to memory, every time the accumulated value external reset is activated, the memory (EE-PROM) will be accessed. Take the life time of the memory device into consideration before using this function.

Peak/Bottom value reset: Peak and bottom value are reset.

#### **■** Forced output function

The output is turned on/off in a fixed state when starting the system or during maintenance. This enables the confirmation of wiring and prevents system errors due to unexpected output.

For the analog output type, when ON the output will be 5 V or 20 mA, and when OFF, it will be 1 V or 4 mA.

For IO-Link compatible PF3W7-L series. Diagnostic bit (error, flow rate, and temperature), process data (PD) flow, and temperature measurement can be checked.

\* Also, an increase or decrease of the flow and temperature will not change the on/off status of the output while the forced output function is activated.

#### ■ Accumulated value hold


The accumulated value is not cleared even when the power supply is turned off.

The accumulated value is memorized every 2 or 5 minutes during measurement and continues from the last memorized value when the power supply is turned on again.

The maximum writable limit of the memory device is 1 million times for PF3W7-Z and 3.7 million times for PF3W7-L, which should be taken into consideration.

#### ■ Display

Display layout for PF3W7-Z series and PF3W7-L series is different.

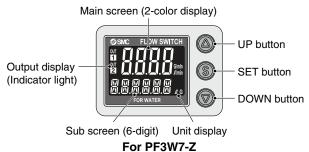


#### ■ Power-saving mode

The display can be turned off to reduce power consumption. In power-saving mode, only decimal points blink.

If any button is pressed during power-saving mode, the display is recovered for 30 seconds to check the flow, etc.

#### ■ Setting of security code

The user can select whether a security code must be entered to release the key lock. At the time of shipment from the factory, it is set such that a security code is not required.

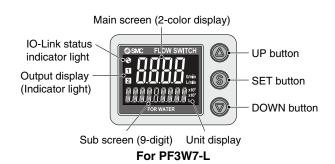

#### ■ Peak/Bottom value display

The maximum (minimum) flow rate is detected and updated from when the power supply is turned on. In peak (bottom) value display mode, this maximum (minimum) flow rate is displayed.

#### ■ Key-lock function

Prevents operation errors such as accidentally changing setting values




# Function Details **PF3W-Z/L** Series

#### Integrated Display (PF3W7-Z Series) / IO-Link Compatible (PF3W7-L Series)

#### ■ Analog output free range function (PF3W7-Z series only)

This function allows a flow that generates an output of 5 V or 20 mA to be changed. (This function is not available for the analog output to the temperature.) This function is available if the analog output type is used. The value can be changed between 10% of the maximum value of the rated flow and the maximum value of the display range.



#### **■** Error display function

When an error or abnormality arises, the location and contents are displayed.

				Applicab	le model
Display	Description	Contents	Action	Integrated display PF3W7-Z series	IO-Link compatible PF3W7-L series
Er 1	OUT1 over current error	The switch output (OUT1) load current of 80 mA or more flows.	Turn the power OFF and remove the cause of the over current. Then turn	•	•
Er 2	OUT2 over current error	The switch output (OUT2) load current of 80 mA or more flows.	the power ON again.	•	•
HHH	Instantaneous flow error	The flow has exceeded the upper limit of the display flow range.	Decrease the flow rate.	•	•
( Alternately displays ( [999] and [999999] )	Accumulated flow error	The accumulated flow has exceeded the accumulated flow range.	Reset the accumulated flow.	•	_
9999 (Flashing)	Accumulated flow error	The accumulated flow has exceeded the accumulated flow range.	Reset the accumulated flow.	_	•
c XXX	Over upper limit of temperature	Fluid temperature exceeds 110°C.	Lower the fluid temperature.	•	•
c LLL	Under lower limit of temperature	Fluid temperature is under –10°C.	Raise the fluid temperature.	•	•
Er 0 Er 4 Er 6 Er 8	- System error	An internal data error has occurred.	Turn the power OFF and turn it ON again.	•	•
Er 7 Er40	- System error	An internal data error has occurred.	Turn the power OFF and turn it ON again.	_	•
Er 12	Temperature sensor failure	Temperature sensor may be damaged.	Turn the power OFF and turn it ON again.	•	•
Er 15	Version does not match	The IO-Link version does not match that of the master. The master uses version 1.0.	Ensure that the master IO-Link version matches the device version.	_	•

If the error cannot be solved after the instructions above are performed, please contact SMC for investigation.

# PF3W-Z/L Series


#### Remote Sensor Unit (PF3W5-Z Series)

#### ■ POWER indicator function

It is possible to check whether power supply is reaching the product. When power is supplied to the product, the indicator lights up green.

#### **■ FLOW indicator function**

Status of the flow rate can be checked visually. When the flow rate increases, the green lamp blinks faster. When below the measurable lower limit of flow rate, the lamp turns off, when above the measurable upper limit of flow rate, red lamp turns on.

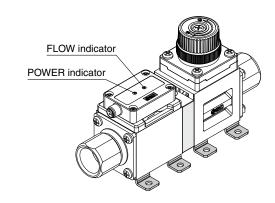

#### ■ Error display function

When an error or abnormality arises, the location and contents are displayed.

LED display	Description	Contents	Action
POWER Green Red FLOW FLOW indicator: Red ON	Over upper limit of flow rate	Flow is approximately 110% or more of the rated flow.	Decrease the flow rate.
POWER -Red- POWER indicator: Blinking red	Temperature measurement range error	Fluid temperature is either under –10°C or over 110°C.	Adjust the fluid temperature within the measurable temperature range.
POWER -Red - Red FLOW  POWER indicator: Blinking red FLOW indicator: Red ON	Over upper limit of flow rate and temperature measurement range error	Refer to above.	Refer to above.

LED display	Description	Contents	Action
POWER Red Red FLOW  POWER indicator: Red ON FLOW indicator: Red ON  POWER Red Red FLOW  POWER indicator: Red ON FLOW indicator: Blinking red	System error	Internal data error or other errors occur.	Turn the power off and then on again. If the error cannot be rectified, please contact SMC for investigation.
POWER Red FLOW  POWER indicator: Red ON FLOW indicator: OFF		Temperature sensor may be damaged.	

If the error cannot be solved after the above instructions are performed, please contact SMC for investigation.



# **⚠** Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of "Caution," "Warning" or "Danger." They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)\*1), and other safety regulations.

⚠ Danger: Danger indicates a hazard with a high level of risk which, If not avoided, will result in death or serious injury.

Warning: Warning indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

⚠ Caution: Caution indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

\*1) ISO 4414: Pneumatic fluid power - General rules and safety requirements for systems and their components ISO 4413: Hydraulic fluid power - General rules and safety requirements for systems and their components IEC 60204-1: Safety of machinery - Electrical equipment of machines - Part 1: General requirements ISO 10218-1: Robots and robotic devices - Safety requirements for industrial robots - Part 1:Robots

#### **⚠Warning**

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

- 3. Do not service or attempt to remove product and machinery/ equipment until safety is confirmed.
  - 1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
  - 2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
  - 3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.
- 4. Our products cannot be used beyond their specifications. Our products are not developed, designed, and manufactured to be used under the following conditions or environments. Use under such conditions or environments is not covered.
  - 1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
  - 2. Use for nuclear power, railways, aviation, space equipment, ships, vehicles, military application, equipment affecting human life, body, and property, fuel equipment, entertainment equipment, emergency shut-off circuits, press clutches, brake circuits, safety equipment, etc., and use for applications that do not conform to standard specifications such as catalogs and operation manuals.
  - 3. Use for interlock circuits, except for use with double interlock such as installing a mechanical protection function in case of failure. Please periodically inspect the product to confirm that the product is operating properly.

#### **⚠** Caution

We develop, design, and manufacture our products to be used for automatic control equipment, and provide them for peaceful use in manufacturing industries.

Use in non-manufacturing industries is not covered.

Products we manufacture and sell cannot be used for the purpose of transactions or certification specified in the Measurement Act.

The new Measurement Act prohibits use of any unit other than SI units in

#### Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following "Limited warranty and Disclaimer" and "Compliance Requirements".

Read and accept them before using the product.

#### **Limited warranty and Disclaimer**

- 1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.\*2) Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
- 2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
- 3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.
  - \*2) Vacuum pads are excluded from this 1 year warranty. A vacuum pad is a consumable part, so it is warranted for a year after it is delivered. Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

#### **Compliance Requirements**

- 1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
- The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

#### **Revision History**

- Edition B \* The PFG200 series 4-channel flow monitor has been added.
  - \* An analog voltage 2-output type (flow rate + temperature) has been added.
  - \* An analog current 2-output type (flow rate + temperature) has been added.
  - \* Number of pages has been increased from 32 to 44.

↑ Safety Instructions Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.

### **SMC** Corporation

Akihabara UDX 15F.

4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN Phone: 03-5207-8249 Fax: 03-5298-5362

https://www.smcworld.com

© 2023 SMC Corporation All Rights Reserved