

Slit Valve XGT Series




XGT Series

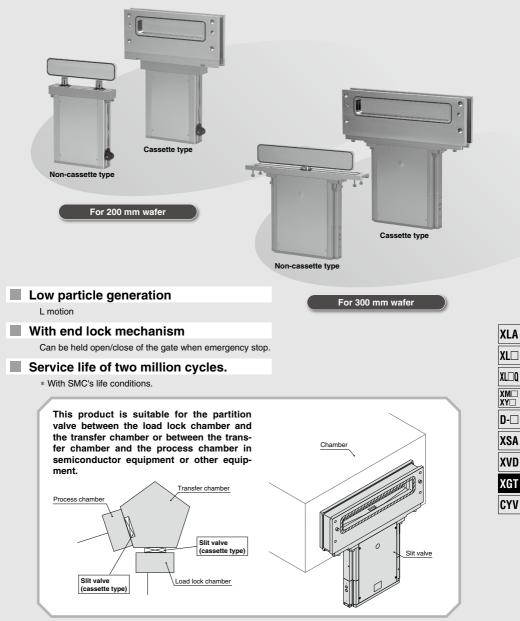




Bellows protection structure The adoption of a wiper decreases the intrusion of foreign objects, resulting from wafer damage and or other sources.



Slit Valve XGT Series

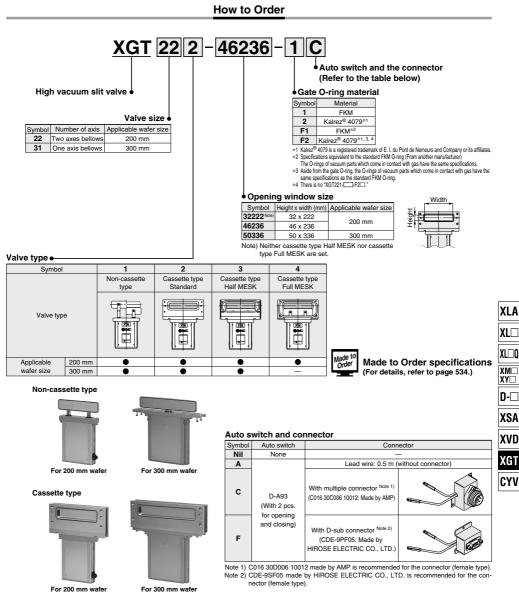

RoHS

XGT Series

Specifications

Moc	lel	XGT22□-32222	XGT22□-46236	XGT31□-50336	
Wafer size (mm)		200 300		300	
Opening window size (Height x V	Vidth) (mm)	32 x 222 46 x 236 50 x 336			
Number of axes		2	2	1	
Operating environmental pressu	re Note 1) (Pa) (abs)		Atmospheric pressure to10 ⁻⁶		
Operating pressure differential	(kPa)		4 or less		
Operating pressure range (MPa) (G)		0.45 to 0.6		
Internal leak Note 2) (Pa·m ³ /s)	O-ring: FKM		6.5 x 10 ⁻¹⁰		
internal leak	O-ring: Kalrez [®]		6.5 x 10 ⁻⁹		
Internal leak Note 2) (Pa·m ³ /s) at reversed pressure	O-ring: FKM		6.5 x 10 ⁻⁸		
[Reversed pressure: 0.1 MPa (abs) or less]	O-ring: Kalrez [®]		6.5 x 10 ⁻⁷		
External leak Note 2) (Pa·m ³ /s)			6.5 x 10 ⁻¹¹		
A Note 2) (co)	Gate part		5 to 150		
Operation temperature Note 3) (°C)	Actuator part		5 to 60		
Fluid			Inert gas		
Operating time Note 4) (s)			0.6 to 1		
	Seal material	FKM, Kalrez [®] 4079 (Option) Note 6)			
	Bellows	AM350			
Main material of vacuum part	Gate		A6063		
Main material of vacuum part	Body		A5052		
	Bonnet		A5052		
	Others		Stainless steel 304		
Exhaust direction			Free		
Mounting direction			Vertical		
Port size		M5 x 0.8		Rc 1/8	
End-lock mechanism		With lock mechanism at opening/closing position Note 5)		osition Note 5)	
Cylinder volume (L)	(L) 0.12 0.4		0.2		
	Non-cassette type	8		14	
Weight (kg)	Cassette type: Standard	1	2	20	
weight (kg)	Cassette type: Half MESK	_	12	20	
	Cassette type: Full MESK	_	11	_	

 Note 1) Absolute pressure

 Note 2) Value at normal temperature: Not including gas permeation.

 Note 3) if the temperature at the gate exceeds 60°C, the operating temperature at actuator may go beyond the range. In this case, cool the actuator part.

Note 4) This shows the time after the switching valve activates and causes the gate to open and close. Note 5) The holding function of the seal is not guaranteed when the gate is clamped.

Note 6) Kalrez[®] is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Auto switch specifications

Auto switch type	D-A93		
Applicable load	Relay, PLC		
Load voltage	24 VDC 100 VAC		
Load current range and maximum load current	t 5 to 40 mA 5 to 20 mA		
Contact protection circuit	None		
Internal voltage drop	2.4 V or less (to 20 mA) / 3 V or less (40 mA)		
Indicator light	Red light emitting diode (LED) lights up when ON.		

D-sub connector specifications

Description		Slit valve body side	Counter side	
	Contacting division	Pin (male type)	Socket (female type)	
D-sub connector	Shell size	hell size E		
	Poles	5	9	

Prepare the socket contacting (female type) because the slit valve body is a pin contacting (male type).

The product should be operated after thoroughly reading the manual and understanding its contents.

SMC

Connector wiring diagram

C: Multiple connector (6P)




	Terminal item no.	Lead wire color	Auto switch
	1	Blue	OPEN (-)
)	2	Brown	OPEN (+)
2	3	-	-
	4	-	-
	5	Brown	CLOSE (+)
	6	Blue	CLOSE (-)

F: D-sub connector (9P)

	Terminal item no.	Lead wire color	Auto switch
	1	Brown	OPEN (+)
	2	Brown	CLOSE (+)
50 09 40 09	3	-	
30 08	4	-	
20 07	5	-	
	6	-	
	7	Blue	OPEN (-)
	8	Blue	CLOSE (-)
	9	-	-

Slit Valve XGT Series

Construction

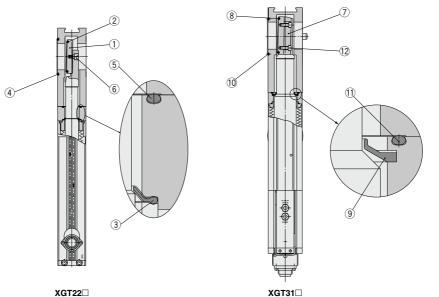

For 200 mm wafer

XGT31 For 300 mm wafer

Component Parts

XGT22 (200 mm wafer type)

No.	Description	Material	Part number	Corresponding model
			XGT0101-2-1S	XGT22-32222-
1	1 Gate	A6063	XGT0402-2-1S	XGT22□-46236-□□
		FKM	XGT200-9-13S	
		FKM (Equivalent to the standard FKM O-ring)	XGT200-9-13-F1S	XGT22□-32222-□□
2		Kalrez®4079	XGT200-9-14S	
2	O-ring (Gate)	FKM	XGT200-9-7S	
		FKM (Equivalent to the standard FKM O-ring)	XGT200-9-7-F1S	XGT22□-46236-□□
		Kalrez®4079	XGT200-9-9S	
3	Gasket	FKM	XGT200-4-9S	XGT22
		FKM	XGT200-9-12S	XGT222-32222-
4	O-ring (Body opening side)			XGT222-46236-
4	O-mig (Body opening side)	FKM (Equivalent to the standard FKM O-ring)	XGT200-9-12-F1S	XGT223-46236-
				XGT224-46236-
		FKM	XGT200-9-11S	XGT222-32222-
5	O-ring (Bonnet assembly)	FKM (Equivalent to the standard FKM O-ring)	XGT200-9-11-F1S	XGT222-46236-
		FRM (Equivalent to the standard FRM O-ring)	AG1200-9-11-F15	XGT223-46236-
6	Holding bolt	Stainless steel 304	XGT200-2-5S	XGT22

XGT31 (300 mm wafer type)

No.	Description	Material Part number		Corresponding model
7	Gate	A6063 XGT300-2-15		
		FKM	XGT300-9-9S	
8	O-ring (Gate)	FKM (Equivalent to the standard FKM O-ring)	XGT300-9-9-F1S]
		Kalrez [®] 4079	XGT300-9-11S	
9	Wiper	FKM	XGT300-4-9S	
10	O view (Deaths encoding adds)	FKM	XGT300-9-10S	XGT31□-50336-□□
10	O-ring (Body opening side)	FKM (Equivalent to the standard FKM O-ring)	XGT300-9-10-F1S]
11	O-ring (Bonnet assembly)	FKM	XGT300-9-7S	
	TT O-Thig (Bonnet assembly)	FKM (Equivalent to the standard FKM O-ring)	XGT300-9-7-F1S	
12	Holding bolt	Stainless steel 316	XGT300-2-5S	


* Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

XLA
XL□
XL□Q
XM□ XY□
D- □
XSA
XVD
XGT
CYV


XGT Series

Dimensions


Cassette type Standard/XGT222




Non-cassette type/XGT221



Cassette type Half MESK/XGT223





Valve seat side (XGT222, 223, and 224 common)

Cassette type Full MESK/XGT224


					(mm)
Model	Valve type	Α	В	С	D
XGT221-32222	Non-cassette type	222	32	235	45
XGT221-46236	Non-casselle type	236	46	249	59
XGT222-32222	Cassette type Standard	222	32	—	_
XGT222-46236	Casselle type Standard	236	46	—	_
XGT223-46236	Cassette type Half MESK	236	46	_	_
XGT224-46236	Cassette type Full MESK	236	46	—	_




SMC

Dimensions


Cassette type standard/XGT312






Valve seat side (XGT312, 313, and 311 common)

Cassette type half MESK/XGT313




Non-cassette type/XGT311



X	(LA
X	(L
X	LDQ
X	XM⊡ Y⊡
0)-[]
X	(SA
X	(VD
Х	(GT
C	CYV

XGT Series Made to Order Specifications: Please contact SMC for detailed dimensions, specifications and lead times.










With heater on cassette


With heater on shaft




The parts which come in contact with gas (oxalic acid aluminum alloy, stainless steel etc.) is changed.

5 Replaceable Bellows

Customer can replace bellows.



O-ring, guide etc. which is the part of actuator are changed to heat resistance.



Sealing is maintained when operating pressure is stopped.

For 300 mm wafer

Parallel Seal Type Slit Valve New

Long service life

3 million cycles (at ordinary temperature)

Maintenance

0

0

Replaceable bellows Top accessible (Made to order)

Air saving Made to order

Air consumption reduced by 22% Low pressure operation possible during normal operation (when back pressure is absent.)

Operating environmental pressure Atmospheric pressure to 1.0 x 10⁻⁶ Pa (abs)

Low particle generation

Reduced by 1/5 or more (compared with the current product)

Safety measures

Mechanical end lock mechanism is adopted.

Gate is held in opened or closed position in case of emergency stop.

Lightweight

14 kg (For cassette type)

Opening window size 50 mm x 336 mm

Seal material: FKM/Kalrez®4079

4

Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates

Insert type (Without body)

Transfer chamber

Cassette type (Standard)

Process chamber

Parallel seal type slit valve

Interchangeable with the current XGT product




This product is suitable for the partition valve between the load lock chamber and the transfer chamber or between the transfer chamber and the process chamber in semiconductor equipment or other equipment.






Parallel Seal Type Slit Valve XGTP Series

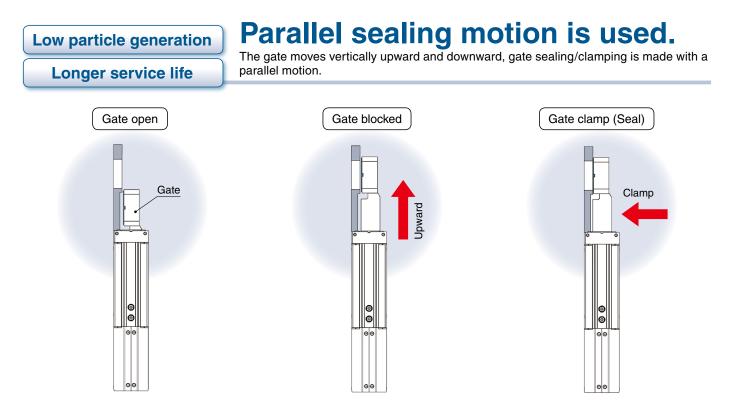



Easier maintenance

Easy replacement of bellows

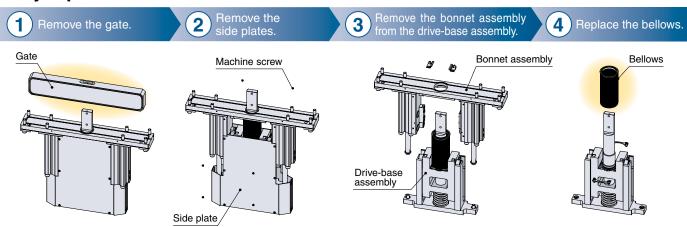

Gate can be replaced from above. Made to order

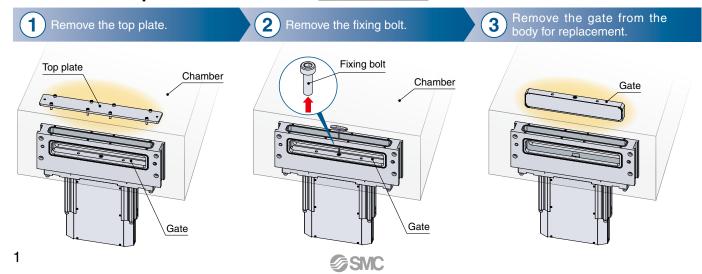

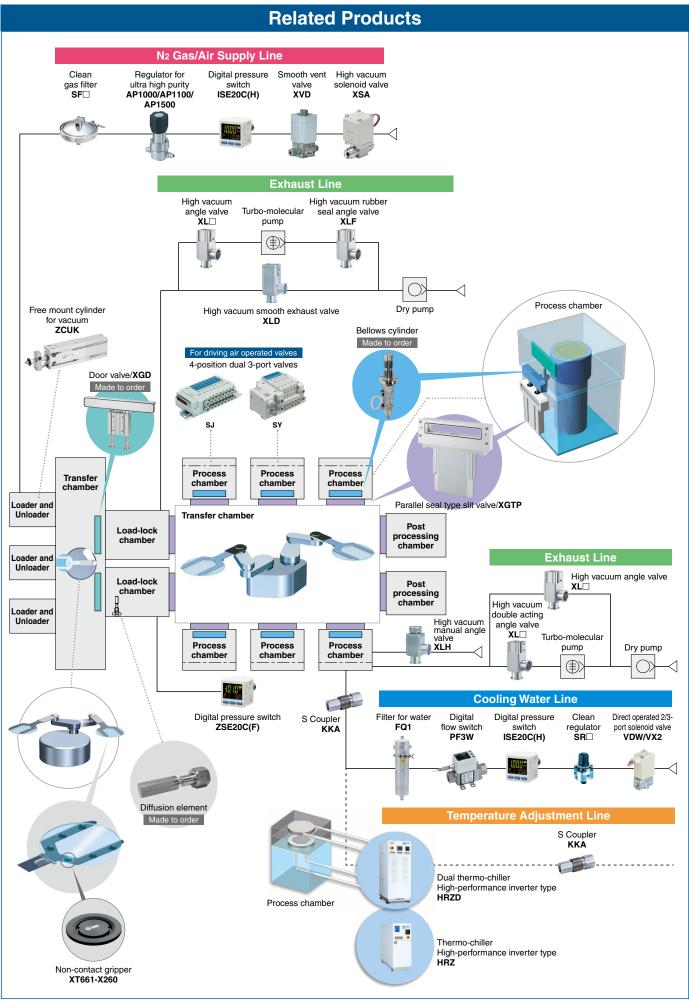


Parallel Seal Type Slit Valve XGTP Series



Cassette type

Insert type

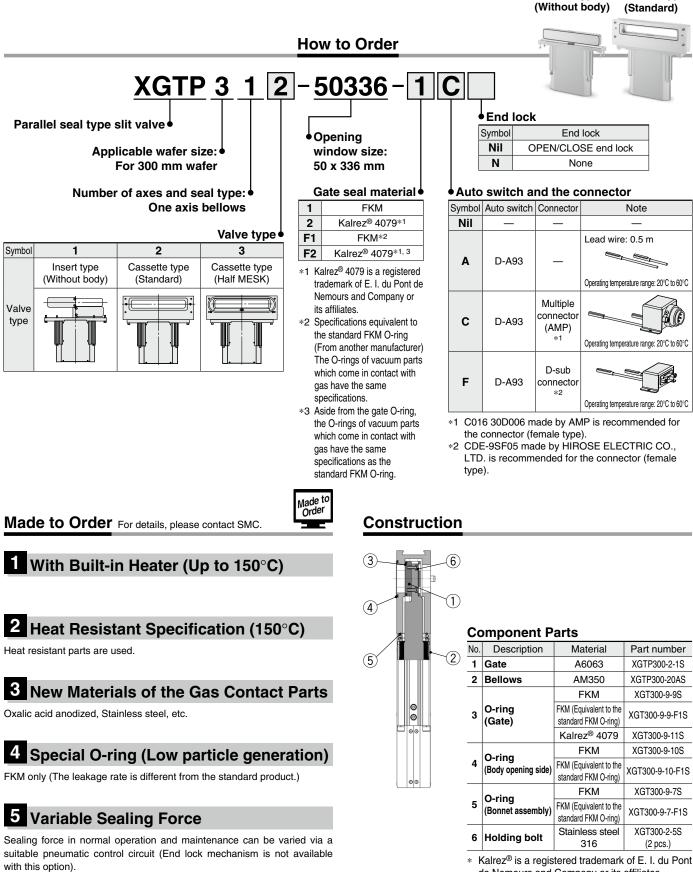

de Nemours and Company or its affiliates.

® 3



Parallel Seal Type Slit Valve XGTP Series

Specifications

For details on the specific product precautions, refer to the "Operation Manual" on the SMC website.

Model		XGTP31□-50336
Wafer size [mm]		300
Opening window size (Height x Width) [mm]		50 x 336
Number of axes		1
Operating environmental pressure*1 [Pa] (abs)		Atmospheric pressure to 1.0 x 10 ⁻⁶
Operating pressure differential [kPa]		4 or less
Operating pressure range [MPa] (G)		0.45 to 0.6
Internal leak*2 [Pa·m³/s]	O-ring: FKM	6.5 x 10 ⁻¹⁰
	O-ring: Kalrez®	6.5 x 10 ⁻⁹
Internal leak at reversed pressure*2 [Pa·m3/s]	O-ring: FKM	6.5 x 10 ⁻⁸
[Reversed pressure: 0.1 MPa (abs) or less]	O-ring: Kalrez®	6.5 x 10 ⁻⁷
External leak*2 [Pa·m ³ /s]		6.5 x 10 ⁻¹¹
Operating temperature*3 [°C]	Gate part	20 to 120/up to 150 (During bake-out)
Operating temperature [C]	Actuator part	20 to 90 (Except auto switch)
Fluid		Inert gas
Operating time ^{*4} [s]		0.6 to 1
	Seal material	FKM, Kalrez [®] 4079 (Option)* ⁵
	Bellows	Equivalent to AM350
Main material of vacuum part	Gate	A6063
Main material of vacuum part	Body	A5052
	Bonnet	A6061
	Others	Stainless steel 304
Exhaust direction		Free
Mounting direction		Vertical
Port size		Rc1/8
End lock mechanism		With lock mechanism in opened or closed position
Cylinder volume [L]		0.2
	Insert type (Without body)	10
Weight [kg]	Cassette type (Standard)	14
	Cassette type (Half MESK)	14

*1 Absolute pressure

*2 Value at normal temperature: Not including gas permeation

*3 If the temperature at the gate exceeds 90°C, the operating temperature at actuator may go beyond the range. In this case, cool the actuator part.

*4 This shows the time after the switching valve activates and causes the gate to open and close. (This may vary depending on the operating condition.)

*5 Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Auto Switch Specifications

-			
Auto switch model	D-A93		
Applicable load	Relay, PLC		
Load voltage	24 VDC 100 VAC		
Load current range and maximum load current	5 to 40 mA	5 to 20 mA	
Contact protection circuit	None		
Internal voltage drop	2.4 V or less (to 20 mA)/3 V or less (40 mA)		
Indicator light	Red light emitting diode (LED) lights up when ON.		
···· · · · · · · · · · · · · · · · · ·			

* When the temperature exceeds 60°C, please use the heat resistant specification (made to order).

D-sub Connector Specifications


Description		XGTP (on side of actuating body) Application control circ		
D-sub connector	Connection type	Plug (male)	Socket (female)	
	Shell size	E		
	Poles	9		

XGTP has Male Plug connection on the side of the actuating body, so for connection to the application control circuit side, please prepare a female socket.

The product should be operated after thoroughly reading the operation manual and understanding its contents.

Connector Wiring Diagram

C: Multiple connector (6P)




F: D-sub connector (9P)

	Terminal no.	Lead wire color	Auto switch
	1	Brown	OPEN (+)
\bigcirc	2	Brown	CLOSE (+)
50 40 09	3	—	_
30 07	4	_	_
10 06	5	—	
0	6	—	—
	7	Blue	OPEN (-)
	8	Blue	CLOSE (-)
	9	_	


XGTP Series

Dimensions


Insert type (Without body) / XGTP311

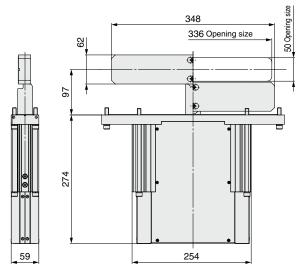


Cassette type (Standard) / XGTP312



Cassette type (Half MESK) / XGTP313



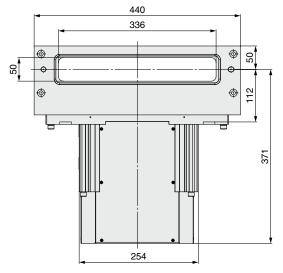

Valve seat side (XGTP312, 313 common)

XGTP Series Return of Product

A Warning

If the product being returned is contaminated or possibly contaminated with substances that are harmful to humans then please contact SMC in the first instance and get the product decontaminated and made safe by a specialist cleaning company. After the decontamination prescribed in the sentence before, submit Product Return Request Sheet or Detoxification/Decontamination certificate to SMC and await return contact from SMC before returning the item to SMC.

Please refer to International Chemical Safety Cards (ICSC) for a list of the harmful substances. If you have any questions, please contact your SMC sales representative.

▲ Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of "**Caution**," "**Warning**" or "**Danger**." They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)^{*1}, and other safety regulations.

- Caution: indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.
- Warning: Warning indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

Danger indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

AWarning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

- 3. Do not service or attempt to remove product and machinery/ equipment until safety is confirmed.
 - The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
 - 2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
 - 3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

- 1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
- 2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
- An application which could have negative effects on people, property, or animals requiring special safety analysis.
- 4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

- *1) ISO 4414: Pneumatic fluid power General rules relating to systems.
 - ISO 4413: Hydraulic fluid power General rules relating to systems. IEC 60204-1: Safety of machinery – Electrical equipment of machines. (Part 1: General requirements)
 - ISO 10218-1: Manipulating industrial robots Safety. etc.

 The product is provided for use in manufacturing industries. The product herein described is basically provided for peaceful use in manufacturing industries. If considering using the product in other industries, consult SMC beforehand

and exchange specifications or a contract if necessary. If anything is unclear, contact your nearest sales branch.

Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following "Limited warranty and Disclaimer" and "Compliance Requirements".

Read and accept them before using the product.

Limited warranty and Disclaimer

- The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.*2) Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
- 2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
- Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.
 - *2) Vacuum pads are excluded from this 1 year warranty. A vacuum pad is a consumable part, so it is warranted for a year after it is delivered. Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

- The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
- 2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

A Safety Instructions Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.